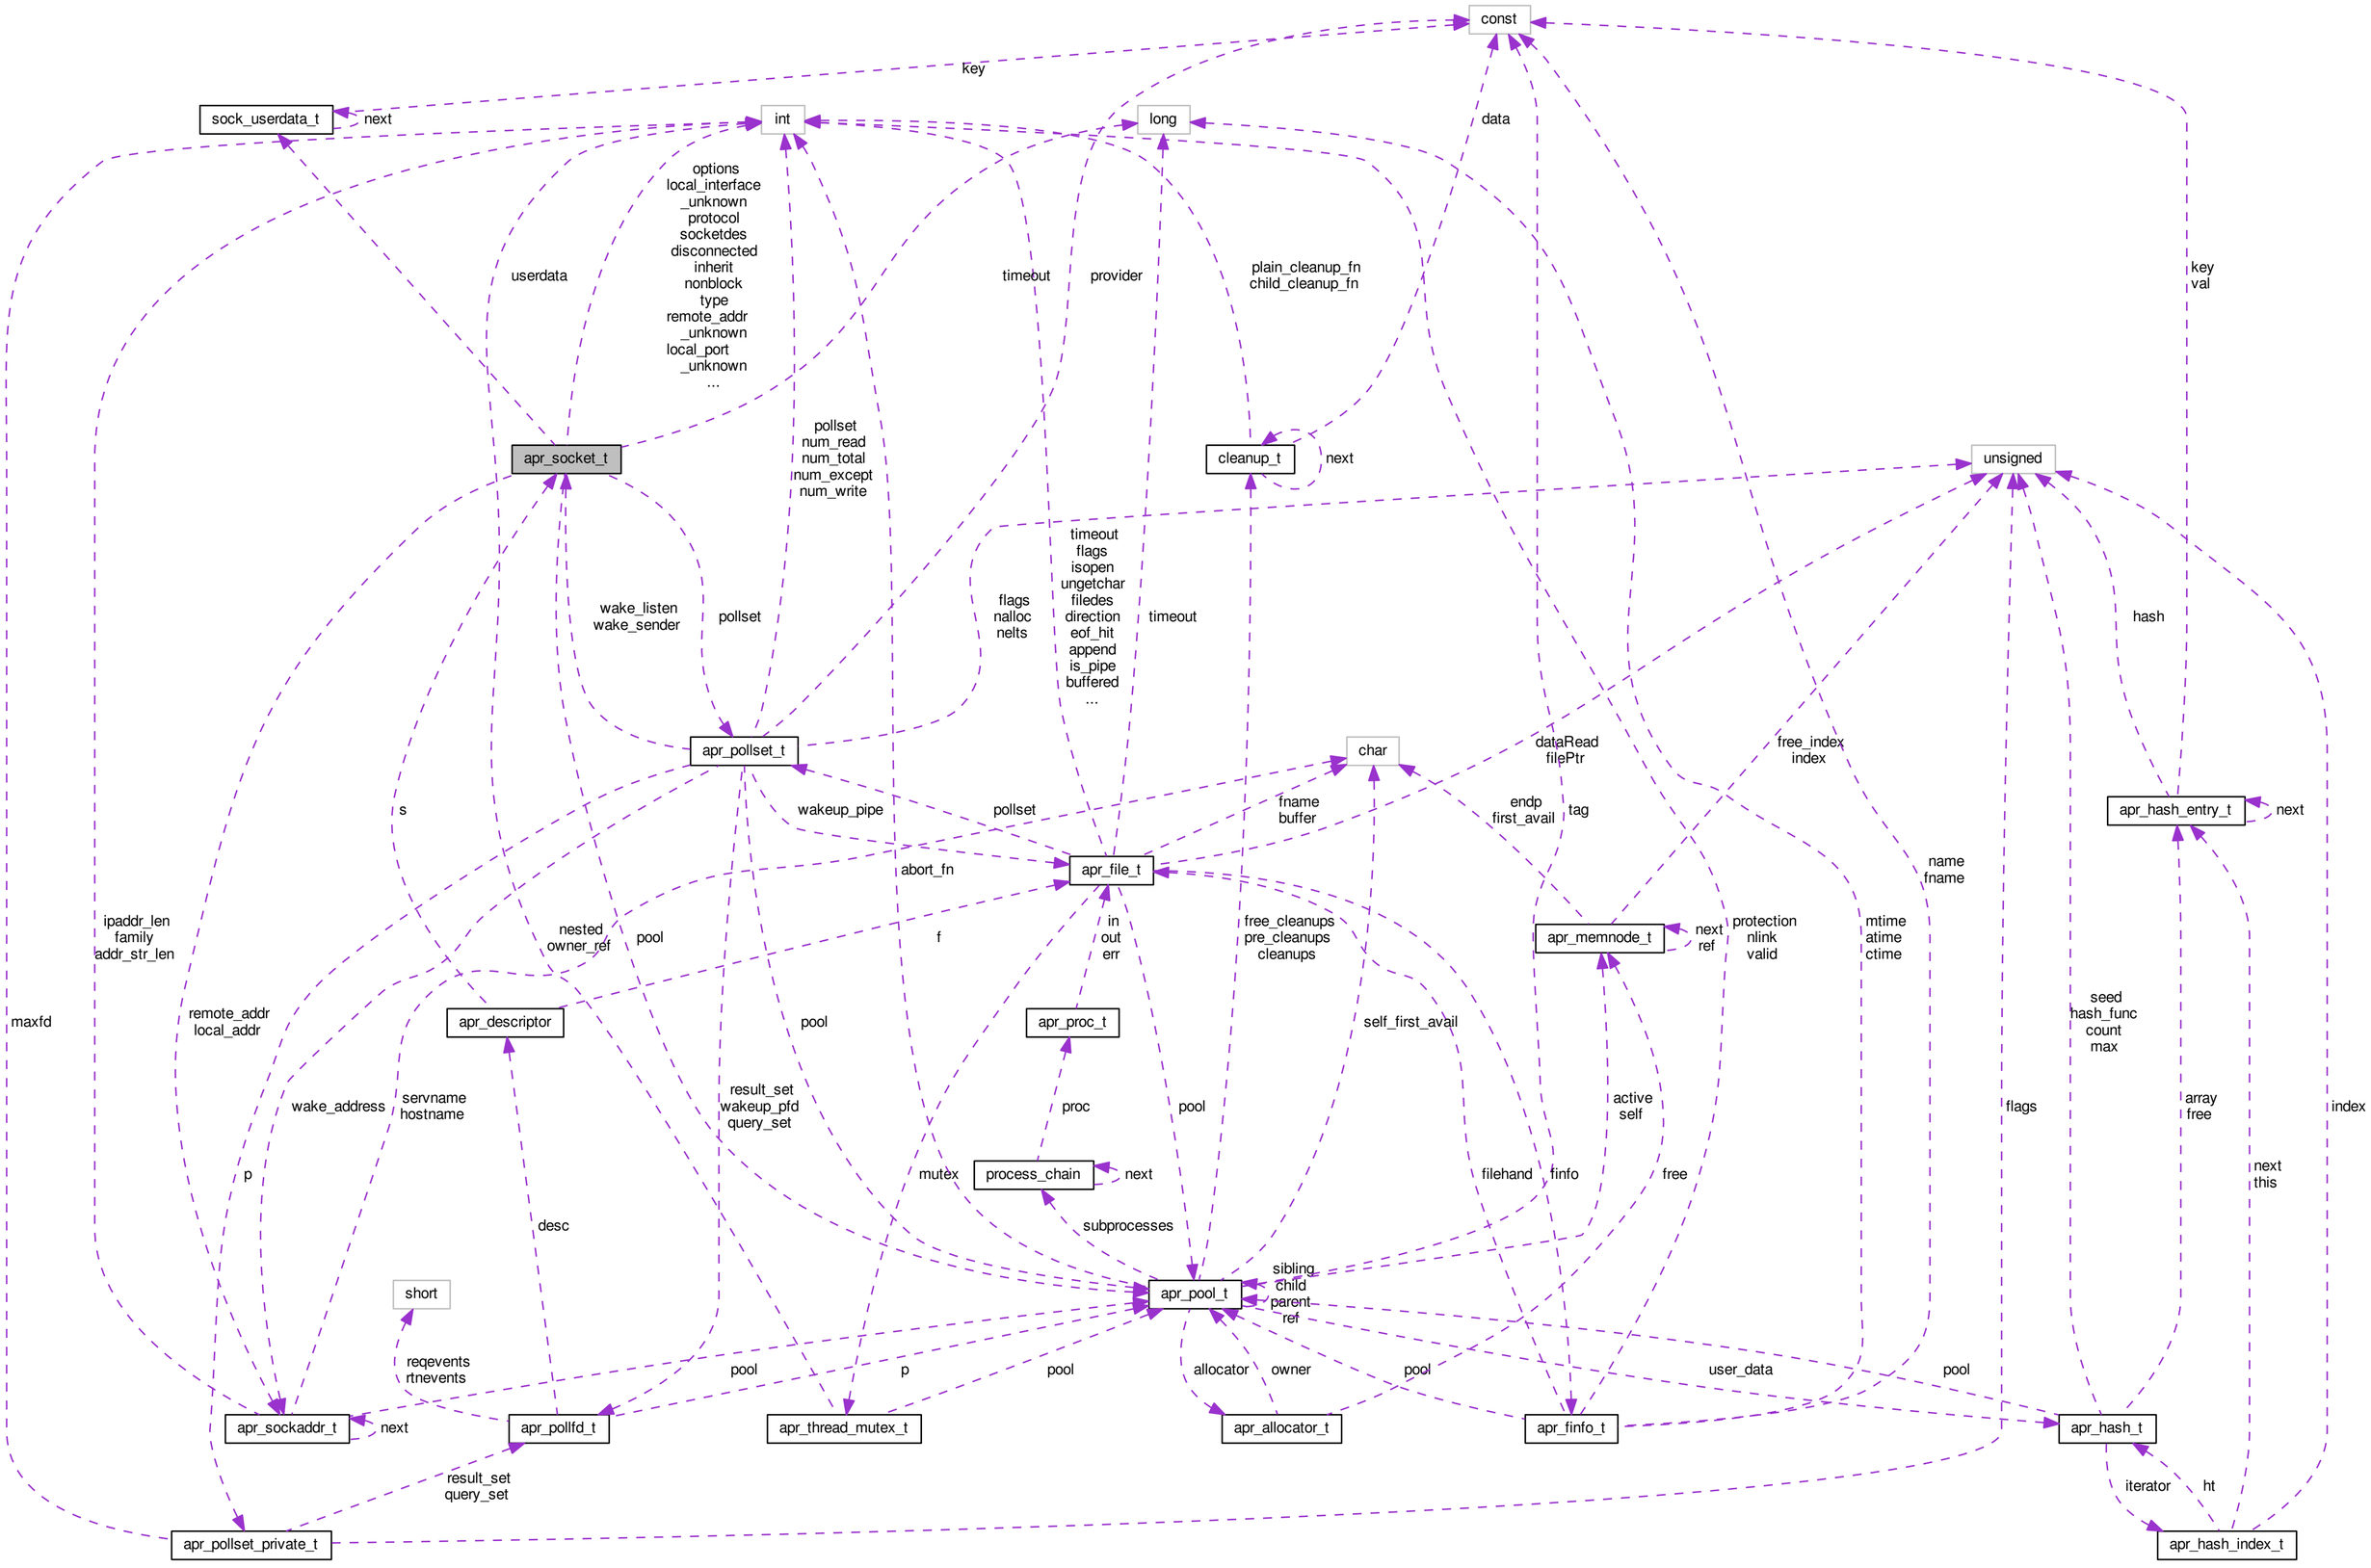
const
key
sock_userdata_t
next
int
long
data
options
local_interface
_unknown
protocol
socketdes
disconnected
inherit
nonblock
type
remote_addr
_unknown
local_port
_unknown
...
userdata
timeout
provider
plain_cleanup_fn
child_cleanup_fn
key
val
apr_socket_t
pollset
num_read
num_total
num_except
num_write
cleanup_t
next
unsigned
timeout
flags
isopen
ungetchar
filedes
direction
eof_hit
append
is_pipe
buffered
...
wake_listen
wake_sender
pollset
flags
nalloc
nelts
timeout
hash
apr_pollset_t
char
dataRead
filePtr
free_index
index
s
wakeup_pipe
pollset
fname
buffer
endp
first_avail
tag
apr_hash_entry_t
next
abort_fn
apr_file_t
name
fname
ipaddr_len
family
addr_str_len
nested
owner_ref
pool
f
in
out
err
free_cleanups
pre_cleanups
cleanups
apr_memnode_t
next
ref
protection
nlink
valid
mtime
atime
ctime
seed
hash_func
count
max
maxfd
remote_addr
local_addr
apr_descriptor
pool
apr_proc_t
self_first_avail
wake_address
servname
hostname
result_set
wakeup_pfd
query_set
proc
pool
active
self
flags
array
free
index
p
mutex
process_chain
next
filehand
finfo
free
next
this
desc
subprocesses
short
sibling
child
parent
ref
apr_pool_t
reqevents
rtnevents
pool
p
pool
allocator
owner
pool
user_data
pool
apr_sockaddr_t
next
apr_pollfd_t
apr_thread_mutex_t
apr_allocator_t
apr_finfo_t
apr_hash_t
result_set
query_set
iterator
ht
apr_pollset_private_t
apr_hash_index_t