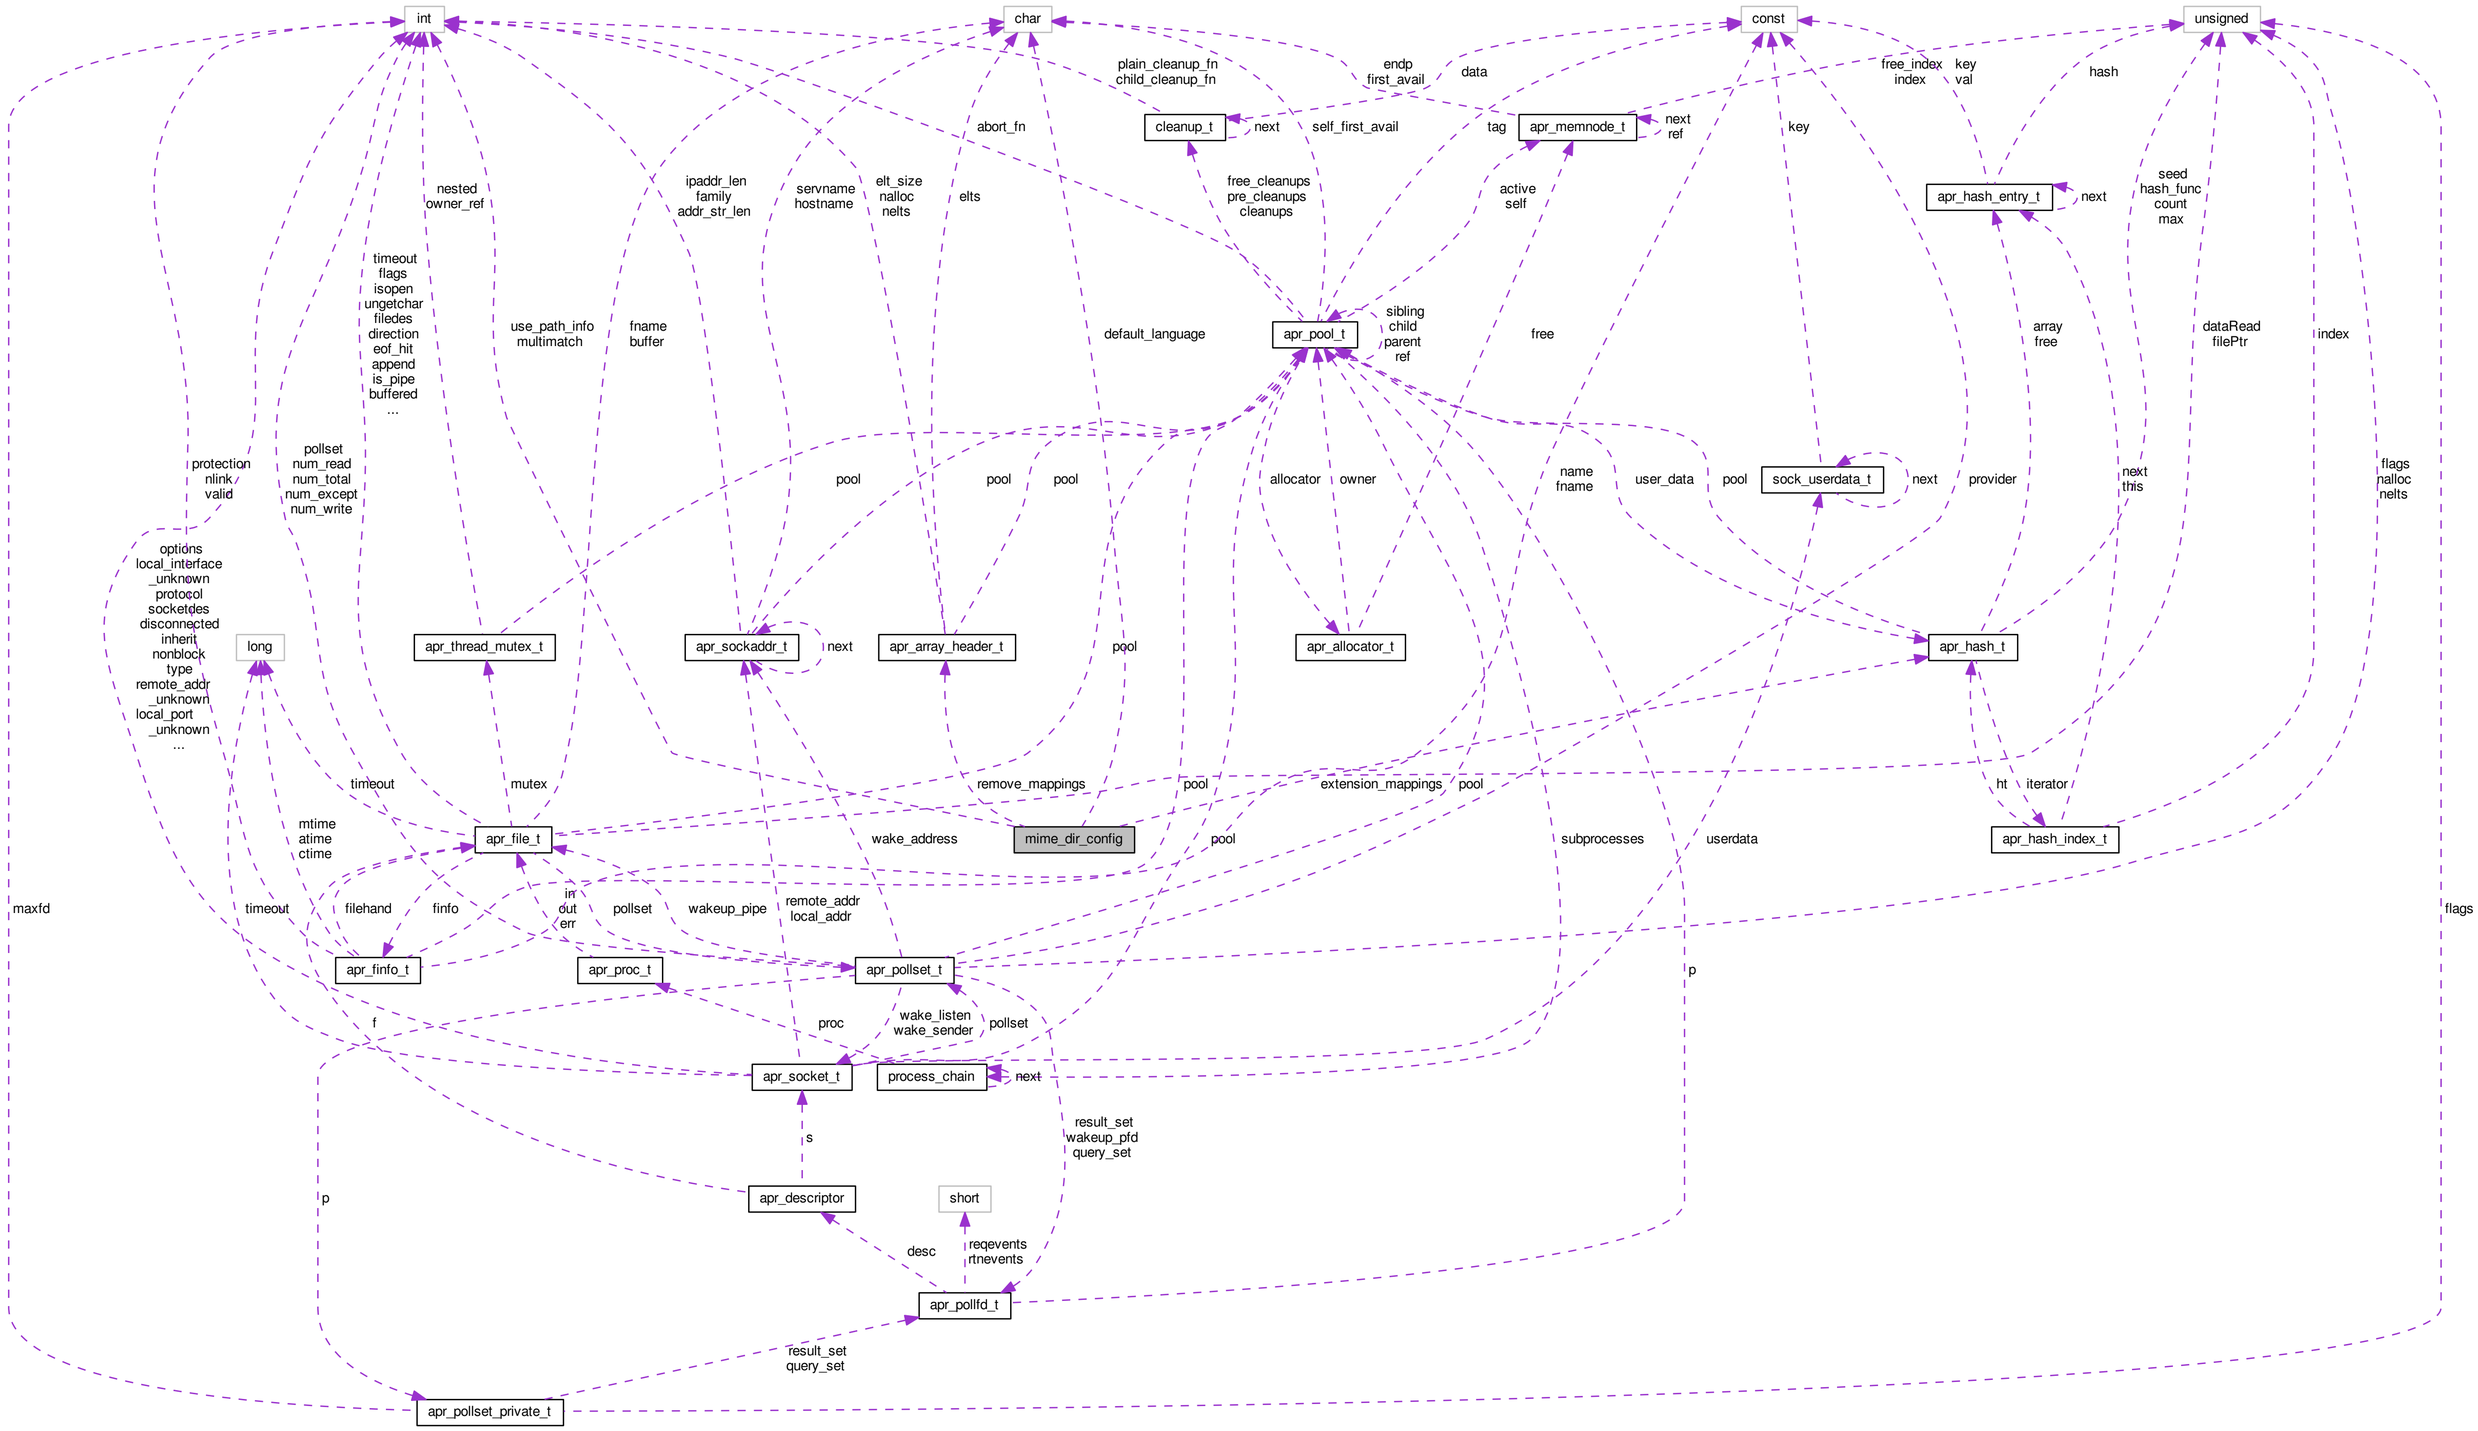
int
char
const
unsigned
cleanup_t
apr_memnode_t
apr_hash_entry_t
apr_pool_t
sock_userdata_t
long
apr_thread_mutex_t
apr_sockaddr_t
apr_array_header_t
apr_allocator_t
apr_hash_t
apr_file_t
mime_dir_config
apr_hash_index_t
apr_finfo_t
apr_proc_t
apr_pollset_t
apr_socket_t
process_chain
apr_descriptor
short
apr_pollfd_t
apr_pollset_private_t
plain_cleanup_fn
child_cleanup_fn
endp
first_avail
data
free_index
index
key
val
hash
abort_fn
next
self_first_avail
tag
next
ref
key
nested
owner_ref
ipaddr_len
family
addr_str_len
servname
hostname
elt_size
nalloc
nelts
elts
free_cleanups
pre_cleanups
cleanups
active
self
seed
hash_func
count
max
timeout
flags
isopen
ungetchar
filedes
direction
eof_hit
append
is_pipe
buffered
...
use_path_info
multimatch
fname
buffer
default_language
sibling
child
parent
ref
free
array
free
dataRead
filePtr
index
protection
nlink
valid
pollset
num_read
num_total
num_except
num_write
pool
pool
pool
allocator
owner
name
fname
user_data
pool
next
provider
next
this
flags
nalloc
nelts
options
local_interface
_unknown
protocol
socketdes
disconnected
inherit
nonblock
type
remote_addr
_unknown
local_port
_unknown
...
timeout
mutex
remove_mappings
pool
extension_mappings
pool
ht
iterator
mtime
atime
ctime
wake_address
pool
subprocesses
userdata
maxfd
timeout
filehand
finfo
in
out
err
pollset
wakeup_pipe
remote_addr
local_addr
flags
p
f
proc
wake_listen
wake_sender
pollset
next
s
result_set
wakeup_pfd
query_set
p
desc
reqevents
rtnevents
result_set
query_set