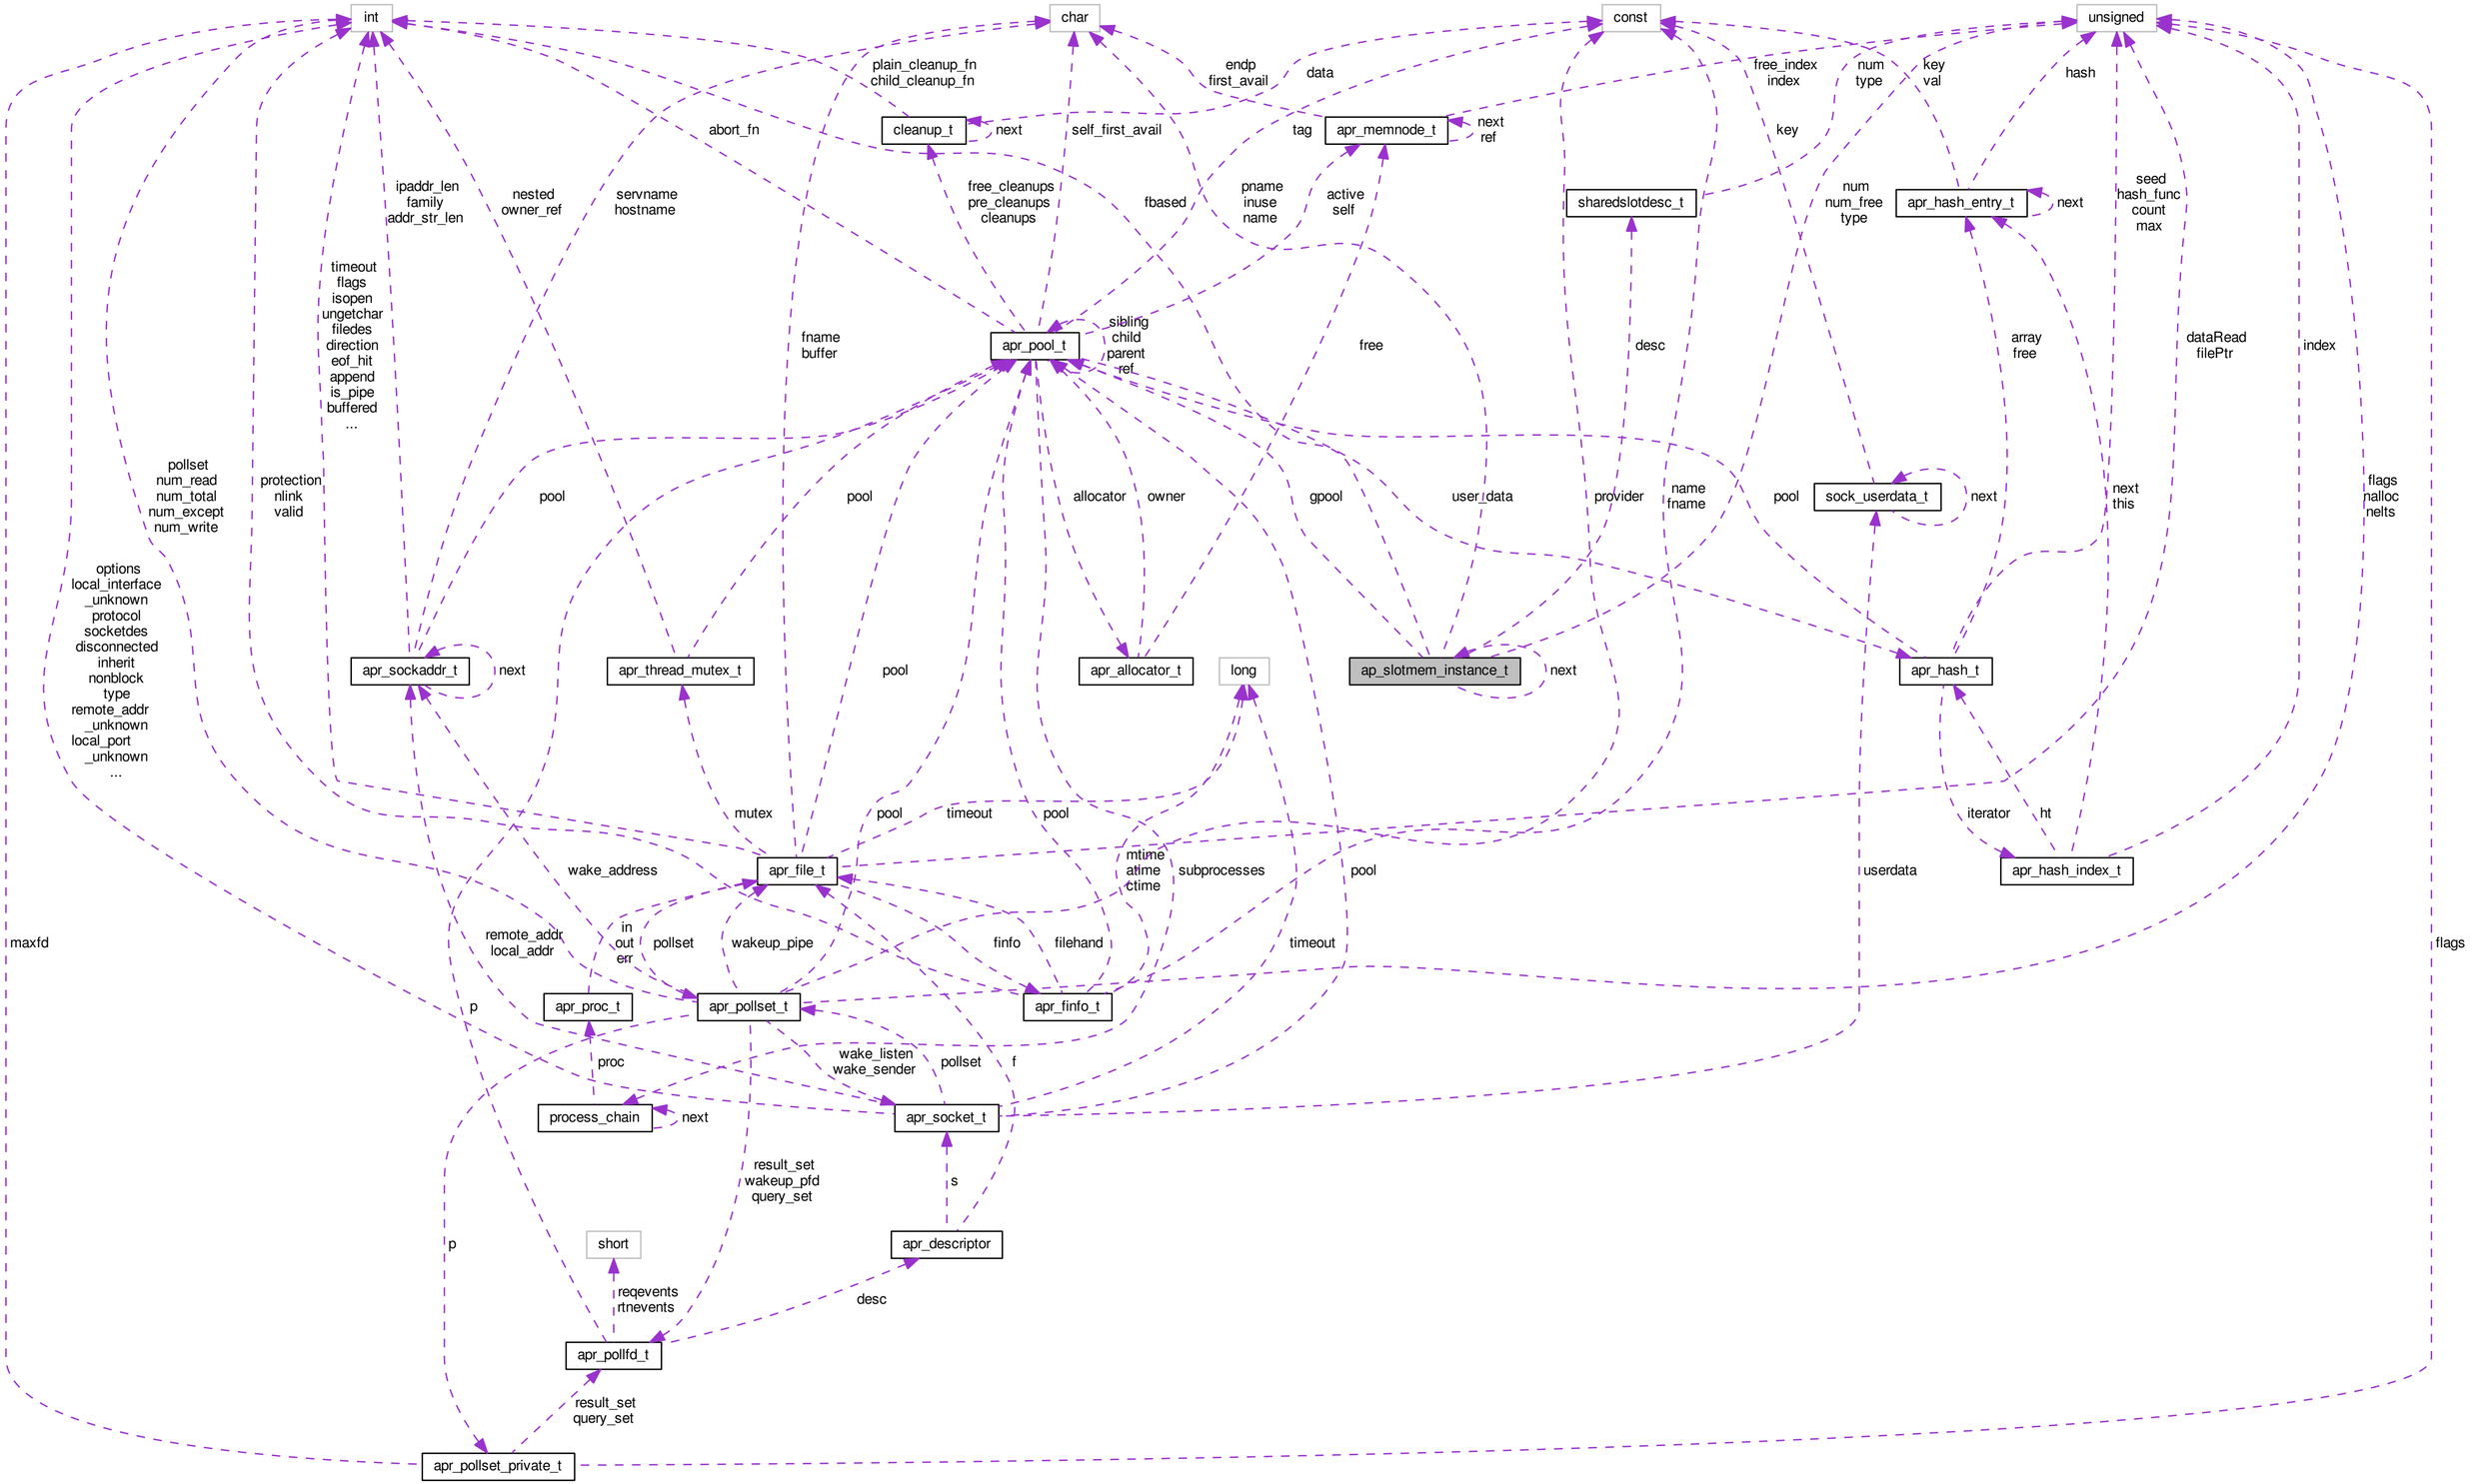
int
char
const
unsigned
cleanup_t
apr_memnode_t
sharedslotdesc_t
apr_hash_entry_t
apr_pool_t
sock_userdata_t
apr_sockaddr_t
apr_thread_mutex_t
apr_allocator_t
long
ap_slotmem_instance_t
apr_hash_t
apr_file_t
apr_hash_index_t
apr_proc_t
apr_pollset_t
apr_finfo_t
process_chain
apr_socket_t
short
apr_descriptor
apr_pollfd_t
apr_pollset_private_t
plain_cleanup_fn
child_cleanup_fn
endp
first_avail
data
free_index
index
num
type
key
val
hash
abort_fn
next
self_first_avail
tag
next
ref
key
ipaddr_len
family
addr_str_len
nested
owner_ref
servname
hostname
free_cleanups
pre_cleanups
cleanups
fbased
pname
inuse
name
active
self
num
num_free
type
seed
hash_func
count
max
timeout
flags
isopen
ungetchar
filedes
direction
eof_hit
append
is_pipe
buffered
...
fname
buffer
sibling
child
parent
ref
free
desc
array
free
dataRead
filePtr
index
pollset
num_read
num_total
num_except
num_write
protection
nlink
valid
pool
pool
allocator
owner
gpool
user_data
provider
name
fname
pool
next
next
this
flags
nalloc
nelts
options
local_interface
_unknown
protocol
socketdes
disconnected
inherit
nonblock
type
remote_addr
_unknown
local_port
_unknown
...
next
pool
iterator
ht
mutex
pool
timeout
pool
mtime
atime
ctime
subprocesses
pool
userdata
wake_address
maxfd
remote_addr
local_addr
in
out
err
pollset
wakeup_pipe
finfo
filehand
timeout
flags
p
proc
wake_listen
wake_sender
pollset
f
next
result_set
wakeup_pfd
query_set
s
p
reqevents
rtnevents
desc
result_set
query_set