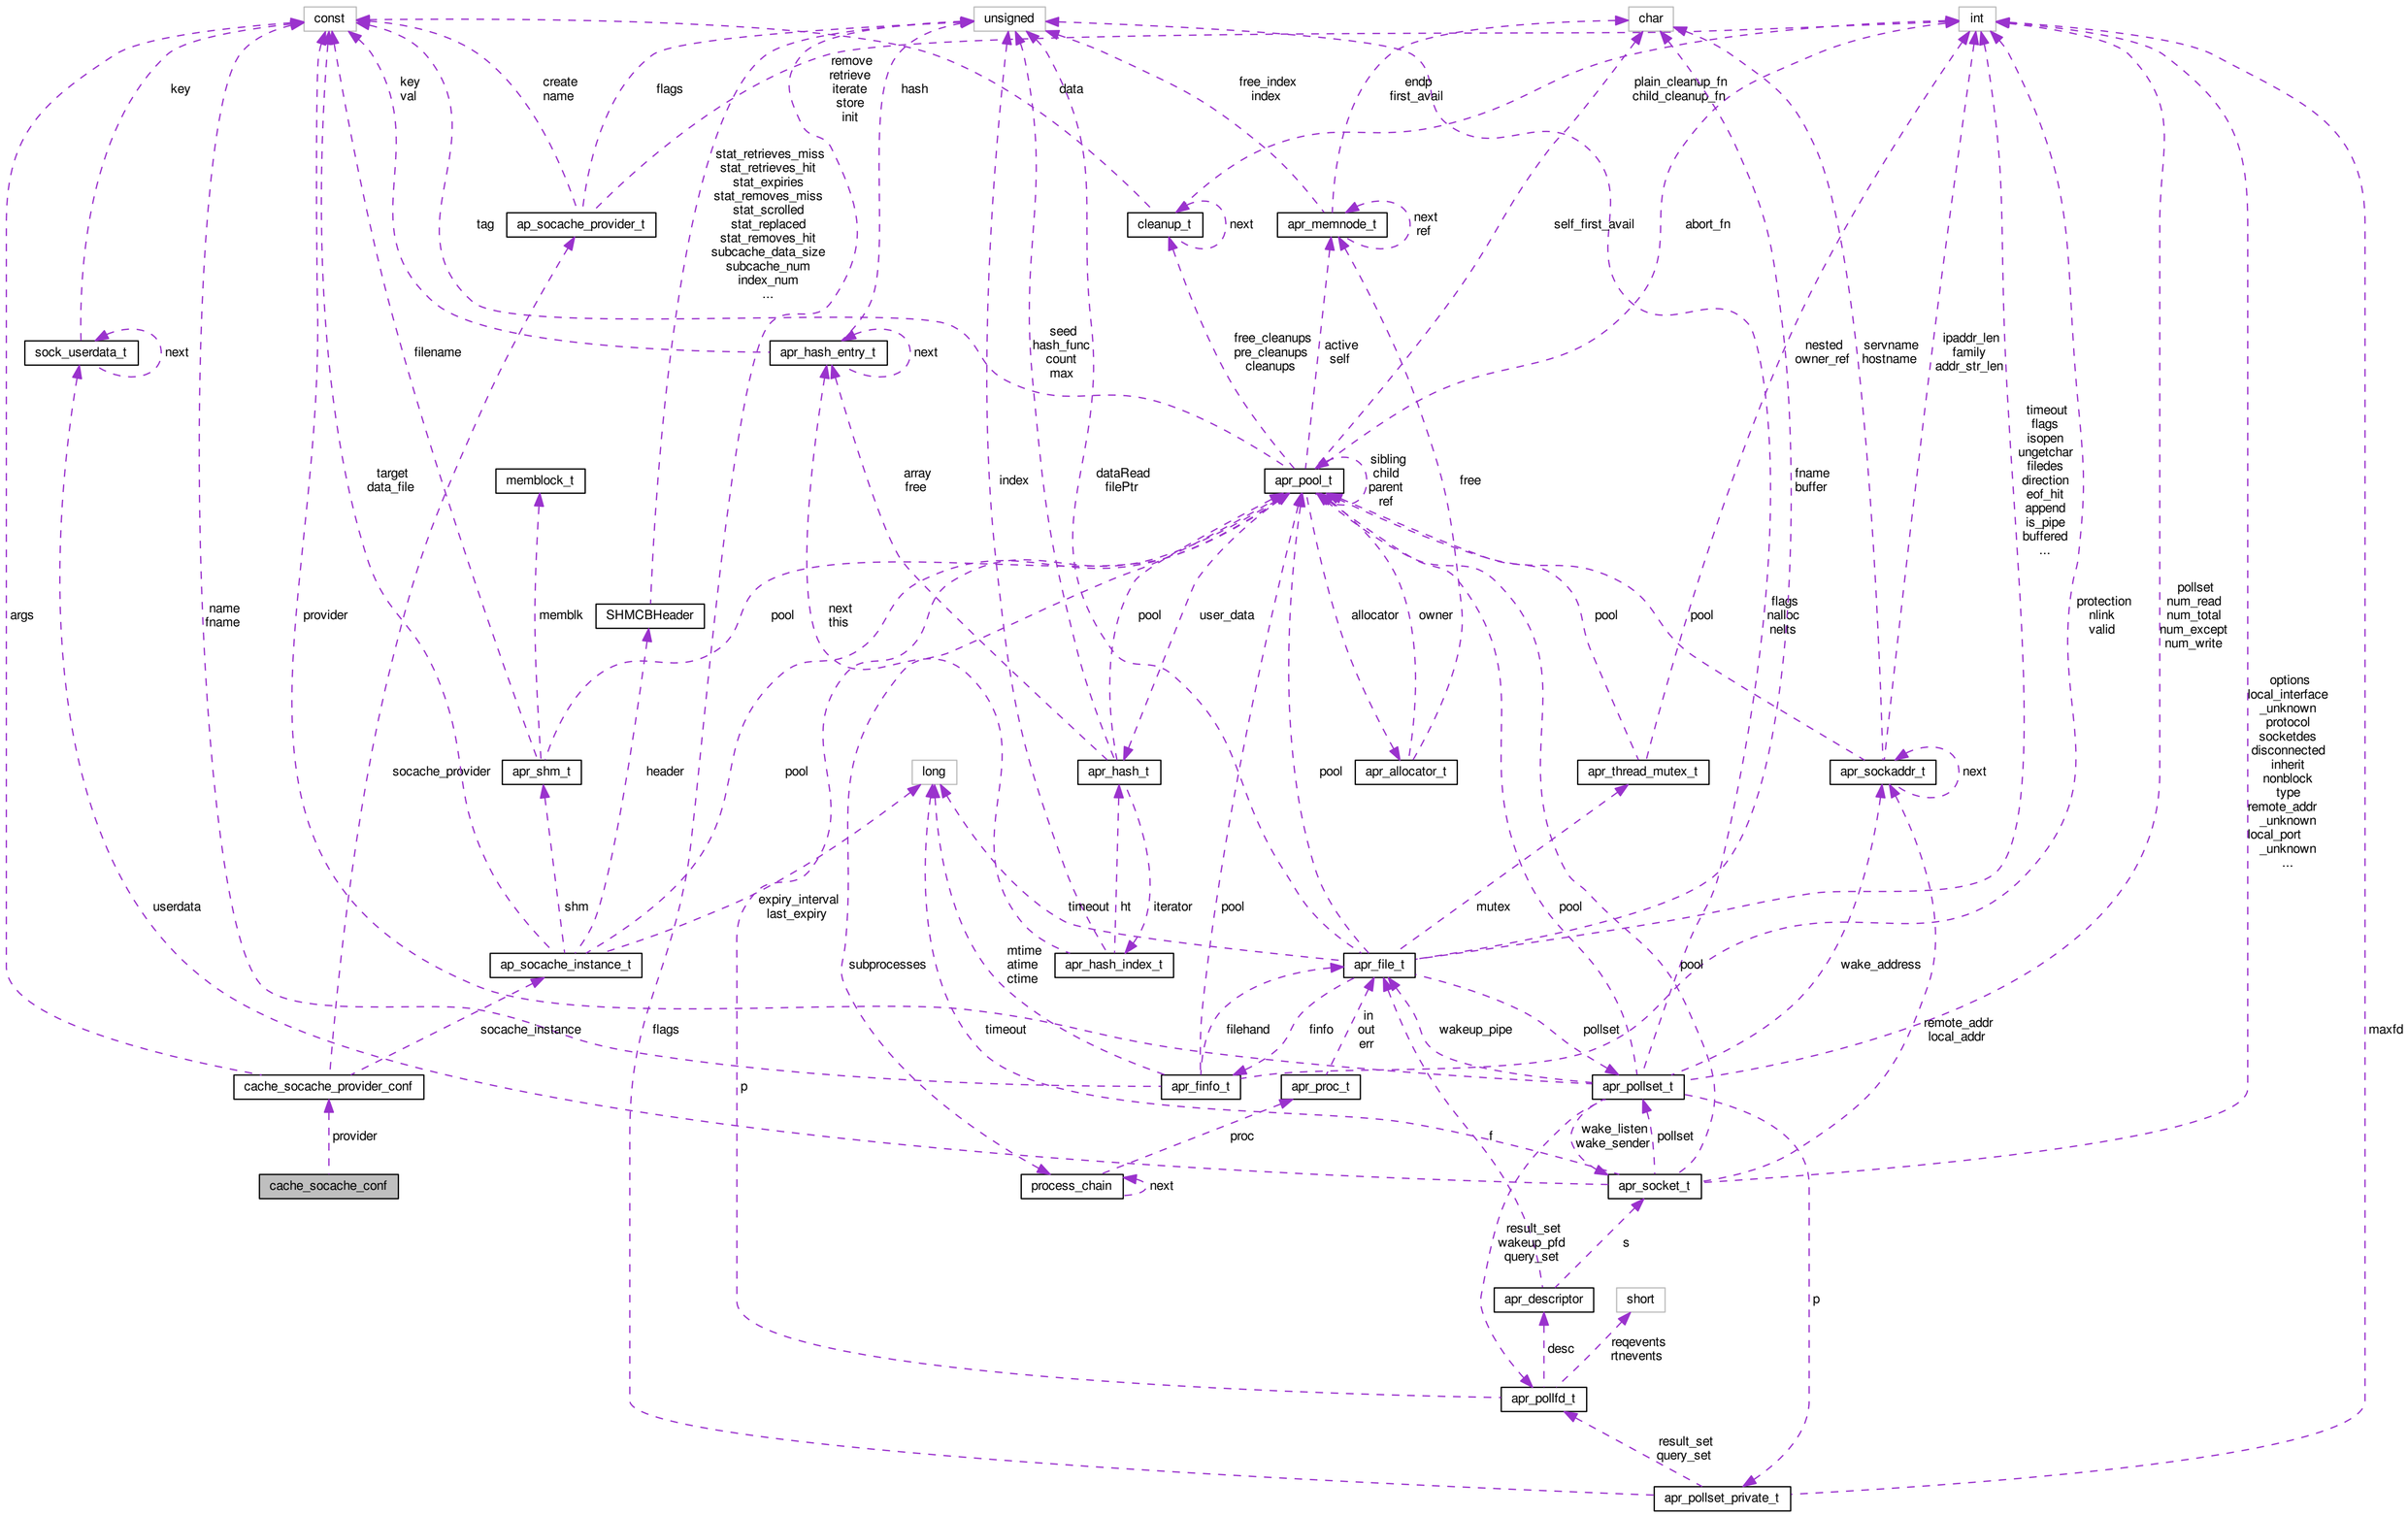
const
unsigned
char
int
sock_userdata_t
ap_socache_provider_t
cleanup_t
apr_memnode_t
apr_hash_entry_t
memblock_t
apr_pool_t
SHMCBHeader
apr_shm_t
long
apr_hash_t
apr_allocator_t
apr_thread_mutex_t
apr_sockaddr_t
ap_socache_instance_t
apr_hash_index_t
apr_file_t
cache_socache_provider_conf
cache_socache_conf
apr_finfo_t
apr_proc_t
apr_pollset_t
process_chain
apr_socket_t
apr_descriptor
short
apr_pollfd_t
apr_pollset_private_t
key
key
val
create
name
flags
remove
retrieve
iterate
store
init
hash
data
free_index
index
endp
first_avail
plain_cleanup_fn
child_cleanup_fn
tag
stat_retrieves_miss
stat_retrieves_hit
stat_expiries
stat_removes_miss
stat_scrolled
stat_replaced
stat_removes_hit
subcache_data_size
subcache_num
index_num
...
next
next
ref
self_first_avail
abort_fn
filename
seed
hash_func
count
max
free_cleanups
pre_cleanups
cleanups
active
self
nested
owner_ref
servname
hostname
ipaddr_len
family
addr_str_len
target
data_file
array
free
index
dataRead
filePtr
sibling
child
parent
ref
free
fname
buffer
timeout
flags
isopen
ungetchar
filedes
direction
eof_hit
append
is_pipe
buffered
...
protection
nlink
valid
pollset
num_read
num_total
num_except
num_write
options
local_interface
_unknown
protocol
socketdes
disconnected
inherit
nonblock
type
remote_addr
_unknown
local_port
_unknown
...
maxfd
args
name
fname
provider
memblk
pool
next
this
pool
user_data
allocator
owner
pool
pool
flags
nalloc
nelts
socache_provider
header
pool
pool
next
userdata
shm
expiry_interval
last_expiry
timeout
ht
iterator
pool
mutex
pool
subprocesses
mtime
atime
ctime
pool
wake_address
remote_addr
local_addr
socache_instance
flags
timeout
filehand
finfo
in
out
err
wakeup_pipe
pollset
p
provider
proc
f
wake_listen
wake_sender
pollset
next
result_set
wakeup_pfd
query_set
s
p
desc
reqevents
rtnevents
result_set
query_set