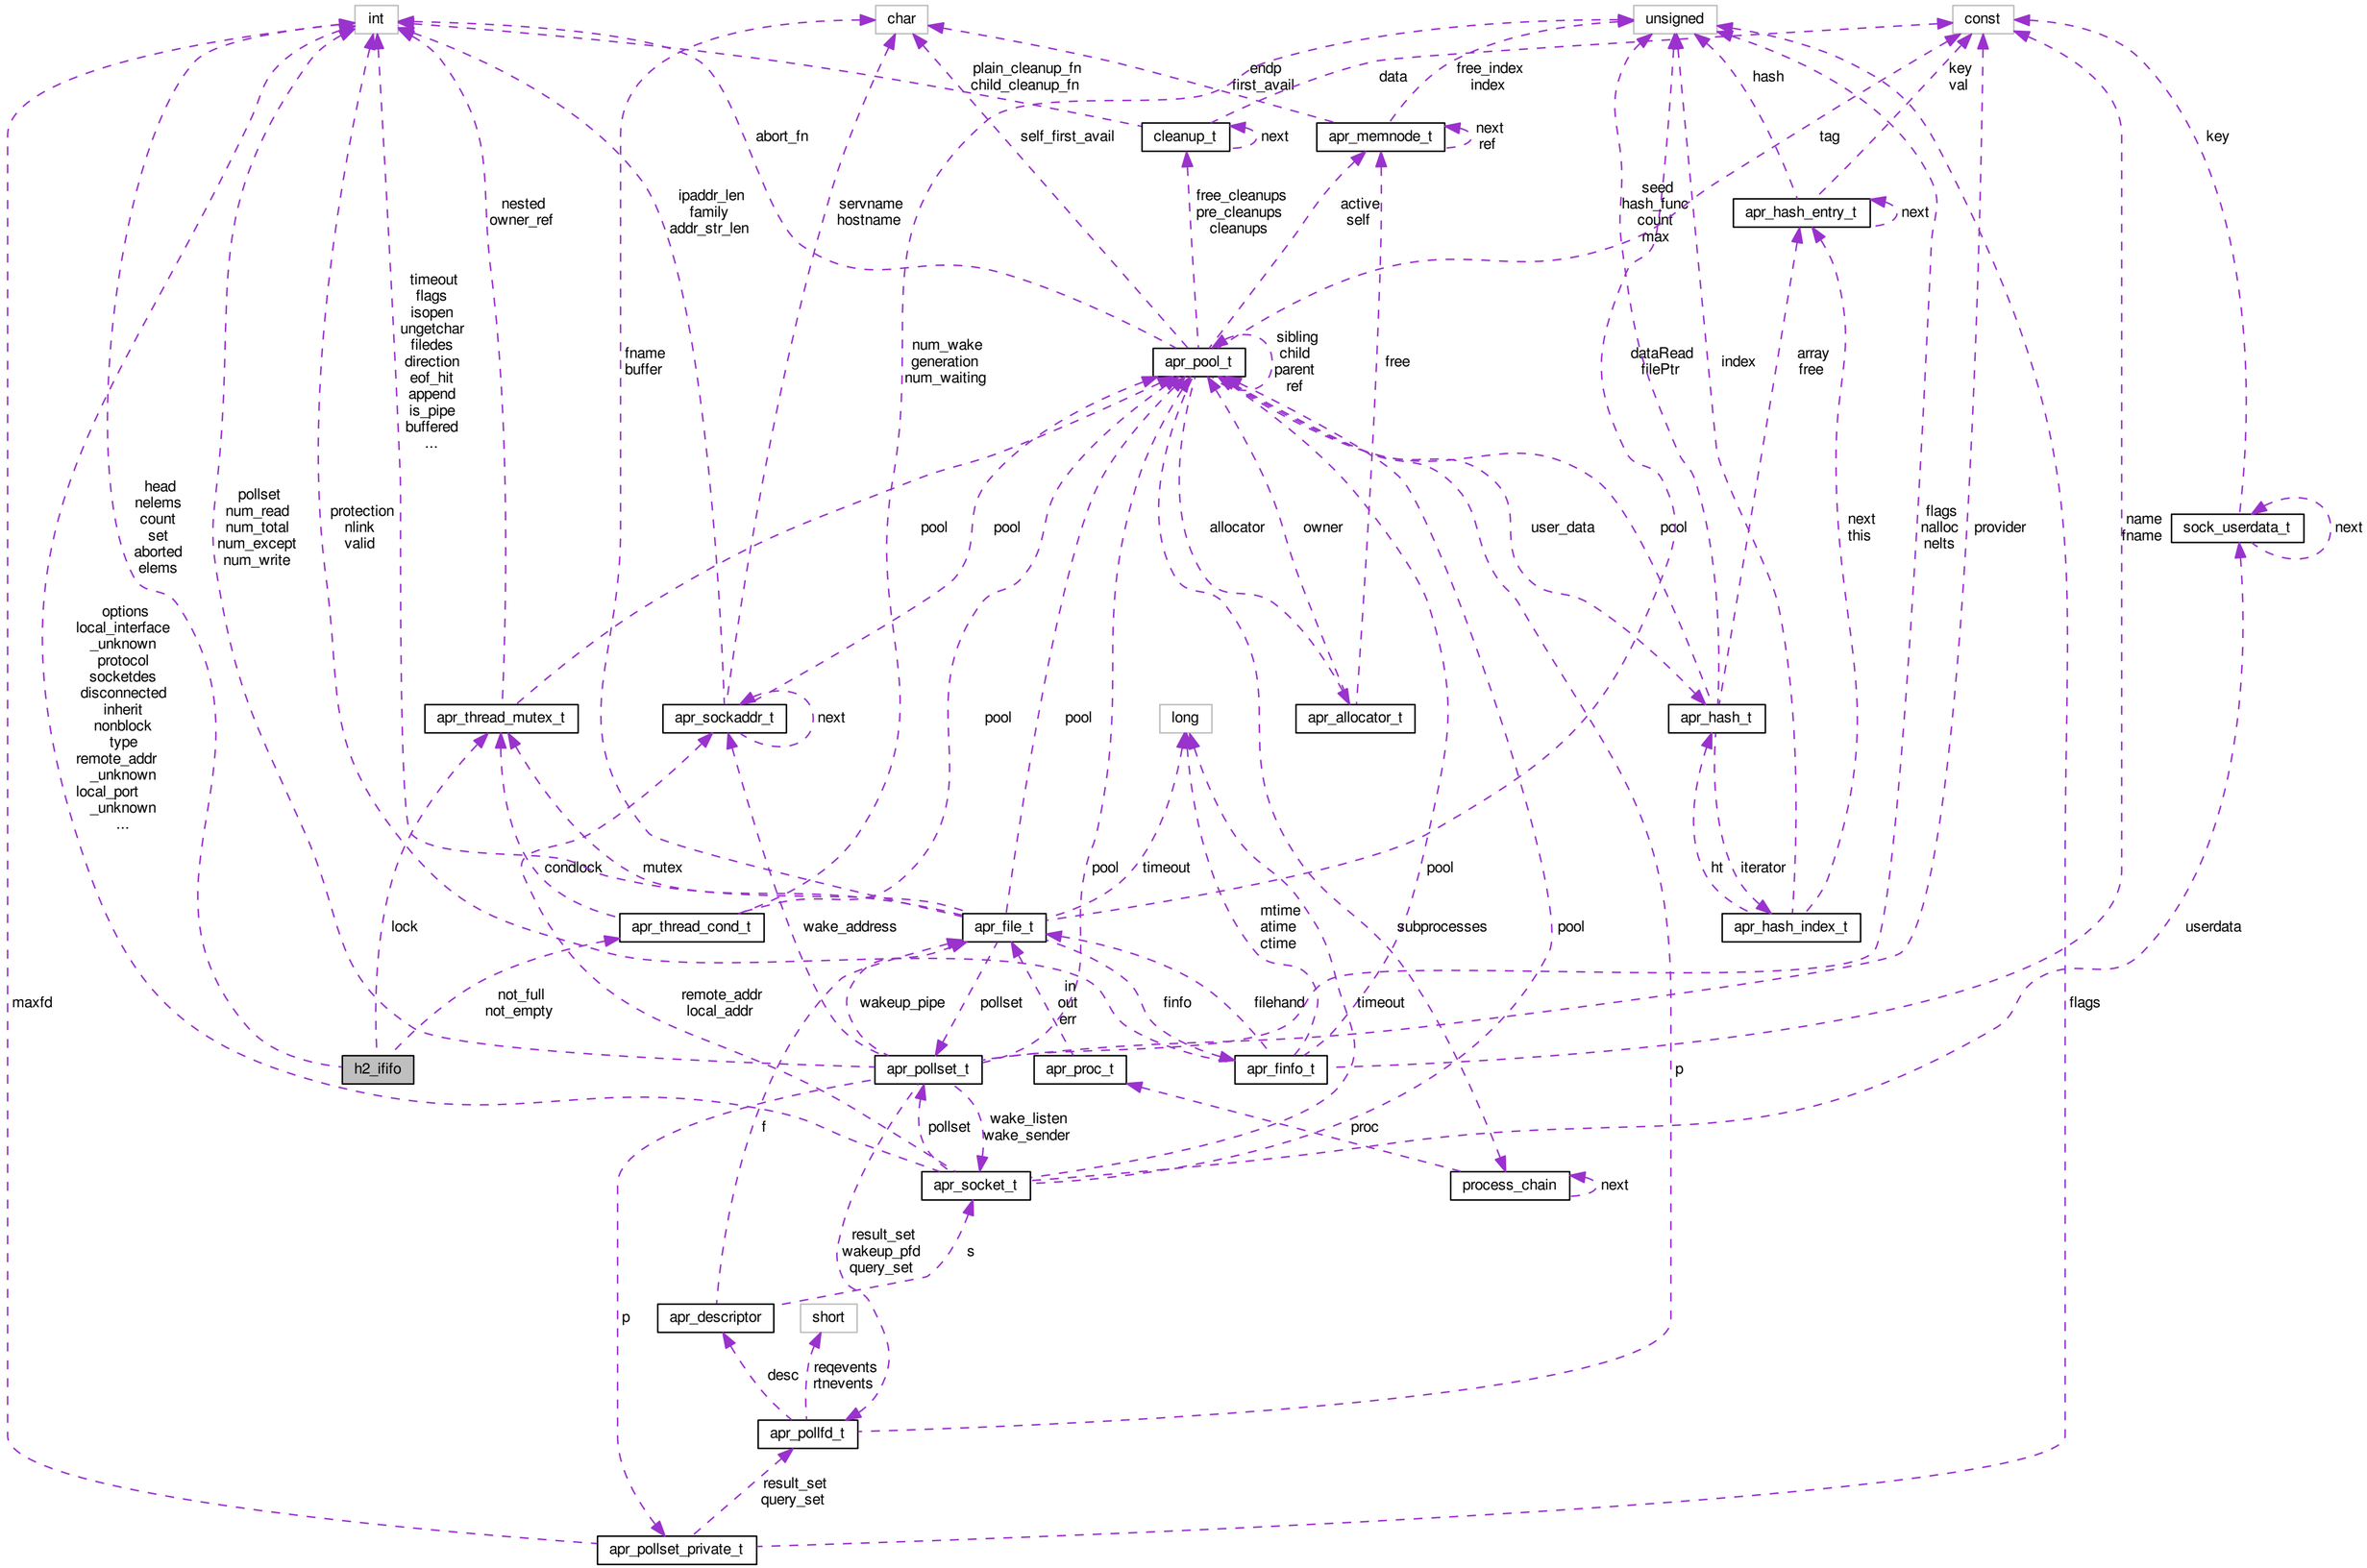
int
char
unsigned
const
cleanup_t
apr_memnode_t
apr_hash_entry_t
apr_pool_t
apr_thread_mutex_t
apr_sockaddr_t
long
apr_allocator_t
apr_hash_t
sock_userdata_t
apr_thread_cond_t
apr_file_t
apr_hash_index_t
h2_ififo
apr_pollset_t
apr_proc_t
apr_finfo_t
apr_socket_t
process_chain
apr_descriptor
short
apr_pollfd_t
apr_pollset_private_t
plain_cleanup_fn
child_cleanup_fn
endp
first_avail
data
free_index
index
hash
key
val
tag
key
abort_fn
self_first_avail
next
next
ref
nested
owner_ref
ipaddr_len
family
addr_str_len
servname
hostname
free_cleanups
pre_cleanups
cleanups
active
self
seed
hash_func
count
max
next
timeout
flags
isopen
ungetchar
filedes
direction
eof_hit
append
is_pipe
buffered
...
fname
buffer
num_wake
generation
num_waiting
sibling
child
parent
ref
free
dataRead
filePtr
index
array
free
head
nelems
count
set
aborted
elems
pollset
num_read
num_total
num_except
num_write
protection
nlink
valid
pool
pool
allocator
owner
user_data
pool
next
this
flags
nalloc
nelts
provider
name
fname
next
options
local_interface
_unknown
protocol
socketdes
disconnected
inherit
nonblock
type
remote_addr
_unknown
local_port
_unknown
...
pool
pool
condlock
mutex
pool
timeout
pool
ht
iterator
lock
wake_address
mtime
atime
ctime
subprocesses
pool
userdata
maxfd
not_full
not_empty
remote_addr
local_addr
wakeup_pipe
pollset
in
out
err
finfo
filehand
timeout
flags
p
f
pollset
wake_listen
wake_sender
proc
next
result_set
wakeup_pfd
query_set
s
p
desc
reqevents
rtnevents
result_set
query_set