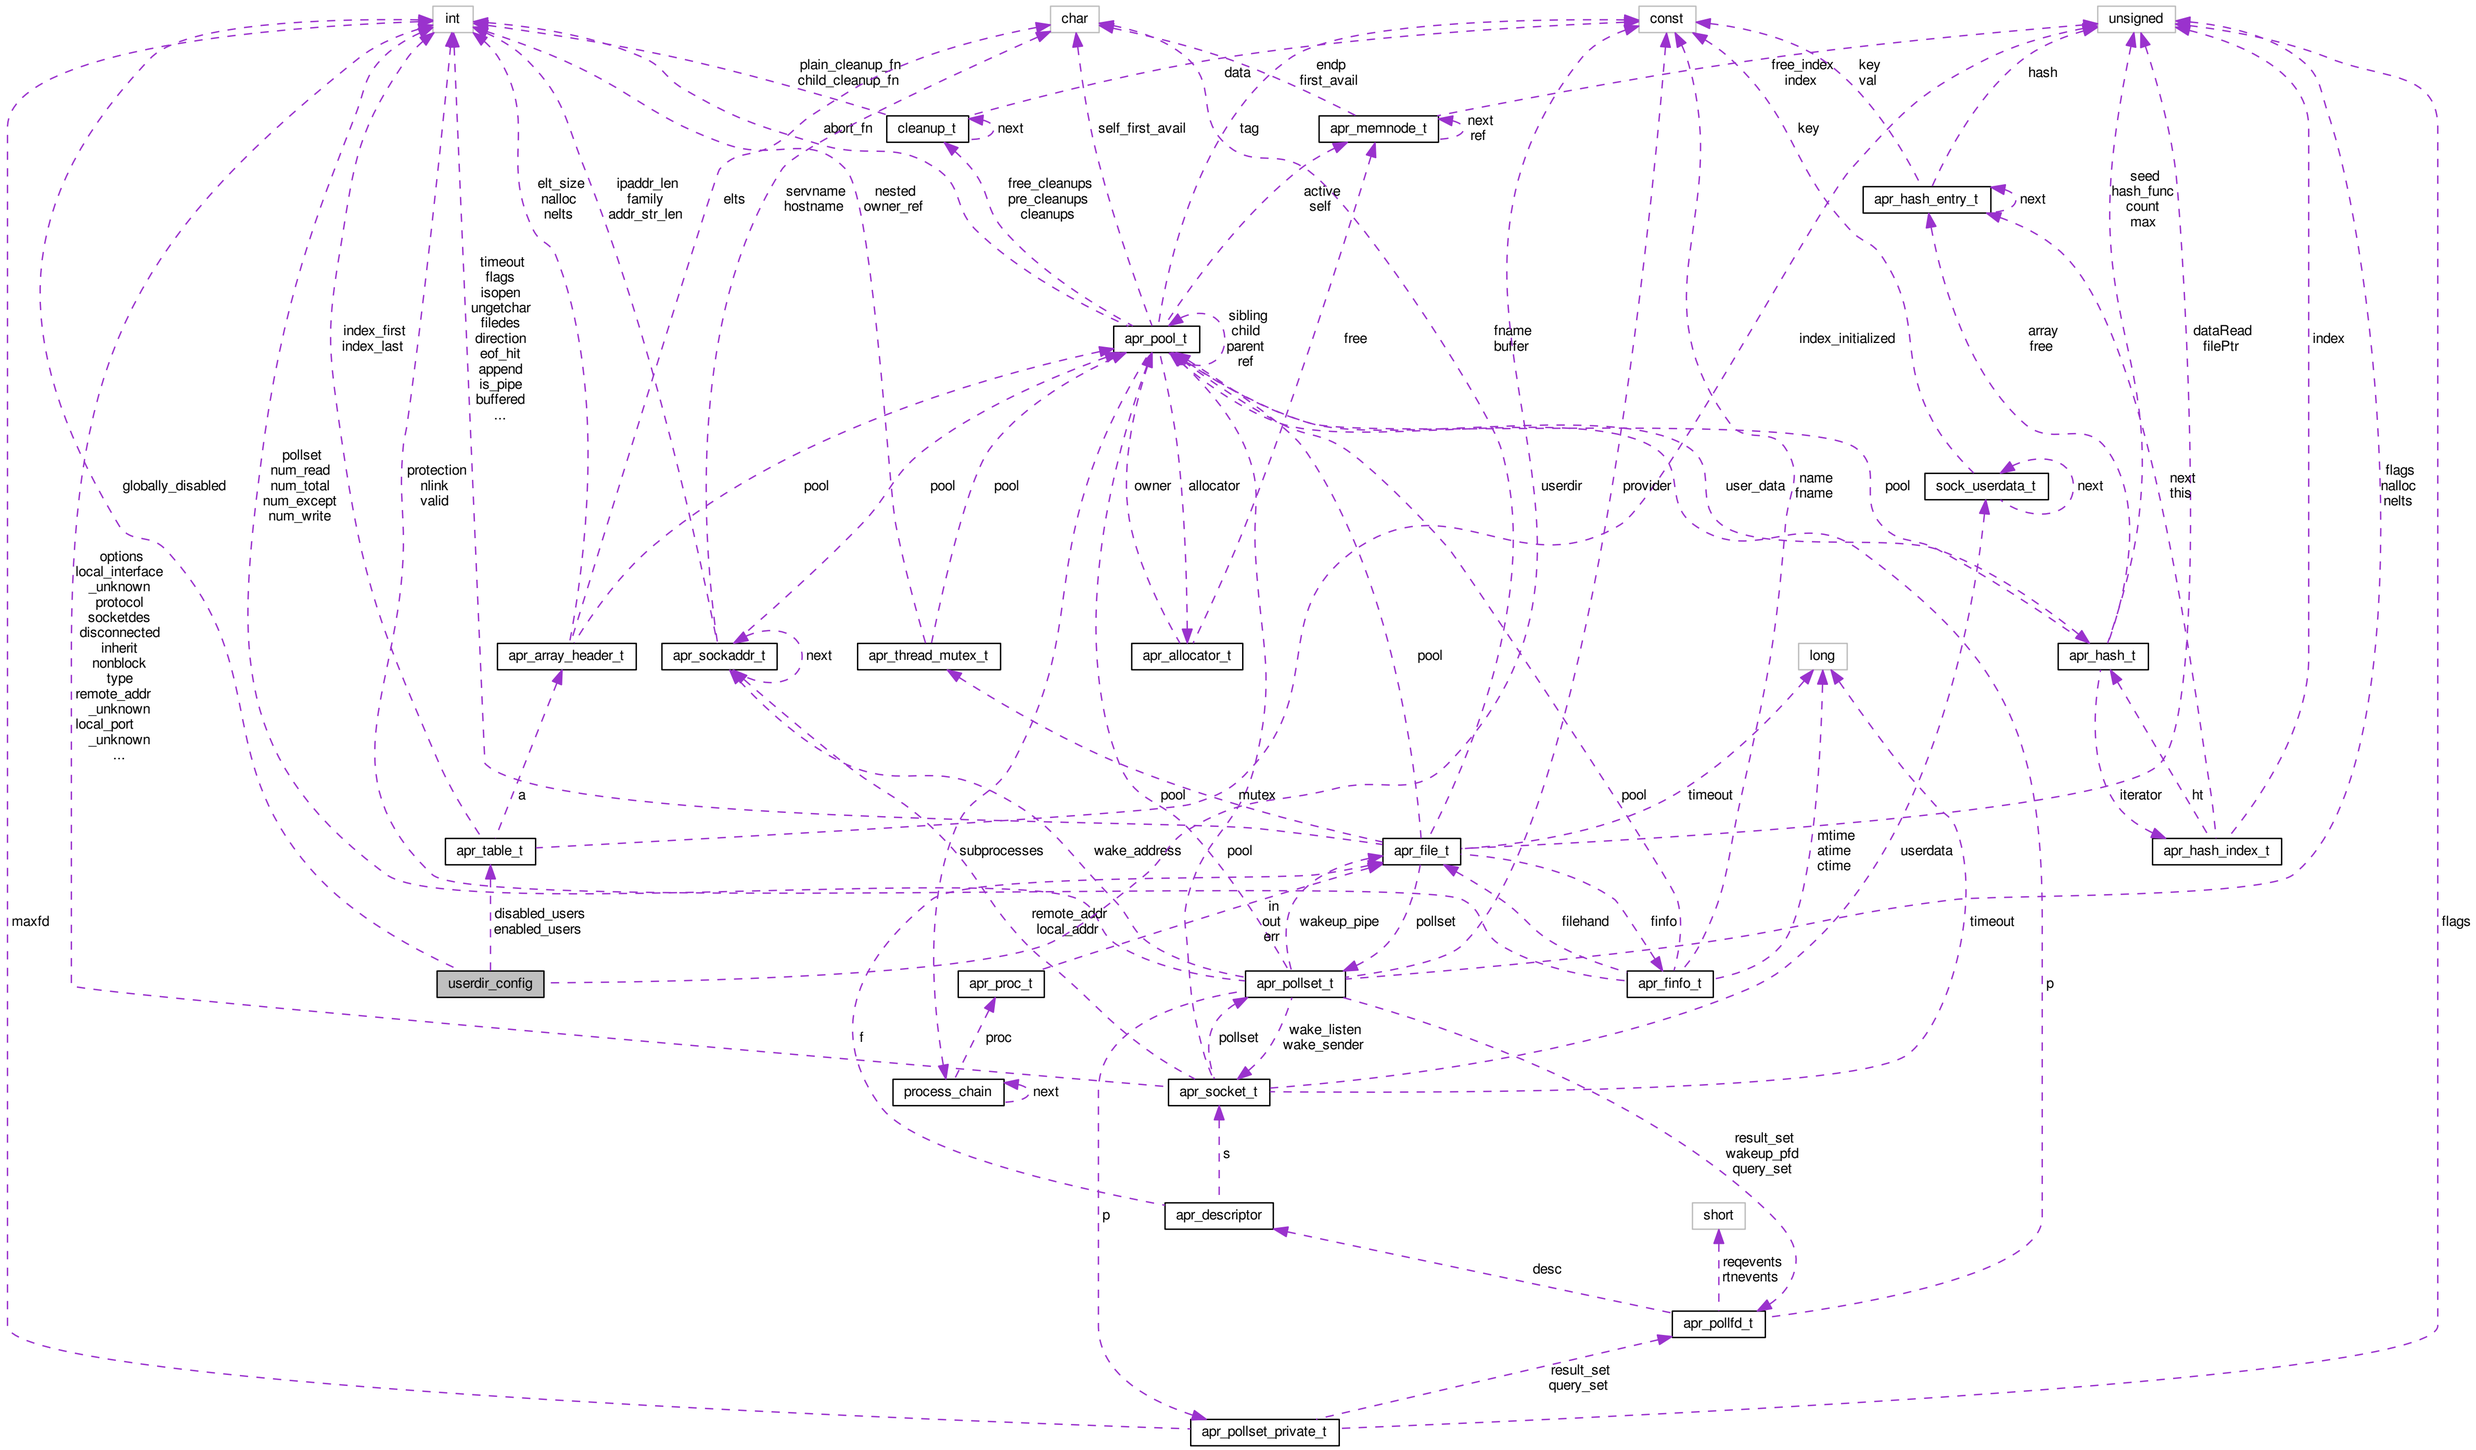
int
char
const
unsigned
cleanup_t
apr_memnode_t
apr_hash_entry_t
apr_pool_t
sock_userdata_t
apr_array_header_t
apr_sockaddr_t
apr_thread_mutex_t
apr_allocator_t
long
apr_hash_t
apr_table_t
apr_file_t
apr_hash_index_t
userdir_config
apr_proc_t
apr_pollset_t
apr_finfo_t
process_chain
apr_socket_t
apr_descriptor
short
apr_pollfd_t
apr_pollset_private_t
plain_cleanup_fn
child_cleanup_fn
abort_fn
next
self_first_avail
data
tag
endp
first_avail
next
ref
free_index
index
key
val
hash
key
elt_size
nalloc
nelts
ipaddr_len
family
addr_str_len
elts
servname
hostname
nested
owner_ref
free_cleanups
pre_cleanups
cleanups
active
self
seed
hash_func
count
max
next
sibling
child
parent
ref
free
fname
buffer
index_initialized
array
free
dataRead
filePtr
index
index_first
index_last
timeout
flags
isopen
ungetchar
filedes
direction
eof_hit
append
is_pipe
buffered
...
globally_disabled
pollset
num_read
num_total
num_except
num_write
protection
nlink
valid
pool
pool
pool
owner
allocator
userdir
provider
user_data
name
fname
pool
next
this
flags
nalloc
nelts
options
local_interface
_unknown
protocol
socketdes
disconnected
inherit
nonblock
type
remote_addr
_unknown
local_port
_unknown
...
pool
a
pool
mutex
pool
timeout
iterator
ht
subprocesses
wake_address
pool
mtime
atime
ctime
userdata
maxfd
disabled_users
enabled_users
remote_addr
local_addr
in
out
err
wakeup_pipe
pollset
filehand
finfo
timeout
flags
f
proc
pollset
wake_listen
wake_sender
next
p
result_set
wakeup_pfd
query_set
s
p
desc
reqevents
rtnevents
result_set
query_set