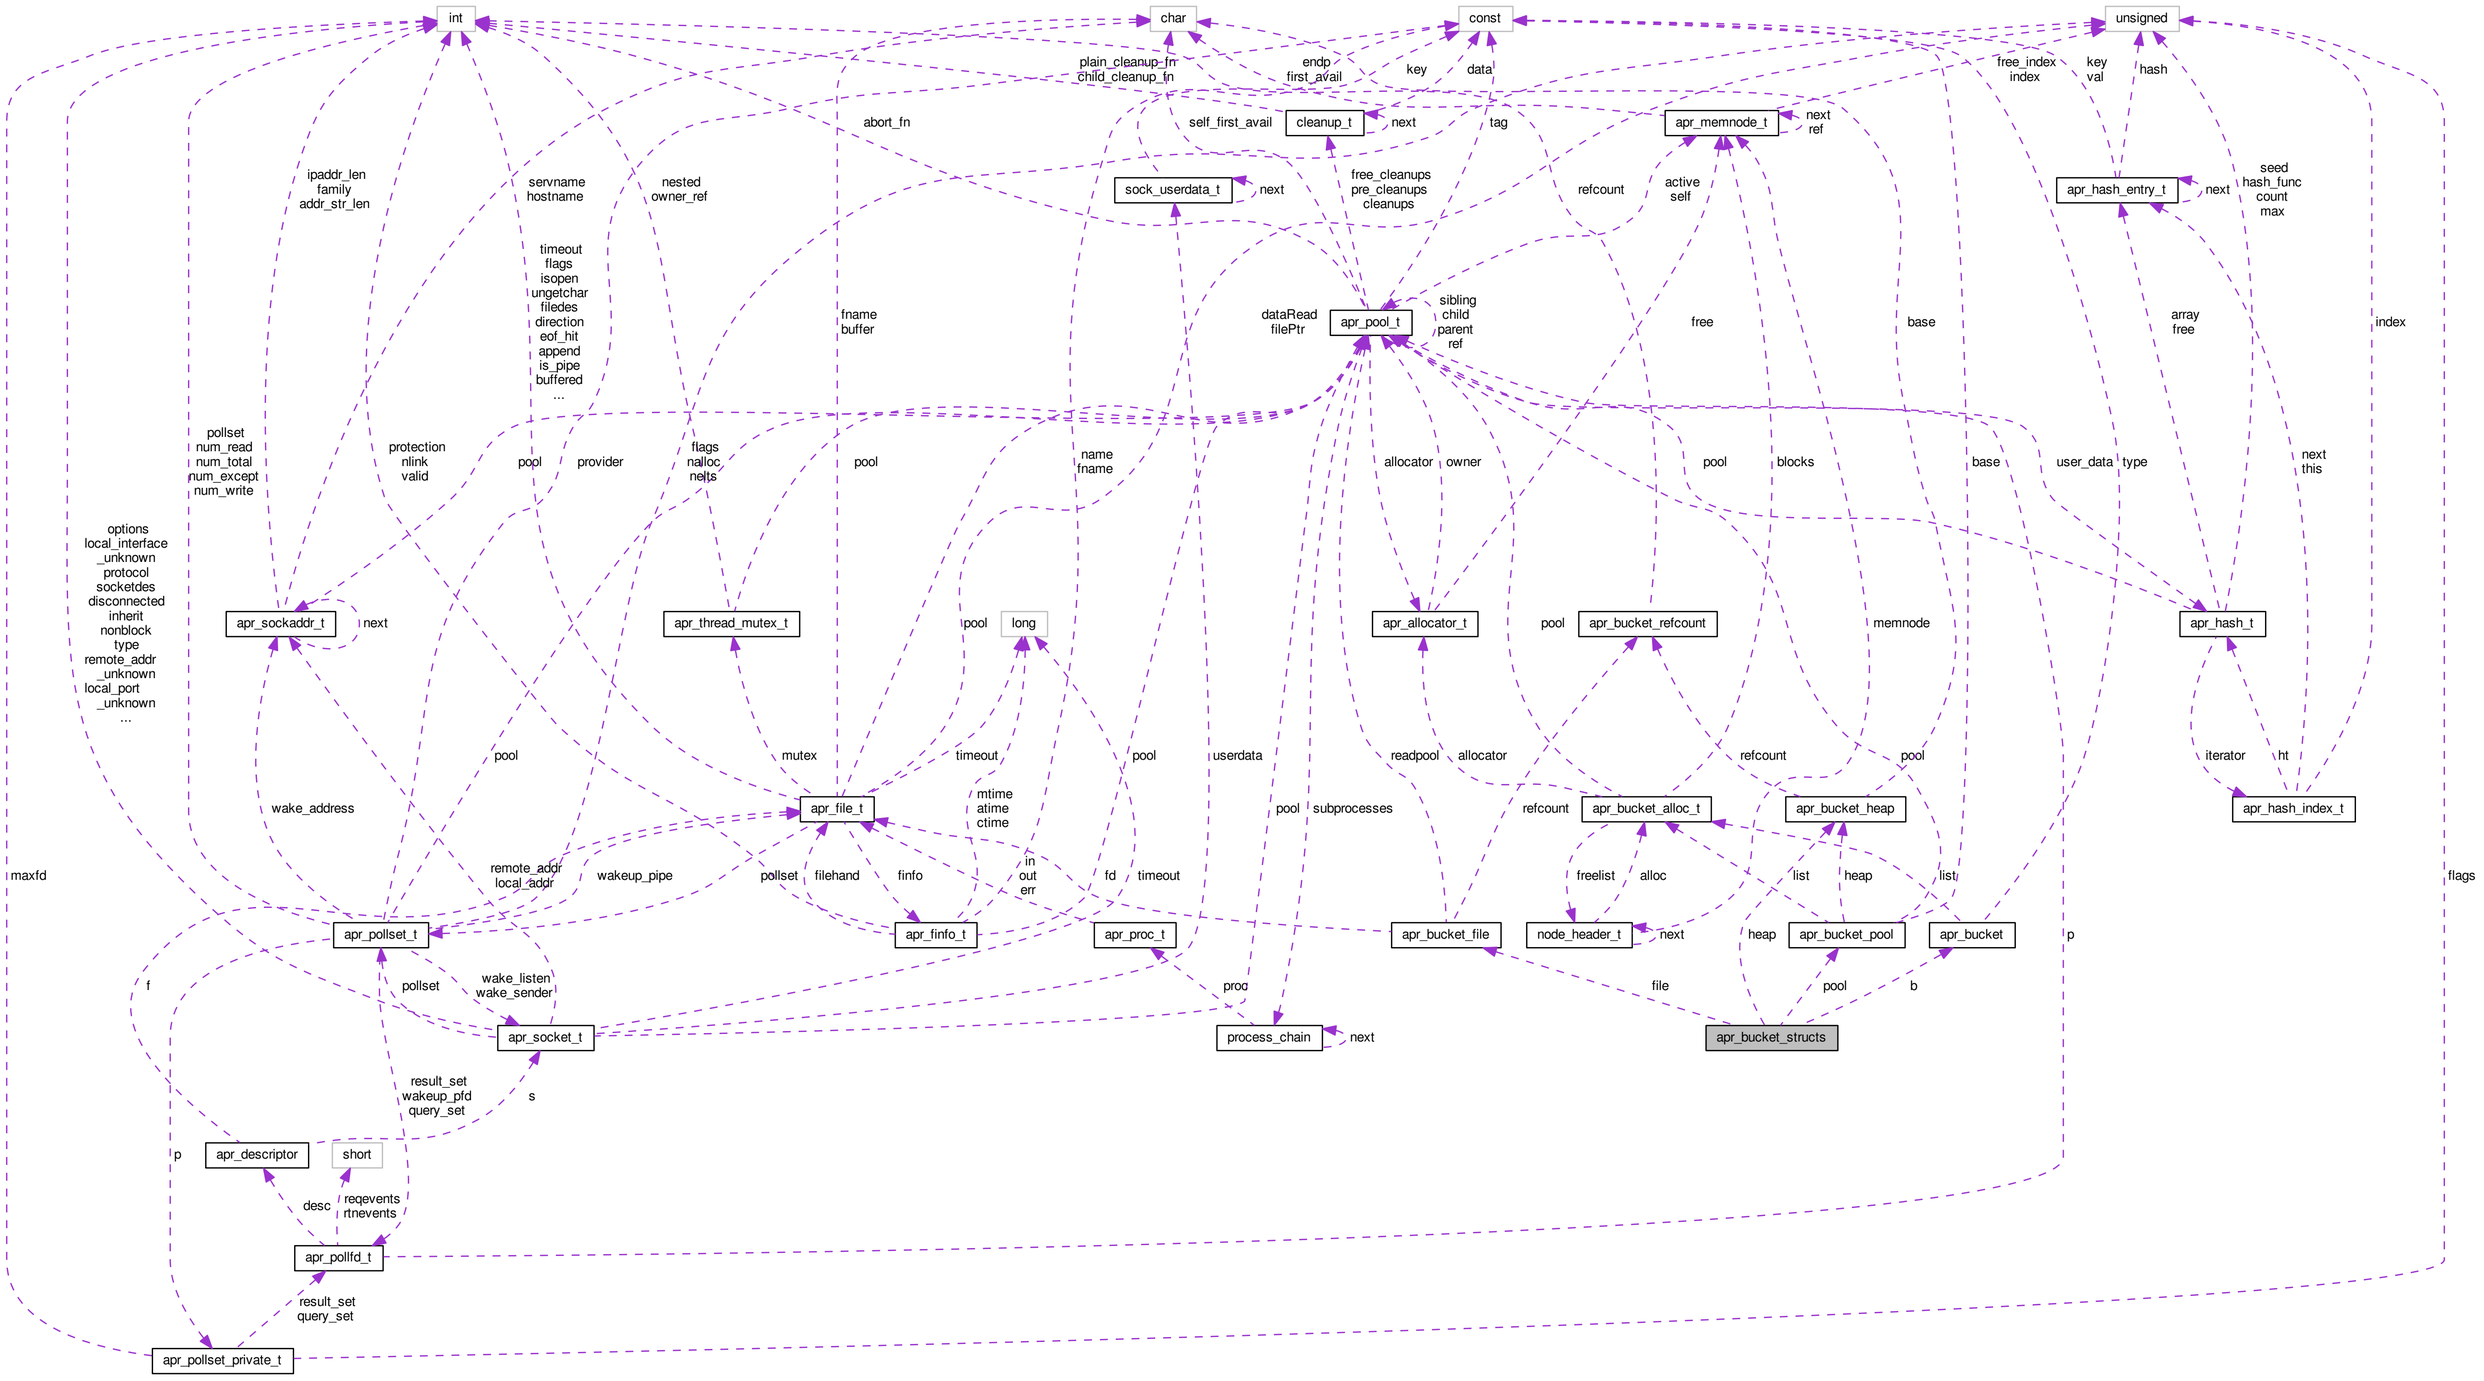
int
char
const
unsigned
cleanup_t
sock_userdata_t
apr_memnode_t
apr_hash_entry_t
apr_pool_t
apr_sockaddr_t
apr_thread_mutex_t
long
apr_allocator_t
apr_bucket_refcount
apr_hash_t
apr_file_t
apr_bucket_alloc_t
apr_bucket_heap
apr_hash_index_t
apr_pollset_t
apr_finfo_t
apr_proc_t
apr_bucket_file
node_header_t
apr_bucket_pool
apr_bucket
apr_socket_t
process_chain
apr_bucket_structs
apr_descriptor
short
apr_pollfd_t
apr_pollset_private_t
plain_cleanup_fn
child_cleanup_fn
endp
first_avail
key
data
free_index
index
key
val
hash
abort_fn
self_first_avail
next
tag
next
ref
ipaddr_len
family
addr_str_len
servname
hostname
nested
owner_ref
free_cleanups
pre_cleanups
cleanups
refcount
active
self
seed
hash_func
count
max
timeout
flags
isopen
ungetchar
filedes
direction
eof_hit
append
is_pipe
buffered
...
fname
buffer
dataRead
filePtr
sibling
child
parent
ref
free
base
array
free
index
pollset
num_read
num_total
num_except
num_write
protection
nlink
valid
pool
provider
flags
nalloc
nelts
pool
name
fname
allocator
owner
pool
blocks
base
user_data
type
next
this
options
local_interface
_unknown
protocol
socketdes
disconnected
inherit
nonblock
type
remote_addr
_unknown
local_port
_unknown
...
next
pool
long
memnode
pool
mutex
timeout
pool
userdata
readpool
allocator
refcount
pool
iterator
ht
wake_address
mtime
atime
ctime
pool
subprocesses
refcount
maxfd
remote_addr
local_addr
wakeup_pipe
pollset
filehand
finfo
in
out
err
fd
timeout
freelist
alloc
list
heap
list
flags
f
pollset
wake_listen
wake_sender
proc
file
pool
b
p
next
result_set
wakeup_pfd
query_set
s
p
desc
reqevents
rtnevents
result_set
query_set