
joi, 7 ianuarie 2021 19:22

= alaterrere de modure

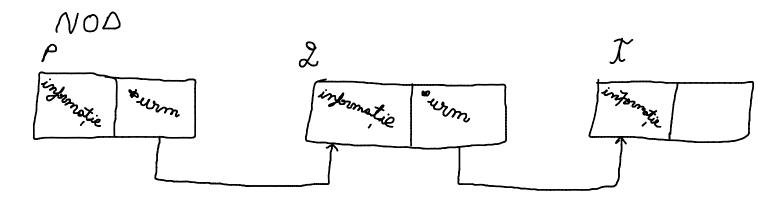

struct nod int info struct nod wrm;

```
#include <stdio.h>
struct nod
    int info;
    struct nod* urm;
};
int main()
{
    struct nod *p = (struct nod*)malloc(sizeof(struct nod));
    p -> info = 10;
    printf("%d ",p->info);
   /// adaugare element urmator si afisare folosind nodul p
    struct nod *q = (struct nod*)malloc(sizeof(struct nod));
    q \rightarrow info = 20;
    p \rightarrow urm = q;
    printf("%d\n", p -> urm -> info);
    system("pause");
    return 0;
```