

# On the competitiveness of memoryless strategies for the $k$ -Canadian Traveller Problem

Pierre Bergé<sup>a,\*</sup>, Julien Hemery<sup>b</sup>, Arpad Rimmel<sup>b</sup>, Joanna Tomasik<sup>b</sup>

<sup>a</sup>*LRI, Université Paris-Sud, Université Paris-Saclay, 91405 Orsay Cedex, France*

<sup>b</sup>*LRI, CentraleSupélec, Université Paris-Saclay, 91405 Orsay Cedex, France*

---

## Abstract

The  $k$ -Canadian Traveller Problem, defined and proven PSPACE-complete by Papadimitriou and Yannakakis, is a generalization of the Shortest Path Problem which admits blocked edges. Its objective is to determine the strategy that makes the traveller traverse graph  $G$  between two given nodes  $s$  and  $t$  with the minimal distance, knowing that at most  $k$  edges are blocked. The traveller discovers that an edge is blocked when arriving at its endpoint.

We study the competitiveness of randomized memoryless strategies for the  $k$ -CTP. Memoryless strategies are more attractive in practice as a decision taken by the strategy for a traveller in node  $v$  of  $G$  does not depend on its anterior moves. We establish that the competitive ratio of any randomized memoryless strategy cannot be better than  $2k + O(1)$ . This means that randomized memoryless strategies are asymptotically as competitive as deterministic strategies which achieve a ratio  $2k + 1$  at best.

---

## 1. Introduction

The *Canadian Traveller Problem* (CTP), a generalization of the *Shortest Path Problem*, was introduced in [6]. Given an undirected weighted graph  $G = (V, E, \omega)$  and two nodes  $s, t \in V$ , the objective is to design a strategy to make a traveller walk from  $s$  to  $t$  through  $G$  on the shortest path possible. Its particularity is that some edges of  $G$  are potentially blocked. The traveller does not know, however, which edges are blocked. This implies that we solve the CTP with online algorithms, called strategies. He discovers blocked edges, also called blockages, when arriving to its endpoints. The  *$k$ -Canadian Traveller Problem* ( $k$ -CTP) is the parameterized variant of CTP, where an upper bound  $k$  for the number of blocked edges is given. Both CTP and  $k$ -CTP are PSPACE-complete [2, 6].

---

\*Corresponding author

Email address: [Pierre.Berge@lri.fr](mailto:Pierre.Berge@lri.fr) (Pierre Bergé)

*State-of-the-art.* Strategies for the  $k$ -CTP are studied through the competitive analysis, which evaluates their quality [4]. The competitive ratio of a strategy is the maximum, over every satisfiable instance, of the ratio of the distance traversed by the traveller following the strategy and the *optimal offline cost*, which is the distance he traverses if he knows blocked edges from the beginning.

There are two classes of strategies: deterministic and randomized. Westphal [7] proved that there is no deterministic strategy that achieves a competitive ratio better than  $2k + 1$ . This ratio is reached by REPOSITION and COMPARISON strategies [7, 8]. The REPOSITION strategy repeats an attempt to reach  $t$  through the shortest  $(s, t)$ -path going back to  $s$  after the discovery of an obstacle. As in practical cases such as urban networks, it does not seem realistic, Xu *et al.* [8] introduced the GREEDY algorithm. For grids, it achieves an  $\mathcal{O}(1)$  ratio, regardless of  $k$ . However, for any graph, this ratio is  $\mathcal{O}(2^k)$ .

We evaluate the competitiveness of the randomized strategies by calculating the maximal ratio of the mean distance traversed by the traveller following the strategy by the optimal offline cost. Westphal [7] proved that there is no randomized algorithm that can attain a ratio smaller than  $k + 1$ . However, unlike the deterministic case, no  $(\alpha k + 1)$ -competitive randomized strategy,  $\alpha < 2$ , was identified, excepted for very particular cases. Two randomized strategies have been proposed. Demaine *et al.* [5] designed a strategy with a ratio  $\left(1 + \frac{\sqrt{2}}{2}\right)k + 1$ , executed in time of  $\mathcal{O}\left(k\mu^2 |E|^2\right)$  where parameter  $\mu$  may be exponential. It is dedicated to graphs that can be transformed into apex trees. Bender *et al.* studied in [3] a restriction of  $k$ -CTP for graphs composed of node-disjoint  $(s, t)$ -paths and proposed a polynomial-time strategy with ratio  $(k + 1)$ .

*Contributions and paper plan.* We study the competitiveness of memoryless strategies [1, 4]. The choice the traveller makes at node  $v$  (to decide where to go next) is independent of his travel before reaching node  $v$ . Memoryless strategies are worth of interest because they are easy to be implemented as they do not memorize the edges already visited by the traveller to make a decision. The only information they use is the graph  $G \setminus E'_*$ , which is the graph  $G$  deprived of the blocked edges discovered  $E'_*$ . Given that deterministic memoryless strategies cannot achieve a ratio better than  $2k + 1$ , our goal is to prove that randomized memoryless strategies are not more competitive asymptotically. To do this, we identify a lower bound  $c_k = 2k + \mathcal{O}(1)$  of the competitiveness of randomized memoryless strategies for the  $k$ -CTP.

We remind, in Section 2, the definitions of  $k$ -CTP, memoryless strategies and the competitive ratio. In Section 3, we present sets  $\mathcal{R}_k$  of *road maps*, *i.e.* pairs  $(G, E_*)$ , which are a means to study the performance of memoryless strategies. We prove in Section 4 that randomized memoryless strategies cannot drop below a ratio  $c_k = 2k + \mathcal{O}(1)$  on road maps in  $\mathcal{R}_k$ , where expression  $\mathcal{O}(1)$  is clarified. Eventually, we draw conclusions and highlight the future work in Section 5.

## 2. Definitions

We start by introducing the notation. For any graph  $G = (V, E, \omega)$ , let  $G \setminus E'$  denotes its subgraph  $(V, E \setminus E', \omega)$ .

### 2.1. Memoryless Strategies for the $k$ -CTP

We remind the definition of CTP. Let  $G = (V, E, \omega)$  be an undirected graph with positive weights. The objective is to make a traveller traverse the graph from a source node  $s$  to a target one  $t$ , with  $s, t \in V$ . There is a set  $E_* \subsetneq E$  of blocked edges. The traveller does not know a priori which edges are blocked. He discovers a blocked edge only when arriving to one of its endpoints. For example, if  $(v, w)$  is a blockage he will discover it when arriving to  $v$  (or  $w$ ). The goal is to design the strategy  $A$  which minimizes the competitive ratio.

We focus on *memoryless strategies* (MS). Concretely, we suppose that the traveller remembers the blocked edges he has discovered but forgets the nodes which he has already visited. In other words, a decision of an MS is independent of the nodes already visited. In the literature, the term *memoryless* was used in the context of online algorithms (e.g. PAGING PROBLEM [4], LIST UPDATE PROBLEM [1]) which take decisions according to the current state, ignoring past events. An MS can be either deterministic or randomized.

**Definition 1 (Memoryless Strategies for the  $k$ -CTP).** *A deterministic strategy  $A$  is an MS if and only if (iff) the next node  $w$  the traveller visits depends on graph  $G$  deprived of blocked edges already discovered  $E'_*$  and the current traveller position  $v$ :  $w = A(G \setminus E'_*, v)$ . Similarly, a randomized strategy  $A$  is an MS iff node  $w$  is the realization of a discrete random variable  $X = A(G \setminus E'_*, v)$ .*

For example, the GREEDY strategy [8] is a deterministic MS. It consists in choosing at each step the first edge of the shortest path between the current node  $v$  and the target  $t$ . In contrast, the REPOSITION strategy [7] is not an MS as any decision refers to the past moves of the traveller. The polynomial-time strategies proposed in the literature do not use much memory information in the decision-taking process. Either they are memoryless or they use a weak quantity of memory. For example, REPOSITION (deterministic [7] or randomized [3]) can be implemented with a one bit memory given that the only information to retain is whether the traveller tries to reach  $t$  or to return to  $s$ .

The following process allows to identify whether a strategy  $A$  is a deterministic MS. Let us suppose that a traveller  $T_1$  executes strategy  $A$ : he has already visited certain nodes of the graph, he is currently at node  $v$  but he has not reached target  $t$  yet. Let us imagine a second traveller  $T_2$  who is airdropped on node  $v$  and starts applying strategy  $A$ . If the traveller  $T_2$  always follows the same path as  $T_1$  until reaching  $t$ ,  $A$  is a deterministic MS. If  $T_1$  and  $T_2$  may follow different paths, then  $A$  is not an MS. Formally, proving that a strategy is a MS consists in finding the function which transforms the pair  $(G \setminus E'_*, v)$  into node  $w = A(G \setminus E'_*, v)$ .

## 2.2. Competitive ratio

Let  $(G, E_*)$  be a *road map*, *i.e.* a pair with graph  $G = (V, E, \omega)$  and blocked edges  $E_* \subsetneq E$ , such that there is an  $(s, t)$ -path in graph  $G \setminus E_*$  (nodes  $s$  and  $t$  remain in the same connected component when all blocked edges are discovered). We note  $\omega_A(G, E_*)$  the distance traversed by the traveller reaching  $t$  with strategy  $A$  on graph  $G$  with blocked edges  $E_*$  and  $\omega_{\min}(G, E_*)$  the cost of the shortest  $(s, t)$ -path in graph  $G \setminus E_*$ .

The ratio  $\omega_A(G, E_*) / \omega_{\min}(G, E_*)$  is abbreviated as  $c_A(G, E_*)$ . A strategy  $A$  is  $c_A$ -competitive [4, 8] iff for any  $(G, E_*)$ ,  $\omega_A(G, E_*) \leq c_A \omega_{\min}(G, E_*)$ . Otherwise stated, for any  $(G, E_*)$ ,  $c_A(G, E_*) \leq c_A$ . If strategy  $A$  is randomized,  $\omega_A(G, E_*)$  is replaced by  $\mathbb{E}(\omega_A(G, E_*))$  which is the expected distance traversed by the traveller to reach  $t$  with strategy  $A$ . The competitive ratio can also be evaluated on a family  $\mathcal{R}$  of road maps, put formally,

$$c_{A, \mathcal{R}} = \max_{(G, E_*) \in \mathcal{R}} c_A(G, E_*) \quad (1)$$

This “local” competitive ratio fulfils  $c_{A, \mathcal{R}} \leq c_A$ . The definition of the competitive ratio can also be extended to families of strategies. We note  $c_{\text{MS}}$  the competitive ratio of MSes, which is the minimum over competitive ratios of any MSes:  $c_{\text{MS}} = \min_{A \text{ MS}} c_A$ .

## 3. Road atlas used to study randomized MSes

Before specifying *road atlases*  $\mathcal{R}_k$ , *i.e.* sets of road maps, which will be used to evaluate the competitiveness of randomized MSes, we need to introduce the concepts used in their definition.

We define recursively a sequence of graphs  $G_i$  for  $i \geq 1$  with weights from  $\{1, \varepsilon\}$ ,  $0 < \varepsilon \ll 1$ . Graphs  $G_1$  and  $G_{i+1}$  are represented in Figures 1a and 1b, respectively. Graphs  $G_2$  and  $G_3$  are shown in Figure 1c and 1d. Edges with weight 1 are thicker than edges with weight  $\varepsilon$ . On any graph  $G_i$ , axis  $\Delta_{\text{vert}}$  is the vertical axis of symmetry (see Figures 1c and 1d).

We focus on a traveller traversing a road map  $(G_i, E_*)$  composed of graph  $G_i$  and at most  $i$  blocked edges, guided by an MS. Blocked edges in  $E_*$  are at the right of axis  $\Delta_{\text{vert}}$ . Indeed, blocking edges left to  $\Delta_{\text{vert}}$  affects negligibly the total distance traversed by a traveller. Let us suppose that he traverses graph  $G_i$  and has already discovered some blocked edges  $E' \subseteq E_*$ . He tries now to reach  $t$  on graph  $G_i \setminus E'$ , ignoring that the undiscovered blocked edges are  $E'_* = E_* \setminus E'$ . From the memoryless point of view, the graph considered at this step is  $G_i \setminus E'$ , without taking past moves into account. Even if road map  $(G_i, E_*)$  is the instance, an MS might take decisions in function of graphs  $G_i \setminus E'$ , where  $E' \subseteq E_*$ . We note  $\mathcal{G}$  the set of all the subgraphs of  $G_i$ , *i.e.* graphs  $G_i \setminus E'$  with at most  $i$  edges  $E'$  right to  $\Delta_{\text{vert}}$ , for any integer  $i \geq 1$ . We call them *diamond graphs* because of their appearance, diamonds joined together. Formally, we set  $\mathcal{G} = \bigcup_{i=1}^{+\infty} \{G_i \setminus E' : |E'| \leq i\}$ . For any graph  $G \in \mathcal{G}$ ,

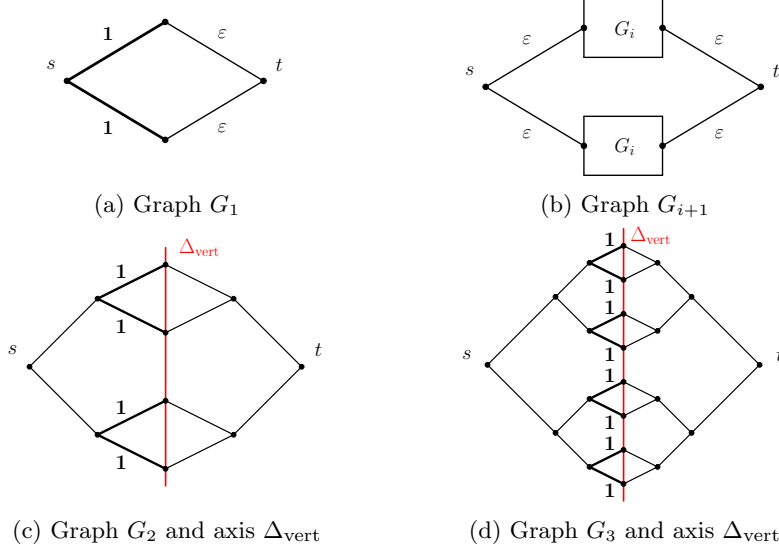


Figure 1: Recursive construction of graphs  $G_i$ . Weights  $\varepsilon$  are omitted in Figures 1c and 1d.

we partition its edges, noted  $E_G$ , in two sets  $E_{G,\text{left}}$  (left to axis  $\Delta_{\text{vert}}$ ) and  $E_{G,\text{right}}$  (right to axis  $\Delta_{\text{vert}}$ ).

To any diamond graph  $G$  of  $\mathcal{G}$ , we associate a *diamond binary tree* (DBT) noted  $T_G$ . Tree  $T_G$  is obtained from the right half of graph  $G$  (on the right side of axis  $\Delta_{\text{vert}}$ ) by successive contractions of edges. Indeed, any node with a single son is merged with its ancestor (see node  $v_2$  in Figure 2a). We note  $T_\emptyset$  the empty tree. Any nonempty tree is a triplet  $(v, T_a, T_b)$  with a root  $v \in V$  and two trees  $T_a$  and  $T_b$ . Figures 2a and 2b illustrate the construction of the DBT.

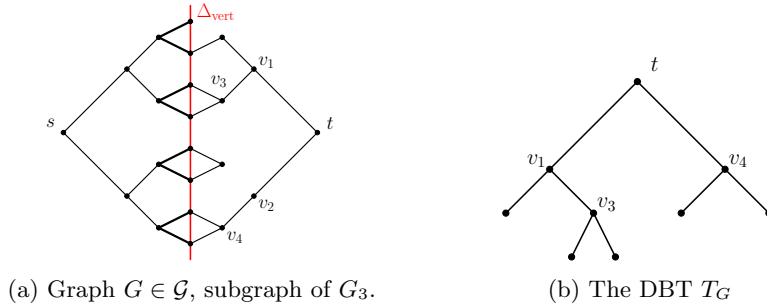


Figure 2: An example of graph  $G \in \mathcal{G}$  and its DBT  $T_G$ .

To put the definition of DBTs formally, let  $L(v)$  denote the set of neighbors of node  $v$  graphically left to  $v$ . For graph  $G$  of Figure 2a,  $L(t) = \{v_1, v_2\}$ ,  $v_3 \in L(v_1)$  and  $L(v_2) = \{v_4\}$ . We force function  $L$  not be applied left to  $\Delta_{\text{vert}}$ , so  $v \in \Delta_{\text{vert}} \Rightarrow L(v) = \emptyset$ . We define below function BIN-TREE which gives the

construction of tree  $T_G$  fulfilling  $\text{BIN-TREE}(t) = T_G$ .

$$\text{BIN-TREE}(v) = \begin{cases} T_\emptyset & \text{if } L(v) = \emptyset, \\ \text{BIN-TREE}(v_{\text{next}}) & \text{if } L(v) = \{v_{\text{next}}\}, \\ (v, \text{BIN-TREE}(v_{\text{up}}), \text{BIN-TREE}(v_{\text{down}})) & \text{if } L(v) = \{v_{\text{up}}, v_{\text{down}}\}. \end{cases}$$

We introduce notations which characterize nodes of a DBT. The depth of a node  $v$  in a DBT  $T$ , noted  $d(v)$ , is equal to the number of edges separating it from the root. We note  $d_{\min}(T)$  the minimum depth among the leaves of  $T$ . For example, for DBT  $T_G$  of Figure 2b,  $d_{\min}(T_G) = 2$ .

**Definition 2 (Sets  $\mathcal{D}_k$ ).** Set  $\mathcal{D}_k$  contain graphs of  $\mathcal{G}$  such that their DBT  $T_G$  fulfils  $d_{\min}(T_G) \geq k$ . Put formally,  $\mathcal{D}_k = \{G \in \mathcal{G} : d_{\min}(T_G) \geq k\}$ .

Finally, we set road atlases  $\mathcal{R}_k$  in Definition 3.

**Definition 3 (Road atlas  $\mathcal{R}_k$ ).** Road atlas  $\mathcal{R}_k$  is composed of road maps  $(G, E_*)$  where  $|E_*| = k$  and  $G \in \mathcal{D}_k$ . Formally,  $\mathcal{R}_k = \{(G, E_*) : G \in \mathcal{D}_k, |E_*| = k\}$ .

#### 4. Competitiveness of randomized MSes

We study the competitiveness of a randomized MS for road atlases  $\mathcal{R}_k$ . We establish properties on DBTs  $T_G$  to understand the behavior of MSes on them.

The following notation characterize edges in an DBT. The depth of an edge  $(u, v)$ ,  $D(u, v)$ , is defined as  $D(u, v) = \min\{d(u), d(v)\}$ . Edge  $e'$  is the mother of edge  $e$  if  $e \cap e' \neq \emptyset$  and  $D(e') = D(e) - 1$ , putting it shortly  $e' = P(e)$ . Edge  $e^*$  is the aunt of edge  $e$  if  $e^* \cap P(e) \neq \emptyset$  and  $D(P(e)) = D(e^*)$ . We indicate this fact as  $e^* = U(e)$ . Observe that the aunt of  $e$  and its mother share the same ancestor which may be written formally as  $U(e) = \{e' \in T : P(e') = P(P(e)) = P^2(e)\}$ .

The following Theorem 1 states that cutting one edge from  $G \in \mathcal{D}_k$  results on a graph  $G \setminus \{e\} \in \mathcal{D}_{k-1}$ .

**Theorem 1.** For any  $G \in \mathcal{D}_k$  and edge  $e \in E_{G, \text{right}}$ , graph  $G \setminus \{e\} \in \mathcal{D}_{k-1}$ .

**Proof.** Let  $G \in \mathcal{D}_k$  and  $e$  be an edge in  $E_{G, \text{right}}$ . There is an edge  $e^*$  in  $T_G$  for which  $T_{G \setminus \{e\}}$  is obtained by removing  $e^*$  and its descendants from  $T_G$  and applying edge contraction if necessary. Let  $v$  be the "top" of edge  $e^*$ , i.e. node  $v$  such that  $e^* = \{u, v\}$  and  $v \in P(e^*)$ . We distinguish two cases :

- **The depth of node  $u$  is greater or equal to  $d_{\min}(T_G)$  :** If  $u$  is the unique leaf of depth  $d_{\min}(T_G)$ , the depth of leaves of the DBT  $T_{G \setminus \{e\}}$  is  $d_{\min}(T_G) - 1 \geq k - 1$ . Otherwise, in DBT  $T_{G \setminus \{e\}}$ , the depth of leaves is still equal to  $d_{\min}(T_G) \geq k$ . In both cases,  $G \setminus \{e\} \in \mathcal{D}_{k-1}$ .
- **The depth of node  $u$  is strictly inferior to  $d_{\min}(T_G)$  :** Let  $T_v$  be the subtree of  $T_G$  with root  $v$ . We note  $w$  the brother of  $u$ , i.e. the other son of node  $v$  (see Figures 3a and 3b). When edge  $e$  is removed from  $G$ , edge  $e^*$  and its descendants are withdrawn in the DBT. So, after the contraction,  $T_v$

becomes  $T_w$ , the subtree of root  $w$ . All the leaves of  $T_w$  have initially a depth greater than  $k$  so by removing  $e$  from  $G$ , all the leaves of  $T_w$  have a depth greater than  $k-1$ . All leaves outside  $T_v$ , preserve their depth which is greater than  $k$ . Therefore, the depth of all leaves of  $T_{G \setminus \{e\}}$  is greater than  $k-1$ .

After examining these two cases, we conclude that  $G \setminus \{e\}$  belongs to  $\mathcal{D}_{k-1}$ . ■

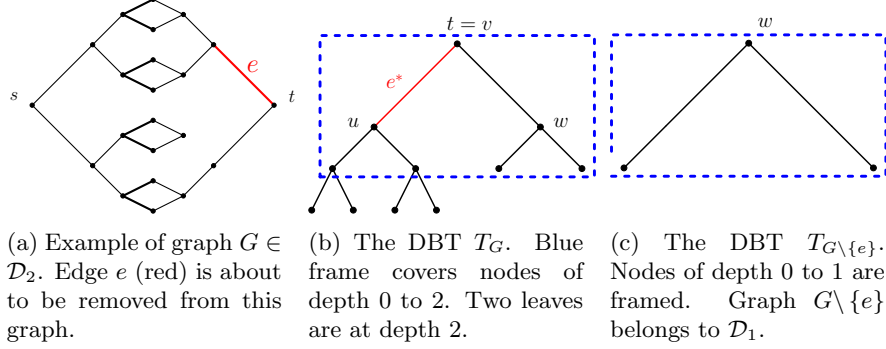


Figure 3: Illustration of the proof of Theorem 1 on a subgraph of  $G_3$ .

We note  $c_{\text{MS}}(G, k)$  the maximum over values  $c_{\text{MS}}(G, E_*)$  where  $(G, E_*) \in \mathcal{R}_k$ . This value represents the competitive ratio of MSes on road maps containing graph  $G$  from  $\mathcal{D}_k$ . Formally,

$$c_{\text{MS}}(G, k) = \min_{A \in \text{MS}} \max_{(G, E_*) \in \mathcal{R}_k} c_A(G, E_*) \quad (2)$$

Observe that the competitive ratio  $c_{\text{MS}}(G)$  defined for a traveller starting from source  $s$  is still valid for a traveller starting his walk at any node on the left side of axis  $\Delta_{\text{vert}}$  as weights  $\varepsilon$  are negligible.

The next theorem states that value  $c_{\text{MS}}(G, k)$  is the same for any graph of  $\mathcal{D}_k$ . In other words, graphs in  $\mathcal{D}_k$  are equivalent regarding the competitiveness of MSes over them. Let  $c_k$  denotes the competitive ratio of MSes over atlas  $\mathcal{R}_k$ . The proof of Theorem 2 provides a recursive formula of ratio  $c_k$ .

**Theorem 2.** For any graphs  $G, G' \in \mathcal{D}_k$ ,  $c_{\text{MS}}(G, k) = c_{\text{MS}}(G', k) = c_k$ .

**Proof.** We prove it by induction. If  $k = 0$ , then for every graph of  $\mathcal{D}_0$ ,  $c_{\text{MS}}(G, 0) = c_0 = 1$  because any path the traveller takes is open.

We assume the theorem holds for graphs from  $\mathcal{D}_{k-1}$ . For any  $G \in \mathcal{D}_k$ , all leaves of  $T_G$  are at depth greater or equal to  $k$ . So,  $T_G$  is complete until depth  $k$  and has  $2^k$  nodes at depth  $k$ . We suppose that the traveller, guided by the most competitive MS  $A$  over atlas  $\mathcal{R}_k$ , is standing at source  $s$  and starts his walk on a road map  $(G, E_*) \in \mathcal{R}_k$ . We start by determining an upper bound of  $c_A(G, E_*)$ .

As strategy  $A$  is the most competitive, the traveller using it either reaches  $t$  directly with distance 1 or meets a blocked edge and traverses a total distance

$2 + c_{k-1}$ : distance 1 to reach the blockage, distance 1 to go back left to  $\Delta_{\text{vert}}$  and distance  $c_{k-1}$  to reach  $t$  on graph  $G$  deprived of the blocked edges, which belongs to  $\mathcal{D}_{k-1}$  (see Theorem 1).

For any  $1 \leq j \leq 2^k$ , let  $p_{k,j}^A$  denote the probability that the traveller visits the  $j^{\text{th}}$  node at depth  $k$ , noted  $v_{k,j}$  (indexing nodes from left to right in the DBT representation). Let  $P_{k,j}$  be the set of simple  $(s, t)$ -paths of length 1 which traverses node  $v_{k,j}$ . Given a set of  $E_*$  of blocked edges, we note  $\mathcal{N}(E_*)$  the set of nodes  $v_{k,j}$  of depth  $k$  such that any path of  $P_{k,j}$  is open. For any set of blocked edges, such a node necessarily exists because the minimum number of edges needed to block at least one path in each set  $P_{k,j}$  is  $k + 1$ .

For any node  $v_{k,j}$ , we construct a set of blocked edges such that  $\mathcal{N}(E_*) = \{v_{k,j}\}$  and all paths in any  $P_{k,j'}$  with  $j' \neq j$  are obstructed. Indeed, let  $e$  be the edge linking the parent node of  $v_{k,j}$  and its sibling. By blocking the set of edges  $E_{k,j}$  containing  $e, U(e), U(U(e)), \dots, U^{k-1}(e)$ , we block  $1 + 2 + 4 + \dots + 2^{k-1} = 2^k - 1$  nodes  $v_{k,j'}$  at depth  $k$ ,  $j' \neq j$ . It comes that:

$$c_A(G, E_j) = p_{k,j}^A + (2 + c_{k-1}) \sum_{j' \neq j} p_{k,j'}^A = p_{k,j}^A + (2 + c_{k-1})(1 - p_{k,j}^A).$$

For any set of blocked edges  $E_*$ , if  $v_{k,j} \in \mathcal{N}(E_*)$ , then the distance traversed when passing through it is 1. If  $v_{k,j} \notin \mathcal{N}(E_*)$ , the distance traversed is at most  $2 + c_{k-1}$ ,

$$c_A(G, E_*) \leq \sum_{v_{k,j} \in \mathcal{N}(E_*)} p_{k,j}^A + (2 + c_{k-1}) \sum_{v_{k,j} \notin \mathcal{N}(E_*)} p_{k,j}^A.$$

We note  $j^*$  the index of the node  $v_{k,j^*}$  in  $\mathcal{N}(E_*)$  where  $p_{k,j^*}^A$  is the smallest. As  $1 < 2 + c_{k-1}$ , the greater  $\sum_{v_{k,j} \in \mathcal{N}(E_*)} p_{k,j}^A$  is, the lower  $c_A(G, E_*)$  is,

$$c_A(G, E_*) \leq p_{k,j^*}^A + (2 + c_{k-1}) \sum_{j \neq j^*} p_{k,j}^A = c_A(G, E_{j^*}).$$

The ratio  $c_A(G, E_*)$  attains this upper bound when blocked edges of road map is one of  $E_{j^*}$ . Consequently, we obtain the competitive ratio of strategy  $A$  over road atlas  $\mathcal{R}_k$ ,

$$\begin{aligned} c_{A, \mathcal{R}_k} &= \max_{1 \leq j \leq 2^k} p_{k,j}^A + \left(1 - p_{k,j}^A\right) (2 + c_{k-1}) \\ &\geq \frac{1}{2^k} + \left(1 - \frac{1}{2^k}\right) (2 + c_{k-1}). \end{aligned}$$

The MS with the smallest value  $c_{A, \mathcal{R}_k}$  fulfils  $p_{k,j}^A = \frac{1}{2^k}$  for any  $1 \leq j \leq 2^k$ . This value depends on  $k$  and  $c_{k-1}$ , not on the graph itself. For  $G, G' \in \mathcal{D}_k$ ,  $c_{\text{MS}}(G, k) = c_{\text{MS}}(G', k) = c_k = \min_A c_{A, \mathcal{R}_k} = \frac{1}{2^k} + \left(1 - \frac{1}{2^k}\right) (2 + c_{k-1})$ . ■

The Theorem 2 says that, for  $k$  blockages, the competitive ratio of MSes on road atlas  $\mathcal{R}_k$  is given by sequence  $c_k$ . Consequently,  $c_{\text{MS}} \leq c_k$ . We remark



that  $c_k - c_{k-1} = 2 - \frac{1}{2^k} - \frac{c_{k-1}}{2^k}$ . We obtain the following iterative formula:

$$c_k = 2k + 1 - \sum_{j=0}^{k-1} \frac{c_j + 1}{2^{j+1}}.$$

As  $\sum_{j=0}^{+\infty} \frac{c_j + 1}{2^{j+1}}$  is finite,  $c_k = 2k + O(1)$ . The numerical computations give  $\sum_{j=0}^{10^4} \frac{c_j + 1}{2^{j+1}} = 3.213$ , so the competitive ratio of MSes is larger than  $2k - 2.22$ . As  $c_k$  represents the competitive ratio of the best competitive MSes over road atlas  $\mathcal{R}_k$ , no MS can go below  $2k + O(1)$  in terms of competitiveness.

## 5. Conclusion and further work

We studied the competitiveness of the MSes for the  $k$ -CTP. An MS is a strategy which does not make decisions referring to the anterior moves of the traveller, in other words, the nodes the traveller visited until his current position.

Then, we constructed a series of  $k$ -CTP instances, called road atlases and noted  $\mathcal{R}_k$ . We foremost concluded that a randomized MS cannot reach a competitive ratio better than  $2k + \mathcal{O}(1)$  on road atlas  $\mathcal{R}_k$ . That is to say that we identified an upper bound on the competitive ratio of randomized MSes which is significantly higher than the existing one  $k + 1$ . In future research, if we aim at designing a strategy with competitive ratio  $\alpha k + O(1)$ ,  $\alpha < 2$ , we shall focus on strategies which are randomized but use memory as well.

## References

- [1] S. Albers. Online algorithms: a survey. *Math. Program.*, pages 3–26, 2003.
- [2] A. Bar-Noy and B. Schieber. The Canadian Traveller Problem. In *Proc. of ACM/SIAM SODA*, pages 261–270, 1991.
- [3] M. Bender and St. Westphal. An optimal randomized online algorithm for the  $k$ -Canadian Traveller Problem on node-disjoint paths. *J. Comb. Optim.*, 30(1):87–96, 2015.
- [4] A. Borodin and R. El-Yaniv. *Online computation and competitive analysis*. Cambridge University Press, 1998.
- [5] E. D. Demaine, Y. Huang, C.-S. Liao, and K. Sadakane. Canadians Should Travel Randomly. *Proc. of ICALP*, pages 380–391, 2014.
- [6] Ch. Papadimitriou and M. Yannakakis. Shortest paths without a map. *Theor. Comput. Sci.*, 84(1):127–150, 1991.
- [7] St. Westphal. A note on the  $k$ -Canadian Traveller Problem. *Inform. Proces. Lett.*, 106(3):87–89, 2008.
- [8] Y. Xu, M. Hu, B. Su, B. Zhu, and Z. Zhu. The Canadian traveller problem and its competitive analysis. *J. Comb. Optim.*, 18(2):195–205, 2009.