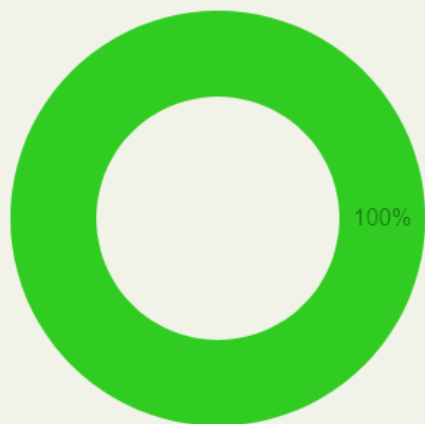


Test Results: All Tests

6 test scenarios (including 6 rows of test data)

[Summary](#)
[Test Results](#)


Scenario Results (including rows of test data)

Automated

✓ Passing

6

100%

⦿ Pending

0

⦿ Ignored

0

⏮ Skipped

0

✗ *Unsuccessful*
✗ Failed

0

⚠ Broken

0

✗ Compromised

0

Total
6

Functional Coverage Overview

Features

Feature	Scenarios	% Pass	Result	Coverage
Get a single character by id	6	100%	✓	<div></div>
Get a single character by id	6	100%	✓	<div></div>

List character info successfully



Given the user is in the Marvel developer portal
When the user sends a request with a valid character id "{id}"
Then the user gets a status code response OK and can see the character's name "{name}" and "{id}"

Examples:

id	name	
1011136	Air-Walker (Gabriel Lan)	
1011334	3-D Man	
1017100	A-Bomb (HAS)	

Failed request



Given a user is in the Marvel developer site
When the user sends an invalid request, with an id "{id}", a token "{token}" and a hash "{hash}"
Then the user gets a status code response {code}

Examples:


Id	token	hash	code	
1234	f0a55c0526a2a7495cce01466a651fa6	b7026387801d6606abe480e0dd879b2e	404	
1011136	aaa	b7026387801d6606abe480e0dd879b2e	401	
1234	aaa	myhash	401	

Test Results: All Tests

4 test scenarios (including 3 rows of test data)

[Summary](#)

[Test Results](#)

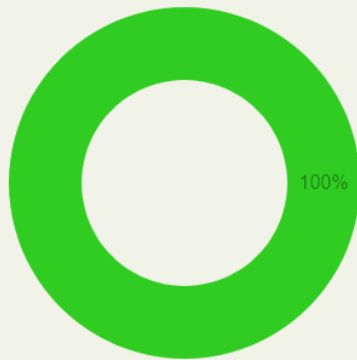

Scenario Results (including rows of test data)	Automated	
✓ Passing	4	100%
⦿ Pending	0	
⌛ Ignored	0	
⏸ Skipped	0	
✗ <i>Unsuccessful</i>		
✗ Failed	0	
⚠ Broken	0	
⚡ Compromised	0	
Total	4	

Scenario details

Create user successfully



When the user sends a request with the user's name "{name}" and job "{job}"

Then the user gets a status code response Created, and can see the user's id, name "{name}", job "{job}" and creation time

Examples:

name	job	
Andres	QA	
Juliana	Developer	
Mario	PO	

Empty user creation



Given the user is in the reqres web page

When the user sends an empty request

Then the user gets a status code Created, and can see the user's id and creation time



Karate Labs

5

0

Scenarios

2023-03-29 01:28:11 p. m.

[1.1:14] Create posts successfully

[1.2:15] Create posts successfully

[1.3:16] Create posts successfully

[1.4:17] Create posts successfully

[1.5:18] Create posts successfully

Summary | Tags | Feature: **src/test/java/features/createpost.feature** | **create post** AS a json place holder user I WANT TO make a request to create the Post service SO THAT I CAN create a new post

Scenario: [1.1:14] Create posts successfully		ms: 996
7	Given url 'https://jsonplaceholder.typicode.com/posts'	73
8	When request {"title":"my first post", "body": "hello, this is my first post ever", "userId": 1}	30
9	And method post	845
10	Then status 201	0
11	And match response == {"title": "my first post", "userId": 1,"body": "hello, this is my first post ever", "id": #ignore}	48

Scenario: [1.2:15] Create posts successfully		ms: 252
7	Given url 'https://jsonplaceholder.typicode.com/posts'	1
8	When request {"title":"hello", "body": "I just want to say hello!!!", "userId": 3}	0
9	And method post	251
10	Then status 201	0
11	And match response == {"title": "hello", "userId": 3,"body": "I just want to say hello!!!", "id": #ignore}	0

Scenario: [1.3:16] Create posts successfully		ms: 264
7	Given url 'https://jsonplaceholder.typicode.com/posts'	0
8	When request {"title":"karate", "body": "I'm learning karate right now", "userId": 2}	0
9	And method post	264
10	Then status 201	0
11	And match response == {"title": "karate", "userId": 2,"body": "I'm learning karate right now", "id": #ignore}	0

Scenario: [1.4:17] Create posts successfully		ms: 292
7	Given url 'https://jsonplaceholder.typicode.com/posts'	0
8	When request {"title":"","body":"","userId": 2000}	0
9	And method post	291
10	Then status 201	0
11	And match response == {"title":"","userId": 2000,"body":"","id": #ignore}	1

Scenario: [1.5:18] Create posts successfully		ms: 268
7	Given url 'https://jsonplaceholder.typicode.com/posts'	0
8	When request {"title":"","body":"","userId": null}	0
9	And method post	267
10	Then status 201	0
11	And match response == {"title":"","userId": null,"body":"","id": #ignore}	1



Karate Labs

6

0

Scenarios

2023-03-29 01:30:13 p. m.

[1.1:14] update a post

[1.2:15] update a post

[1.3:16] update a post

[2.1:25] invalid id

[2.2:26] invalid id

[2.3:27] invalid id

Summary | Tags | Feature: **src/test/java/features/putpost.feature** | **update post** AS a json place holder user I WANT TO make a request to update a post SO THAT I CAN update a new post

Scenario: [1.1:14] update a post		ms: 965
7	Given url 'https://jsonplaceholder.typicode.com/posts/1'	66
8	When request {"title":"editing a post", "body": "hello, this an updated post", "userId": 1, "id":1}	34
9	And method put	827
10	Then status 200	0
11	And match response == {"title": "editing a post", "userId": 1,"body": "hello, this an updated post", "id":1}	38

Scenario: [1.2:15] update a post		ms: 282
7	Given url 'https://jsonplaceholder.typicode.com/posts/2'	1
8	When request {"title":"updated post", "body": "updating this post", "userId": 3, "id":2}	0
9	And method put	281
10	Then status 200	0
11	And match response == {"title": "updated post", "userId": 3,"body": "updating this post", "id":2}	1

Scenario: [1.3:16] update a post		ms: 266
7	Given url 'https://jsonplaceholder.typicode.com/posts/3'	0
8	When request {"title":"still karate", "body": "I'm still learning karate", "userId": 2, "id":30}	0
9	And method put	265
10	Then status 200	0
11	And match response == {"title": "still karate", "userId": 2,"body": "I'm still learning karate", "id":3}	0

Scenario: [2.1:25] invalid id		ms: 272
19	Given url 'https://jsonplaceholder.typicode.com/posts/200'	1
20	When request {"title":"editing a post", "body": "", "userId": 500}	0
21	And method put	272
22	Then status 500	0

Scenario: [2.2:26] invalid id		ms: 291
19	Given url 'https://jsonplaceholder.typicode.com/posts/250'	1
20	When request {"title":"","body": "updating this post", "userId": 400}	0
21	And method put	290
22	Then status 500	0

Scenario: [2.3:27] invalid id		ms: 249
19	Given url 'https://jsonplaceholder.typicode.com/posts/'	1
20	When request {"title":"still karate", "body": "I'm still learning karate", "userId": 1000}	0
21	And method put	248
22	Then status 404	0