

Casos de Prueba y Evidencias

Nombre : Juan David Cardona - Melisa Meneses
Hu es certificable : Si

Casos de prueba servicio crear user (POST)

No	Nombre	Descripcion	Pre-Condicion	Entradas	Pasos	Resultados Esperados	Resultados Obtenidos	Estado	Prioridad
1	CP_001	Crear un user sin datos en el json	Que exista el endpoint que apunta a users.	Json vacio	1. Crear la nueva solicitud de tipo POST. 2. Ingresar la ruta del endpoint a users. 3. Ingresar en el body un json vacio 4. Hacer click en Send.	Mostrara un mensaje error.	Se muestra el mensaje 201 Created que crea un nuevo registro unicamente con un id.	Fallido	Alta
2	CP_002	Crear un user con atributos "name" y "job"	Que existan los atributos "name" y "job"	Json con los atributos name y job y sus respectivos valores.	1. Crear la nueva solicitud de tipo POST. 2. Ingresar la ruta del endpoint a users. 3. Ingresar en el body un json con los atributos y sus valores.. 4. Hacer click en Send.	Se espera un mensaje 201 Created y, el json creado con el id asignado y la fecha y hora de creacion del registro.	Se muestra el json con los datos del nuevo registro.	Exitoso	Alta
3	CP_003	Crear un nuevo user con caracteres numericos en el campo "name"	Que exista el atributo name en users.	Json con los atributos name y el valor numerico.	1. Crear la nueva solicitud de tipo POST. 2. Ingresar la ruta del endpoint a users. 3. Ingresar en el body un json el atributo name y el valor numerico. 4. Hacer click en Send.	Se espera un mensaje de error.	Se muestra el mensaje 201 Created que crea un nuevo registro con el campo name numerico.	Fallido	Alta
4	CP_004	Crear un nuevo usuario pre definiendo un id deseado	Asegurarse de ingresar los atributos correspondientes	Json con todos los atributos correspondientes para crear un nuevo usuario y adicionalmente el id deseado.	1. Crear la nueva solicitud de tipo POST. 2. Ingresar la ruta del endpoint a users. 3. Ingresar en el body un json con todos los atributos y sus valores. 4. Hacer click en Send.	Se espera un mensaje 201 Created y, el json creado con el id asignado y la fecha y hora de creacion del registro.	Se muestra el json con los datos del nuevo registro y el campo id predefinido	Exitoso	Media

- Evidencia CP_001 (Crear un user sin datos)

POSThttps://reqres.in/api/usersSend

ParamsAuthorizationHeaders (8)BodyPre-request ScriptTestsSettingsCookies</>

● none● form-data● x-www-form-urlencoded● raw● binary● GraphQLJSONBeautify

12

json vacio

Se crea un registro con un id que no tiene datos asociados.

BodyCookiesHeaders (13)Test Results

201 Created527 ms707 BSave Response

PrettyRawPreviewVisualizeJSON

1234

```
"id": "691",
"createdAt": "2023-02-27T19:56:06.072Z"
```

- Evidencia CP_002 (Crear user con atributos name y job)

The screenshot shows a REST client interface with a POST request to `https://reqres.in/api/users`. The request body is a JSON object: `{ "name": "morpheus", "job": "leader" }`. The response is a 201 status code with a JSON body: `{ "name": "morpheus", "job": "leader", "id": "188", "createdAt": "2023-02-27T19:58:38.715Z" }`. Red boxes and arrows highlight the request body and the response body, with Spanish annotations explaining the data flow.

POST `https://reqres.in/api/users` Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL JSON Beautify

```
1 {
2   "name": "morpheus",
3   "job": "leader"
4 }
```

Se pasan los datos en el json

Body Cookies Headers (13) Test Results 201 Created 18 ms 748 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "name": "morpheus",
3   "job": "leader",
4   "id": "188",
5   "createdAt": "2023-02-27T19:58:38.715Z"
6 }
```

Se crea el registro con un id autogenerado

- Evidencia CP_003 (Crear un nuevo user con caracteres numericos en el campo "name").

The screenshot shows a REST client interface with a POST request to `https://reqres.in/api/users`. The request body is a JSON object: `{ "name": "12345", "job": "leader" }`. The response is a 201 status code with a JSON body: `{ "name": "12345", "job": "leader", "id": "481", "createdAt": "2023-02-27T20:01:17.193Z" }`. Red boxes and arrows highlight the request body and the response body, with Spanish annotations explaining the data flow.

POST `https://reqres.in/api/users` Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL JSON Beautify

```
1 {
2   "name": "12345",
3   "job": "leader"
4 }
```

Se le pasan caracteres numericos en el campo name

Body Cookies Headers (13) Test Results 201 Created 371 ms 743 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "name": "12345",
3   "job": "leader",
4   "id": "481",
5   "createdAt": "2023-02-27T20:01:17.193Z"
6 }
```

Se crea el registro sin importar que el name tenga valores numericos.

- Evidencia CP_004 (Crear un nuevo usuario pre definiendo un id deseado)

The screenshot shows a REST client interface with a POST request to `https://reqres.in/api/users`. The request body is a JSON object: `{ "id": "123", "name": "Julian", "job": "leader" }`. A red box highlights the `id` field, with a red arrow pointing to it and the text "Se especifica el id en el json". The response status is `201 Created`, with a red box around it and a red arrow pointing to it and the text "Se crea el nuevo registro con el id predefinido". The response body is a JSON object: `{ "id": "123", "name": "Julian", "job": "leader", "createdAt": "2023-02-27T20:04:44.533Z" }`. A red box highlights the `id` field in the response, with a red arrow pointing to it and the text "Se crea el nuevo registro con el id predefinido".

Casos de Prueba servicio Actualizar user(UPDATE)

The screenshot shows a Gherkin feature file for the feature "Actualizar la informacion de user". The feature description is "As an user Quiero actualizar mi informacion y que se vea la informacion actualizada". The background is "Given Estoy apuntando al endpoint 'reqres.in/api/users/'". There are four scenarios:

- Escenario 1:** Actualizar informacion de un user existente. When Le añado al endpoint un <user_id> existente con los datos a actualizar en formato json: Then la respuesta debería ser un código de estado 200 And la respuesta debe incluir el json con valores actualizados
- Escenario 2:** Actualizar informacion de un user invalido. When Envio una solicitud PUT al endpoint con un <user_id> invalido y con los datos a actualizar en formato json Then la respuesta debería ser un código de estado 400 And No debería retornar ningun formato json con datos actualizados
- Escenario 3:** Actualizar id de un user existente. When Le añado al endpoint un <user_id> existente con el json incluyendo el id nuevo Then la respuesta debería ser un código de estado 400 And Se debería retornar un mensaje indicando que no se puede cambiar el id del usuario registrado
- Escenario 4:** Actualizar nombre de un user existente. When Le añado al endpoint un <user_id> existente con el json que contenga el valor nuevo de name Then la respuesta debería ser un código de estado 200 And la respuesta debe incluir el json con valores actualizados

Evidencias Pruebas del Feature “Actualizar la información de user”

- Escenario: Actualizar información de user existente

The screenshot shows a REST client interface with a PUT request to `https://reqres.in/api/users/2`. The URL `2` is highlighted with a red box and labeled "id del user que se quiere actualizar". The request body is in JSON format, containing `"name": "John"` and `"job": "tester"`, highlighted with a red box and labeled "Nuevos valores para el user de id 2". The response status is `200 OK` with a response time of `1375 ms` and a size of `773 B`, highlighted with a red box and labeled "Codigo de estado OK". The response body is in JSON format, containing `"name": "John"`, `"job": "tester"`, and `"updatedAt": "2023-02-24T19:32:25.628Z"`, highlighted with a red box and labeled "Datos actualizados".

- Escenario: Actualizar la información de un user invalido

The screenshot shows a REST client interface with a PUT request to `https://reqres.in/api/users/-2000`. The URL `-2000` is highlighted with a red box and labeled "id de user invalido". The request body is in JSON format, containing `"name": "Juan"` and `"job": "mecanico"`, highlighted with a red box and labeled "datos a actualizar". The response status is `200 OK` with a response time of `345 ms` and a size of `775 B`, highlighted with a red box and labeled "Retorna un estado 200 y, esto es incorrecto porque el id de usuario no es valido.". The response body is in JSON format, containing `"name": "Juan"`, `"job": "mecanico"`, and `"updatedAt": "2023-02-24T19:37:59.088Z"`.

- Escenario: Actualizar id de un user existente

The screenshot shows a REST client interface with a PUT request to `https://reqres.in/api/users/2`. The URL `2` is highlighted with a red box and labeled "id de usuario existente". The request body is a JSON object: `{ "id": 40, "name": "Juan", "job": "mecnico" }`, which is also highlighted with a red box and labeled "valores a actualizar". The response status is `200 OK` with a response time of `354 ms` and a size of `789 B`, highlighted with a red box. The response body is a JSON object: `{ "id": 40, "name": "Juan", "job": "mecnico", "updatedAt": "2023-02-24T19:41:40.976Z" }`.

devuelve un estado de que se actualizo correctamente y, esto no deberia permitirse.

- Escenario: Actualizar nombre de un user existente

The screenshot shows a REST client interface with a PUT request to `https://reqres.in/api/users/2`. The URL `2` is highlighted with a red box and labeled "id de user existente". The request body is a JSON object: `{ "name": "Juan" }`, which is highlighted with a red box and labeled "nuevo valor de name". The response status is `200 OK` with a response time of `360 ms` and a size of `60 B`, highlighted with a red box and labeled "Estado 200 lo cual es correcto". The response body is a JSON object: `{ "name": "Juan", "updatedAt": "2023-02-24T19:44:24.720Z" }`, which is highlighted with a red box and labeled "se muestra que se actualizo el name".

Casos de prueba Registro en Aliexpress

Feature: Registro de usuario en AliExpress

Como un nuevo user
Quiero registrarme en AliExpress

→ Descripción del caso

Background:

Given Estoy en la pagina de registro de Aliexpress

→ Given general para todos los escenarios.

Scenario: Registro Exitoso con informacion valida

When Ingreso informacion valida de registro
And Doy click en el boton de Create account
Then Deberia recibir un codigo de verificacion en mi correo
And Al ingresar el codgio deberia redirigirme a la pagina principal

Escenario 1

Scenario: Registro fallido con contraseña muy corta

When Ingreso una contraseña con menos de 6 caracteres
And Intento dar click en el boton Create account
Then Deberia tener el boton de Create account deshabilitado
And Debe aparecer un mensaje indicando la longitud que debe tener la contraseña

Escenario 2

Scenario: Registro fallido con correo ya existente

When Ingreso un correo ya registrado
And Intento dar click en el boton Create account
Then Deberia tener el boton de Create account deshabilitado
And Deberia ver un mensaje indicando que el correo ingresado ya existe

Escenario 3

Scenario: Registro fallido con informacion vacia

When No ingreso ninguna informacion en el formulario de registro
And Intento dar click en el boton Create account
Then Deberia tener el boton de Create account deshabilitado


Escenario 4



Resultados Pruebas del Feature “Registro de Usuario en AliExpress”

- Escenario: Registro Exitoso con información válida

The screenshot shows the AliExpress registration interface. At the top, there are tabs for 'Register' and 'Sign in'. Below this, a dropdown menu shows 'Your location: Colombia'. A red arrow points to the location dropdown with the label 'correo valido'. The 'Email address' field contains 'polof91484@wireps.com' and is highlighted with a red box. The 'Password' field contains six dots and is also highlighted with a red box. A red arrow points to the password field with the label 'contraseña valida'. Below the password field, there are two green checkmarks indicating password requirements: '6-20 characters' and 'Contains numbers, letters or symbols'. The 'Create account' button is highlighted with a red box. Below the button, there is a section for social media login with icons for Facebook, Google, Twitter, and Apple. A red arrow points to this section with the label 'Se habilita el boton'. At the bottom, there is a link to the 'AliExpress.com Free Membership Agreement and Privacy Policy'.

AliExpress

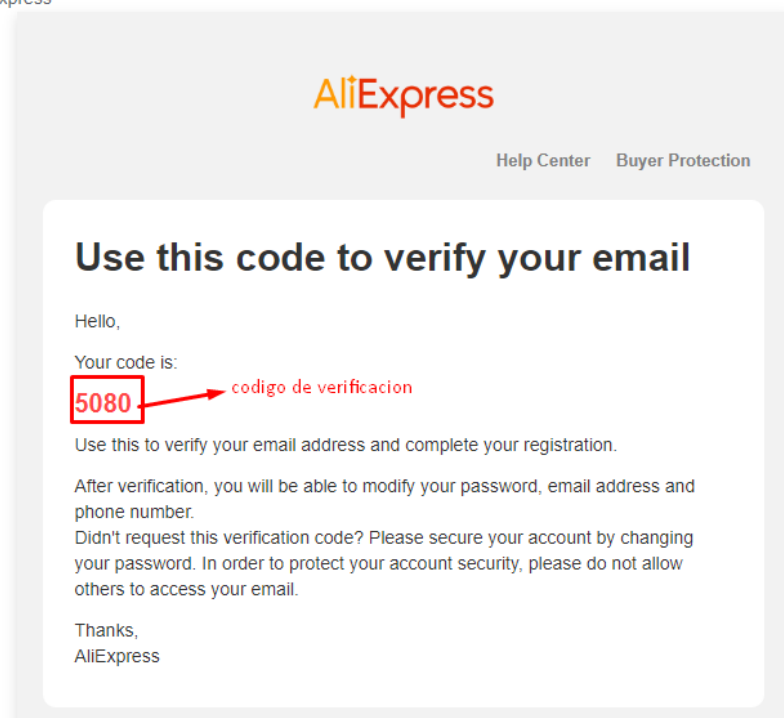

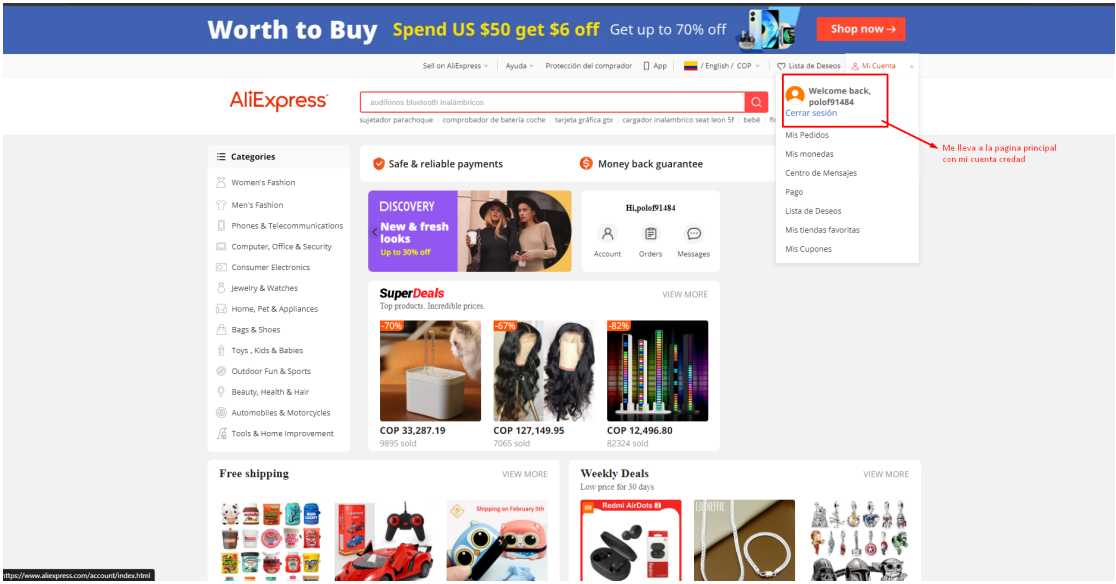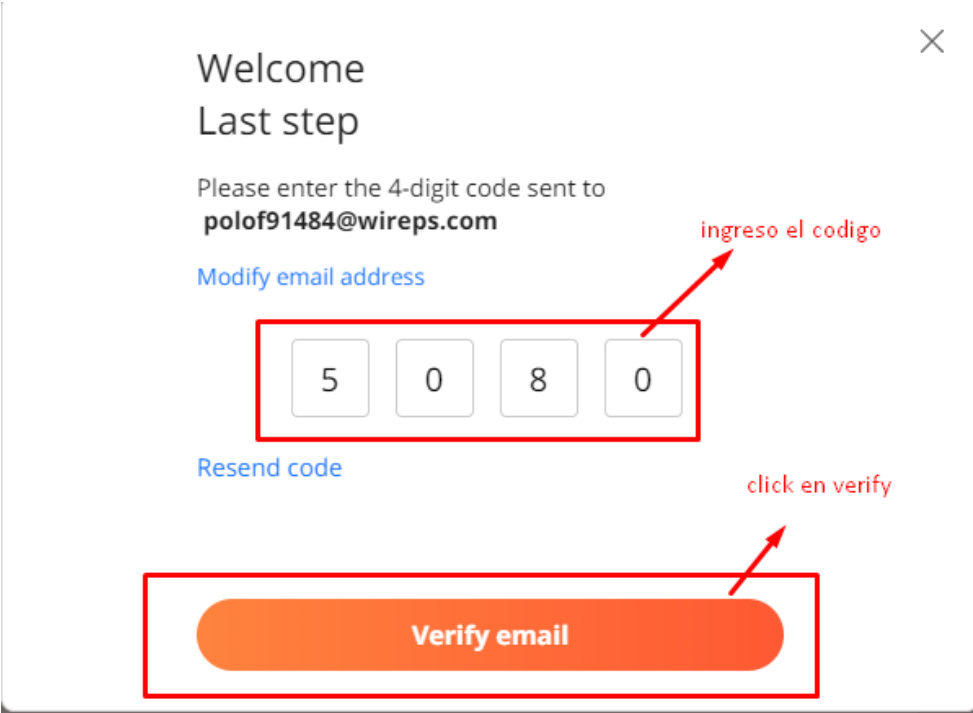

- Escenario: Registro fallido con contraseña muy corta

The screenshot shows the 'Register' tab of the AliExpress mobile app. The 'Your location' dropdown is set to 'Colombia'. The 'Email address' field contains 'polof91484@wireps.com' and has a red border with a red error message below it: 'This email already exists. Sign in'. The 'Password' field has a red border and a red error message: 'X 6-20 characters'. Below this, a green checkmark indicates 'Contains numbers, letters or symbols'. The 'Create account' button is orange and is disabled. Below the button, there are social media login options (Facebook, Google, Twitter, Apple) and a 'Show all' link. At the bottom, there is a disclaimer: 'By creating an account, you agree to the AliExpress.com Free Membership Agreement and Privacy Policy'.

Mensaje que indica que la contraseña es muy corta

- Escenario: Registro Fallido con correo existente

The screenshot shows the 'Register' tab of the AliExpress mobile app. The 'Your location' dropdown is set to 'Colombia'. The 'Email address' field contains 'polof91484@wireps.com' and has a red border with a red error message below it: 'This email already exists. Sign in'. The 'Password' field has a red border and a red error message: 'X 6-20 characters'. Below this, a green checkmark indicates 'Contains numbers, letters or symbols'. The 'Create account' button is orange and is disabled. Below the button, there are social media login options (Facebook, Google, Twitter, Apple) and a 'Show all' link. At the bottom, there is a disclaimer: 'By creating an account, you agree to the AliExpress.com Free Membership Agreement and Privacy Policy'.

Indica que este correo ya esta registrado.

Boton deshabilitado

- Escenario: Registro fallido con información vacía


The screenshot shows the 'Register' page of AliExpress. At the top, there are tabs for 'Register' and 'Sign in'. Below them is a dropdown menu for 'Your location:' set to 'Colombia'. A link 'Why choose a location?' is present. The main form has two input fields: 'Email address' and 'Password'. The 'Email address' field is highlighted with a red box and labeled 'formulario vacio'. The 'Password' field is also highlighted with a red box and has a red arrow pointing to it with the label 'boton deshabilitado'. Below the password field, there are two requirements: '6-20 characters' and 'Contains numbers, letters or symbols'. At the bottom of the form is a large orange button labeled 'Create account'. Below this button are social media icons for Facebook, Google, Twitter, and Apple. At the very bottom, there is a link to the 'AliExpress.com Free Membership Agreement and Privacy Policy'.

Casos de Prueba Login Aliexpress


Feature: User Login	
Como un usuario registrado Quiero loguearme en mi cuenta Para poder acceder a las funcionalidades de la pagina	Descripción del feature
Background: Given Estoy en la pagina de registro de Aliexpress	Given general para todos los escenarios
Scenario: Login exitoso con credenciales correctas When Ingreso un usuario y contraseña validos. And Doy click en el boton de Sign in Then Deberia ser redirigido a la pagina principiapl	Escenario 1
Scenario: Login fallido con correo invalido When Ingreso un correo invalido y contraseña valida And Doy click en el boton de Sign in Then Deberia ver un mensaje indicando que el correo es invalido	Escenario 2
Scenario: Login fallido con contraseña invalida When Ingreso un correo valido y contraseña invalida And Doy click en el boton de Sign in Then Deberia ver un mensaje indicando que el correo es invalido	Escenario 3
Scenario: Login fallido con correo y contraseña vacios When Dejo el campo de email y contraseña vacios And Intento dar click en el boton de Sign in Then Deberia tener el boton de Sign in deshabilitado	Escenario 4

Resultados de pruebas Feature “User Login”

- Escenario: Login Exitoso con credenciales correctas

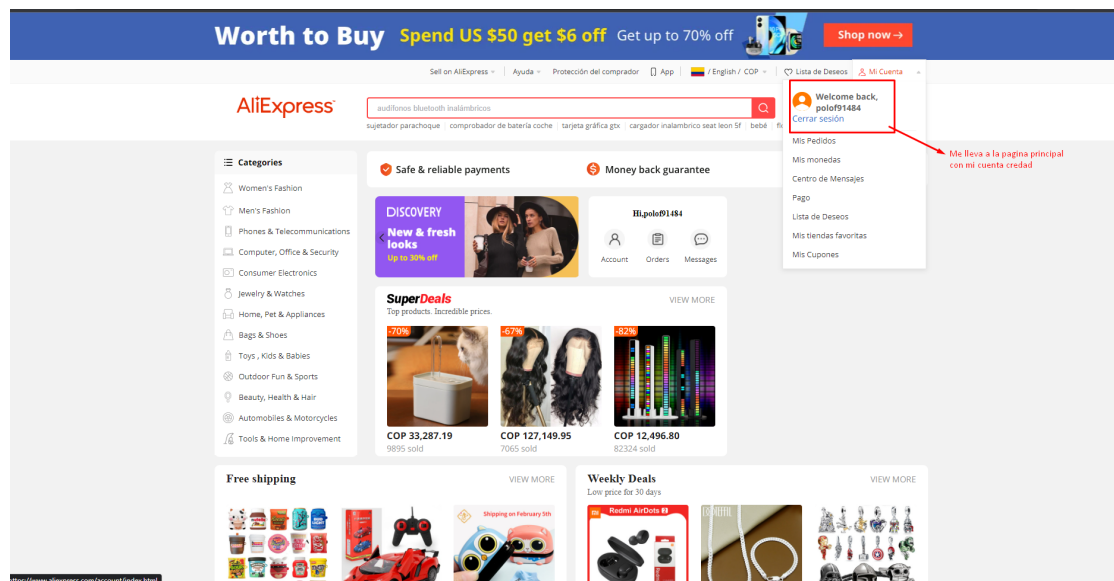

- Login fallido con correo invalido

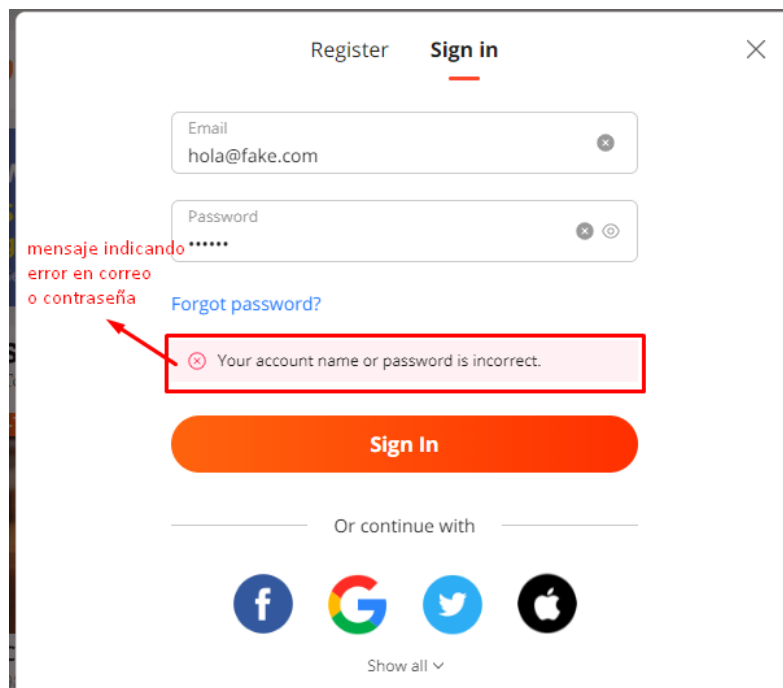

- Login fallido con contraseña invalida

The screenshot shows a login interface with a modal window. At the top, there are two tabs: "Register" and "Sign in", with "Sign in" being the active tab. Below the tabs are two input fields: "Email" containing "hola@fake.com" and "Password" with masked characters. A red arrow points from the text "mensaje indicando error en correo o contraseña" to a red-bordered box containing the error message: "Your account name or password is incorrect." Above this box is a link "Forgot password?". Below the error message is a large orange "Sign In" button. Further down, there is a section "Or continue with" followed by social media icons for Facebook, Google, Twitter, and Apple, and a "Show all" link.

- Escenario: Login fallido con correo y contraseña vacíos

The screenshot shows the same login interface as the previous one, but with the "Email" and "Password" fields empty. A red arrow points from the text "Formulario vacio" to the empty input fields. Below the fields is a link "Forgot password?". The "Sign In" button is highlighted with a red border, and a red arrow points from the text "Boton deshabilitado" to it. The rest of the interface, including the "Or continue with" section and social media icons, remains the same.

