

Retrieving Data Using the SQL `SELECT` Statement

Objectives

After completing this lesson, you should be able to do the following:

- List the capabilities of SQL `SELECT` statements
- Execute a basic `SELECT` statement

Basic SELECT Statement

```
SELECT  *|{[DISTINCT] column [alias],...}  
FROM    table;
```

- SELECT identifies the columns to be displayed.
- FROM identifies the table containing those columns.

3

Selecting All Columns

```
SELECT *  
FROM departments;
```

	DEPARTMENT_ID	DEPARTMENT_NAME	MANAGER_ID	LOCATION_ID
1	10	Administration	200	1700
2	20	Marketing	201	1800
3	50	Shipping	124	1500
4	60	IT	103	1400
5	80	Sales	149	2500
6	90	Executive	100	1700
7	110	Accounting	205	1700
8	190	Contracting	(null)	1700

4

Selecting Specific Columns

```
SELECT department_id, location_id  
FROM departments;
```

	DEPARTMENT_ID	LOCATION_ID
1	10	1700
2	20	1800
3	50	1500
4	60	1400
5	80	2500
6	90	1700
7	110	1700
8	190	1700

5

Writing SQL Statements

- SQL statements are not case-sensitive.
- SQL statements can be entered on one or more lines.
- Keywords cannot be abbreviated or split across lines.
- Clauses are usually placed on separate lines.
- Indents are used to enhance readability.
- In SQL Developer, SQL statements can be optionally terminated by a semicolon (;). Semicolons are required when you execute multiple SQL statements.
- In SQL*Plus, you are required to end each SQL statement with a semicolon (;).

6

Arithmetic Expressions

Create expressions with number and date data by using arithmetic operators.

Operator	Description
+	Add
-	Subtract
*	Multiply
/	Divide

7

Using Arithmetic Operators

```
SELECT last_name, salary, salary + 300  
FROM employees;
```

	LAST_NAME	SALARY	SALARY+300
1	King	24000	24300
2	Kochhar	17000	17300
3	De Haan	17000	17300
4	Hunold	9000	9300
5	Ernst	6000	6300
6	Lorentz	4200	4500
7	Mourgos	5800	6100
8	Rajs	3500	3800
9	Davies	3100	3400
10	Matos	2600	2900

...

8

Operator Precedence

```
SELECT last_name, salary, 12*salary+100
FROM employees;
```

1

	LAST_NAME	SALARY	12*SALARY+100
1	King	24000	288100
2	Kochhar	17000	204100
3	De Haan	17000	204100
4	Hunold	9000	108100

...

```
SELECT last_name, salary, 12*(salary+100)
FROM employees;
```

2

	LAST_NAME	SALARY	12*(SALARY+100)
1	King	24000	289200
2	Kochhar	17000	205200
3	De Haan	17000	205200
4	Hunold	9000	109200

...

9

Defining a Null Value

- Null is a value that is unavailable, unassigned, unknown, or inapplicable.
- Null is not the same as zero or a blank space.

```
SELECT last_name, job_id, salary, commission_pct
FROM employees;
```

	LAST_NAME	JOB_ID	SALARY	COMMISSION_PCT
1	King	AD_PRES	24000	(null)
2	Kochhar	AD_VP	17000	(null)
3	De Haan	AD_VP	17000	(null)

...

12	Zlotkey	SA_MAN	10500	0.2
13	Abel	SA_REP	11000	0.3
14	Taylor	SA_REP	8600	0.2
15	Grant	SA_REP	7000	0.15

...

18	Fay	MK_REP	6000	(null)
19	Higgins	AC_MGR	12008	(null)
20	Gietz	AC_ACCOUNT	8300	(null)

10

Null Values in Arithmetic Expressions

Arithmetic expressions containing a null value evaluate to null.

```
SELECT last_name, 12*salary*commission_pct
FROM employees;
```

	LAST_NAME	12*SALARY*COMMISSION_PCT
1	King	(null)
2	Kochhar	(null)
3	De Haan	(null)

...

12	Zlotkey	25200
13	Abel	39600
14	Taylor	20640
15	Grant	12600

...

17	Hartstein	(null)
18	Fay	(null)
19	Higgins	(null)
20	Gietz	(null)

11

Defining a Column Alias

A column alias:

- Renames a column heading
- Is useful with calculations
- Immediately follows the column name (there can also be the optional **AS** keyword between the column name and the alias)
- Requires double quotation marks if it contains spaces or special characters, or if it is case-sensitive

12

Using Column Aliases

```
SELECT last_name AS name, commission_pct comm
FROM employees;
```

	NAME	COMM
1	King	(null)
2	Kochhar	(null)
3	De Haan	(null)
4	Hunold	(null)

...

```
SELECT last_name "Name", salary*12 "Annual Salary"
FROM employees;
```

	Name	Annual Salary
1	King	288000
2	Kochhar	204000
3	De Haan	204000
4	Hunold	108000

...

13

Concatenation Operator

A concatenation operator:

- Links columns or character strings to other columns
- Is represented by two vertical bars (||)
- Creates a resultant column that is a character expression

```
SELECT last_name||job_id AS "Employees"
FROM employees;
```

	Employees
1	AbelSA_REP
2	DaviesST_CIFRK
3	De HaanAD_VP
4	ErnstIT_PROG
5	FayMK_REP
6	GietzAC_ACCOUNT
7	GrantSA_REP
8	HartsteinMK_MAN

...

14

Using Literal Character Strings

```
SELECT last name || ' is a ' || job id  
       AS "Employee Details"  
FROM   employees;
```

	Employee Details
1	Abel is a SA_REP
2	Davies is a ST_CLERK
3	De Haan is a AD_VP
4	Ernst is a IT_PROG
5	Fay is a MK_REP
6	Gietz is a AC_ACCOUNT
7	Grant is a SA_REP
8	Hartstein is a MK_MAN
9	Higgins is a AC_MGR
10	Hunold is a IT_PROG
11	King is a AD_PRES

...

15

Duplicate Rows

The default display of queries is all rows, including duplicate rows.

①

```
SELECT department_id  
FROM   employees;
```

	DEPARTMENT_ID
1	90
2	90
3	90
4	60
5	60
6	60
7	50
8	50

...

②

```
SELECT DISTINCT department_id  
FROM   employees;
```


	DEPARTMENT_ID
1	(null)
2	90
3	20
4	110
5	50
6	80
7	60
8	10

16

Displaying Table Structure

- Use the DESCRIBE command to display the structure of a table.
- Or, select the table in the Connections tree and use the Columns tab to view the table structure.

```
DESC[RIBE] tablename
```

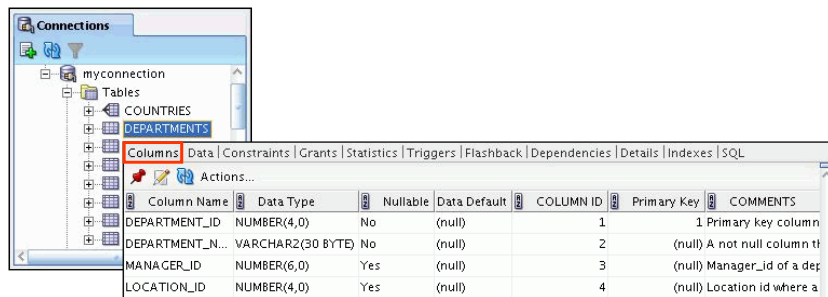

17

Using the DESCRIBE Command

```
DESCRIBE employees
```

```
DESCRIBE Employees
Name          Null    Type
-----
EMPLOYEE_ID   NOT NULL NUMBER(6)
FIRST_NAME    VARCHAR2(20)
LAST_NAME     NOT NULL VARCHAR2(25)
EMAIL         NOT NULL VARCHAR2(25)
PHONE_NUMBER  VARCHAR2(20)
HIRE_DATE     NOT NULL DATE
JOB_ID        NOT NULL VARCHAR2(10)
SALARY        NUMBER(8,2)
COMMISSION_PCT NUMBER(2,2)
MANAGER_ID    NUMBER(6)
DEPARTMENT_ID NUMBER(4)
```

18

Summary

In this lesson, you should have learned how to write a `SELECT` statement that:

- Returns all rows and columns from a table
- Returns specified columns from a table
- Uses column aliases to display more descriptive column headings