

Converting Markdown to Other Formats with `knitr::pandoc()`

Yihui Xie

March 1st, 2013

A bit *introduction* here.

Start with a cool section

You can use traditional **Markdown** syntax, such as links and code.

Followed by another section

Of course you can write lists:

- ▶ apple

Or ordered lists:

Followed by another section

Of course you can write lists:

- ▶ apple
- ▶ pear

Or ordered lists:

Followed by another section

Of course you can write lists:

- ▶ apple
- ▶ pear
- ▶ banana

Or ordered lists:

Followed by another section

Of course you can write lists:

- ▶ apple
- ▶ pear
- ▶ banana

Or ordered lists:

1. items

Followed by another section

Of course you can write lists:

- ▶ apple
- ▶ pear
- ▶ banana

Or ordered lists:

1. items
2. will

Followed by another section

Of course you can write lists:

- ▶ apple
- ▶ pear
- ▶ banana

Or ordered lists:

1. items
2. will
3. be

Followed by another section

Of course you can write lists:

- ▶ apple
- ▶ pear
- ▶ banana

Or ordered lists:

1. items
2. will
3. be
4. ordered

Followed by another section

Of course you can write lists:

- ▶ apple
- ▶ pear
- ▶ banana

Or ordered lists:

1. items
2. will
3. be
4. ordered
 - ▶ nested

Followed by another section

Of course you can write lists:

- ▶ apple
- ▶ pear
- ▶ banana

Or ordered lists:

1. items
2. will
3. be
4. ordered
 - ▶ nested
 - ▶ items

More sections

Hi

hi hi

Hello

hello hello

Howdy

howdy howdy





Okay, some R code

```
fit = lm(dist ~ speed, data = cars)
b = coef(fit) # coefficients
summary(fit)

##
## Call:
## lm(formula = dist ~ speed, data = cars)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -29.07  -9.53  -2.27   9.21  43.20
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -17.579      6.758   -2.60   0.012 *
## speed         3.932      0.416    9.46  1.5e-12 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1
```

And some pictures

```
par(mfrow = c(2, 2), pch = 20, mar = c(4, 4, 2, .1), bg =  
plot(fit)
```

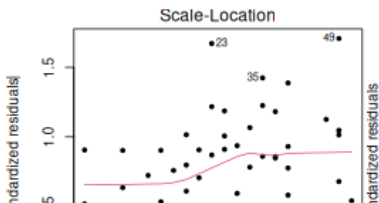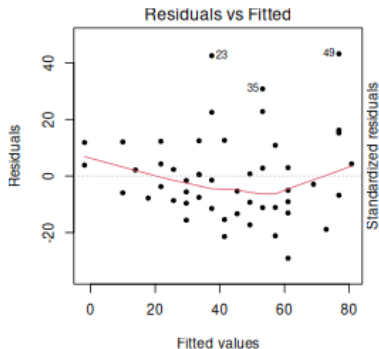

A little bit math

Our regression equation is $Y = -17.5791 + 3.9324x$, and the model is:

$$Y = \beta_0 + \beta_1 x + \epsilon$$

Pandoc extension: definition lists

Programmer A programmer is the one who turns coffee into code.
LaTeX
A simple tool which is nothing but a couple of
backslashes.

Pandoc extension: examples

We have some examples.

(1) Think what is $0.3 + 0.4 - 0.7$. Zero. Easy.

People are often surprised by (2).

Pandoc extension: examples

We have some examples.

- (1) Think what is $0.3 + 0.4 - 0.7$. Zero. Easy.
- (2) Now think what is $0.3 - 0.7 + 0.4$. Still zero?

People are often surprised by (2).

Pandoc extension: tables

A table here.

Table 1: Demonstration of simple table syntax.

Right	Left	Center	Default
12	12	12	12
123	123	123	123
1	1	1	1

Pandoc extension: footnotes

We can also write footnotes¹.

Or write some inline footnotes².

¹hi, I'm a footnote

²as you can see here

Pandoc extension: citations

We compile the R Markdown file to Markdown through **knitr** [xie2013] in R [R-base]. For more about xie2013, see <http://yihui.org/knitr>.

References