

```
options(width = 60)
summary(iris)

##   Sepal.Length   Sepal.Width   Petal.Length   Petal.Width
##   Min.    :4.30   Min.    :2.00   Min.    :1.00   Min.    :0.1
##   1st Qu.:5.10   1st Qu.:2.80   1st Qu.:1.60   1st Qu.:0.3
##   Median :5.80   Median :3.00   Median :4.35   Median :1.3
##   Mean   :5.84   Mean   :3.06   Mean   :3.76   Mean   :1.2
##   3rd Qu.:6.40   3rd Qu.:3.30   3rd Qu.:5.10   3rd Qu.:1.8
##   Max.    :7.90   Max.    :4.40   Max.    :6.90   Max.    :2.5
##           Species
##   setosa      :50
##   versicolor:50
##   virginica   :50
##
##
##
```

Let's see how to work with child documents in knitr. Below we input the file 087-child-example-child.rnw:

This chunk below is from the child document.


```
1 + 1

## [1] 2


rnorm(5)

## [1] -0.56048 -0.23018  1.55871  0.07051  0.12929

plot(1)
```

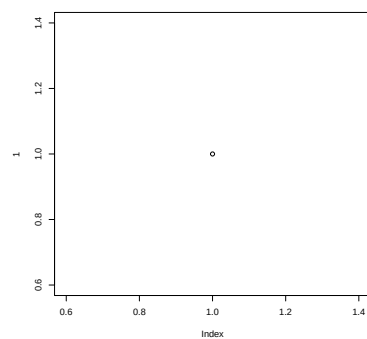

```
boxplot(1:10)
```



```
str(mtcars)
```

```
## 'data.frame': 32 obs. of 11 variables:
## $ mpg : num 21 21 22.8 21.4 18.7 18.1 14.3 24.4 22.8 19.2 ...
## $ cyl : num 6 6 4 6 8 6 8 4 4 6 ...
## $ disp: num 160 160 108 258 360 ...
## $ hp : num 110 110 93 110 175 105 245 62 95 123 ...
## $ drat: num 3.9 3.9 3.85 3.08 3.15 2.76 3.21 3.69 3.92 3.92 ...
## $ wt : num 2.62 2.88 2.32 3.21 3.44 ...
## $ qsec: num 16.5 17 18.6 19.4 17 ...
## $ vs : num 0 0 1 1 0 1 0 1 1 1 ...
## $ am : num 1 1 1 0 0 0 0 0 0 0 ...
## $ gear: num 4 4 4 3 3 3 3 4 4 4 ...
## $ carb: num 4 4 1 1 2 1 4 2 2 4 ...
```

Done!