VietGuard Scan

.All rights reserved

VNeID
App Security Performance Report

CYBER SECURITY

Scanned Time: 2026-03-11 15:25:45

Contents

1.Abstract 4

1.1.App Security Posture 4

1.2.App Information 5

1.3.Findings summary 6

2.App-safety 8

2.1.Behavior information 8

2.2.Permission information....26

2.3.Virus scanning....29

3.M1-Improper platform usage 29

3.1.Risk of intent component being implicitly called 29

3.2.Risk of loading DEX from SD card 31

3.3.Risk of loading SO files from SD card 31

4.M2-Insecure data storage 32

4.1.WebView plaintext password storage risk....32

5.M3-Insecure communication....33

5.1.WebView bypasses certificate verification vulnerability....33

5.2.HTTPS does not verify server certificate(SSL PINNING) 34

5.3.HTTP data transmission risk....36

6.M5-Insufficient cryptography 41

6.1.Digital certificate being stored in plaintext risk 41

7.M6-Insecure authorization....42

7.1.Security for exporting Activity component....42

7.2.Security against ContentProvider component leakage 43

7.3.Security of Exported Broadcast Receiver Component....43

7.4.Security of exported service component....44

7.5.Database file arbitrary read and write vulnerability....45

7.6.Vulnerability of globally readable and writable internal files....46

7.7.SharedPreferences data global read-write vulnerability....46

7.8.Content provider data leak vulnerability....47

8.M7-Poor code quality....48

8.1.Risk of Input monitoring(Keylogger)....48

8.2.WebView remote code execution vulnerability....48

8.3.Fragment injection attack vulnerability....49

8.4.Vulnerability of intent scheme URL attack....50

9.M8-Code tampering....50

9.1.Dynamic debug attack risk....50

9.2.Java layer dynamic debugging risk....51

9.3.APK tampering / repackaging risks....51

9.4.Dynamic injection attack risk....52

10.M9-Reverse engineering....53

10.1.Java code decompilation risk....53

10.2.Risk of Debug log function calls....54

10.3.Risk of resource file leakage....102

10.4.SO file cracking risk....103

11.M10-Extraneous functionality....103

11.1.Residual risk vulnerability in Intranet test information....103

11.2.Download arbitrary APK vulnerability....104

1.Abstract

1.1.App Security Posture

Security Score	64 /100

	TOTAL	HIGH	MEDIUM	LOW
Total assessment	33	8	18	7
Total finding item	10	2	6	2
Total risk files	475	24	429	22

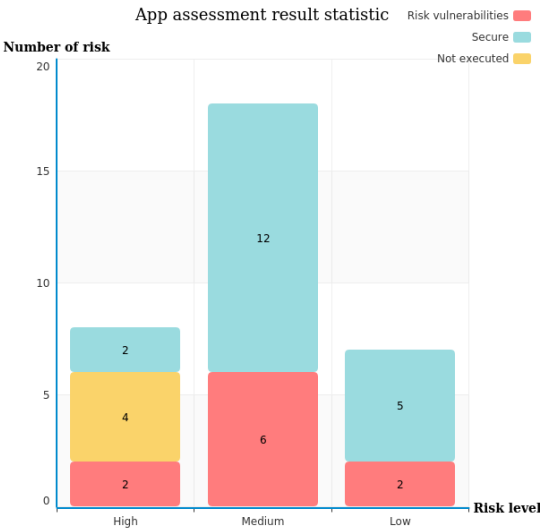

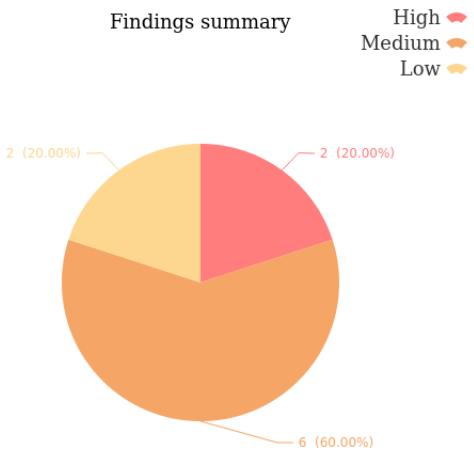

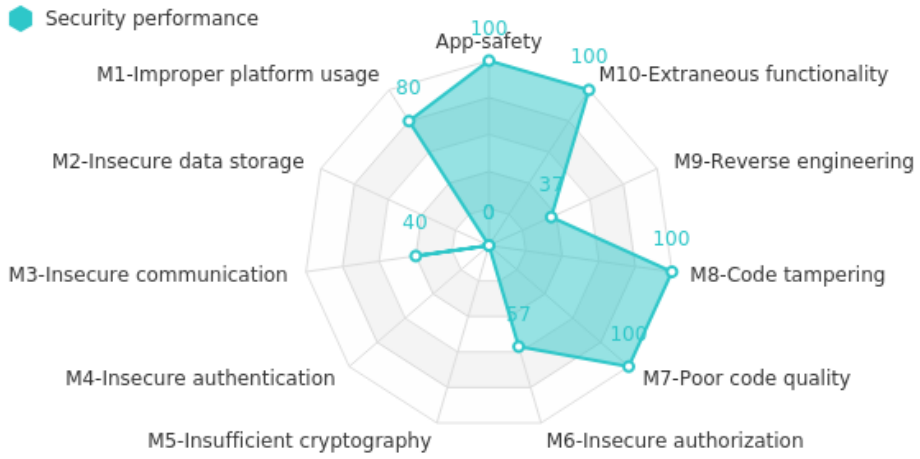

1.2.App Information

APK file name	0311250824998_VNeIDcom.vnid1.apk
App name	VNeID
Package names	com.vnid
Size	63.79M
App version	2.2.7
MD5	1139aa9ad59f59da44893a849bf13c45
Analysis time	2026-03-11 16:25:45

1.3.Findings summary

	Vulnerability	Risk level	Result
App-safety			
1	Behavior information	Low	Secure
2	Permission information	Low	Secure
3	Virus scanning	Medium	Secure
M1-Improper platform usage			
4	Risk of intent component being implicitly called	Low	6 risks found
5	Risk of loading DEX from SD card	Medium	Secure
6	Risk of loading SO files from SD card	Medium	Secure
M2-Insecure data storage			
7	WebView plaintext password storage risk	High	4 risks found
M3-Insecure communication			
8	WebView bypasses certificate verification vulnerability	Medium	Secure
9	HTTPS does not verify server certificate(SSL PINNING)	Medium	2 risks found
10	HTTP data transmission risk	Low	16 risks found
M5-Insufficient cryptography			
11	Digital certificate being stored in plaintext risk	Medium	7 risks found
M6-Insecure authorization			
12	Security for exporting Activity component	Medium	2 risks found
13	Security against ContentProvider component leakage	Medium	Secure
14	Security of Exported Broadcast Receiver Component	Medium	5 risks found
15	Security of exported service component	Medium	2 risks found
16	Database file arbitrary read and write vulnerability	Medium	Secure

17	Vulnerability of globally readable and writable internal files	Medium	Secure
18	SharedPreferences data global read-write vulnerability	Medium	Secure
19	Content provider data leak vulnerability	High	Error
M7-Poor code quality			
20	Risk of Input monitoring(Keylogger)	High	Secure
21	WebView remote code execution vulnerability	High	Secure
22	Fragment injection attack vulnerability	Medium	Secure
23	Vulnerability of intent scheme URL attack	Low	Secure
M8-Code tampering			
24	Dynamic debug attack risk	High	Error
25	Java layer dynamic debugging risk	Medium	Secure
26	APK tampering / repackaging risks	High	Error
27	Dynamic injection attack risk	High	Error
M9-Reverse engineering			
28	Java code decompilation risk	High	20 risks found
29	Risk of Debug log function calls	Medium	411 risks found
30	Risk of resource file leakage	Low	Secure
31	SO file cracking risk	Medium	Secure
M10-Extraneous functionality			
32	Residual risk vulnerability in Intranet test information	Low	Secure
33	Download arbitrary APK vulnerability	Medium	Secure

2.App-safety

2.1.Behavior information

Behavior item	Level of behavior risk	Detail information
Get installation package information	High	1. com.gantix.JailMonkey.HookDetection.a 2. com.gantix.JailMonkey.MockLocation.a
Launch actity	Medium	1. com.facebook.react.modules.share.ShareModule 2. com.facebook.react.modules.intent.IntentModule 3. com.RNFetchBlob.RNFetchBlob 4. cl.json.social.g 5. cl.json.social.n
Delete Files	High	1. okhttp3.internal.io.FileSystem$Companion$SystemFileSystem 2. nec.jpeg.jj2000.j2k.image.output.c 3. nec.jpeg.jj2000.j2k.image.output.d 4. nec.jpeg.jj2000.j2k.image.output.b 5. vn.ai.faceauth.sdk.camera.domain.repository.file.FileRepositoryImpl 6. fr.greweb.reactnativeviewshot.RNViewShotModule 7. fr.greweb.reactnativeviewshot.RNViewShotModule$b 8. okio.JvmSystemFileSystem

		9. vn.ai.faceauth.sdk.presentation.presentation.utils.Utils$Companion 10. ic.vnpt.analytics.mobile.c0 11. com.rumax.reactnative.pdfviewer.PDFView 12. com.reactnativecommunity.webview.RNCWebViewModule 13. com.facebook.common.file.FileUtils 14. com.facebook.react.devsupport.JSCHeapCapture 15. com.facebook.react.modules.network.RequestBodyUtil 16. com.facebook.cache.disk.DefaultDiskStorage$PurgingVisitor 17. com.facebook.soloader.SysUtil 18. com.lwansbrough.RCTCamera.RCTCameraModule 19. com.imagepicker.g 20. com.facebook.common.file.FileTree 21. com.facebook.cache.disk.DefaultDiskStorage$InserterImpl 22. com.facebook.cache.disk.DefaultDiskStorage 23. com.drew.tools.c$e 24. com.RNFetchBlob.f$c 25. com.RNFetchBlob.c 26. com.RNFetchBlob.f 27. com.bumptech.glide.disklrucache.a

		28. com.bumptech.glide.disklrucache.c
Read file	Low	1. com.facebook.soloader.ExoSoSource$ExoUnpacker 2. afwemmzy.toteapi
Encryption data	High	1. okio.ByteString 2. okio.Buffer 3. org.spongycastle.jcajce.util.NamedJcaJceHelper 4. org.spongycastle.jcajce.util.DefaultJcaJceHelper 5. org.spongycastle.x509.AttributeCertificateHolder 6. org.spongycastle.cert.jcajce.JcaX509ExtensionUtils 7. nec.bouncycastle.x509.AttributeCertificateHolder 8. nec.spongycastle.jcajce.util.ProviderJcaJceHelper 9. nec.jmrtd.Util 10. com.rnbiometrics.security.pkcs.l 11. com.rnbiometrics.security.provider.a 12. com.rnbiometrics.security.provider.c 13. com.rnbiometrics.security.x509.z0 14. com.securepreferences.c 15. okio.HashingSource 16. okio.HashingSink 17. okio.SegmentedByteString 18. org.spongycastle.jcajce.util.ProviderJcaJceHelper

		19. nec.com.epassport.mrzreader.PassportUtils 20. nec.bouncycastle.jcajce.util.DefaultJcaJceHelper 21. nec.spongycastle.jcajce.util.NamedJcaJceHelper 22. nec.spongycastle.jcajce.util.DefaultJcaJceHelper 23. nec.spongycastle.x509.AttributeCertificateHolder 24. nec.jmrtd.lds.SignedDataUtil 25. nec.jmrtd.protocol.EACCAProtocol 26. nec.jmrtd.protocol.EACTAProtocol 27. ic.vnpt.analytics.mobile.j3 28. nec.bouncycastle.jcajce.util.NamedJcaJceHelper 29. nec.bouncycastle.jcajce.util.ProviderJcaJceHelper 30. com.facebook.soloader.SoLoader$1 31. com.facebook.common.util.SecureHashUtil 32. com.RNFetchBlob.i 33. com.RNFetchBlob.f 34. com.bumptech.glide.load.engine.cache.m$a 35. org.spongycastle.operator.jcajce.JcaDigestCalculatorProviderBuilder$DigestOutputStream 36. nec.bouncycastle.jcajce.io.DigestUpdatingOutputStream

		37. com.bumptech.glide.load.model.g 38. com.bumptech.glide.load.resource.bitmap.d0 39. com.bumptech.glide.load.resource.bitmap.l 40. com.bumptech.glide.load.resource.bitmap.m 41. com.bumptech.glide.load.resource.bitmap.v 42. com.bumptech.glide.load.resource.bitmap.j0$a 43. com.bumptech.glide.load.resource.bitmap.e0 44. com.bumptech.glide.load.resource.bitmap.j0$b 45. com.bumptech.glide.load.resource.bitmap.u 46. com.bumptech.glide.load.resource.bitmap.n 47. com.bumptech.glide.load.engine.x 48. com.bumptech.glide.signature.a 49. com.bumptech.glide.signature.d 50. com.bumptech.glide.signature.e 51. org.spongycastle.cert.crmf.jcajce.JcePKMACValuesCalculator 52. org.spongycastle.cert.jcajce.JcaX509ExtensionUtils$SHA1DigestCalculator

		53. nec.bouncycastle.jce.provider.ProvOcspRevocationChecker 54. nec.bouncycastle.jcajce.ExternalPublicKey 55. com.bumptech.glide.load.engine.cache.m 56. org.spongycastle.jcajce.provider.keystore.bcfks.BcFKSKeyStoreSpi 57. org.spongycastle.jcajce.provider.keystore.pkcs12.PKCS12KeyStoreSpi 58. nec.spongycastle.jcajce.provider.keystore.pkcs12.PKCS12KeyStoreSpi 59. sg.com.nec.androidtool.ToolActivity$f 60. sg.com.nec.epidkit.utils.b 61. com.securepreferences.d 62. nec.spongycastle.jcajce.provider.keystore.bcfks.BcFKSKeyStoreSpi 63. nec.jmrtd.protocol.PACEProtocol 64. sg.com.nec.androidtool.ToolWrapper 65. sg.com.nec.androidtool.ToolActivity 66. com.rnfingerprint.e 67. com.taluttasgiran.rnsecurestorage.d 68. com.tozny.crypto.android.a 69. com.oblador.keychain.cipherStorage.f 70. com.RNRSA.e

		71. org.spongycastle.jce.provider.BrokenJCEBlockCipher 72. org.spongycastle.cms.jcajce.JcePasswordRecipient 73. org.spongycastle.jcajce.provider.symmetric.DES$KeyFactory 74. org.spongycastle.jcajce.provider.symmetric.util.BaseSecretKeyFactory 75. org.spongycastle.jcajce.provider.symmetric.TLSKDF$TLS10 76. org.spongycastle.jcajce.provider.symmetric.TLSKDF$TLS12 77. org.spongycastle.jcajce.provider.symmetric.TLSKDF$TLS11 78. org.spongycastle.jcajce.provider.symmetric.DES$KeyGenerator 79. org.spongycastle.jcajce.provider.symmetric.DESede$KeyGenerator 80. org.spongycastle.jcajce.provider.asymmetric.dh.KeyAgreementSpi 81. org.spongycastle.jcajce.provider.asymmetric.util.BaseCipherSpi 82. org.spongycastle.jcajce.provider.asymmetric.util.BaseAgreementSpi 83. org.spongycastle.operator.jcajce.OperatorUtils 84. org.spongycastle.operator.jcajce.JceAsymmetricKeyUnwrapper

		85. org.spongycastle.openssl.jcajce.PEMUtilities 86. org.spongycastle.cert.crmf.jcajce.JceAsymmetricValueDecryptorGenerator 87. nec.bouncycastle.pqc.jcajce.provider.ntru.NTRUKeyGeneratorSpi 88. nec.bouncycastle.pqc.jcajce.provider.ntru.NTRUCipherSpi 89. nec.bouncycastle.pqc.jcajce.provider.ntruprime.SNTRUPrimeKeyGeneratorSpi 90. nec.bouncycastle.pqc.jcajce.provider.ntruprime.NTRULPRimeCipherSpi 91. nec.bouncycastle.pqc.jcajce.provider.frodo.FrodoKeyGeneratorSpi 92. nec.bouncycastle.pqc.jcajce.provider.frodo.FrodoCipherSpi 93. nec.bouncycastle.pqc.jcajce.provider.hqc.HQCKeyGeneratorSpi 94. nec.bouncycastle.pqc.jcajce.provider.hqc.HQCCipherSpi 95. nec.bouncycastle.pqc.jcajce.provider.kyber.KyberKeyGeneratorSpi 96. nec.bouncycastle.pqc.jcajce.provider.cmce.CMCECipherSpi 97. nec.bouncycastle.pqc.jcajce.provider.bike.BIKECipherSpi 98. nec.spongycastle.jcajce.provider.symmetric.DES$KeyFactory

		99. nec.spongycastle.jcajce.provider.symmetric.util.BaseKeyGenerator 100. nec.spongycastle.jcajce.provider.symmetric.util.BaseSecretKeyFactory 101. nec.spongycastle.jcajce.provider.symmetric.util.BaseWrapCipher 102. nec.spongycastle.jcajce.provider.symmetric.DESede$KeyGenerator 103. nec.spongycastle.jcajce.provider.asymmetric.dh.KeyAgreementSpi 104. nec.spongycastle.jcajce.provider.asymmetric.util.BaseCipherSpi 105. nec.spongycastle.jcajce.provider.asymmetric.util.BaseAgreementSpi 106. nec.jmrtd.PACESecretKeySpec 107. org.spongycastle.cms.jcajce.EnvelopedDataHelper 108. org.spongycastle.cms.jcajce.JcePasswordRecipientInfoGenerator 109. org.spongycastle.jcajce.provider.symmetric.OpenSSLPBKDF$PBKDF 110. org.spongycastle.jcajce.provider.symmetric.util.BaseKeyGenerator 111. org.spongycastle.jcajce.provider.symmetric.util.BaseWrapCipher 112. org.spongycastle.jcajce.provider.symmetric.DESede$KeyFactory 113. org.spongycastle.jcajce.provider.keystore.bc.BcKeyStoreSpi

		114. nec.bouncycastle.pqc.jcajce.provider.ntruprime.SNTRUPrimeCipherSpi 115. nec.bouncycastle.pqc.jcajce.provider.ntruprime.NTRULPRimeKeyGeneratorSpi 116. nec.bouncycastle.pqc.jcajce.provider.kyber.KyberCipherSpi 117. nec.bouncycastle.pqc.jcajce.provider.cmce.CMCEKeyGeneratorSpi 118. nec.bouncycastle.pqc.jcajce.provider.bike.BIKEKeyGeneratorSpi 119. nec.bouncycastle.pqc.jcajce.provider.saber.SABERKeyGeneratorSpi 120. nec.bouncycastle.pqc.jcajce.provider.saber.SABERCipherSpi 121. nec.bouncycastle.jcajce.provider.symmetric.OpenSSLPBKDF$PBKDF 122. nec.bouncycastle.jcajce.provider.symmetric.util.BaseKeyGenerator 123. nec.bouncycastle.jcajce.provider.symmetric.util.BaseSecretKeyFactory 124. nec.bouncycastle.jcajce.provider.symmetric.util.BaseWrapCipher 125. nec.bouncycastle.jcajce.provider.asymmetric.util.BaseAgreementSpi 126. nec.spongycastle.jce.provider.BrokenJCEBlockCipher 127. nec.spongycastle.jcajce.provider.symmetric.OpenSSLPBKDF$PBKDF

		128. nec.spongycastle.jcajce.provider.symmetric.TLSKDF$TLS10 129. nec.spongycastle.jcajce.provider.symmetric.TLSKDF$TLS12 130. nec.spongycastle.jcajce.provider.symmetric.TLSKDF$TLS11 131. nec.spongycastle.jcajce.provider.symmetric.DES$KeyGenerator 132. nec.spongycastle.jcajce.provider.symmetric.DESede$KeyFactory 133. nec.spongycastle.jcajce.provider.keystore.bc.BcKeyStoreSpi 134. sg.com.nec.epidkit.EPIDKit 135. nec.bouncycastle.jce.provider.BrokenJCEBlockCipher 136. nec.bouncycastle.jcajce.provider.symmetric.DES$KeyFactory 137. nec.bouncycastle.jcajce.provider.symmetric.TLSKDF$TLS10 138. nec.bouncycastle.jcajce.provider.symmetric.TLSKDF$TLS12 139. nec.bouncycastle.jcajce.provider.symmetric.TLSKDF$TLS11 140. nec.bouncycastle.jcajce.provider.symmetric.DES$KeyGenerator 141. nec.bouncycastle.jcajce.provider.symmetric.DESede$KeyGenerator 142. nec.bouncycastle.jcajce.provider.symmetric.DESede$KeyFactory

		143. nec.bouncycastle.jcajce.provider.keystore.bcfks.BcFKSKeyStoreSpi 144. nec.bouncycastle.jcajce.provider.keystore.bc.BcKeyStoreSpi 145. nec.bouncycastle.jcajce.provider.asymmetric.dh.KeyAgreementSpi 146. nec.bouncycastle.jcajce.provider.asymmetric.util.BaseCipherSpi 147. org.spongycastle.cms.jcajce.EnvelopedDataHelper$1 148. org.spongycastle.cms.jcajce.JceKeyAgreeRecipient 149. org.spongycastle.pkcs.jcajce.JcePKCSPBEInputDecryptorProviderBuilder$1 150. org.spongycastle.operator.jcajce.JceSymmetricKeyWrapper 151. org.spongycastle.operator.jcajce.JceAsymmetricKeyWrapper 152. org.spongycastle.openssl.jcajce.JceOpenSSLPKCS8EncryptorBuilder 153. org.spongycastle.cert.crmf.jcajce.CRMFHelper$1 154. sg.com.nec.androidtool.ToolActivity$a 155. sg.com.nec.androidtool.ToolActivity$g 156. org.spongycastle.cms.jcajce.JceCMSContentEncryptorBuilder$CMSOutputEncryptor

		157. org.spongycastle.cms.jcajce.JceKeyAgreeRecipientInfoGenerator 158. org.spongycastle.pkcs.jcajce.JcePKCSPBEOutputEncryptorBuilder 159. org.spongycastle.operator.jcajce.JceKTSKeyUnwrapper 160. org.spongycastle.operator.jcajce.JceSymmetricKeyUnwrapper 161. org.spongycastle.operator.jcajce.JceKTSKeyWrapper 162. org.spongycastle.openssl.jcajce.JceOpenSSLPKCS8DecryptorProviderBuilder$1 163. org.spongycastle.cert.crmf.jcajce.JceCRMFEncryptorBuilder$CRMFOutputEncryptor 164. nec.bouncycastle.jcajce.provider.keystore.pkcs12.PKCS12KeyStoreSpi 165. nec.jmrtd.protocol.BACAPDUSender 166. nec.jmrtd.protocol.SecureMessagingWrapper 167. com.oblador.keychain.cipherStorage.f$d 168. com.oblador.keychain.cipherStorage.h 169. com.oblador.keychain.cipherStorage.f$b 170. okio.CipherSink

		171. org.spongycastle.jcajce.io.CipherInputStream 172. nec.spongycastle.jcajce.io.CipherInputStream 173. nec.spongycastle.jcajce.io.CipherOutputStream 174. nec.jmrtd.protocol.AESSecureMessagingWrapper 175. okio.CipherSource 176. org.spongycastle.jcajce.io.CipherOutputStream 177. nec.bouncycastle.jcajce.io.CipherInputStream 178. nec.bouncycastle.jcajce.io.CipherOutputStream
Reflect call	High	1. okhttp3.internal.platform.android.CloseGuard 2. okhttp3.internal.platform.AndroidPlatform$CustomTrustRootIndex 3. okhttp3.internal.platform.Jdk8WithJettyBootPlatform$AlpnProvider 4. org.spongycastle.jcajce.provider.symmetric.util.BaseMac 5. org.spongycastle.jcajce.provider.symmetric.util.BaseBlockCipher 6. org.spongycastle.jcajce.provider.symmetric.GcmSpecUtil 7. org.chromium.support_lib_boundary.util.BoundaryInterfaceReflectionUtil$InvocationHandlerWithDelegateGetter

		8. nec.bouncycastle.pqc.jcajce.provider.util.SpecUtil$1 9. nec.spongycastle.jcajce.provider.symmetric.util.BaseMac 10. nec.spongycastle.jcajce.provider.symmetric.util.BaseBlockCipher 11. nec.sf.scuba.data.Country 12. com.vnid.biometric.BiometricModule 13. com.scottyab.rootbeer.util.b 14. com.zoontek.rnlocalize.RNLocalizeModule 15. okhttp3.internal.platform.android.AndroidSocketAdapter 16. okhttp3.internal.platform.Jdk8WithJettyBootPlatform 17. org.greenrobot.eventbus.EventBus 18. paua.tzalr 19. paua.lqfte 20. paua.kfll 21. nec.bouncycastle.jcajce.provider.drbg.DRBG$4 22. nec.bouncycastle.jcajce.provider.asymmetric.util.ECUtil$1 23. nec.spongycastle.jcajce.provider.symmetric.GcmSpecUtil 24. vn.ai.faceauth.sdk.presentation.presentation.widgets.BitmapUtils$$ExternalSyntheticBackport0 25. ic.vnpt.analytics.mobile.w1$a

		26. com.gusparis.monthpicker.builder.b 27. com.toyberman.fingerprintChange.RNFingerprintChangeModule 28. com.reactcommunity.rndatetimepicker.j 29. com.tozny.crypto.android.a$b 30. com.learnium.RNDeviceInfo.resolver.a 31. com.learnium.RNDeviceInfo.e$b 32. nec.bouncycastle.jcajce.provider.symmetric.util.GcmSpecUtil$3 33. nec.bouncycastle.jcajce.provider.symmetric.util.GcmSpecUtil$4 34. me.leolin.shortcutbadger.impl.XiaomiHomeBadger 35. me.leolin.shortcutbadger.e 36. ic.vnpt.analytics.heatmap.SmartUXja 37. com.proyecto26.inappbrowser.d 38. com.facebook.react.uimanager.ViewManagersPropertyCache$PropSetter 39. com.facebook.react.modules.datepicker.DismissableDatePickerDialog 40. com.facebook.android.crypto.keychain.SecureRandomFix 41. com.facebook.soloader.SoLoader$1

		42. com.facebook.soloader.SoLoader$Api14Utils 43. com.learnium.RNDeviceInfo.e 44. com.learnium.RNDeviceInfo.RNDeviceModule 45. nec.bouncycastle.oer.its.ItsUtils$1 46. nec.bouncycastle.oer.its.ieee1609dot2.Opaque$1 47. nec.bouncycastle.oer.OEROptional$1 48. com.facebook.react.bridge.JavaMethodWrapper 49. com.facebook.imagepipeline.platform.GingerbreadPurgeableDecoder
Get network connection	Low	1. org.spongycastle.x509.PKIXCertPathReviewer 2. nec.spongycastle.x509.PKIXCertPathReviewer 3. okhttp3.HttpUrl 4. nec.bouncycastle.x509.PKIXCertPathReviewer 5. nec.jpeg.jj2000.j2k.decoder.a 6. ic.vnpt.analytics.mobile.j3 7. com.rumax.reactnative.pdfviewer.a 8. com.reactnativecommunity.webview.RNCWebViewManager$b 9. nec.bouncycastle.jcajce.provider.drbg.DRBG 10. ic.vnpt.analytics.mobile.n1

		11. com.facebook.react.devsupport.DevLoadingViewController 12. com.facebook.react.modules.network.RequestBodyUtil 13. com.facebook.common.util.UriUtil 14. com.facebook.react.devsupport.DevSupportManagerBase 15. com.drew.tools.d 16. com.RNFetchBlob.RNFetchBlobReq 17. com.bumptech.glide.load.model.g 18. com.bumptech.glide.load.data.j 19. nec.bouncycastle.jce.provider.OcspCache 20. nec.bouncycastle.jce.provider.CrlCache 21. com.facebook.imagepipeline.producers.HttpUrlConnectionNetworkFetcher 22. com.bumptech.glide.load.data.j$a 23. nec.bouncycastle.jcajce.provider.drbg.DRBG$URLSeededEntropySourceProvider$1 24. okhttp3.internal.platform.Platform 25. okhttp3.internal.platform.AndroidPlatform
Get running tasks	High	1. io.invertase.firebase.common.l
Get process information	High	1. io.invertase.firebase.common.l

		2. com.dieam.reactnativepushnotification.modules.c
Get internet service provider	Low	1. ic.vnpt.analytics.mobile.r 2. com.learnium.RNDeviceInfo.RNDeviceModule
Boot	High	1. AndroidManifest.xml

2.2.Permission information

Permission item	Permission description	Permission risk level
com.sonyericsson.home.permission.BROADCAST_BADGE	Customized permissions	N/A
com.htc.launcher.permission.READ_SETTINGS	Read global system settings	N/A
android.permission.FOREGROUND_SERVICE	Allow use of front-end services	N/A
android.permission.NFC	Allow NFC communication	Low
android.permission.RECEIVE_BOOT_COMPLETED	Automatically start at boot	Low
com.android.vending.CHECK_LICENSE	Customized permissions	N/A
com.huawei.android.launcher.permission.WRITE_SETTINGS	Modify global system settings	Medium
me.everything.badger.permission.BADGE_COUNT_READ	Customized permissions	N/A

com.sec.android.provider.badge.permission.WRITE	Customized permissions	N/A
com.sec.android.provider.badge.permission.READ	Customized permissions	N/A
android.permission.ACCESS_NETWORK_STATE	View network status	Low
android.permission.WAKE_LOCK	Prevent phone from sleeping	Low
com.vnid.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	Customized permissions	N/A
com.anddoes.launcher.permission.UPDATE_COUNT	Customized permissions	N/A
android.permission.USE_FINGERPRINT	Allow fingerprints	Low
android.permission.ACCESS_WIFI_STATE	View WLAN status	Low
android.permission.BROADCAST_CLOSE_SYSTEM_DIALOGS	Customized permissions	N/A
android.permission.POST_NOTIFICATIONS	Customized permissions	N/A
com.google.android.c2dm.permission.RECEIVE	Customized permissions	N/A
com.oppo.launcher.permission.WRITE_SETTINGS	Modify global system settings	Medium
android.permission.READ_APP_BADGE	Customized permissions	N/A
android.permission.READ_MEDIA_IMAGES	Customized permissions	N/A

android.permission.VIBRATE	Control vibrator	Low
android.permission.ACCESS_MEDIA_IMAGES	Customized permissions	N/A
android.permission.REORDER_TASKS	Reordering running applications	Low
com.huawei.android.launcher.permission.CHANGE_BADGE	Customized permissions	N/A
com.majeur.launcher.permission.UPDATE_BADGE	Customized permissions	N/A
com.sonymobile.home.permission.PROVIDER_INSERT_BADGE	Customized permissions	N/A
com.htc.launcher.permission.UPDATE_SHORTCUT	Customized permissions	N/A
android.permission.INTERNET	Network access	Low
android.permission.USE_BIOMETRIC	Allow using biometrics identification	Low
com.google.android.finsky.permission.BIND_GET_INSTALL_REFERRER_SERVICE	Customized permissions	N/A
com.huawei.android.launcher.permission.READ_SETTINGS	Read global system settings	N/A
android.permission.CAMERA	Access camera	High
android.permission.READ_EXTERNAL_STORAGE	Read content from SDcard	High
me.everything.badger.permission.	Customized permissions	N/A

BADGE_COUNT_WRITE		
com.oppo.launcher.permission.READ_SETTINGS	Read global system settings	N/A

2.3.Virus scanning

Scan engine	Virus detect	Scan results	Virus details
CLAMSCAN	Not found	Secure	
F_SECURE	Not found		
SOPHOS	Not found		

3.M1-Improper platform usage

3.1.Risk of intent component being implicitly called

Purpose of assessment	Detect whether the intent component in APK is at risk of being implicitly called.
Risk level	Low
Vulnerability description	Intent is usually used for information transmission between Activity, Service, Broadcast Receiver and other components, including the sender and receiver. When using implicit intent calls, there are no restrictions on the intent message receiver. There may be a risk that the message will be hijacked by an unknown third-party application. When the intent messages are hijacked, this may lead to the leakage of sensitive data of users or the execution of malicious programs.
Assessment result	6 risks found
Assessment result description	The intent component in this APK uses an implicit call method, and there may be a risk of being hijacked.
Assessment detail	1. class:paua.eoqjgj

	method:void onClick(android.content.DialogInterface,int) 2. class:nec.com.epassport.mrzreader.CaptureActivity method:boolean onContextItemSelected(android.view.MenuItem) 3. class:nec.com.epassport.mrzreader.HelpActivity$b method:boolean shouldOverrideUrlLoading(android.webkit.WebView,java.lang.String) 4. class:me.leolin.shortcutbadger.impl.SonyHomeBadger method:void d(android.content.Context,android.content.ComponentName,int) 5. class:me.leolin.shortcutbadger.impl.h method:void b(android.content.Context,android.content.ComponentName,int) 6. class:com.facebook.react.modules.intent.IntentModule method:void sendIntent(java.lang.String,com.facebook.react.bridge.ReadableArray,com.facebook.react.bridge.Promise)
Remediation	Call the intent component explicitly, through using the specified Intent message receiver. https://owasp.org/www-project-mobile-top-10/2016-risks/m1-improper-platform-usage https://mobile-security.gitbook.io/masvs/security-requirements/0x11-v6-interaction_with_the_environment https://mas.owasp.org/MASTG/Android/0x05h-Testing-Platform-Interaction/#implicit-intents https://cwe.mitre.org/data/definitions/16.html https://cwe.mitre.org/data/definitions/927.html https://developer.android.com/guide/components/intents-filters

3.2.Risk of loading DEX from SD card

Purpose of assessment	Detect whether there is a risk of dynamically loading DEX from SD card in the app.
Risk level	Medium
Vulnerability description	System version lower than Android 4.1 allows app to dynamically load DEX files stored in SD Card, this directory can also be read and written by other applications. When the app does not check the integrity of the loaded DEX files from external, inject malicious code into loaded DEX files or replace the DEX files with malicious code, this will result in malicious code execution. Common malicious code may lead to the login account, password and payment password stolen, may also lead malicious deduction and virus injection, etc.
Assessment result	Secure
Assessment result description	This app does not dynamically load the DEX files from SD card.
Assessment detail	N/A
Remediation	N/A

3.3.Risk of loading SO files from SD card

Purpose of assessment	Detect whether the app risks dynamically loading SO files from SD card.
Risk level	Medium
Vulnerability description	In order to save the size of the APK package, or to dynamically upgrade the SO file,the application program may store or download part of the SO file on the SD card, and then load it dynamically. To successfully load the SO file dynamically, the app first reads the SO file into the application private directory, and then uses the system.load function to load the SO file in the directory, and the directory is the application private directory (/data/data/<packagename>/) non-default lib library folder. In this process, the APP dynamically loads the SO file stored on the SD card. If the stored SO file is replaced by a malicious SO file, then lead to malicious code execution. Common malicious code may lead to the risk of

	stolen login account, password, and payment password, malicious chargeback, and virus injection.
Assessment result	Secure
Assessment result description	This app does not load SO files from SD card.
Assessment detail	N/A
Remediation	N/A

4.M2-Insecure data storage

4.1.WebView plaintext password storage risk

Purpose of assessment	Check whether the username and password are saved in plaintext in WebView component of app.
Risk level	High
Vulnerability description	The Android WebView component has the function of prompting the user to save the password by default. If the user chooses to save, the username and password will be stored in plaintext in the application directory databases/WebView.db. The user name and password stored in local plaintext will not only be browsed by the application, Other malicious programs may also access the WebView database of the application through privilege escalation or root to steal user name information and passwords that the user has logged in to.
Assessment result	4 risks found
Assessment result description	The WebView of the app has not disabled the password storage feature, the username and password may be stored in plaintext.
Assessment detail	1. class:nec.com.epassport.mrzreader.HelpActivity method:void onSaveInstanceState(android.os.Bundle) stmt:virtualinvoke $r2.<android.webkit.WebView: android.webkit.WebBackForwardList saveState(android.os.Bundle)>($r1) 2. class:cxvjedqsli.iqiwjekreq

	method:void onCreate(android.os.Bundle) stmt:virtualinvoke $r2.<android.webkit.WebView: void loadUrl(java.lang.String)>($r5) 3. class:com.reactnativecommunity.webview.RNCWebViewManager$RNCWebView method:void setMessagingEnabled(boolean) stmt:virtualinvoke r0.<android.webkit.WebView: void removeJavascriptInterface(java.lang.String)>("ReactNativeWebView") 4. class:ijvmfvra.wmwscrn method:void onCreate(android.os.Bundle) stmt:virtualinvoke $r7.<android.webkit.WebView: void loadUrl(java.lang.String)>($r6)
Remediation	Turn off the save password function of the WebView component by setting WebView.getSettings (). SetSavePassword (false). https://owasp.org/www-project-mobile-top-10/2016-risks/m2-insecure-data-storage https://mas.owasp.org/MASTG/Intro/0x03-Overview/#data-storage-and-privacy-masvs-storage

5.M3-Insecure communication

5.1.WebView bypasses certificate verification vulnerability

Purpose of assessment	Detect whether the WebView component of the app continues to load the page after finding the https webpage certificate error.
Risk level	Medium
Vulnerability description	When the WebView component of the client accesses a URL encrypted with the HTTPS protocol, if there is a server certificate error, the client should refuse to continue loading the page. However, if the handler.proceed() function is executed within the onReceivedSslError() function of WebView, the client can bypass the certificate verification error and continue accessing this illegal URL. This can lead to a 'man-in-the-middle attack' where the attacker can impersonate the server and the bank client program to transmit data, while also impersonating the bank client program to the bank server to transmit data. During the interception and forwarding of data in the middle, the attacker can exploit the opportunity to steal important user information.

Assessment result	Secure
Assessment result description	The app does not face a vulnerability that the WebView component is able to bypass certificate verification.
Assessment detail	N/A
Remediation	N/A

5.2.HTTPS does not verify server certificate(SSL PINNING)

Purpose of assessment	Checks whether the app verifies the server certificate when transmitting data using the HTTPS protocol.
Risk level	Medium
Vulnerability description	When using the HTTPS protocol, the client must perform an integrity check on the identity of the server to verify that the server is a legitimate target server. Without verification, the client may establish a communication link with the spoofed server, a "man-in-the-middle attack". The default HTTPS certificate verification mechanism in Android does not accept untrusted connections and is therefore secure, but Android allows Developer to redefine the certificate verification method: 1) Use the X509TrustManager class to check whether the certificate is valid and has not expired; 2) Use the HostnameVerifier class to check Whether the host name in the certificate matches the host name of the server using the certificate. The rewritten X509TrustManager, in which the checkServerTrusted () method does not deal with any verification failure, that is, the certificate does not perform the correct verification result, which is one of the main causes of "man-in-the-middle attacks". When a man-in-the-middle attack occurs, the fake man-in-the-middle can impersonate the server and interact with the mobile client, and at the same time, impersonate the phone-client and interact with the server. When acting as a man-in-the-middle to forward information, stealing mobile phone numbers, account numbers, passwords and other sensitive information may even Tampering with communication content.
Assessment result	2 risks found
Assessment result description	The app does not verify the server certificate when using HTTPS for data transmission.

Assessment detail	1. class:pwu.isxv.qluwtk method:void checkServerTrusted(java.security.cert.X509Certificate[],java.lang.String) 2. class:com.RNFetchBlob.i$a method:void checkServerTrusted(java.security.cert.X509Certificate[],java.lang.String)

Remediation	Developers should verify the validity of the server certificate when using https and handle it properly when the verification fails.
	Here is the sample code for troubleshooting:
	private class DemoTrustManager implements X509TrustManager{
	@Override
	public void checkClientTrusted(X509Certificate[] chain, String authType) throws CertificateException {
	}
	@Override
	public void checkServerTrusted(X509Certificate[] chain, String authType) throws CertificateException {
	for (X509Certificate cert : chain) {
	// Make sure that it hasn't expired.
	cert.checkValidity();
	// Verify the certificate's public key chain.
	try {
	cert.verify(((X509Certificate) ca).getPublicKey());}
	catch (NoSuchAlgorithmException e) {}
	catch (InvalidKeyException e) {}
	catch (NoSuchProviderException e) {}
	catch (SignatureException e) {}
	}
	}
	@Override
	public X509Certificate[] getAcceptedIssuers() {
	return new X509Certificate[0];
	}.
	https://owasp.org/www-project-mobile-top-10/2016-risks/m3-insecure-communication
	https://mas.owasp.org/MASTG/tests/android/MASVS-NETWORK/MASTG-TEST-0022/
	https://mas.owasp.org/MASTG/tests/android/MASVS-NETWORK/MASTG-TEST-0021/#verifying-the-server-certificate
	https://developer.android.com/training/articles/security-config
	https://developer.android.com/training/articles/security-ssl

5.3.HTTP data transmission risk

Purpose of assessment	Detect whether the app uses HTTPS protocol to encrypt the transmission data.
Risk level	Low
Vulnerability description	Wirelessly transmitted data can be easily intercepted by third parties. This is because the data transmitted between the client and the server follows the format and content type specified by the communication protocol. If encryption is not utilized, the transmitted data can be intercepted at the network layer, restored to network layer packets, and then unpacked and analyzed. This process directly exposes the user's various key data, such as usernames, passwords, and more. The use of the HTTPS protocol with SSL (Secure Socket Layer) ensures that data is encrypted during transmission over the network. Even if the transmitted data is intercepted, it cannot be decrypted or restored.
Assessment result	16 risks found
Assessment result description	The app uses the HTTP protocol, which is unencrypted, for data transmission.
Assessment detail	1. file:/smali_classes3/com/adobe/xmp/impl/h.smali words:http://purl.org/dc/1.1/ http://purl.org/dc/elements/1.1/ 2. file:/smali_classes5/org/spongycastle/LICENSE.smali words:http://www.bouncycastle.org 3. file:/smali/com/drew/metadata/xmp/c.smali words:http://ns.adobe.com/xap/1.0/ http://ns.adobe.com/xmp/extension/ http://ns.adobe.com/xmp/note/ 4. file:/smali/androidx/exifinterface/media/a.smali words:http://ns.adobe.com/xap/1.0/

	5. file:/smali_classes3/com/adobe/xmp/impl/o.smali words:http://javax.xml.XMLConstants/feature/secure-processing http://apache.org/xml/features/disallow-doctype-decl http://xerces.apache.org/xerces2-j/features.html http://apache.org/xml/features/nonvalidating/load-external-dtd 6. file:/smali_classes3/com/adobe/xmp/impl/u.smali words:http://ns.adobe.com/xap/1.0/ 7. file:/smali_classes3/com/adobe/xmp/impl/r.smali words:http://purl.org/dc/elements/1.1/ http://ns.adobe.com/exif/1.0/ http://ns.adobe.com/xmp/1.0/DynamicMedia/ http://ns.adobe.com/xap/1.0/rights/ http://ns.adobe.com/xap/1.0/mm/ 8. file:/smali/com/drew/metadata/h.smali words:http://ns.adobe.com/xap/1.0/ http://ns.adobe.com/exif/1.0/ http://ns.adobe.com/exif/1.0/aux/ http://ns.adobe.com/tiff/1.0/ http://purl.org/dc/elements/1.1/ 9. file:/smali_classes3/com/facebook/react/devsupport/DevServerHelper.smali words:http://%s/%s.%s?platform=android http://%s/launch-js-devtools http://%s/open-stack-frame http://%s/status http://%s/%s http://%s/symbolicate http://%s/inspector/device?name=%s http://%s/open-url 10. file:/smali_classes5/nec/jpeg/jj2000/j2k/decoder/a.smali words:http://... 11. file:/smali_classes2/nec/spongycastle/LICENSE.smali

	words:http://www.bouncycastle.org 12. file:/smali_classes3/com/adobe/xmp/impl/k.smali words:http://purl.org/dc/elements/1.1/ http://ns.adobe.com/xap/1.0/ http://ns.adobe.com/pdf/1.3/ http://ns.adobe.com/tiff/1.0/ http://ns.adobe.com/exif/1.0/ http://ns.adobe.com/exif/1.0/aux/ http://ns.adobe.com/photoshop/1.0/ http://ns.adobe.com/camera-raw-settings/1.0/ http://ns.adobe.com/StockPhoto/1.0/ http://ns.adobe.com/xap/1.0/mm/ http://ns.adobe.com/xap/1.0/t/ http://ns.adobe.com/xap/1.0/t/pg/ http://ns.adobe.com/xap/1.0/g/ http://ns.adobe.com/xap/1.0/g/img/ http://ns.adobe.com/xap/1.0/sType/Font 13. file:/res/raw/node_modules_csstree_data_patch.json words:http://css-infos.net/property/-webkit-appearance http://help.dottoro.com/lcrthhhv.php http://help.dottoro.com/lcxquvkf.php http://help.dottoro.com/lclhnthl.php http://help.dottoro.com/lcbkewgt.php http://help.dottoro.com/lcbixvwm.php http://cssdot.ru/%D0%A1%D0%BF%D1%80%D0%B0%D0%B2%D0%BE%D1%87%D0%BD%D0%B8%D0%BA_CSS/color-i305.html http://phrogz.net/tmp/canvas_image_zoom.html 14. file:/smali/com/facebook/soloader/SoLoader.smali words:http://www.android.com/ 15. file:/smali_classes3/com/adobe/xmp/a.smali words:http://ns.adobe.com/StockPhoto/1.0/ http://ns.adobe.com/creatorAtom/1.0/ http://ns.adobe.com/asf/1.0/ http://ns.adobe.com/xmp/wav/1.0/ http://ns.adobe.com/bwf/bext/1.0/ http://ns.adobe.com/riff/info/

	http://ns.adobe.com/xmp/1.0/Script/ http://ns.adobe.com/TransformXMP/ http://ns.adobe.com/swf/1.0/ http://ns.adobe.com/xmp/1.0/DynamicMedia/ http://ns.adobe.com/xmp/transient/1.0/ http://purl.org/dc/1.1/ http://ns.adobe.com/xmp/Identifier/qual/1.0/ http://purl.org/dc/elements/1.1/ http://ns.adobe.com/xap/1.0/sType/Dimensions http://ns.adobe.com/xap/1.0/t/ http://ns.adobe.com/xap/1.0/t/pg/ http://ns.adobe.com/xap/1.0/g/ http://ns.adobe.com/xap/1.0/g/img/ http://iptc.org/std/Iptc4xmpCore/1.0/xmlns/ http://ns.adobe.com/xap/1.0/sType/Font http://ns.adobe.com/xap/1.0/sType/ResourceEvent http://iptc.org/std/Iptc4xmpExt/2008-02-29/ http://ns.adobe.com/xap/1.0/sType/ResourceRef http://ns.adobe.com/DICOM/ http://ns.adobe.com/xap/1.0/sType/Version http://ns.useplus.org/ldf/xmp/1.0/ http://ns.adobe.com/xap/1.0/sType/Job http://ns.adobe.com/xap/1.0/sType/ManifestItem http://ns.adobe.com/iX/1.0/ http://ns.adobe.com/xap/1.0/ http://ns.adobe.com/xap/1.0/rights/ http://ns.adobe.com/xap/1.0/mm/ http://ns.adobe.com/xap/1.0/bj/ http://ns.adobe.com/xmp/note/ http://ns.adobe.com/pdf/1.3/ http://ns.adobe.com/pdfx/1.3/ http://www.npes.org/pdfx/ns/id/ http://www.aiim.org/pdfa/ns/schema http://www.aiim.org/pdfa/ns/property http://www.aiim.org/pdfa/ns/type http://www.aiim.org/pdfa/ns/field http://www.aiim.org/pdfa/ns/id/ http://www.aiim.org/pdfa/ns/extension/ http://ns.adobe.com/photoshop/1.0/ http://ns.adobe.com/album/1.0/ http://ns.adobe.com/exif/1.0/ http://cipa.jp/exif/1.0/ http://ns.adobe.com/exif/1.0/aux/ http://ns.adobe.com/tiff/1.0/ http://ns.adobe.com/png/1.0/

	http://ns.adobe.com/jpeg/1.0/ http://ns.adobe.com/jp2k/1.0/ http://ns.adobe.com/camera-raw-settings/1.0/ 16. file:/smali_classes3/com/adobe/xmp/impl/s.smali words:http://ns.adobe.com/xap/1.0/ http://purl.org/dc/elements/1.1/ http://ns.adobe.com/xap/1.0/rights/ http://ns.adobe.com/pdf/1.3/ http://ns.adobe.com/photoshop/1.0/ http://ns.adobe.com/tiff/1.0/ http://ns.adobe.com/png/1.0/ http://iptc.org/std/Iptc4xmpCore/1.0/xmlns/ http://iptc.org/std/Iptc4xmpExt/2008-02-29/ http://ns.adobe.com/DICOM/ http://ns.useplus.org/ldf/xmp/1.0/ http://ns.adobe.com/iX/1.0/ http://ns.adobe.com/xap/1.0/mm/ http://ns.adobe.com/xap/1.0/bj/ http://ns.adobe.com/xmp/note/ http://ns.adobe.com/pdfx/1.3/ http://www.npes.org/pdfx/ns/id/ http://www.aiim.org/pdfa/ns/schema http://www.aiim.org/pdfa/ns/property http://www.aiim.org/pdfa/ns/type http://www.aiim.org/pdfa/ns/field http://www.aiim.org/pdfa/ns/id/ http://www.aiim.org/pdfa/ns/extension/ http://ns.adobe.com/album/1.0/ http://ns.adobe.com/exif/1.0/ http://cipa.jp/exif/1.0/ http://ns.adobe.com/exif/1.0/aux/ http://ns.adobe.com/jpeg/1.0/ http://ns.adobe.com/jp2k/1.0/ http://ns.adobe.com/camera-raw-settings/1.0/ http://ns.adobe.com/StockPhoto/1.0/ http://ns.adobe.com/creatorAtom/1.0/ http://ns.adobe.com/asf/1.0/ http://ns.adobe.com/xmp/wav/1.0/ http://ns.adobe.com/bwf/bext/1.0/ http://ns.adobe.com/riff/info/ http://ns.adobe.com/xmp/1.0/Script/ http://ns.adobe.com/TransformXMP/ http://ns.adobe.com/swf/1.0/

	http://ns.adobe.com/xmp/1.0/DynamicMedia/ http://ns.adobe.com/xmp/transient/1.0/ http://ns.adobe.com/xap/1.0/t/ http://ns.adobe.com/xap/1.0/t/pg/ http://ns.adobe.com/xap/1.0/g/ http://ns.adobe.com/xap/1.0/g/img/ http://ns.adobe.com/xap/1.0/sType/Font http://ns.adobe.com/xap/1.0/sType/Dimensions http://ns.adobe.com/xap/1.0/sType/ResourceEvent http://ns.adobe.com/xap/1.0/sType/ResourceRef http://ns.adobe.com/xap/1.0/sType/Version http://ns.adobe.com/xap/1.0/sType/Job http://ns.adobe.com/xap/1.0/sType/ManifestItem http://ns.adobe.com/xmp/Identifier/qual/1.0/
Remediation	Please utilize the HTTPS protocol to encrypt the transmission data. https://owasp.org/www-project-mobile-top-10/2016-risks/m3-insecure-communication https://developer.android.com/training/articles/security-ssl https://mas.owasp.org/MASTG/General/0x04f-Testing-Network-Communication/#intercepting-https-traffic

6.M5-Insufficient cryptography

6.1.Digital certificate being stored in plaintext risk

Purpose of assessment	Detect whether the client possess a digital certificate file stored in plaintext.
Risk level	Medium
Vulnerability description	The digital certificate used in APK can be used to verify the identity of the server, and to encrypt and decrypt the transmission data during communication with the server to ensure the confidentiality and integrity of the transmitted data. If the digital certificate stored in the plain text is tampered, the client may connect to the spoofed server, which will lead to the theft of the username, password and other information. If the plain text certificate is stolen, the transmission data may be intercepted and decrypted, and the user information may be leaked, or the forged client sends a request to the server, falsifies user data in the server, or causes the server to respond abnormally.

Assessment result	7 risks found
Assessment result description	There is a digital certificate file stored in plaintext in this APK.
Assessment detail	1. /assets/DEV_EPID.RSA.ENC.001.cer 2. /assets/1.1.PROD.EPID.RSA.ENC.001.cer 3. /assets/EPID.RSA.ENC.001.cer 4. /assets/DEV_EPID.cer 5. /assets/PROD_EPID.RSA.ENC.001.cer 6. /assets/cert.crt 7. /assets/UAT_EPID.RSA.ENC.001.cer
Remediation	Use a third-party professional hardening solution with file encryption to prevent certificate from file leakage. https://owasp.org/www-project-mobile-top-10/2016-risks/m5-insufficient-cryptography https://developer.android.com/training/articles/keystore https://developer.android.com/training/articles/security-tips#Crypto https://mas.owasp.org/MASTG/tests/android/MASVS-CRYPTO/MASTG-TEST-0015/ https://mas.owasp.org/MASTG/Android/0x05d-Testing-Data-Storage/#secure-key-import-into-keystore

7.M6-Insecure authorization

7.1.Security for exporting Activity component

Purpose of assessment	Determine whether the activity components are subject to export risk.
Risk level	Medium
Vulnerability description	Activity component is the interface for interaction between Android program and user. Activity component may directly called and used by the system or third party app if export authority enabled and this may lead to the risks of bypass login interface, denial of service attacks, call of program interface by third party and etc.
Assessment result	2 risks found
Assessment result description	Export authority was enabled and there is risk on Activity component security.

Assessment detail	1. nec.com.epassport.mrzreader.CaptureActivity 2. sg.com.nec.androidtool.ToolActivity
Remediation	Export authority was enabled and there is risk on Activity component security. https://owasp.org/www-project-mobile-top-10/2016-risks/m6-insecure-authorization https://developer.android.com/topic/security/risks/android-exported https://cwe.mitre.org/data/definitions/926.html https://mas.owasp.org/MASTG/tests/android/MASVS-PLATFORM/MASTG-TEST-0029/#inspect-the-androidmanifest

7.2.Security against ContentProvider component leakage

Purpose of assessment	Determine whether ContentProvider components are subject to exporting risk.
Risk level	Medium
Vulnerability description	ContentProvider is a container for sharing data between applications and provide the data set designated by application to third party app. It may directly called and used by the system or third party app when export authority is set and this may lead to the risks of sensitive information disclosure, SQL injection and others.
Assessment result	Secure
Assessment result description	No ContentProvider threat found.
Assessment detail	N/A
Remediation	N/A

7.3.Security of Exported Broadcast Receiver Component

Purpose of assessment	Determine whether Broadcast Receiver components have export risks.
Risk level	Medium
Vulnerability description	Broadcast Receiver filters external events and executes response according to message contents.

	It may directly be called and used by the system or third party app when export permissions is set and this may lead to the risks of sensitive information disclosure, bypassed login interface and etc.
Assessment result	5 risks found
Assessment result description	Export permissions was enabled, therefore there is a security risk on the exported Broadcast Receiver component.
Assessment detail	1. com.dieam.reactnativepushnotification.modules.RNPushNotificationBootEventReceiver 2. com.google.firebase.iid.FirebaseInstanceIdReceiver 3. io.invertase.firebase.messaging.ReactNativeFirebaseMessagingReceiver 4. com.dieam.reactnativepushnotification.modules.RNPushNotificationPublisher 5. com.dieam.reactnativepushnotification.modules.RNPushNotificationActions
Remediation	Disable Broadcast Receiver component export permissions in AndroidManifest.xml and for those components need to be exported should set the authorization to specified users or application components. https://owasp.org/www-project-mobile-top-10/2016-risks/m6-insecure-authorization https://developer.android.com/reference/android/content/BroadcastReceiver https://mas.owasp.org/MASTG/Android/0x05a-Platform-Overview/#broadcast-receivers https://mas.owasp.org/MASTG/tests/android/MASVS-PLATFORM/MASTG-TEST-0029/#inspect-the-source-code_2 https://cwe.mitre.org/data/definitions/926.html

7.4.Security of exported service component

Purpose of assessment	Determine whether service components are subject to export risk.
Risk level	Medium
Vulnerability description	Service components usually operate as background processes. When export permissions are set, the system or third-party applications may directly invoke and use it. This could lead to risks such as denial of service attacks, third-party application interface invocations, and etc.

Assessment result	2 risks found
Assessment result description	Export permissions was enabled and there is risk on service component export security.
Assessment detail	1. com.dieam.reactnativepushnotification.modules.RNPushNotificationListenerService 2. com.google.android.gms.auth.api.signin.RevocationBoundService
Remediation	Disable Service component export permissions in AndroidManifest.xml and for those components need to be exported should set the authorization to specified users or application components. https://owasp.org/www-project-mobile-top-10/2016-risks/m6-insecure-authorization https://developer.android.com/guide/components/services https://developer.android.com/guide/topics/manifest/service-element https://developer.android.com/training/articles/security-tips#Services https://mas.owasp.org/MASTG/Android/0x05a-Platform-Overview/#services https://mas.owasp.org/MASTG/tests/android/MASVS-PLATFORM/MASTG-TEST-0029/#services_1 https://cwe.mitre.org/data/definitions/926.html

7.5.Database file arbitrary read and write vulnerability

Purpose of assessment	Detect whether a database file in the app can be read and written arbitrarily.
Risk level	Medium
Vulnerability description	Database configuration mode security risks stem from: When creating a database, the appropriate creation mode (MO DE_PRIVATE, MODE_WORLD_READABLE, and MODE_WORLD_WRITEABLE) was not selected properly for permission control. As a result, the contents of the database are read and written maliciously, causing the leakage of account passwords, identity information, and other sensitive information of financial accounts, and may even lead to further malicious attacks by attackers.
Assessment result	Secure
Assessment result description	The APK program does not have database file that can be read and written arbitrarily.

Assessment detail	N/A
Remediation	N/A

7.6.Vulnerability of globally readable and writable internal files

Purpose of assessment	Detecting the presence of internal files in the app that can be read and written by other apps.
Risk level	Medium
Vulnerability description	In order to achieve data sharing between different software, the internal file is set to be globally readable or globally writable, so that other applications can read and modify the file. If such files contain critical configuration information, account information, and other sensitive information, they may be stolen or tampered with maliciously, resulting in problems such as program failure to run and business logic being modified.
Assessment result	Secure
Assessment result description	The app does not contain globally readable and writetable internal files.
Assessment detail	N/A
Remediation	N/A

7.7.SharedPreferences data global read-write vulnerability

Purpose of assessment	Detect whether there is a global read/write vulnerability for SharedPreferences data in the app.
Risk level	Medium
Vulnerability description	SharedPreferences, as one of the local data storage methods of the Android system, can permanently store application data in the App in the form of key-value. When using the SharedPreferences method to create a local storage file, if the MODE_WORLD_READABLE mode is used, or the MODE_WORLD_WRITEABLE mode is used and the "android: sharedUserId" property value is configured, sensitive information stored in the SharedPreferences file may be read and written by other programs. As a result, important sensitive information such as personal identity

	information, passwords, and tokens stored in the plain text of the application is leaked, or stored user information and historical data are tampered with, leading to misuse by users. What's more serious is that programs or users with root permissions can read and write Shared Preferences files created by all applications in any mode (including MODE_PRIVATE).
Assessment result	Secure
Assessment result description	The app's SharedPreferences data is not vulnerable to be read and written globally.
Assessment detail	N/A
Remediation	N/A

7.8.Content provider data leak vulnerability

Purpose of assessment	Detect whether app has content provider data leakage risk.
Risk level	High
Vulnerability description	Content providers can be used to share data among different applications or processes, and different data content of an application should have strict access permissions. If the permissions are set incorrectly, the content provider data of the application may be directly accessed or modified by other programs, leading to the leakage of user’s sensitive data, or the application data may be maliciously tampered, such as stealing account information and modifying payment amounts.
Assessment result	Error
Assessment result description	Error: The automatic assessment task execution is failed due to the app could not be started up normally on the simulator. This has lead to the termination of the assessment. Before executing this assessment item, please confirm that the application can be started normally in the simulator. After confirming the anit-simulator has disabled, resubmit the assessment. Anti-simulator may be enabled after the assessment.
Assessment detail	N/A
Remediation	N/A

8.M7-Poor code quality

8.1.Risk of Input monitoring(Keylogger)

Purpose of assessment	Detect whether the app is at risk of having their input monitored.
Risk level	High
Vulnerability description	Sensitive data in applications typically originates from direct user input. If a user's input data is intercepted or keystrokes are logged, it can potentially lead to the extraction of the user's input data, including confidential information such as usernames and passwords. Default input keyboards face the risk of data interception due to the following reasons: 1. When using the iOS system keyboard for input, the system activates the autocorrect feature, which first caches the input records on the device. Then, during the user's input process, it utilizes the cached records to autocorrect the user's input. These system input records are stored in plaintext in local cache files and can be exported and viewed. 2. The system keyboard can be recorded through screen capture and used to reproduce the input.
Assessment result	Secure
Assessment result description	The app does not use the system default keyboard for input.
Assessment detail	N/A
Remediation	N/A

8.2.WebView remote code execution vulnerability

Purpose of assessment	Detect whether a remote code execution vulnerability exists in the WebView component of the app.
Risk level	High
Vulnerability description	WebView is a component of Android for browsing web pages. Its interface function addjavascriptinterface () can export Java classes or methods for JavaScript calls, and interact between web page JS and local Java. Since the system does not limit the method calls of registered Java classes, any

	other Java classes that are not registered can also be called by the reflection mechanism. This may cause issues such as malicious code in the tampered URL to be executed, user's mobile phone to be installed with a Trojan horse program, theft of contacts or message data, risk of mobile phone being remotely controlled and etc.
Assessment result	Secure
Assessment result description	There are no vulnerabilities in the WebView component of the app that could be exploited using Java code.
Assessment detail	N/A
Remediation	N/A

8.3.Fragment injection attack vulnerability

Purpose of assessment	Detect whether there is a Fragment injection attack vulnerability in the app.
Risk level	Medium
Vulnerability description	An activity is able to contain multiple fragments to display the interface. PreferenceActivity is a base class activity that supports fragments. It dynamically creates fragments to implement the interface display based on the parameter EXTRA_SHOW_FRAGMENT (‘: android: show_fragment’). When the activity of PreferenceActivity has the property export, PreferenceActivity does not check the incoming parameters and constructs the object based on it directly. It can construct extra data in the intent and call any fragment inside the application. Fragment injection attacks can cause sensitive information leakage of applications, remote code execution, or application crashes.
Assessment result	Secure
Assessment result description	The app is not vulnerable to Fragment injection attack.
Assessment detail	N/A
Remediation	N/A

8.4.Vulnerability of intent scheme URL attack

Purpose of assessment	Detect whether there is a vulnerability for Intent Scheme URL attack in the app.
Risk level	Low
Vulnerability description	Using intent scheme URLs (intent protocol URLs), you can send intents through web pages to launch the app. Attackers can construct URLs with special formats to directly send Intents to the system, triggering the launch of the app's activity components or sending abnormal data, leading to sensitive data leakage or may even cause the app to crash.
Assessment result	Secure
Assessment result description	The app is not vulnerable to intent scheme URL attack.
Assessment detail	N/A
Remediation	N/A

9.M8-Code tampering

9.1.Dynamic debug attack risk

Purpose of assessment	Check whether the client app is running the risk of C-layer dynamic debugging.
Risk level	High
Vulnerability description	If the app is at risk of dynamic debugging of C-level code, attackers can use GDB, IDA, Ptrace and other debuggers to track the running target program, view and modify the code and data in memory. They can even analyze the business logic of the tampered program to carry out malicious attacks on the client's key data or server. For example, modifying the data of the client's business operations, such as the account number and amount of the transaction, leads to financial loss of the user.
Assessment result	Error

Assessment result description	Error: The automatic assessment task execution is failed due to the app could not be started up normally on the simulator. This has lead to the termination of the assessment. Before executing this assessment item, please confirm that the application can be started normally in the simulator. After confirming the anit-simulator has disabled, resubmit the assessment. Anti-simulator may be enabled after the assessment.
Assessment detail	N/A
Remediation	N/A

9.2.Java layer dynamic debugging risk

Purpose of assessment	Detect whether the debugging function of the Java layer is turned on, and whether the Java code layer faces the risk of being dynamically debugged.
Risk level	Medium
Vulnerability description	If the debug flag in the client software AndroidManifest.xml is turned on, it can be debugged by Java debugging tools such as JDB, obtain and tamper with sensitive user information, and even analyze and modify the business logic implemented by the code, such as stealing user passwords and bypassing verification code protection etc.
Assessment result	Secure
Assessment result description	The debugging flags in AndroidManifest.xml in this APK have been turned off and the Java layer cannot be debugged.
Assessment detail	N/A
Remediation	N/A

9.3.APK tampering / repackaging risks

Purpose of assessment	Check whether the source code, resource file, configuration file of client can be repackaged and run normally after being tampered with.
Risk level	High
Vulnerability description	Repackaging APK after tampering not only poses a serious threat to the developer's copyright and business interests but also exposes users to malicious app infringements. Modifying the APK file's code, resource images, configuration information, and icons, and adding advertisements

	or even plagiarizing the source code to develop a new app, can lead to the proliferation of pirated or counterfeit apps, diminishing the developer's revenue. Malicious repackaging can also facilitate phishing attacks or the addition of malicious code, enabling the theft of user account credentials, interception of verification code messages, and unauthorized modification of transfer account details and amounts.
Assessment result	Error
Assessment result description	Error: The automatic assessment task execution is failed due to the app could not be started up normally on the simulator. This has lead to the termination of the assessment. Before executing this assessment item, please confirm that the application can be started normally in the simulator. After confirming the anit-simulator has disabled, resubmit the assessment. Anti-simulator may be enabled after the assessment.
Assessment detail	N/A
Remediation	N/A

9.4.Dynamic injection attack risk

Purpose of assessment	Detect whether the app faces the risk of a dynamic injection attack.
Risk level	High
Vulnerability description	Dynamic injection attacks are a common attack method against Android applications, where attackers use dynamic injection techniques to inject malicious code into the application, in order to obtain sensitive information, steal data, or control the behavior of the application. The following are some common dynamic injection attack risks:Hooking functions: Attackers can use dynamic injection techniques to hook functions in the application, in order to record or modify the behavior of the function. For example, attackers can hook network request functions in the application to steal users' sensitive information.Data theft: Attackers can use dynamic injection techniques to steal data from the application, such as stealing users' account information, passwords, bank card numbers, and other sensitive information.Modifying application behavior: Attackers can use dynamic injection techniques to modify the behavior of the application, such as disabling security checks or bypassing license verification in the application.
Assessment result	Error

Assessment result description	Error: The automatic assessment task execution is failed due to the app could not be started up normally on the simulator. This has lead to the termination of the assessment. Before executing this assessment item, please confirm that the application can be started normally in the simulator. After confirming the anit-simulator has disabled, resubmit the assessment. Anti-simulator may be enabled after the assessment.
Assessment detail	N/A
Remediation	N/A

10.M9-Reverse engineering

10.1.Java code decompilation risk

Purpose of assessment	Detect whether the Java layer code is at risk of being decompiled and leaked.
Risk level	High
Vulnerability description	APK may face the risk of being decompiled if no protective measures are enforced. Decompilation is the conversion of binary programs into a human-readable description language. The result of the decompilation is the application code, which exposes all the client's logic, such as the communication method with the server, encryption and decryption algorithms, keys, transfer business processes, soft keyboard technology implementation, and so on. Attackers can use this information to steal the client's sensitive data, including mobile phone numbers and passwords; intercept communication data with the server; bypass the business security authentication process and directly tamper with user account information; launch attacks on server interfaces, etc.
Assessment result	20 risks found
Assessment result description	The APK can be decompiled to obtain the source code.
Assessment detail	1. com.proyecto26.inappbrowser.ChromeTabsManagerActivity 2. ijvmfvra.wmwscrn 3. vn.ai.faceauth.sdk.presentation.presentation.LivenessCameraXActivity 4. com.vnid.MainActivity 5. nec.com.epassport.mrzreader.CaptureActivity 6. com.vnid.FaceLive.LiveMainActivity

	7. com.vnid.FaceLive.LiveEnActivity 8. sg.com.nec.androidtool.ToolActivity 9. io.invertase.firebase.messaging.ReactNativeFirebaseMessagingHeadlessService 10. com.dieam.reactnativepushnotification.modules.RNPushNotificationListenerService 11. io.invertase.firebase.messaging.ReactNativeFirebaseMessagingService 12. io.invertase.firebase.app.ReactNativeFirebaseAppInitProvider 13. com.reactnativecommunity.webview.RNCWebViewFileProvider 14. cl.json.RNShareFileProvider 15. com.imagepicker.ImagePickerProvider 16. com.RNFetchBlob.Utils.FileProvider 17. com.dieam.reactnativepushnotification.modules.RNPushNotificationBootEventReceiver 18. io.invertase.firebase.messaging.ReactNativeFirebaseMessagingReceiver 19. com.dieam.reactnativepushnotification.modules.RNPushNotificationPublisher 20. com.dieam.reactnativepushnotification.modules.RNPushNotificationActions
Remediation	Using the third-party professional hardening with anti decompilation function to prevent the applications from being decompiled

10.2.Risk of Debug log function calls

Purpose of assessment	Detect whether the debug log function is called in the application.
Risk level	Medium
Vulnerability description	Debugging log function may provide output for important log files, including information that may disclose important client information and expose client code logic, etc. It provides useful information for hacker attacks, such as: the component names of Activities, which are necessary for intercepting Activities; log records of network transmissions, which could become useful information for attacking servers; important variable values, which could potentially leak sensitive data, such as user-entered account credentials.

Assessment result	411 risks found
Assessment result description	The app calls to the debug log function, which may cause the leakage of important log information.
Assessment detail	1. class:org.greenrobot.eventbus.Logger$SystemOutLogger method:public log(Ljava/util/logging/Level;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-virtual {p3, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V 2. class:org.greenrobot.eventbus.Logger$AndroidLogger method:public log(Ljava/util/logging/Level;Ljava/lang/String;)V stmt:invoke-static {p1, v0, p2}, Landroid/util/Log;->println(ILjava/lang/String;Ljava/lang/String;)I 3. class:org.greenrobot.eventbus.Logger$AndroidLogger method:public log(Ljava/util/logging/Level;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p3}, Landroid/util/Log;->getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String; 4. class:org.greenrobot.eventbus.Logger$AndroidLogger method:public log(Ljava/util/logging/Level;Ljava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p1, v0, p2}, Landroid/util/Log;->println(ILjava/lang/String;Ljava/lang/String;)I 5. class:org.spongycastle.crypto.examples.DESExample method:private performDecrypt([B)V stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V 6. class:org.spongycastle.crypto.examples.DESExample method:private performEncrypt([B)V stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V 7. class:org.spongycastle.pqc.crypto.rainbow.RainbowParameters method:public constructor <init>([I)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 8. class:org.spongycastle.pqc.math.linearalgebra.GF2nField method:public final invertMatrix([Lorg/spongycastle/pqc/math/linearalgebra/GF2Polynomial;)[

	Lorg/spongycastle/pqc/math/linearalgebra/GF2Polynomial;
	stmt:invoke-virtual {v4}, Ljava/lang/RuntimeException;->printStackTrace()V
	9.
	class:org.spongycastle.pqc.jcajce.spec.RainbowParameterSpec
	method:public constructor <init>([I)V
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	10.
	class:org.spongycastle.pqc.jcajce.provider.mceliece.BCMcElieciePrivateKey
	method:public getEncoded()[B
	stmt:invoke-virtual {v1}, Ljava/io/IOException;->printStackTrace()V
	11.
	class:org.spongycastle.pqc.jcajce.provider.mceliece.BCMcElieciePrivateKey
	method:public getEncoded()[B
	stmt:invoke-virtual {v1}, Ljava/io/IOException;->printStackTrace()V
	12.
	class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieciePKCSCipherSpi
	method:public messageDecrypt([B)[B
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	13.
	class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieciePKCSCipherSpi
	method:public messageEncrypt([B)[B
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	14.
	class:org.ejbca.cvc.CVCPublicKey
	method:public getEncoded()[B
	stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V
	15.
	class:org.ejbca.cvc.example.Parse
	method:public static main([Ljava/lang/String;)V
	stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V
	16.
	class:org.ejbca.cvc.example.GenerateRequest
	method:public static main([Ljava/lang/String;)V
	stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V
	17.
	class:org.ejbca.cvc.CardVerifiableCertificate
	method:public getPublicKey()Ljava/security/PublicKey;
	stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V
	18.
	class:org.reactnative.camera.tasks.ResolveTakenPictureAsyncTask
	method:private
	writeStreamToFile(Ljava/io/ByteArrayOutputStream;)Ljava/lang/String;
	stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V

	19.
	class:org.reactnative.camera.tasks.ResolveTakenPictureAsyncTask
	method:private
	writeStreamToFile(Ljava/io/ByteArrayOutputStream;)Ljava/lang/String;
	stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V
	20.
	class:org.reactnative.camera.tasks.ResolveTakenPictureAsyncTask
	method:private
	writeStreamToFile(Ljava/io/ByteArrayOutputStream;)Ljava/lang/String;
	stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V
	21.
	class:org.reactnative.camera.tasks.ResolveTakenPictureAsyncTask
	method:public varargs
	doInBackground([Ljava/lang/Void;)Lcom/facebook/react/bridge/WritableMap;
	stmt:invoke-virtual {v2}, Ljava/io/IOException;->printStackTrace()V
	22.
	class:org.reactnative.camera.tasks.ResolveTakenPictureAsyncTask
	method:public varargs
	doInBackground([Ljava/lang/Void;)Lcom/facebook/react/bridge/WritableMap;
	stmt:invoke-virtual {v2}, Ljava/io/IOException;->printStackTrace()V
	23.
	class:org.reactnative.camera.tasks.ResolveTakenPictureAsyncTask
	method:public varargs
	doInBackground([Ljava/lang/Void;)Lcom/facebook/react/bridge/WritableMap;
	stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V
	24.
	class:org.reactnative.camera.tasks.ResolveTakenPictureAsyncTask
	method:public varargs
	doInBackground([Ljava/lang/Void;)Lcom/facebook/react/bridge/WritableMap;
	stmt:invoke-virtual {v0},
	Landroid/content/res/Resources$NotFoundException;->printStackTrace()V
	25.
	class:org.reactnative.camera.tasks.ResolveTakenPictureAsyncTask
	method:public varargs
	doInBackground([Ljava/lang/Void;)Lcom/facebook/react/bridge/WritableMap;
	stmt:invoke-virtual {v2}, Ljava/io/IOException;->printStackTrace()V
	26.
	class:org.reactnative.camera.tasks.ResolveTakenPictureAsyncTask
	method:public varargs
	doInBackground([Ljava/lang/Void;)Lcom/facebook/react/bridge/WritableM

	ap; stmt:invoke-virtual {v3}, Ljava/io/IOException;->printStackTrace()V 27. class:org.reactnative.camera.tasks.BarCodeScannerAsyncTask method:public varargs doInBackground([Ljava/lang/Void;)Lcom/google/zxing/Result; stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 28. class:org.reactnative.camera.CameraModule method:public checkIfRecordAudioPermissionsAreDefined(Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 29. class:nec.com.epassport.mrzreader.CaptureActivity$b method:public final onClick(Landroid/view/View;)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 30. class:nec.com.epassport.mrzreader.CaptureActivity$b method:public final onClick(Landroid/view/View;)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 31. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V 32. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v5}, Ljava/lang/Throwable;->printStackTrace()V 33. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V 34. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V 35. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V 36. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V

	37. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V 38. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V 39. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 40. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v5}, Ljava/lang/Throwable;->printStackTrace()V 41. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 42. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 43. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 44. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 45. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 46. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V 47. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V

	48. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 49. class:nec.com.epassport.mrzreader.CaptureActivity$e method:public final varargs a()Ljava/lang/Exception; stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V 50. class:nec.com.epassport.mrzreader.CaptureActivity$d method:public final onFinish()V stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 51. class:nec.com.epassport.mrzreader.h method:public final handleMessage(Landroid/os/Message;)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 52. class:nec.com.epassport.mrzreader.camera.d method:public final a(Landroid/hardware/Camera;)V stmt:invoke-static {v3, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 53. class:nec.bouncycastle.util.test.SimpleTest method:public static runTest(Lnec/bouncycastle/util/test/Test;Ljava/io/PrintStream;)V stmt:invoke-virtual {v0, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V 54. class:nec.bouncycastle.util.test.SimpleTest method:public static runTests([Lnec/bouncycastle/util/test/Test;Ljava/io/PrintStream;)V stmt:invoke-virtual {v3, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V 55. class:nec.spongycastle.crypto.examples.DESExample method:private performDecrypt([B)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 56. class:nec.spongycastle.crypto.examples.DESExample method:private performEncrypt([B)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 57. class:nec.spongycastle.pqc.crypto.rainbow.RainbowParameters method:public constructor <init>([I)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V

	58.
	class:nec.spongycastle.pqc.crypto.xmss.XMSSPrivateKeyParameters
	method:private constructor
	<init>(Lnec/spongycastle/pqc/crypto/xmss/XMSSPrivateKeyParameters$Builder;)V
	stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V
	59.
	class:nec.spongycastle.pqc.math.linearalgebra.GF2nField
	method:public final
	invertMatrix([Lnec/spongycastle/pqc/math/linearalgebra/GF2Polynomial;)[Lnec/spongycastle/pqc/math/linearalgebra/GF2Polynomial;
	stmt:invoke-virtual {v4}, Ljava/lang/Throwable;->printStackTrace()V
	60.
	class:nec.spongycastle.pqc.jcajce.provider.mceliece.McElieciePKCSCipherSpi
	method:public messageDecrypt([B)[B
	stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V
	61.
	class:nec.spongycastle.pqc.jcajce.provider.mceliece.McElieciePKCSCipherSpi
	method:public messageEncrypt([B)[B
	stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V
	62.
	class:nec.spongycastle.util.test.SimpleTest
	method:public static
	runTest(Lnec/spongycastle/util/test/Test;Ljava/io/PrintStream;)V
	stmt:invoke-virtual {p0, p1},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V
	63.
	class:nec.droidsonroids.gif.GifTextureView
	method:public declared-synchronized
	setInputSource(Lnec/droidsonroids/gif/i;Lnec/droidsonroids/gif/GifTextureView$b;)V
	stmt:invoke-virtual {p2}, Ljava/lang/Throwable;->printStackTrace()V
	64.
	class:sg.com.nec.epidkit.utils.b
	method:public final b([BLjava/security/PublicKey;)Ljava/lang/String;
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	65.
	class:vn.ai.faceauth.sdk.presentation.presentation.widgets.VisionProcessorBase
	method:private static final setUpListener$lambda-3(Lvn/ai/faceauth/sdk/presentation/presentation/widgets/VisionProcessorBase;Ljava/lang/Exception;)V
	stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V

	66. class:vn.ai.faceauth.sdk.camera.core.callback.CameraXCallbackImpl method:public onSuccess(Ljava/io/File;)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 67. class:com.rnbiometrics.security.pkcs.h method:private k(Ljava/io/ObjectInputStream;)V stmt:invoke-virtual {p1}, Ljava/security/InvalidKeyException;->printStackTrace()V 68. class:com.rnbiometrics.security.x509.t method:private k(Lcom/rnbiometrics/security/x509/n0;)V stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 69. class:com.swmansion.reanimated.e method:public F(IDDZ)V stmt:invoke-virtual {p1}, Ljava/lang/RuntimeException;->printStackTrace()V 70. class:com.swmansion.reanimated.e method:public v(I)[F stmt:invoke-virtual {p1}, Ljava/lang/RuntimeException;->printStackTrace()V 71. class:com.vnid.NECModule method:public constructor <init>(Lcom/facebook/react/bridge/ReactApplicationContext;)V stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V 72. class:com.vnid.NECModule method:public startLiveness(Ljava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 73. class:com.vnid.NECModule method:public startLivenessEn(Ljava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 74. class:com.vnid.biometric.BiometricModule method:private createKeyPair()V stmt:invoke-virtual {v0}, Ljava/security/NoSuchProviderException;->printStackTrace()V 75. class:com.vnid.biometric.BiometricModule

	method:private createKeyPair()V stmt:invoke-virtual {v0}, Ljava/security/NoSuchAlgorithmException;->printStackTrace()V 76. class:com.vnid.biometric.BiometricModule method:private initSignature(Lcom/facebook/react/bridge/Callback;Lcom/facebook/react/bridge/Callback;)V stmt:invoke-virtual {v1}, Ljava/lang/Exception;->printStackTrace()V 77. class:com.vnid.biometric.BiometricModule method:private initSignature(Lcom/facebook/react/bridge/Callback;Lcom/facebook/react/bridge/Callback;)V stmt:invoke-virtual {v1}, Landroid/security/keystore/KeyPermanentlyInvalidatedException;->printStackTrace()V 78. class:com.vnid.biometric.BiometricModule method:public hasFingerPrintChanged(Lcom/facebook/react/bridge/Callback;Lcom/facebook/react/bridge/Callback;)V stmt:invoke-virtual {p1}, Ljava/lang/ReflectiveOperationException;->printStackTrace()V 79. class:com.reactnativedocumentpicker.DocumentPickerModule method:public pick(Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 80. class:com.reactnativedocumentpicker.DocumentPickerModule$b method:private b(Landroid/content/Context;Lcom/facebook/react/bridge/WritableMap;Landroid/net/Uri;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 81. class:com.th3rdwave.safeareacontext.g method:public static a(Landroid/view/ViewGroup;Landroid/view/View;)Lcom/th3rdwave/safeareacontext/e; stmt:invoke-virtual {p0}, Ljava/lang/IllegalArgumentException;->printStackTrace()V 82. class:com.shockwave.pdfium.PdfiumCore

	method:public static c(Landroid/os/ParcelFileDescriptor;)I stmt:invoke-virtual {p0}, Ljava/lang/IllegalAccessException;->printStackTrace()V 83. class:com.shockwave.pdfium.PdfiumCore method:public static c(Landroid/os/ParcelFileDescriptor;)I stmt:invoke-virtual {p0}, Ljava/lang/NoSuchFieldException;->printStackTrace()V 84. class:com.shockwave.pdfium.PdfiumCore method:public v(Lcom/shockwave/pdfium/b;Landroid/view/Surface;IIIIIZ)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 85. class:com.shockwave.pdfium.PdfiumCore method:public v(Lcom/shockwave/pdfium/b;Landroid/view/Surface;IIIIIZ)V stmt:invoke-virtual {v0}, Ljava/lang/NullPointerException;->printStackTrace()V 86. class:com.shockwave.pdfium.PdfiumCore method:public x(Lcom/shockwave/pdfium/b;Landroid/graphics/Bitmap;IIIIIZ)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 87. class:com.shockwave.pdfium.PdfiumCore method:public x(Lcom/shockwave/pdfium/b;Landroid/graphics/Bitmap;IIIIIZ)V stmt:invoke-virtual {v0}, Ljava/lang/NullPointerException;->printStackTrace()V 88. class:com.scottyab.rootbeer.util.a method:public static b(Ljava/lang/Exception;)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 89. class:com.scottyab.rootbeer.util.a method:private static e(Ljava/lang/Throwable;)Ljava/lang/String; stmt:invoke-virtual {p0, v1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V 90. class:okhttp3.internal.platform.android.AndroidLog method:private final enableLogging(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p2, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z

	91. class:okhttp3.internal.platform.android.AndroidLog method:private final enableLogging(Ljava/lang/String;Ljava/lang/String;)V stmt:invoke-static {p2, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 92. class:okhttp3.internal.platform.android.AndroidLog method:public final androidLog$okhttp(Ljava/lang/String;ILjava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p1, p2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 93. class:okhttp3.internal.platform.android.AndroidLog method:public final androidLog$okhttp(Ljava/lang/String;ILjava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p4}, Landroid/util/Log;->getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String; 94. class:okhttp3.internal.platform.android.AndroidLog method:public final androidLog$okhttp(Ljava/lang/String;ILjava/lang/String;Ljava/lang/Throwable;)V stmt:invoke-static {p2, p1, p4}, Landroid/util/Log;->println(ILjava/lang/String;Ljava/lang/String;)I 95. class:org.spongycastle.pqc.crypto.gmss.GMSSKeyPairGenerator method:private genKeyPair()Lorg/spongycastle/crypto/AsymmetricCipherKeyPair; stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 96. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceKobaraImaiCipherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 97. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceKobaraImaiCipherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 98. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceKobaraImaiCipherSpi

	method:public messageDecrypt()[B stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 99. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceKobaraImaiCipherSpi method:public messageEncrypt()[B stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 100. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceFujisakiCipherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 101. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceFujisakiCipherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 102. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceFujisakiCipherSpi method:public messageDecrypt([B)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 103. class:org.spongycastle.pqc.jcajce.provider.mceliece.McElieceFujisakiCipherSpi method:public messageEncrypt([B)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 104. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePointchevalCipherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 105. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePointchevalCipherSpi method:public doFinal([BII)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 106. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePointchevalCipherSpi method:public messageDecrypt([B)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 107. class:org.spongycastle.pqc.jcajce.provider.mceliece.McEliecePointchevalCipherSpi

	method:public messageEncrypt([B)[B stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 108. class:org.spongycastle.pqc.jcajce.provider.rainbow.BCRainbowPrivateKey method:public getEncoded()[B stmt:invoke-virtual {v1}, Ljava/io/IOException;->printStackTrace()V 109. class:org.spongycastle.pqc.jcajce.provider.rainbow.BCRainbowPrivateKey method:public getEncoded()[B stmt:invoke-virtual {v1}, Ljava/io/IOException;->printStackTrace()V 110. class:org.spongycastle.util.test.SimpleTest method:public static runTest(Lorg/spongycastle/util/test/Test;Ljava/io/PrintStream;)V stmt:invoke-virtual {p0, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V 111. class:org.ejbca.cvc.example.GenerateCert method:public static main([Ljava/lang/String;)V stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V 112. class:org.reactnative.camera.CameraModule$4 method:public execute(Lcom/facebook/react/uimanager/NativeViewHierarchyManager;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 113. class:org.reactnative.camera.CameraModule$8 method:public execute(Lcom/facebook/react/uimanager/NativeViewHierarchyManager;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 114. class:org.reactnative.camera.CameraModule$9 method:public execute(Lcom/facebook/react/uimanager/NativeViewHierarchyManager;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 115. class:org.reactnative.camera.CameraModule$7 method:public execute(Lcom/facebook/react/uimanager/NativeViewHierarchyManager;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 116. class:org.reactnative.camera.CameraModule$10 method:public execute(Lcom/facebook/react/uimanager/NativeViewHierarchyManager;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V

	117. class:org.reactnative.camera.CameraModule$13 method:public execute(Lcom/facebook/react/uimanager/NativeViewHierarchyManager;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 118. class:org.reactnative.camera.CameraModule$14 method:public varargs doInBackgroundGuarded([Ljava/lang/Void;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 119. class:org.reactnative.camera.CameraModule$3 method:public execute(Lcom/facebook/react/uimanager/NativeViewHierarchyManager;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 120. class:org.reactnative.camera.CameraModule$11 method:public execute(Lcom/facebook/react/uimanager/NativeViewHierarchyManager;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 121. class:nec.com.epassport.mrzreader.CaptureActivity method:public final B(Landroid/graphics/Bitmap;)V stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 122. class:nec.com.epassport.mrzreader.CaptureActivity method:public final C(Ljava/lang/String;)Z stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 123. class:nec.com.epassport.mrzreader.CaptureActivity method:public final F(Ljava/lang/String;)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 124. class:nec.com.epassport.mrzreader.CaptureActivity method:public final b(Landroid/graphics/Bitmap;)Ljava/lang/String; stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 125. class:nec.com.epassport.mrzreader.CaptureActivity method:public final i(Ljava/lang/Integer;)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 126. class:nec.com.epassport.mrzreader.CaptureActivity method:public final onNewIntent(Landroid/content/Intent;)V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 127. class:nec.com.epassport.mrzreader.CaptureActivity

	method:public final y(Lnec/com/epassport/mrzreader/n;)V
	stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V
	128.
	class:nec.com.epassport.mrzreader.PassportUtils
	method:public static a([I)Ljava/util/ArrayList;
	stmt:invoke-virtual {v3}, Ljava/lang/Throwable;->printStackTrace()V
	129.
	class:nec.com.epassport.mrzreader.PassportUtils
	method:public static
	a([B[BLnec/jmrtd/lds/SODFile;)Lnec/com/epassport/mrzreader/j;
	stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V
	130.
	class:nec.bouncycastle.crypto.examples.DESExample
	method:private performDecrypt([B)V
	stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V
	131.
	class:nec.bouncycastle.crypto.examples.DESExample
	method:private performEncrypt([B)V
	stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V
	132.
	class:nec.bouncycastle.pqc.jcajce.provider.ntruprime.SNTRUPrimeCipherSpi
	method:public engineUnwrap([BLjava/lang/String;I)Ljava/security/Key;
	stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V
	133.
	class:nec.spongycastle.pqc.crypto.xmss.XMSSMTPrivateKeyParameters
	method:private constructor
	<init>(Lnec/spongycastle/pqc/crypto/xmss/XMSSMTPrivateKeyParameters$Builder;)V
	stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V
	134.
	class:nec.spongycastle.pqc.crypto.xmss.XMSSMTPrivateKeyParameters
	method:public toByteArray()[B
	stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V
	135.
	class:nec.spongycastle.pqc.crypto.gmss.GMSSKeyPairGenerator
	method:private
	genKeyPair()Lnec/spongycastle/crypto/AsymmetricCipherKeyPair;
	stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V
	136.
	class:nec.jmrtd.lds.icao.DG13ContentThai
	method:public parseDG13([B)V
	stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V
	137.
	class:nec.jpeg.jj2000.j2k.entropy.decoder.g

	method:public final p(IIILnec/jpeg/jj2000/j2k/wavelet/synthesis/g;Lnec/jpeg/jj2000/j2k/image/d;)Lnec/jpeg/jj2000/j2k/image/d; stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 138. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 139. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 140. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 141. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 142. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 143. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 144. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 145. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 146. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 147. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V

	148. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 149. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 150. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 151. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 152. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 153. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 154. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 155. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 156. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 157. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 158. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V

	159. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 160. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 161. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 162. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 163. class:nec.jpeg.jj2000.j2k.decoder.a method:public final run()V stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 164. class:nec.jpeg.jj2000.j2k.codestream.reader.c method:public final j(II)V stmt:invoke-virtual {v4}, Ljava/lang/Throwable;->printStackTrace()V 165. class:vn.ai.faceauth.sdk.presentation.presentation.fragment.CameraXFrag ment method:private final setupConfig()V stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 166. class:vn.ai.faceauth.sdk.presentation.presentation.fragment.CameraXFrag ment$tryReloadAndDetectInImage$1 method:public processBitmap(Lcom/google/mlkit/vision/face/Face;Ljava/util/ArrayList;)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 167. class:vn.ai.faceauth.sdk.presentation.presentation.utils.Utils$Companion method:private final saveBitmapToFile(Landroid/graphics/Bitmap;Ljava/io/File;)Ljava/io/File; stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 168. class:vn.ai.faceauth.sdk.presentation.presentation.utils.UtilsKt method:public static final bindHtmlByKey(Landroid/widget/TextView;Ljava/lang/String;)V stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V

	169.
	class:vn.ai.faceauth.sdk.presentation.presentation.utils.UtilsKt
	method:public static final
	bindHtmlToString(Landroid/widget/TextView;Ljava/lang/String;)V
	stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V
	170.
	class:vn.ai.faceauth.sdk.presentation.presentation.utils.UtilsKt
	method:public static final
	updateFont(Landroid/widget/Button;Ljava/lang/String;F)V
	stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V
	171.
	class:vn.ai.faceauth.sdk.presentation.presentation.utils.UtilsKt
	method:public static final
	updateFont(Landroid/widget/TextView;Ljava/lang/String;F)V
	stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V
	172.
	class:vn.ai.faceauth.sdk.presentation.presentation.widgets.OverlayView
	method:public constructor
	<init>(Landroid/content/Context;Landroid/util/AttributeSet;)V
	stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V
	173.
	class:vn.ai.faceauth.sdk.presentation.navigation.AuthenticationID
	method:public static final
	configure(Lvn/ai/faceauth/sdk/presentation/domain/configs/SDKConfig;)V
	stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V
	174.
	class:io.invertase.firebase.messaging.v
	method:public
	a(Ljava/lang/String;)Lcom/facebook/react/bridge/WritableMap;
	stmt:invoke-virtual {p1}, Lorg/json/JSONException;->printStackTrace()V
	175.
	class:io.invertase.firebase.messaging.v
	method:public c(Lcom/google/firebase/messaging/RemoteMessage;)V
	stmt:invoke-virtual {p1}, Lorg/json/JSONException;->printStackTrace()V
	176.
	class:ic.vnpt.analytics.mobile.c0
	method:public final d(Lic/vnpt/analytics/mobile/l2;)V
	stmt:invoke-virtual {v5}, Ljava/lang/Throwable;->printStackTrace()V
	177.
	class:ic.vnpt.analytics.mobile.c0
	method:public final i(Ljava/lang/Throwable;)Lic/vnpt/analytics/mobile/e2;
	stmt:invoke-virtual {p1, v1},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V
	178.
	class:ic.vnpt.analytics.mobile.w

	method:public final
	uncaughtException(Ljava/lang/Thread;Ljava/lang/Throwable;)V
	stmt:invoke-virtual {p2, v1},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V
	179.
	class:ic.vnpt.analytics.mobile.l1
	method:public static
	h(Lic/vnpt/analytics/mobile/s2;)Lic/vnpt/analytics/mobile/l1$a;
	stmt:invoke-virtual {p0}, Ljava/lang/Throwable;->printStackTrace()V
	180.
	class:ic.vnpt.analytics.mobile.c3$b
	method:public final invokeSuspend(Ljava/lang/Object;)Ljava/lang/Object;
	stmt:invoke-static {v0, p1},
	Landroid/util/Log;->e(Ljava/lang/String;Ljava/lang/String;)I
	181.
	class:com.gusparis.monthpicker.builder.b
	method:public g()Lcom/gusparis/monthpicker/builder/b;
	stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V
	182.
	class:com.rnbiometrics.security.x509.d2
	method:private l(Ljava/io/ObjectInputStream;)V
	stmt:invoke-virtual {p1},
	Ljava/security/InvalidKeyException;->printStackTrace()V
	183.
	class:com.horcrux.svg.RNSVGRenderableManager
	method:public
	getRawResource(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)
	V
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	184.
	class:com.vnid.NECModule$a
	method:private synthetic
	a(Ljava/util/concurrent/atomic/AtomicInteger;Lsg/com/nec/epidkit/EPIDKi
	t;Lorg/json/JSONArray;Ljava/lang/String;[B)V
	stmt:invoke-virtual {p2}, Ljava/lang/Exception;->printStackTrace()V
	185.
	class:com.vnid.NECModule$a
	method:public
	onActivityResult(Landroid/app/Activity;IILandroid/content/Intent;)V
	stmt:invoke-virtual {p3}, Ljava/lang/Exception;->printStackTrace()V
	186.
	class:com.vnid.NECModule$a
	method:public
	onActivityResult(Landroid/app/Activity;IILandroid/content/Intent;)V
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V

	187.
	class:com.reactnativecommunity.webview.RNCWebViewModule
	method:private getPhotoIntent()Landroid/content/Intent;
	stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V
	188.
	class:com.reactnativecommunity.webview.RNCWebViewModule
	method:private getVideoIntent()Landroid/content/Intent;
	stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V
	189.
	class:com.oblador.vectoricons.VectorIconsModule
	method:public
	createGlyphImagePath(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Integer;Ljava/lang/Integer;)Ljava/lang/String;
	stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V
	190.
	class:com.learnium.RNDeviceInfo.e$b
	method:public b(I)V
	stmt:invoke-virtual {p1, v0},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	191.
	class:me.leolin.shortcutbadger.e
	method:public static a(Landroid/content/Context;I)Z
	stmt:invoke-static {p1, p0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	192.
	class:me.leolin.shortcutbadger.e
	method:public static
	c(Landroid/content/Context;Landroid/app/Notification;I)V
	stmt:invoke-static {p1, p0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	193.
	class:io.invertase.firebase.common.h
	method:private c(Lio/invertase/firebase/interfaces/c;)Z
	stmt:invoke-static {v2, p1, v0},
	Landroid/util/Log;->wtf(Ljava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)I
	194.
	class:ic.vnpt.analytics.mobile.n1
	method:public final declared-synchronized
	a(Ljava/lang/String;Ljava/lang/String;)Ljava/net/URLConnection;
	stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V
	195.
	class:ic.vnpt.analytics.mobile.v0
	method:public final
	d(Ljava/lang/String;Ljava/lang/Throwable;Lic/vnpt/analytics/mobile/v0$b;)

	V stmt:invoke-static {p2}, Landroid/util/Log;->getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/ String; 196. class:ic.vnpt.analytics.mobile.t2 method:public static a()J stmt:invoke-virtual {v2}, Ljava/lang/Throwable;->printStackTrace()V 197. class:ic.vnpt.analytics.mobile.t2 method:public static a()J stmt:invoke-virtual {v1}, Ljava/lang/Throwable;->printStackTrace()V 198. class:ic.vnpt.analytics.mobile.t2 method:public static a()J stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 199. class:ic.vnpt.analytics.mobile.t2 method:public static a()J stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 200. class:com.proyecto26.inappbrowser.d method:public l(Landroid/content/Context;Lcom/facebook/react/bridge/ReadableMap;Lc om/facebook/react/bridge/Promise;Landroid/app/Activity;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 201. class:com.proyecto26.inappbrowser.ChromeTabsManagerActivity method:public onCreate(Landroid/os/Bundle;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 202. class:com.facebook.imageutils.WebpUtil method:public static getSize(Ljava/io/InputStream;)Landroid/util/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 203. class:com.facebook.imageutils.WebpUtil method:public static getSize(Ljava/io/InputStream;)Landroid/util/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 204. class:com.facebook.imageutils.WebpUtil method:public static getSize(Ljava/io/InputStream;)Landroid/util/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 205. class:com.facebook.imageutils.WebpUtil

	method:public static getSize(Ljava/io/InputStream;)Landroid/util/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 206. class:com.facebook.imageutils.WebpUtil method:public static getSize(Ljava/io/InputStream;)Landroid/util/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 207. class:com.facebook.imageutils.WebpUtil method:public static getSize(Ljava/io/InputStream;)Landroid/util/Pair; stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V 208. class:com.facebook.imageutils.WebpUtil method:public static getSize(Ljava/io/InputStream;)Landroid/util/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 209. class:com.facebook.imageutils.WebpUtil method:public static getSize(Ljava/io/InputStream;)Landroid/util/Pair; stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 210. class:com.facebook.soloader.SoLoader method:private static doLoadLibraryBySoName(Ljava/lang/String;ILandroid/os/StrictMode$ThreadPolicy;)V stmt:invoke-virtual {p1}, Ljava/lang/Throwable;->printStackTrace()V 211. class:com.RNRSA.b$a method:public getSignature()[B stmt:invoke-virtual {v0}, Ljava/security/GeneralSecurityException;->printStackTrace()V 212. class:com.reactnativecommunity.cameraroll.CameraRollModule method:private static putImageSize(Landroid/content/ContentResolver;Landroid/database/Cursor;Lcom/facebook/react/bridge/WritableMap;IILandroid/net/Uri;ZZ)Z stmt:invoke-virtual {v11}, Ljava/io/IOException;->printStackTrace()V 213. class:com.oblador.keychain.decryptionHandler.f method:private k()V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 214. class:com.lwansbrough.RCTCamera.RCTCameraModule$d method:public onShutter()V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 215. class:com.lwansbrough.RCTCamera.d

	method:private declared-synchronized r()V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 216. class:com.lwansbrough.RCTCamera.d method:private declared-synchronized r()V stmt:invoke-virtual {v0}, Ljava/lang/NullPointerException;->printStackTrace()V 217. class:com.lwansbrough.RCTCamera.d method:private declared-synchronized t()V stmt:invoke-virtual {v1}, Ljava/lang/Exception;->printStackTrace()V 218. class:com.lwansbrough.RCTCamera.d method:public g(Landroid/view/MotionEvent;Landroid/hardware/Camera$Parameters;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 219. class:com.lwansbrough.RCTCamera.d method:public g(Landroid/view/MotionEvent;Landroid/hardware/Camera$Parameters;)V stmt:invoke-virtual {p1}, Ljava/lang/RuntimeException;->printStackTrace()V 220. class:com.lwansbrough.RCTCamera.b method:public b(II)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 221. class:com.lwansbrough.RCTCamera.b method:public c(I)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 222. class:com.lwansbrough.RCTCamera.RCTCameraModule method:public static convertFileToByteArray(Ljava/io/File;)[B stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 223. class:com.drew.imaging.c method:public static a([Ljava/lang/String;)V stmt:invoke-virtual {v12, v0}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 224. class:com.drew.imaging.png.g method:public static c(Ljava/io/InputStream;)Lcom/drew/metadata/e; stmt:invoke-virtual {v1, v2}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 225. class:com.drew.metadata.xmp.d

	method:public static a(Ljava/io/OutputStream;Lcom/drew/metadata/e;)Z stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 226. class:com.drew.lang.g method:public printStackTrace()V stmt:invoke-super {p0}, Ljava/lang/Exception;->printStackTrace()V 227. class:com.drew.lang.g method:public printStackTrace()V stmt:invoke-virtual {v0}, Ljava/lang/Throwable;->printStackTrace()V 228. class:com.drew.lang.g method:public printStackTrace(Ljava/io/PrintStream;)V stmt:invoke-super {p0, p1}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 229. class:com.drew.lang.g method:public printStackTrace(Ljava/io/PrintStream;)V stmt:invoke-virtual {v0, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V 230. class:com.drew.lang.g method:public printStackTrace(Ljava/io/PrintWriter;)V stmt:invoke-super {p0, p1}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintWriter;)V 231. class:com.drew.lang.g method:public printStackTrace(Ljava/io/PrintWriter;)V stmt:invoke-virtual {v0, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V 232. class:com.imagepicker.g method:public static B(Landroid/net/Uri;Landroid/content/Context;Lcom/imagepicker/e;)Landroid/net/Uri; stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 233. class:com.imagepicker.g method:public static b(Landroid/net/Uri;Landroid/net/Uri;Landroid/content/ContentResolver;)V stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V 234. class:com.imagepicker.g method:public static

	c(Landroid/content/Context;Ljava/lang/String;)Ljava/io/File;
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	235.
	class:com.imagepicker.g
	method:public static
	g(Landroid/net/Uri;Landroid/content/Context;)Ljava/lang/String;
	stmt:invoke-virtual {p0}, Ljava/io/IOException;->printStackTrace()V
	236.
	class:com.imagepicker.g
	method:public static
	g(Landroid/net/Uri;Landroid/content/Context;)Ljava/lang/String;
	stmt:invoke-virtual {p0},
	Ljava/io/FileNotFoundException;->printStackTrace()V
	237.
	class:com.imagepicker.g
	method:public static k(Landroid/net/Uri;Landroid/content/Context;)D
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	238.
	class:com.imagepicker.g
	method:public static n(Landroid/net/Uri;Landroid/content/Context;)[I
	stmt:invoke-virtual {p0},
	Ljava/io/FileNotFoundException;->printStackTrace()V
	239.
	class:com.imagepicker.g
	method:public static w(Landroid/content/Context;Landroid/app/Activity;)Z
	stmt:invoke-virtual {p0},
	Landroid/content/pm/PackageManager$NameNotFoundException;->print
	StackTrace()V
	240.
	class:com.imagepicker.h
	method:public constructor
	<init>(Landroid/net/Uri;Landroid/content/Context;)V
	stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V
	241.
	class:com.bumptech.glide.integration.okhttp3.b
	method:public onFailure(Lokhttp3/Call;Ljava/io/IOException;)V
	stmt:invoke-static {p1, v0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	242.
	class:com.bumptech.glide.load.model.t
	method:public
	c(Ljava/io/InputStream;Ljava/io/File;Lcom/bumptech/glide/load/j;)Z
	stmt:invoke-static {p1, p2},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z

	243.
	class:com.bumptech.glide.load.model.s
	method:private d(Ljava/lang/Integer;)Landroid/net/Uri;
	stmt:invoke-static {v1, v0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	244.
	class:com.bumptech.glide.load.engine.prefill.a
	method:public a()Z
	stmt:invoke-static {v5, v3},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	245.
	class:com.bumptech.glide.load.engine.bitmap_recycle.k
	method:private j()V
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	246.
	class:com.bumptech.glide.load.engine.bitmap_recycle.k
	method:private declared-synchronized
	q(IILandroid/graphics/Bitmap$Config;)Landroid/graphics/Bitmap;
	stmt:invoke-static {v1, v2},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	247.
	class:com.bumptech.glide.load.engine.bitmap_recycle.k
	method:private declared-synchronized
	q(IILandroid/graphics/Bitmap$Config;)Landroid/graphics/Bitmap;
	stmt:invoke-static {v1, v2},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	248.
	class:com.bumptech.glide.load.engine.bitmap_recycle.k
	method:private declared-synchronized v(J)V
	stmt:invoke-static {p1, p2},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	249.
	class:com.bumptech.glide.load.engine.bitmap_recycle.k
	method:private declared-synchronized v(J)V
	stmt:invoke-static {v1, v2},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	250.
	class:com.bumptech.glide.load.engine.bitmap_recycle.k
	method:public a(I)V
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	251.
	class:com.bumptech.glide.load.engine.bitmap_recycle.k
	method:public b()V

	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	252.
	class:com.bumptech.glide.load.engine.bitmap_recycle.k
	method:public declared-synchronized d(Landroid/graphics/Bitmap;)V
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	253.
	class:com.bumptech.glide.load.engine.bitmap_recycle.k
	method:public declared-synchronized d(Landroid/graphics/Bitmap;)V
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	254.
	class:com.bumptech.glide.load.engine.bitmap_recycle.j
	method:private h(I)V
	stmt:invoke-static {v2, v3},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	255.
	class:com.bumptech.glide.load.engine.bitmap_recycle.j
	method:private
	m(Lcom/bumptech/glide/load/engine/bitmap_recycle/j$a;Ljava/lang/Class;
	)Ljava/lang/Object;
	stmt:invoke-static {p2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	256.
	class:com.bumptech.glide.gifdecoder.d
	method:private g()V
	stmt:invoke-static {v3, v2},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	257.
	class:com.bumptech.glide.gifdecoder.d
	method:private h(I)[I
	stmt:invoke-static {p1, v0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	258.
	class:com.bumptech.glide.gifdecoder.f
	method:public declared-synchronized a()Landroid/graphics/Bitmap;
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	259.
	class:com.bumptech.glide.gifdecoder.f
	method:public declared-synchronized a()Landroid/graphics/Bitmap;
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z

	260.
	class:com.bumptech.glide.gifdecoder.f
	method:public declared-synchronized a()Landroid/graphics/Bitmap;
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	261.
	class:com.bumptech.glide.util.c
	method:private static d(Ljava/lang/String;)I
	stmt:invoke-static {v1, v0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	262.
	class:com.bumptech.glide.manager.e$a
	method:public
	onReceive(Landroid/content/Context;Landroid/content/Intent;)V
	stmt:invoke-static {p2, p1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	263.
	class:com.learnium.RNDeviceInfo.e
	method:public constructor <init>(Landroid/content/Context;)V
	stmt:invoke-virtual {p1, v0},
	Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V
	264.
	class:com.facebook.common.logging.FLogDefaultLoggingDelegate
	method:private static
	getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String;
	stmt:invoke-virtual {p0, v1},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V
	265.
	class:com.facebook.common.logging.FLogDefaultLoggingDelegate
	method:private println(ILjava/lang/String;Ljava/lang/String;)V
	stmt:invoke-static {p1, p2, p3},
	Landroid/util/Log;->println(ILjava/lang/String;Ljava/lang/String;)I
	266.
	class:com.facebook.common.logging.FLogDefaultLoggingDelegate
	method:private
	println(ILjava/lang/String;Ljava/lang/String;Ljava/lang/Throwable;)V
	stmt:invoke-static {p1, p2, p3},
	Landroid/util/Log;->println(ILjava/lang/String;Ljava/lang/String;)I
	267.
	class:com.facebook.common.internal.Throwables
	method:public static
	getStackTraceAsString(Ljava/lang/Throwable;)Ljava/lang/String;
	stmt:invoke-virtual {p0, v1},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V

	268.
	class:com.facebook.react.ReactInstanceManagerBuilder
	method:private
	getDefaultJSExecutorFactory(Ljava/lang/String;Ljava/lang/String;Landroid/content/Context;)Lcom/facebook/react/bridge/JavaScriptExecutorFactory;
	stmt:invoke-virtual {p2},
	Ljava/lang/UnsatisfiedLinkError;->printStackTrace()V
	269.
	class:com.facebook.imagepipeline.core.CloseableReferenceFactory
	method:private static
	getStackTraceString(Ljava/lang/Throwable;)Ljava/lang/String;
	stmt:invoke-virtual {p0, v1},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V
	270.
	class:com.RNRSA.e
	method:public
	n(Ljava/lang/String;Ljava/lang/String;ILandroid/content/Context;)V
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	271.
	class:com.drew.tools.c$e
	method:public
	f(Ljava/io/File;Lcom/drew/metadata/e;Ljava/lang/String;Ljava/io/PrintStream;)V
	stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V
	272.
	class:com.drew.tools.c$e
	method:public
	f(Ljava/io/File;Lcom/drew/metadata/e;Ljava/lang/String;Ljava/io/PrintStream;)V
	stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V
	273.
	class:com.drew.tools.d
	method:private static b(Ljava/net/URL;)V
	stmt:invoke-virtual {v0, p0},
	Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V
	274.
	class:com.drew.tools.c$d
	method:public b(Ljava/io/PrintStream;)V
	stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V
	275.
	class:com.drew.tools.c$d
	method:public b(Ljava/io/PrintStream;)V
	stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V
	276.
	class:com.drew.tools.c$d

	method:public b(Ljava/io/PrintStream;)V
	stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V
	277.
	class:com.drew.metadata.exif.i
	method:public
	e(Lcom/drew/lang/n;Lcom/drew/metadata/e;ILcom/drew/metadata/b;)V
	stmt:invoke-virtual {p1, p2},
	Ljava/io/IOException;->printStackTrace(Ljava/io/PrintStream;)V
	278.
	class:com.drew.metadata.exif.i
	method:public
	e(Lcom/drew/lang/n;Lcom/drew/metadata/e;ILcom/drew/metadata/b;)V
	stmt:invoke-virtual {p1, p2},
	Lcom/drew/lang/g;->printStackTrace(Ljava/io/PrintStream;)V
	279.
	class:com.drew.metadata.exif.makernotes.f0
	method:private g0([B)V
	stmt:invoke-virtual {p1}, Ljava/io/IOException;->printStackTrace()V
	280.
	class:com.drew.metadata.webp.c
	method:public a(Ljava/lang/String;[B)V
	stmt:invoke-virtual {p1, p2},
	Ljava/io/IOException;->printStackTrace(Ljava/io/PrintStream;)V
	281.
	class:com.drew.metadata.webp.c
	method:public a(Ljava/lang/String;[B)V
	stmt:invoke-virtual {p1, p2},
	Ljava/io/IOException;->printStackTrace(Ljava/io/PrintStream;)V
	282.
	class:com.dieam.reactnativepushnotification.modules.c
	method:public m()Ljava/lang/Class;
	stmt:invoke-virtual {v0},
	Ljava/lang/ClassNotFoundException;->printStackTrace()V
	283.
	class:com.dieam.reactnativepushnotification.modules.b
	method:public constructor <init>(Landroid/content/Context;)V
	stmt:invoke-virtual {p1},
	Landroid/content/pm/PackageManager$NameNotFoundException;->print
	StackTrace()V
	284.
	class:com.RNFetchBlob.i
	method:public static b(Ljava/lang/String;)Ljava/lang/String;
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	285.
	class:com.RNFetchBlob.c

	method:public
	i(Lcom/facebook/react/bridge/ReadableArray;)Lcom/RNFetchBlob/c;
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	286.
	class:com.RNFetchBlob.c
	method:public j(Ljava/lang/String;)Lcom/RNFetchBlob/c;
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	287.
	class:com.RNFetchBlob.c
	method:public writeTo(Lokio/BufferedSink;)V
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	288.
	class:com.RNFetchBlob.Utils.a
	method:public static
	b(Landroid/content/Context;Landroid/net/Uri;Ljava/lang/String;[Ljava/lang/String;)Ljava/lang/String;
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	289.
	class:com.RNFetchBlob.RNFetchBlobReq
	method:public
	onReceive(Landroid/content/Context;Landroid/content/Intent;)V
	stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V
	290.
	class:com.RNFetchBlob.RNFetchBlobReq
	method:public run()V
	stmt:invoke-virtual {v0},
	Ljava/net/MalformedURLException;->printStackTrace()V
	291.
	class:com.RNFetchBlob.RNFetchBlobReq
	method:public run()V
	stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V
	292.
	class:com.RNFetchBlob.f
	method:public static
	B(Ljava/lang/String;Ljava/lang/String;IILjava/lang/String;Lcom/facebook/react/bridge/Promise;)V
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	293.
	class:com.RNFetchBlob.f
	method:public static
	o(Ljava/lang/String;Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V
	stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V
	294.
	class:com.RNFetchBlob.f

	method:public static s(Ljava/lang/String;Lcom/facebook/react/bridge/Promise;)V stmt:invoke-virtual {p0}, Ljava/lang/Exception;->printStackTrace()V 295. class:com.RNFetchBlob.f method:public y(Ljava/lang/String;Ljava/lang/String;IILjava/lang/String;)V stmt:invoke-virtual {v0}, Ljava/lang/Exception;->printStackTrace()V 296. class:com.bumptech.glide.load.model.f$c method:public e(Lcom/bumptech/glide/j;Lcom/bumptech/glide/load/data/d$a;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 297. class:com.bumptech.glide.load.model.c method:public c(Ljava/nio/ByteBuffer;Ljava/io/File;Lcom/bumptech/glide/load/j;)Z stmt:invoke-static {p2, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 298. class:com.bumptech.glide.load.model.d$a method:public e(Lcom/bumptech/glide/j;Lcom/bumptech/glide/load/data/d$a;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 299. class:com.bumptech.glide.load.resource.bitmap.w method:private declared-synchronized f()Z stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 300. class:com.bumptech.glide.load.resource.bitmap.w method:public g(IIZZ)Z stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 301. class:com.bumptech.glide.load.resource.bitmap.w method:public g(IIZZ)Z stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 302. class:com.bumptech.glide.load.resource.bitmap.w method:public g(IIZZ)Z stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z

	303. class:com.bumptech.glide.load.resource.bitmap.w method:public g(IIZZ)Z stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 304. class:com.bumptech.glide.load.resource.bitmap.w method:public g(IIZZ)Z stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 305. class:com.bumptech.glide.load.resource.bitmap.w method:public g(IIZZ)Z stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 306. class:com.bumptech.glide.load.resource.bitmap.w method:public g(IIZZ)Z stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 307. class:com.bumptech.glide.load.resource.bitmap.w method:public g(IIZZ)Z stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 308. class:com.bumptech.glide.load.resource.bitmap.q method:private b(Lcom/bumptech/glide/load/resource/bitmap/x;Lcom/bumptech/glide/load/b;ZZLandroid/graphics/BitmapFactory$Options;II)V stmt:invoke-static {p4, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 309. class:com.bumptech.glide.load.resource.bitmap.q method:private static c(Lcom/bumptech/glide/load/ImageHeaderParser$ImageType;Lcom/bumptech/glide/load/resource/bitmap/x;Lcom/bumptech/glide/load/resource/bitmap/q$b;Lcom/bumptech/glide/load/engine/bitmap_recycle/e;Lcom/bumptech/glide/load/resource/bitmap/p;IIIIILandroid/graphics/BitmapFactory$Options;)V stmt:invoke-static {v3, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 310. class:com.bumptech.glide.load.resource.bitmap.q method:private static

	c(Lcom/bumptech/glide/load/ImageHeaderParser$ImageType;Lcom/bumptech/glide/load/resource/bitmap/x;Lcom/bumptech/glide/load/resource/bitmap/q$b;Lcom/bumptech/glide/load/engine/bitmap_recycle/e;Lcom/bumptech/glide/load/resource/bitmap/p;IIIIILandroid/graphics/BitmapFactory$Options;)V
	stmt:invoke-static {v3, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	311.
	class:com.bumptech.glide.load.resource.bitmap.q
	method:private
	h(Lcom/bumptech/glide/load/resource/bitmap/x;Landroid/graphics/BitmapFactory$Options;Lcom/bumptech/glide/load/resource/bitmap/p;Lcom/bumptech/glide/load/b;Lcom/bumptech/glide/load/k;ZIIZLcom/bumptech/glide/load/resource/bitmap/q$b;)Landroid/graphics/Bitmap;
	stmt:invoke-static {v4, v6},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	312.
	class:com.bumptech.glide.load.resource.bitmap.q
	method:private
	h(Lcom/bumptech/glide/load/resource/bitmap/x;Landroid/graphics/BitmapFactory$Options;Lcom/bumptech/glide/load/resource/bitmap/p;Lcom/bumptech/glide/load/b;Lcom/bumptech/glide/load/k;ZIIZLcom/bumptech/glide/load/resource/bitmap/q$b;)Landroid/graphics/Bitmap;
	stmt:invoke-static {v4, v2},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	313.
	class:com.bumptech.glide.load.resource.bitmap.q
	method:private static
	i(Lcom/bumptech/glide/load/resource/bitmap/x;Landroid/graphics/BitmapFactory$Options;Lcom/bumptech/glide/load/resource/bitmap/q$b;Lcom/bumptech/glide/load/engine/bitmap_recycle/e;)Landroid/graphics/Bitmap;
	stmt:invoke-static {v1, v2},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	314.
	class:com.bumptech.glide.load.resource.bitmap.o
	method:private
	f(Lcom/bumptech/glide/load/resource/bitmap/o$c;Lcom/bumptech/glide/load/engine/bitmap_recycle/b;)I
	stmt:invoke-static {v4, v3},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	315.
	class:com.bumptech.glide.load.resource.bitmap.o
	method:private
	f(Lcom/bumptech/glide/load/resource/bitmap/o$c;Lcom/bumptech/glide/

	load/engine/bitmap_recycle/b;)I stmt:invoke-static {v4, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 316. class:com.bumptech.glide.load.resource.bitmap.o method:private j(Lcom/bumptech/glide/load/resource/bitmap/o$c;)I stmt:invoke-static {v3, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 317. class:com.bumptech.glide.load.resource.bitmap.o method:private j(Lcom/bumptech/glide/load/resource/bitmap/o$c;)I stmt:invoke-static {v3, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 318. class:com.bumptech.glide.load.resource.bitmap.o method:private j(Lcom/bumptech/glide/load/resource/bitmap/o$c;)I stmt:invoke-static {v3, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 319. class:com.bumptech.glide.load.resource.bitmap.o method:private static k(Lcom/bumptech/glide/load/resource/bitmap/o$b;)I stmt:invoke-static {v4, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 320. class:com.bumptech.glide.load.resource.bitmap.o method:private static k(Lcom/bumptech/glide/load/resource/bitmap/o$b;)I stmt:invoke-static {v4, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 321. class:com.bumptech.glide.load.resource.bitmap.o method:private static k(Lcom/bumptech/glide/load/resource/bitmap/o$b;)I stmt:invoke-static {v4, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 322. class:com.bumptech.glide.load.resource.bitmap.o method:private static k(Lcom/bumptech/glide/load/resource/bitmap/o$b;)I stmt:invoke-static {v4, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 323. class:com.bumptech.glide.load.resource.bitmap.o method:private static

	k(Lcom/bumptech/glide/load/resource/bitmap/o$b;)I stmt:invoke-static {v4, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 324. class:com.bumptech.glide.load.resource.bitmap.o method:private static k(Lcom/bumptech/glide/load/resource/bitmap/o$b;)I stmt:invoke-static {v4, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 325. class:com.bumptech.glide.load.resource.bitmap.o method:private static k(Lcom/bumptech/glide/load/resource/bitmap/o$b;)I stmt:invoke-static {v4, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 326. class:com.bumptech.glide.load.resource.bitmap.o method:private l(Lcom/bumptech/glide/load/resource/bitmap/o$c;[BI)I stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 327. class:com.bumptech.glide.load.resource.bitmap.o method:private l(Lcom/bumptech/glide/load/resource/bitmap/o$c;[BI)I stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 328. class:com.bumptech.glide.load.resource.bitmap.e method:public c(Lcom/bumptech/glide/load/engine/v;Ljava/io/File;Lcom/bumptech/glide/load/j;)Z stmt:invoke-static {v0, p2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 329. class:com.bumptech.glide.load.resource.bitmap.e method:public c(Lcom/bumptech/glide/load/engine/v;Ljava/io/File;Lcom/bumptech/glide/load/j;)Z stmt:invoke-static {v0, p2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 330. class:com.bumptech.glide.load.resource.bitmap.g0 method:public static c(Lcom/bumptech/glide/load/engine/bitmap_recycle/e;Landroid/graphics/Bitmap;II)Landroid/graphics/Bitmap;

	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	331.
	class:com.bumptech.glide.load.resource.bitmap.g0
	method:public static
	c(Lcom/bumptech/glide/load/engine/bitmap_recycle/e;Landroid/graphics/Bitmap;II)Landroid/graphics/Bitmap;
	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	332.
	class:com.bumptech.glide.load.resource.bitmap.g0
	method:public static
	f(Lcom/bumptech/glide/load/engine/bitmap_recycle/e;Landroid/graphics/Bitmap;II)Landroid/graphics/Bitmap;
	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	333.
	class:com.bumptech.glide.load.resource.bitmap.g0
	method:public static
	f(Lcom/bumptech/glide/load/engine/bitmap_recycle/e;Landroid/graphics/Bitmap;II)Landroid/graphics/Bitmap;
	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	334.
	class:com.bumptech.glide.load.resource.bitmap.g0
	method:public static
	f(Lcom/bumptech/glide/load/engine/bitmap_recycle/e;Landroid/graphics/Bitmap;II)Landroid/graphics/Bitmap;
	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	335.
	class:com.bumptech.glide.load.resource.bitmap.g0
	method:public static
	n(Landroid/graphics/Bitmap;I)Landroid/graphics/Bitmap;
	stmt:invoke-static {v0, p1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	336.
	class:com.bumptech.glide.load.resource.bitmap.r
	method:private static
	b(Lcom/bumptech/glide/load/engine/bitmap_recycle/e;Landroid/graphics/drawable/Drawable;II)Landroid/graphics/Bitmap;
	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	337.
	class:com.bumptech.glide.load.resource.bitmap.r

	method:private static
	b(Lcom/bumptech/glide/load/engine/bitmap_recycle/e;Landroid/graphics/drawable/Drawable;II)Landroid/graphics/Bitmap;
	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	338.
	class:com.bumptech.glide.load.resource.bitmap.f
	method:public
	c(Landroid/graphics/ImageDecoder$Source;IILandroid/graphics/ImageDecoder$OnHeaderDecodedListener;)Lcom/bumptech/glide/load/engine/v;
	stmt:invoke-static {p4, v0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	339.
	class:com.bumptech.glide.load.resource.bitmap.j0
	method:private static
	g(Landroid/media/MediaMetadataRetriever;JIIILcom/bumptech/glide/load/resource/bitmap/p;)Landroid/graphics/Bitmap;
	stmt:invoke-static {p1, p0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	340.
	class:com.bumptech.glide.load.resource.gif.a
	method:private
	c(Ljava/nio/ByteBuffer;IILcom/bumptech/glide/gifdecoder/d;Lcom/bumptech/glide/load/j;)Lcom/bumptech/glide/load/resource/gif/e;
	stmt:invoke-static {v3, v6},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	341.
	class:com.bumptech.glide.load.resource.gif.a
	method:private
	c(Ljava/nio/ByteBuffer;IILcom/bumptech/glide/gifdecoder/d;Lcom/bumptech/glide/load/j;)Lcom/bumptech/glide/load/resource/gif/e;
	stmt:invoke-static {v3, v6},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	342.
	class:com.bumptech.glide.load.resource.gif.a
	method:private
	c(Ljava/nio/ByteBuffer;IILcom/bumptech/glide/gifdecoder/d;Lcom/bumptech/glide/load/j;)Lcom/bumptech/glide/load/resource/gif/e;
	stmt:invoke-static {v3, v6},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	343.
	class:com.bumptech.glide.load.resource.gif.a
	method:private
	c(Ljava/nio/ByteBuffer;IILcom/bumptech/glide/gifdecoder/d;Lcom/bumptech/glide/load/j;)Lcom/bumptech/glide/load/resource/gif/e;

	stmt:invoke-static {v3, v6}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 344. class:com.bumptech.glide.load.resource.gif.a method:private static e(Lcom/bumptech/glide/gifdecoder/c;II)I stmt:invoke-static {v3, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 345. class:com.bumptech.glide.load.resource.gif.d method:public c(Lcom/bumptech/glide/load/engine/v;Ljava/io/File;Lcom/bumptech/glide/load/j;)Z stmt:invoke-static {p2, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 346. class:com.bumptech.glide.load.resource.gif.j method:private static e(Ljava/io/InputStream;)[B stmt:invoke-static {v0, p0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 347. class:com.bumptech.glide.load.resource.a$a method:public onHeaderDecoded(Landroid/graphics/ImageDecoder;Landroid/graphics/ImageDecoder$ImageInfo;Landroid/graphics/ImageDecoder$Source;)V stmt:invoke-static {v6, v5}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 348. class:com.bumptech.glide.load.engine.i method:private c(Lcom/bumptech/glide/load/data/e;IILcom/bumptech/glide/load/j;Ljava/util/List;)Lcom/bumptech/glide/load/engine/v; stmt:invoke-static {v6, v5}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 349. class:com.bumptech.glide.load.engine.executor.b method:private static b()I stmt:invoke-static {v1, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 350. class:com.bumptech.glide.load.engine.executor.acb method:public a(Ljava/lang/Throwable;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 351. class:com.bumptech.glide.load.engine.z

	method:private c(Ljava/lang/Object;)V stmt:invoke-static {v3, v4}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 352. class:com.bumptech.glide.load.engine.q method:public printStackTrace()V stmt:invoke-virtual {p0, v0}, Lcom/bumptech/glide/load/engine/q;->printStackTrace(Ljava/io/PrintStream;)V 353. class:com.bumptech.glide.load.engine.k method:public static constructor <clinit>()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 354. class:com.bumptech.glide.load.engine.cache.l method:public constructor <init>(Lcom/bumptech/glide/load/engine/cache/l$a;)V stmt:invoke-static {v3, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 355. class:com.bumptech.glide.load.engine.cache.e method:public a(Lcom/bumptech/glide/load/g;Lcom/bumptech/glide/load/engine/cache/a$b;)V stmt:invoke-static {v0, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 356. class:com.bumptech.glide.load.engine.cache.e method:public a(Lcom/bumptech/glide/load/g;Lcom/bumptech/glide/load/engine/cache/a$b;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 357. class:com.bumptech.glide.load.engine.cache.e method:public b(Lcom/bumptech/glide/load/g;)Ljava/io/File; stmt:invoke-static {v1, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 358. class:com.bumptech.glide.load.engine.cache.e method:public b(Lcom/bumptech/glide/load/g;)Ljava/io/File; stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z

	359. class:com.bumptech.glide.load.engine.cache.e method:public c(Lcom/bumptech/glide/load/g;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 360. class:com.bumptech.glide.load.engine.cache.e method:public declared-synchronized clear()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 361. class:com.bumptech.glide.load.engine.h method:private l(Lcom/bumptech/glide/load/data/d;Ljava/lang/Object;Lcom/bumptech/gli de/load/a;)Lcom/bumptech/glide/load/engine/v; stmt:invoke-static {p3, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 362. class:com.bumptech.glide.load.engine.h method:private n()V stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 363. class:com.bumptech.glide.load.engine.h method:public run()V stmt:invoke-static {v2, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 364. class:com.bumptech.glide.load.data.mediastore.c method:public e(Lcom/bumptech/glide/j;Lcom/bumptech/glide/load/data/d$a;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 365. class:com.bumptech.glide.load.data.mediastore.e method:private b(Landroid/net/Uri;)Ljava/lang/String; stmt:invoke-static {v2, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 366. class:com.bumptech.glide.load.data.mediastore.e method:public a(Landroid/net/Uri;)I stmt:invoke-static {v1, v2}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 367. class:com.bumptech.glide.load.data.l

	method:public final e(Lcom/bumptech/glide/j;Lcom/bumptech/glide/load/data/d$a;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 368. class:com.bumptech.glide.load.data.b method:public e(Lcom/bumptech/glide/j;Lcom/bumptech/glide/load/data/d$a;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 369. class:com.bumptech.glide.load.data.j method:private static f(Ljava/net/HttpURLConnection;)I stmt:invoke-static {v0, p0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 370. class:com.bumptech.glide.load.data.j method:private g(Ljava/net/HttpURLConnection;)Ljava/io/InputStream; stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 371. class:com.bumptech.glide.load.data.j method:public e(Lcom/bumptech/glide/j;Lcom/bumptech/glide/load/data/d$a;)V stmt:invoke-static {v0, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 372. class:com.bumptech.glide.load.data.j method:public e(Lcom/bumptech/glide/j;Lcom/bumptech/glide/load/data/d$a;)V stmt:invoke-static {v0, v5}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 373. class:com.bumptech.glide.load.data.j method:public e(Lcom/bumptech/glide/j;Lcom/bumptech/glide/load/data/d$a;)V stmt:invoke-static {v0, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 374. class:com.bumptech.glide.load.data.j method:public e(Lcom/bumptech/glide/j;Lcom/bumptech/glide/load/data/d$a;)V stmt:invoke-static {v0, v3}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z

	375.
	class:com.bumptech.glide.c
	method:private static
	f(Landroid/content/Context;)Lcom/bumptech/glide/GeneratedAppGlideMo
	dule;
	stmt:invoke-static {v0, p0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	376.
	class:com.bumptech.glide.c
	method:public static
	m(Landroid/content/Context;Ljava/lang/String;)Ljava/io/File;
	stmt:invoke-static {p1, p0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	377.
	class:com.bumptech.glide.c
	method:private static
	t(Landroid/content/Context;Lcom/bumptech/glide/d;Lcom/bumptech/glid
	e/GeneratedAppGlideModule;)V
	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	378.
	class:com.bumptech.glide.c
	method:private static
	t(Landroid/content/Context;Lcom/bumptech/glide/d;Lcom/bumptech/glid
	e/GeneratedAppGlideModule;)V
	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	379.
	class:com.bumptech.glide.util.pool.a$e
	method:public acquire()Ljava/lang/Object;
	stmt:invoke-static {v2, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	380.
	class:com.bumptech.glide.GeneratedAppGlideModuleImpl
	method:public constructor <init>(Landroid/content/Context;)V
	stmt:invoke-static {p1, v0},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	381.
	class:com.bumptech.glide.request.k
	method:public static constructor <clinit>()V
	stmt:invoke-static {v0, v1},
	Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z
	382.
	class:com.bumptech.glide.request.target.fba
	method:public onPreDraw()Z

	stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 383. class:com.bumptech.glide.request.target.r$b method:private e(III)I stmt:invoke-static {p2, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 384. class:com.bumptech.glide.request.target.f$b method:private e(III)I stmt:invoke-static {p2, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 385. class:com.bumptech.glide.request.target.rba method:public onPreDraw()Z stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 386. class:com.bumptech.glide.module.e method:public a()Ljava/util/List; stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 387. class:com.bumptech.glide.module.e method:public a()Ljava/util/List; stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 388. class:com.bumptech.glide.module.e method:public a()Ljava/util/List; stmt:invoke-static {v0, v4}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 389. class:com.bumptech.glide.module.e method:public a()Ljava/util/List; stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 390. class:com.bumptech.glide.module.e method:public a()Ljava/util/List; stmt:invoke-static {v0, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 391. class:com.bumptech.glide.manager.q method:public i(Lcom/bumptech/glide/request/e;)V

	stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 392. class:com.bumptech.glide.manager.o method:public handleMessage(Landroid/os/Message;)Z stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 393. class:com.bumptech.glide.manager.RequestManagerFragment method:public onAttach(Landroid/app/Activity;)V stmt:invoke-static {v0, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 394. class:com.bumptech.glide.manager.e method:private f()V stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 395. class:com.bumptech.glide.manager.e method:public d(Landroid/content/Context;)Z stmt:invoke-static {v1, p1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 396. class:com.bumptech.glide.manager.r method:public onAttach(Landroid/content/Context;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 397. class:com.bumptech.glide.manager.r method:public onAttach(Landroid/content/Context;)V stmt:invoke-static {v1, v0}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 398. class:com.bumptech.glide.manager.f method:public a(Landroid/content/Context;Lcom/bumptech/glide/manager/c$a;)Lcom/bumptech/glide/manager/c; stmt:invoke-static {v2, v1}, Landroid/util/Log;->isLoggable(Ljava/lang/String;I)Z 399. class:cl.json.social.t method:public m(Lcom/facebook/react/bridge/ReadableMap;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 400. class:cl.json.social.s

	method:public m(Lcom/facebook/react/bridge/ReadableMap;)V stmt:invoke-virtual {p1}, Ljava/lang/Exception;->printStackTrace()V 401. class:cl.json.g method:public d()Ljava/util/ArrayList; stmt:invoke-virtual {v4}, Ljava/io/IOException;->printStackTrace()V 402. class:cl.json.RNShareModule method:public isBase64File(Ljava/lang/String;Lcom/facebook/react/bridge/Callback;Lcom/facebook/react/bridge/Callback;)V stmt:invoke-virtual {p1, p3}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 403. class:cl.json.RNShareModule method:public open(Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Callback;Lcom/facebook/react/bridge/Callback;)V stmt:invoke-virtual {p1, v0}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 404. class:cl.json.RNShareModule method:public open(Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Callback;Lcom/facebook/react/bridge/Callback;)V stmt:invoke-virtual {p1, v0}, Landroid/content/ActivityNotFoundException;->printStackTrace(Ljava/io/PrintStream;)V 405. class:cl.json.RNShareModule method:public shareSingle(Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Callback;Lcom/facebook/react/bridge/Callback;)V stmt:invoke-virtual {p1, p2}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 406. class:cl.json.RNShareModule method:public shareSingle(Lcom/facebook/react/bridge/ReadableMap;Lcom/facebook/react/bridge/Callback;Lcom/facebook/react/bridge/Callback;)V stmt:invoke-virtual {p1, p2}, Landroid/content/ActivityNotFoundException;->printStackTrace(Ljava/io/PrintStream;)V 407. class:cl.json.f

	method:public d()Landroid/net/Uri; stmt:invoke-virtual {v0}, Ljava/io/IOException;->printStackTrace()V 408. class:bolts.a method:public printStackTrace(Ljava/io/PrintStream;)V stmt:invoke-super {p0, p1}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintStream;)V 409. class:bolts.a method:public printStackTrace(Ljava/io/PrintStream;)V stmt:invoke-virtual {v2, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintStream;)V 410. class:bolts.a method:public printStackTrace(Ljava/io/PrintWriter;)V stmt:invoke-super {p0, p1}, Ljava/lang/Exception;->printStackTrace(Ljava/io/PrintWriter;)V 411. class:bolts.a method:public printStackTrace(Ljava/io/PrintWriter;)V stmt:invoke-virtual {v2, p1}, Ljava/lang/Throwable;->printStackTrace(Ljava/io/PrintWriter;)V
Remediation	Disable debugging log function calls or ensure that log outputs use the correct level. Log messages involving sensitive data should be disabled in the release version.

10.3.Risk of resource file leakage

Purpose of assessment	Detect whether the resource files in APK can be read and tampered with.
Risk level	Low
Vulnerability description	An APK contains many types of resource files, including icons, pictures, JavaScript (JS) files, etc. The JS files may contain important display interfaces and implementations in resource files. If the JS file is read, the functional logic may be leaked. If it is tampered, it may be implanted with phishing pages or malicious code, causing the user's sensitive information to be leaked.
Assessment result	Secure
Assessment result description	There are no JS resource files that can be read in this app.

Assessment detail	N/A
Remediation	N/A

10.4.SO file cracking risk

Purpose of assessment	Check whether the SO file in the APK can be cracked and read.
Risk level	Medium
Vulnerability description	SO file is a dynamic link library file included in APK. Android uses the NDK technology to compile the core code implemented in the C/C++ language into an SO library for the Java layer to call. The cracked SO file may cause the core function's assembly code and even source code to be leaked, which not only infringe the developer's intellectual property but may also expose the app core function logic. Attackers can use this information to steal the client's sensitive data, including mobile phone numbers and passwords; intercept communication data with the server; bypass the business security authentication process, directly tamper with user account information; launch attacks on server interfaces and etc.
Assessment result	Secure
Assessment result description	The SO file in the app cannot be cracked.
Assessment detail	N/A
Remediation	N/A

11.M10-Extraneous functionality

11.1.Residual risk vulnerability in Intranet test information

Purpose of assessment	Detect whether the program code contains residual test information, such as the intranet URL address.
Risk level	Low

Vulnerability description	By detecting whether the mobile application contains an intranet URL address, to determine whether the distribution package contains test data. Residual test data may be stolen and maliciously used to attack on production servers, and attack weak test servers to obtain server security or logic vulnerability.
Assessment result	Secure
Assessment result description	The app does not contain test data information.
Assessment detail	N/A
Remediation	N/A

11.2.Download arbitrary APK vulnerability

Purpose of assessment	Detect whether there are vulnerabilities in downloading arbitrary APK in the application.
Risk level	Medium
Vulnerability description	If the download APK function is present, then it may be an export vulnerability and does not perform checks on the component caller. The attackers can use the means of exporting components to download any APK file specified by the attacker, and during the download process, disguise the download information of the APK file, such as icons and descriptions, causing users to be induced to download and install malicious applications.
Assessment result	Secure
Assessment result description	The app does not have a component with APK download functionality.
Assessment detail	N/A
Remediation	N/A