

# treeheatr: an R package for interpretable decision tree visualizations

This manuscript ([permalink](#)) was automatically generated from [trang1618/treeheatr-manuscript@929d099](#) on April 30, 2020.

## Authors

---

- **Trang T. Le**

 [0000-0003-3737-6565](#) ·  [trang1618](#) ·  [trang1618](#)

Department of Biostatistics, Epidemiology and Informatics, Institute for Biomedical Informatics, University of Pennsylvania, Philadelphia, PA 19104

- **Jason H. Moore**

 [0000-0002-5015-1099](#) ·  [EpistasisLab](#) ·  [moorejh](#)

Department of Biostatistics, Epidemiology and Informatics, Institute for Biomedical Informatics, University of Pennsylvania, Philadelphia, PA 19104 · Funded by National Institutes of Health Grant Nos. [LM010098, LM012601, AI116794]

# Abstract

---

## Summary

*treeheatr* is an R package for creating interpretable decision tree visualizations with the data represented as heatmaps at the tree's terminal nodes. Going beyond the if-then step-by-step logic of a decision tree, the inclusion of a heatmap offers a broader view of the classification or regression problem and provides meaningful clarification of different node splits in the tree. Working harmoniously with other packages, *treeheatr* empowers the user with refined controls over the statistical threshold and presentation of the tree and heatmap.

## Availability and implementation

The *treeheatr* package is freely available under the permissive [MIT license](https://trang1618.github.io/treeheatr) at <https://trang1618.github.io/treeheatr>. It comes with a detailed vignette that is automatically built with continuous integration.

## Contact

[ttle@pennmedicine.upenn.edu](mailto:ttle@pennmedicine.upenn.edu)

## Supplementary information

## Introduction

---

Tree-based algorithms such as random forests and gradient boosted trees are widely used techniques that comprise an important section of supervised machine learning. Visualizing and interpreting their building blocks, the single decision trees, are the first steps toward understanding these complex tree-based structures. However, it is difficult to incorporate the tree's predictive performance and the feature space in a single visualization. Existing softwares frequently treat all nodes in a decision tree similarly, leaving limited options for improving information presentation at the leaf nodes. Specifically, state-of-the-art libraries such as Python's [dtreeviz](#), while producing aesthetic trees with detailed histograms at inner nodes, draw pie chart at leaf nodes. The *ggparty* R package allows the user to have full control of the representation of each node but fixes the terminal node widths, which can limit the ability to show more collective visualizations.

We have developed the *treeheatr* package to utilize the leaf node space to show the data as a heatmap where the samples and features are optionally clustered to improve interpretation. After simple installation, the user can apply *treeheatr* on their classification or regression problem with a single function, `heat_tree()`, as follows:

```
heat_tree(data, task = 'classification', target_lab = 'Outcome')
```

This one line of code above will generate the conditional inference tree, perform clustering, and produce a *ggplot* object that can be viewed in RStudio's viewer pane, saved to a graphic file, or embedded in an RMarkdown document. This example assumes a classification problem, but one can also apply *treeheatr* on a regression problem by changing the `task` argument.

This article is organized as follows. In Section 2, we show an example *treeheatr* application by employing its functions on a real-world clinical dataset from a study of diabetes mellitus in a high risk population of Pima Indians [1]. In Section 3, we describe in details the important functions and

corresponding arguments in *treeheatr*. We demonstrate the flexibility the user has in tweaking these arguments to enhance understanding of the tree-based models applied on their dataset. Finally, we discuss general guidelines for creating effective decision tree-heatmap visualization.


## A simple example

This example visualizes the conditional inference tree model built to predict whether or not a patient has diabetes from a dataset provided by the National Institute of Diabetes and Digestive and Kidney Diseases [1]. This dataset of female patients at least 21 years old of Pima Indian heritage near Phoenix, Arizona was downloaded from [Kaggle](#) and has eight features: age, number of pregnancies, plasma glucose concentration, diastolic blood pressure, skin fold thickness, 2-hour serum insulin, body mass index and diabetes pedigree function. Detailed descriptions of these variables and data source can be found on the Kaggle page.

The following lines of code computes and visualizes the conditional decision tree along with the heatmap containing features that are important for building this model (Fig. 1):

```
heat_tree(  
  data = diabetes,  
  target_lab = 'Diabetes status',  
  label_map = c(`0` = 'Negative', `1` = 'Positive')  
)
```

The `heat_tree()` function takes a data frame, a character string indicating the column name associated with the outcome/phenotype (e.g., Diabetes status) and other optional arguments such as the mapping of the outcome label.

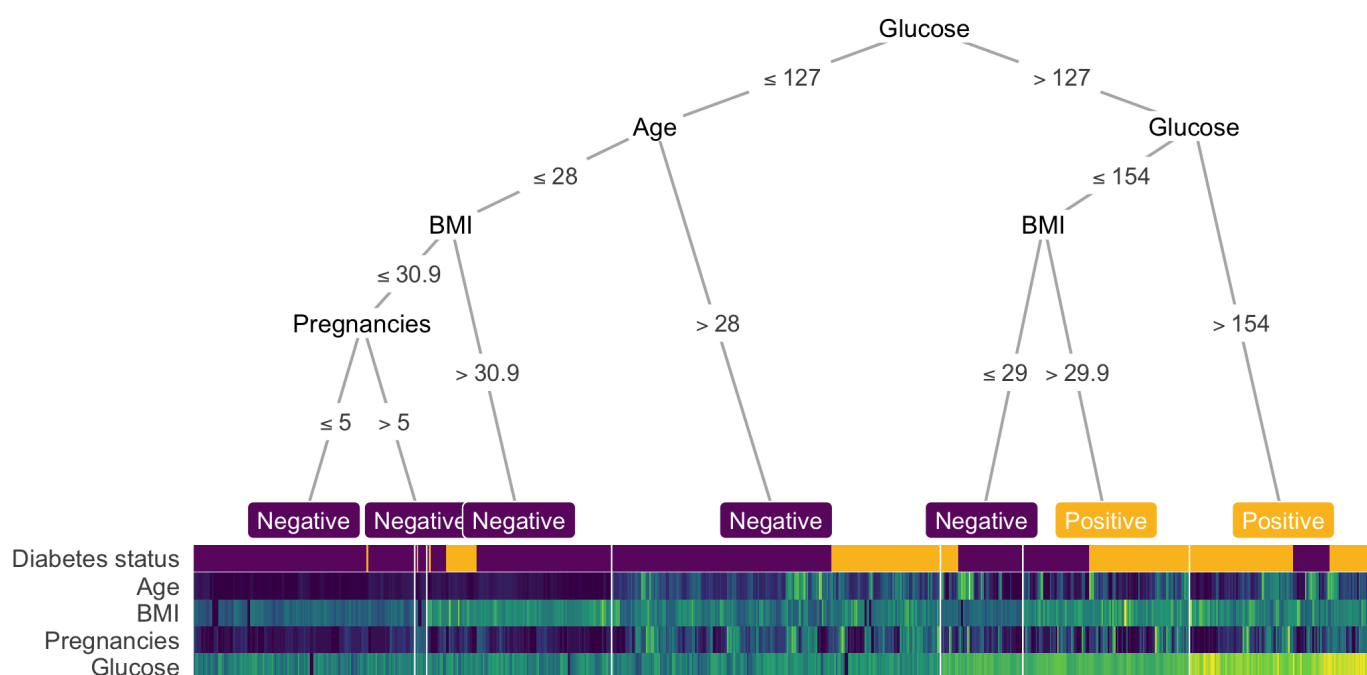

**Figure 1:** A decision tree-heatmap for predicting whether an individual has diabetes.

## Methods

We utilize the *ggparty* R package to compute the conditional inference tree (indirectly via the *partykit* R package) and edge and node information. However, because *ggparty* assumes fixed terminal widths, we recompute the node layout to accommodate the different number of samples shown in the heatmap at each terminal node. We implemented a node layout structure that can generalize as the trees grow in size. This new layout weighs the x-coordinate of the parent node according to the level of the child nodes in order to avoid crossing of tree branches. This relative weight can be adjusted with the `lev_fac` parameter in `heat_tree()`. `lev_fac = 1` sets the parent node's x-coordinate perfectly in the middle of those of its child nodes. The default `lev_fac = 1.3` seems to provide aesthetically pleasing trees independent of the tree size (see [vignette](#)). The user can define customized layout for specific nodes and combine it with the automatic layout for the other nodes.

As default, *treeheatr* automatically performs clustering when organizing the heatmap. To order the features, clustering is run on the two groups of features, continuous and categorical, across all samples (including the outcome label, unless `clust_target = FALSE`). To order the samples, clustering is run on samples within each terminal node of all features. *treeheatr* uses the `daisy()` function in the [cluster](#) R package with the Gower metric [2] to compute dissimilarity in both continuous and nominal categorical feature types. We note that, while there is no definitive guideline for proper weighting of features of different types, the goal of the clustering step is to improve our interpretability of the tree-based model and not to make precise inference about each cluster. Therefore, *treeheatr* does not draw dendrograms and allows for the inclusion of outcome labels in clustering the samples.

In a visualization, it is difficult to find the balance between enhancing understanding and overloading information. We believe showing a heatmap at the terminal node space provides additional information of the data in an elegant way that is not overwhelming and may even simplify the model's interpretation. We left it for the user to decide what type of information to be displayed at the inner nodes via different *geom* objects (e.g., `geom_node_plot`, `geom_edge_label`, etc.) in the *ggparty* package. For example, one may choose to show the [distribution](#) of the features and how they split the samples at these decision nodes.

The integration of heatmap nicely complements the current techniques of visualizing decision trees. Node purity, a metric measuring the tree's performance, can be visualized from the distribution of true outcome label at each terminal node in the first row. Comparing these values with the terminal node label gives a visual estimate of how accurate the tree predictions are. Further, without specifically choose two features to show in a 2-D scatter plot, we can infer correlation structures among features in the heatmap. The additional clustering may also reveal sub-structures within a leaf node.

## Conclusion

---

In this paper, we presented the new type of integrated visualization of decision trees and heatmaps, which provides a comprehensive data overview as well as model interpretation. We demonstrated that [...] The visualization is implemented in an easily installed package with a detailed vignette. Released as open source software, `{treeheatr}` hopes to receive contribution from other developers.

Future works on *treeheatr* include enhancements such as supporting heatmap visualization of a holdout set and highlighting the tree branches that point to a specific holdout sample.

## Acknowledgements

---

The *treeheatr* package was made possible by leveraging integral R packages including *ggplot2* [3], *partykit* [4], *ggparty* [5] and many others. We would also like to thank Daniel Himmelstein for his

helpful comments on the package's continuous integration configuration.

## References

---

**1. Using the ADAP Learning Algorithm to Forecast the Onset of Diabetes Mellitus**

Jack W. Smith, J. E. Everhart, W. C. Dickson, W. C. Knowler, R. S. Johannes  
*Proceedings of the Annual Symposium on Computer Application in Medical Care* (1988-11-09)  
<https://www.ncbi.nlm.nih.gov/pmc/articles/PMC2245318/>  
PMCID: [PMC2245318](https://pubmed.ncbi.nlm.nih.gov/2245318/)

**2. A General Coefficient of Similarity and Some of Its Properties**

J. C. Gower  
*Biometrics* (1971-12) <https://doi.org/dxtrt7>  
DOI: [10.2307/2528823](https://doi.org/10.2307/2528823)

**3. Ggplot2: elegant graphics for data analysis**

Hadley Wickham  
*Springer* (2009)  
ISBN: [9780387981406](https://www.isbn-international.org/en/product/9780387981406)

**4. partykit: A Modular Toolkit for Recursive Partytioning in R**

Torsten Hothorn, Achim Zeileis  
*Journal of Machine Learning Research* (2015) <http://jmlr.org/papers/v16/hothorn15a.html>

**5. martin-borkovec/ggparty**

Martin Borkovec  
(2020-04-25) <https://github.com/martin-borkovec/ggparty>