16-831: Introduction to Robot Learning, Spring 2024

Imitation Learning

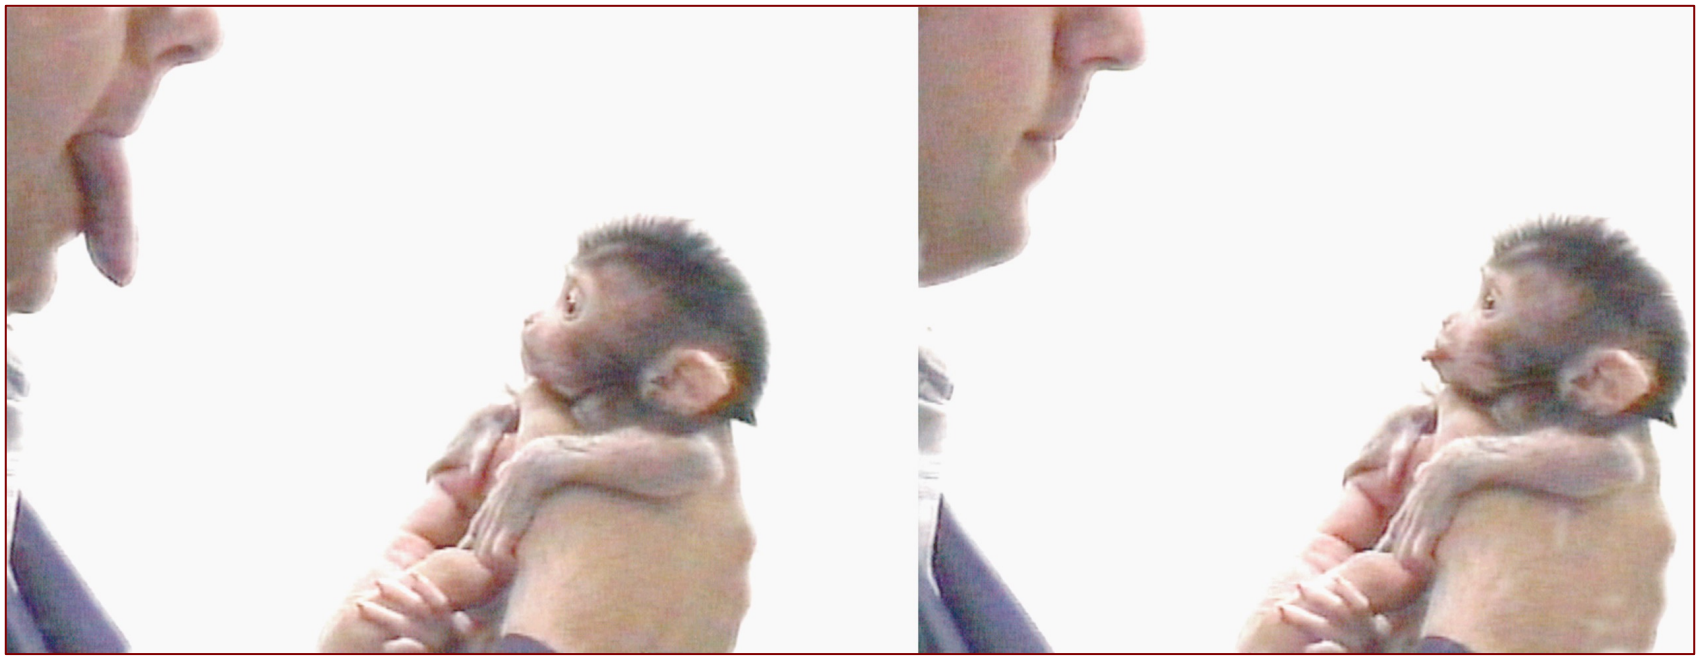

https://en.wikipedia.org/wiki/Imitation

Instructor: Guanya Shi

Learning and Control for Agile Robotics Lab

Carnegie Mellon University
The Robotics Institute

Recording Reminder

- This session will be audio recorded for educational use by other students in this course.

Course Structure

Latest schedule: https://16-831-s24.github.io/lectures

- ❑ Topic group 1: Course introduction: What is robot learning and why?
- ❑ Topic group 2: Machine/Deep learning refresher
- ❑ Topic group 3: Imitation learning
- ❑ Topic group 4: Model-free reinforcement learning
- ❑ Topic group 5: Model-based reinforcement learning (one guest lecture)
- ❑ Topic group 6: Reinforcement learning from offline data (one guest lecture)
- ❑ Topic group 7: Bandit, preference-based learning, exploration
- ❑ Topic group 8: Specialized topics (one guest lecture)
- ❑ Project presentation & poster session

Outline

- ❑ Notations, MDP, POMDP
- ❑ What is imitation learning?
- ❑ Why/how is imitation learning different from standard supervised learning?
  - Does behavior cloning (BC) work?
- ❑ How to address the issue?
- ❑ Deep imitation learning via generative models

(Some slides are from 22F, 23F, Berkeley CS 285, and CMU 10-703)

Outline

- ❑ Notations, MDP, POMDP
- ❑ What is imitation learning?
- ❑ Why/how is imitation learning different from standard supervised learning?
  - Does behavior cloning (BC) work?
- ❑ How to address the issue?
- ❑ Deep imitation learning via generative models

(Some slides are from 22F, 23F, Berkeley CS 285, and CMU 10-703)

MDP

- Definitions:
  - S is the state space. $s_t \in S$ is the state at time step t.
  - A is the action space. $a_t \in A$ is the action at time step t.
  - O is the observation space. $o_t \in O$ is the observation at time step t.
  - p is the one-step transition probability (a.k.a., dynamics): $s_{t+1} \sim p(\cdot \mid s_t, a_t)$
  - h is the observation model: $o_t \sim h(\cdot \mid s_t)$
  - $r: S \times A \to \mathbb{R}$ is the reward function.

- A Markov decision process (MDP) is a tuple (S, A, p, r)
  - Goal: learn a policy $\pi_\theta(a_t \mid s_t)$

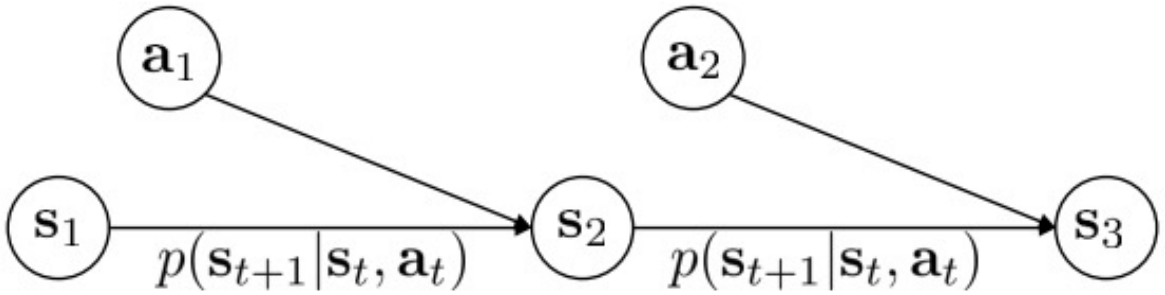

POMDP

- Definitions:
  - S is the state space. $s_t \in S$ is the state at time step t.
  - A is the action space. $a_t \in A$ is the action at time step t.
  - O is the observation space. $o_t \in O$ is the observation at time step t.
  - p is the one-step transition probability (a.k.a., dynamics): $s_{t+1} \sim p(\cdot \mid s_t, a_t)$
  - h is the observation model: $o_t \sim h(\cdot \mid s_t)$
  - $r: S \times A \rightarrow \mathbb{R}$ is the reward function.

- A partially observed Markov decision process (POMDP) is a tuple (S, A, O, p, h, r)
  - Goal: learn a policy $\pi_\theta(a_t \mid o_t)$

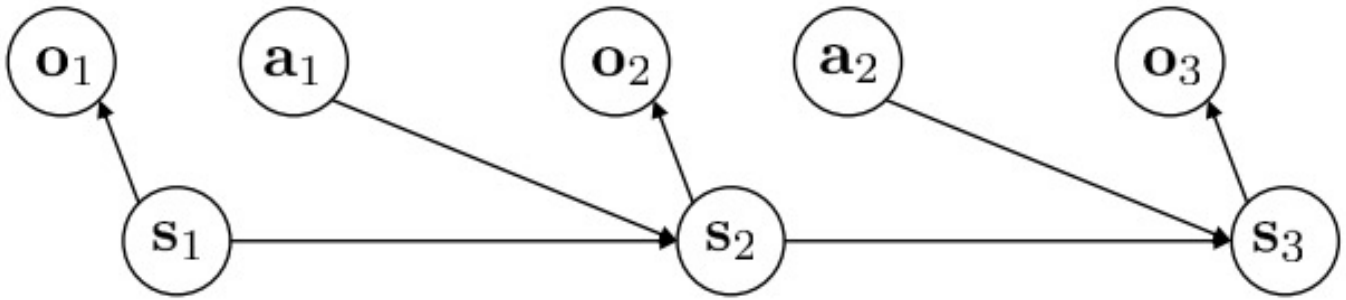

Markov Property

- Definitions:
  - S is the state space. $s_t \in S$ is the state at time step t.
  - A is the action space. $a_t \in A$ is the action at time step t.
  - O is the observation space. $o_t \in O$ is the observation at time step t.
  - p is the one-step transition probability (a.k.a., dynamics): $s_{t+1} \sim p(\cdot \mid s_t, a_t)$
  - h is the observation model: $o_t \sim h(\cdot \mid s_t)$
  - $r: S \times A \to \mathbb{R}$ is the reward function.

- Why Markov?
  - Allow us to throw away history once state is known!

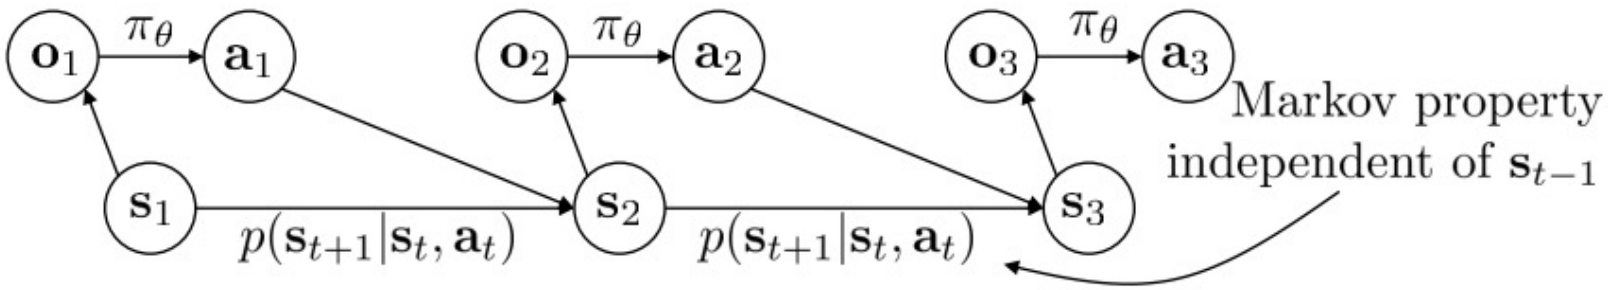

Andrey Markov

The Goal of Reinforcement Learning and Control

- Finite horizon case: T is finite
- Infinite horizon case: $T = \infty$
- The cumulative reward can be discounted: $\sum_t \gamma^t r(s_t, a_t)$ where $0 < \gamma \leq 1$

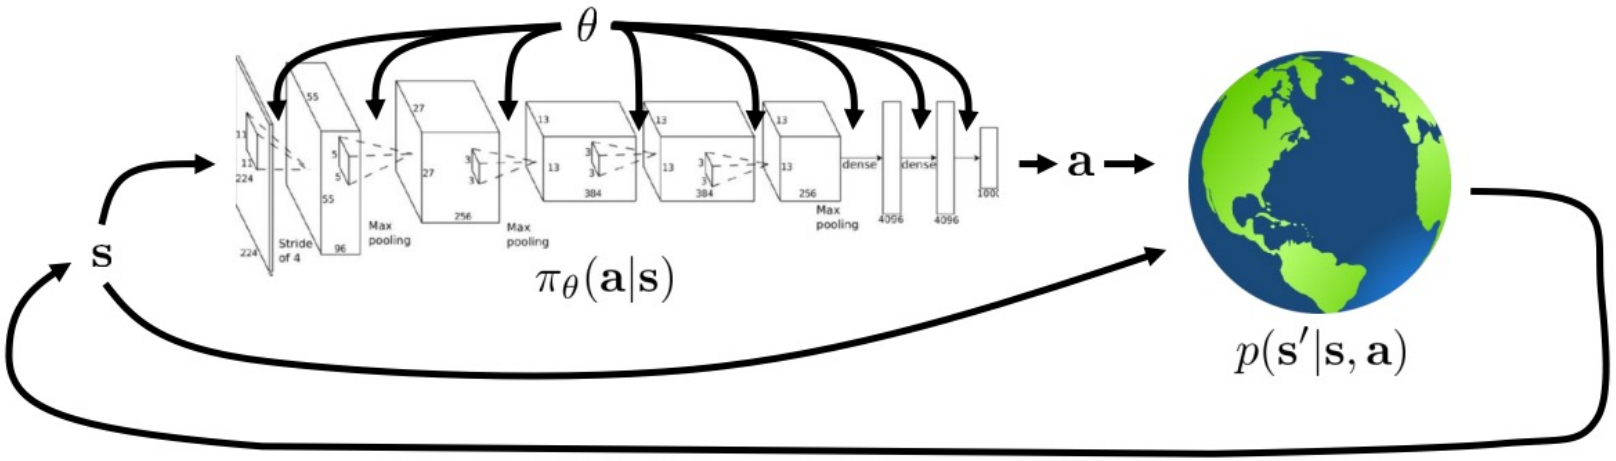

$$\underbrace{p_\theta(\mathbf{s}_1, \mathbf{a}_1, \ldots, \mathbf{s}_T, \mathbf{a}_T)}_{\pi_\theta(\tau)} = p(\mathbf{s}_1) \prod_{t=1}^{T} \pi_\theta(\mathbf{a}_t|\mathbf{s}_t) p(\mathbf{s}_{t+1}|\mathbf{s}_t, \mathbf{a}_t)$$

$$\theta^\star = \arg\max_\theta E_{\tau \sim p_\theta(\tau)} \left[\sum_t r(\mathbf{s}_t, \mathbf{a}_t) \right]$$

Outline

- ❑ Notations, MDP, POMDP
- ❑ What is imitation learning?
- ❑ Why/how is imitation learning different from standard supervised learning?
  - Does behavior cloning (BC) work?
- ❑ How to address the issue?
- ❑ Deep imitation learning via generative models

(Some slides are from 22F, 23F, Berkeley CS 285, and CMU 10-703)

Imitation Learning

- Main idea:
  - Collect expert data (observation/state and action pairs)
  - Train a function to map observations/states to actions

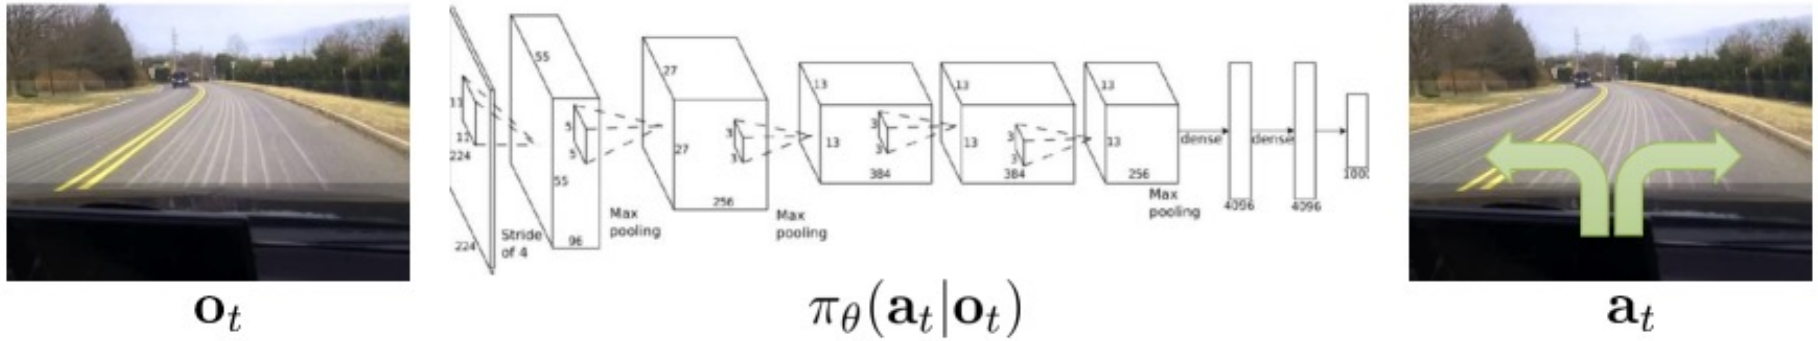

Deep Imitation Learning in 1989

- ❑ A CMU paper!
  - CMU has incubated many self-driving companies

ALVINN:
AN AUTONOMOUS LAND VEHICLE IN A NEURAL NETWORK

Dean A. Pomerleau
Computer Science Department
Carnegie Mellon University
Pittsburgh, PA 15213

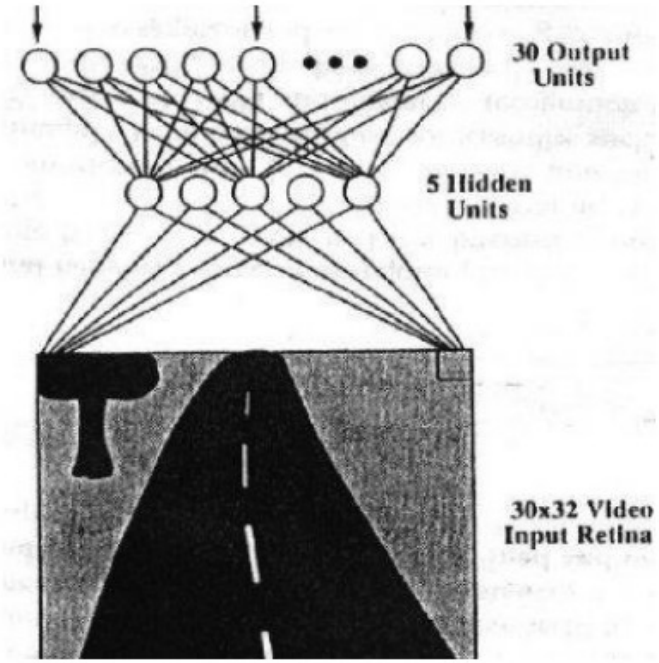

Deep Imitation Learning Today

- Left: Mobile ALOHA; Right: Diffusion policy.

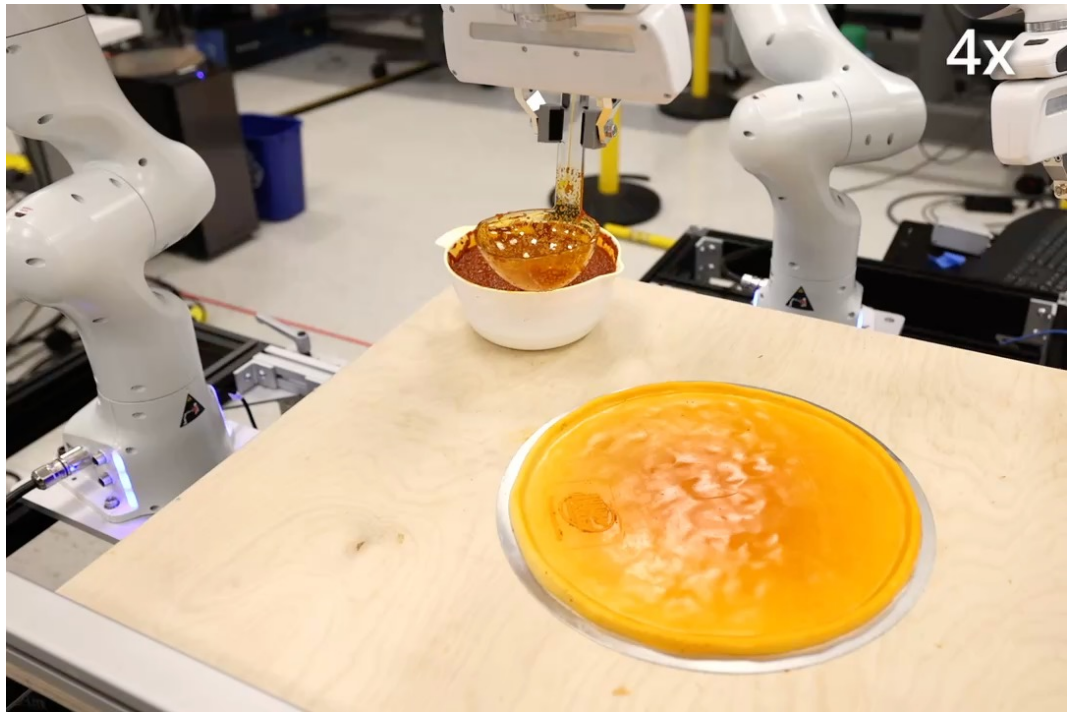

Outline

- ❑ Notations, MDP, POMDP
- ❑ What is imitation learning?
- ❑ Why/how is imitation learning different from standard supervised learning?
  - Does behavior cloning (BC) work?
- ❑ How to address the issue?
- ❑ Deep imitation learning via generative models

(Some slides are from 22F, 23F, Berkeley CS 285, and CMU 10-703)

It Sounds Like Supervised Learning …

- Main idea:
  - Collect expert data (observation/state and action pairs)
  - Train a function to map observations/states to actions
  - A.k.a. "**behavior cloning (BC)**"

Expert Trajectories

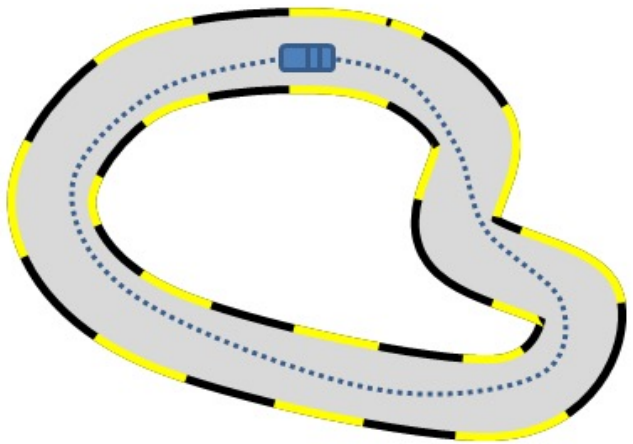

s: state / observation

a: expert action

$$s_0, a_0, s_1, a_1, \ldots, s_T, a_T$$

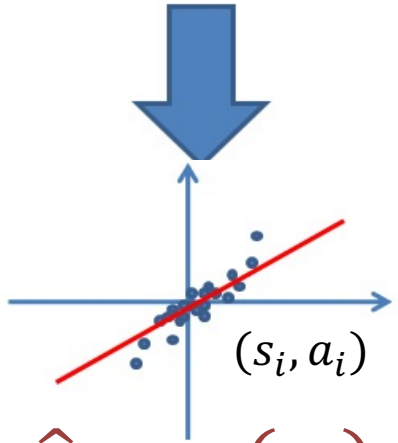

$$\hat{a} = \pi(s_i)$$

Supervised Learning

Learned Policy π

Mapping from state (image) to control (steering direction)

It Sounds Like Supervised Learning …

- High-dimensional observations:

[Pomerleau89, Saxena05, Ross11a]

Input:

Camera Image

Policy

Output:

Steering Angle
in [-1, 1]

It Sounds Like Supervised Learning …

- Does BC work?

It Is NOT Standard Supervised Learning!

- ❑ Behavior cloning (BC) does work.
- ❑ What goes wrong?

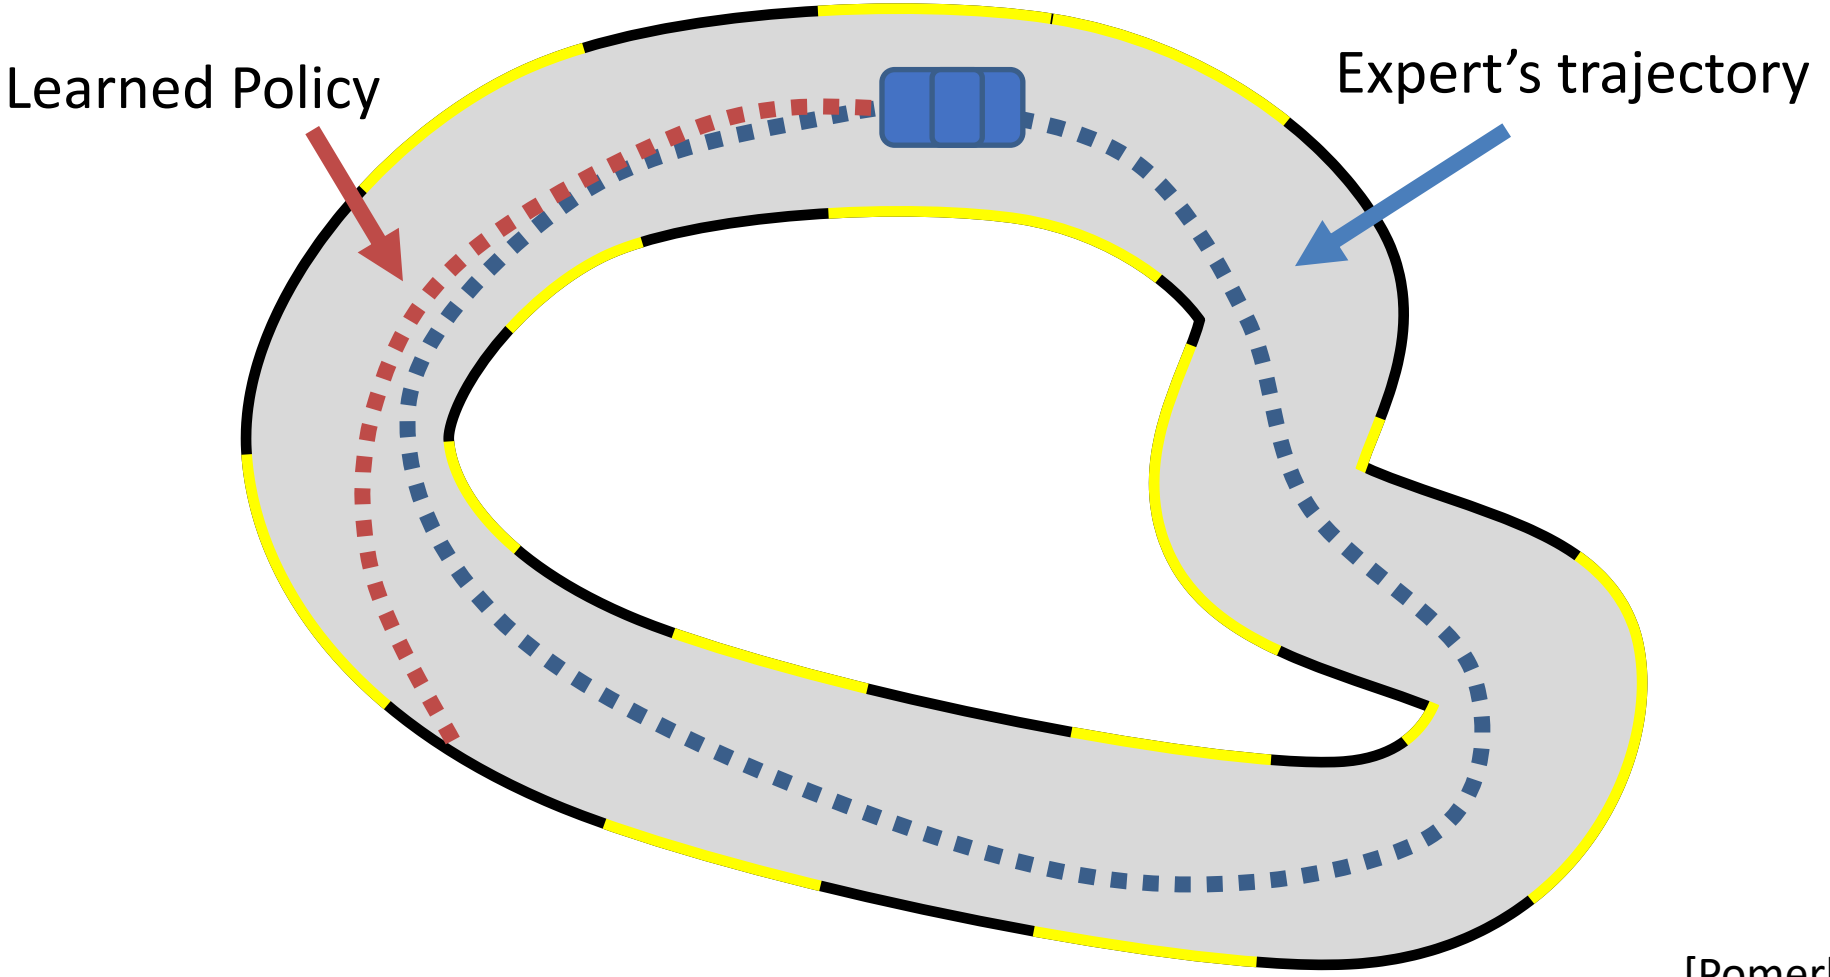

[Pomerleau89,Daume09]

It Is NOT Standard Supervised Learning!

- ❑ The i.i.d. (independent and identically distributed) assumption doesn't hold!
- ❑ Recap the supervised learning story (lecture 3):

Theorem (Vapnik and Chervonenkis, 1971)

Consider $\mathcal{F} \subseteq \{-1,1\}^{\mathcal{X}}$, $\mathcal{Y} = \{\pm 1\}$, $\ell = \ell_{01}$.
For every prob distribution P on $\mathcal{X} \times \{-1,1\}$,
with probability $1-\delta$ over n iid examples $(x_1, y_1), \ldots, (x_n, y_n)$,
every f in $\mathcal{F}$ satisfies

"train error"

"test error"

$$\mathbb{E}\ell_f \leq \hat{\mathbb{E}}\ell_f + O\left(\sqrt{\frac{d_{VC}(\mathcal{F})}{n}}\right).$$

- ❑ (x_i, y_i) is i.i.d. sampled from some distribution
- ❑ Basically, "low training error" -> "good test performance"

It Is NOT Standard Supervised Learning!

- ❑ The expert data only contains “good” behaviors
- ❑ Therefore, a small mistake in the test time will cause cascading failures

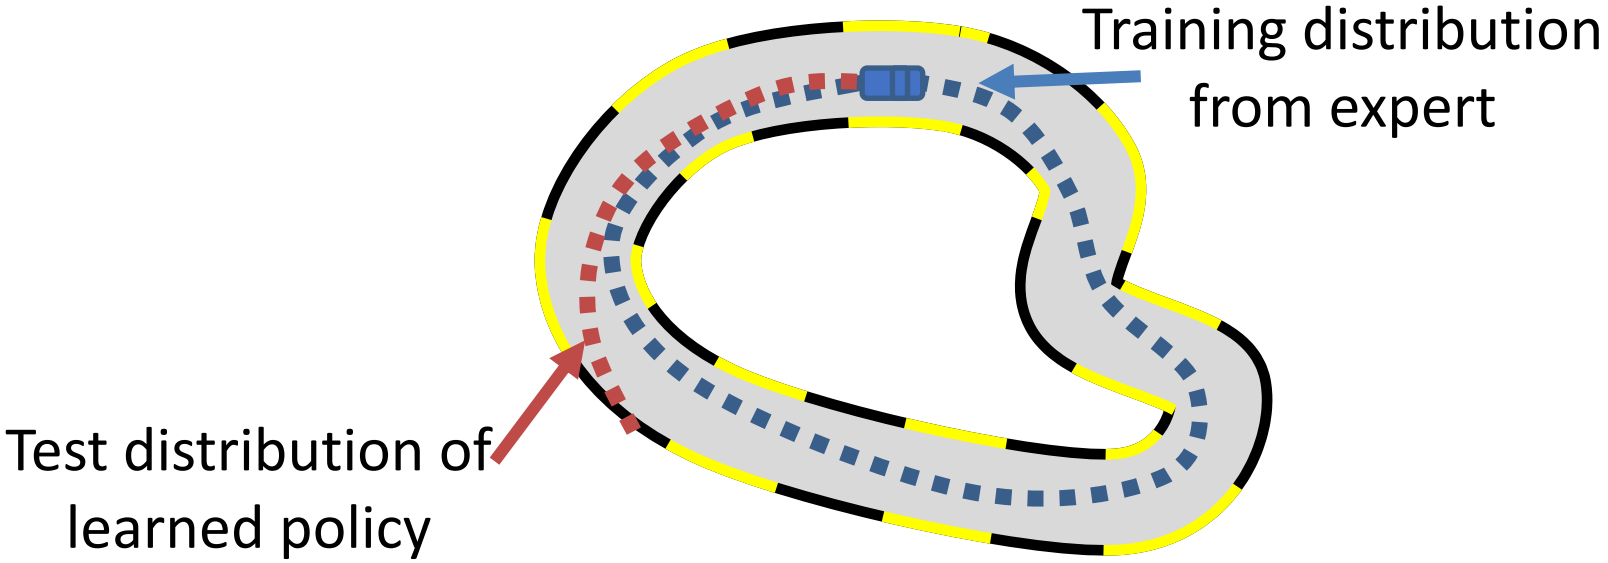

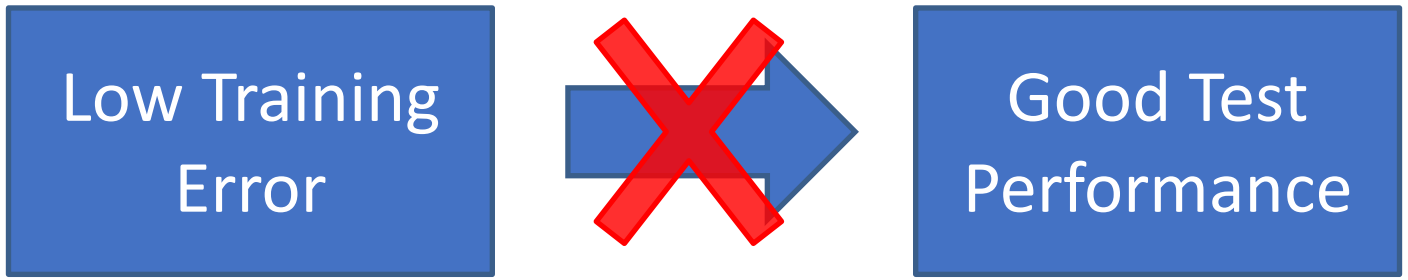

It Is NOT Standard Supervised Learning!

- Recap the **domain shift** problem in ML/DL (lecture 3):

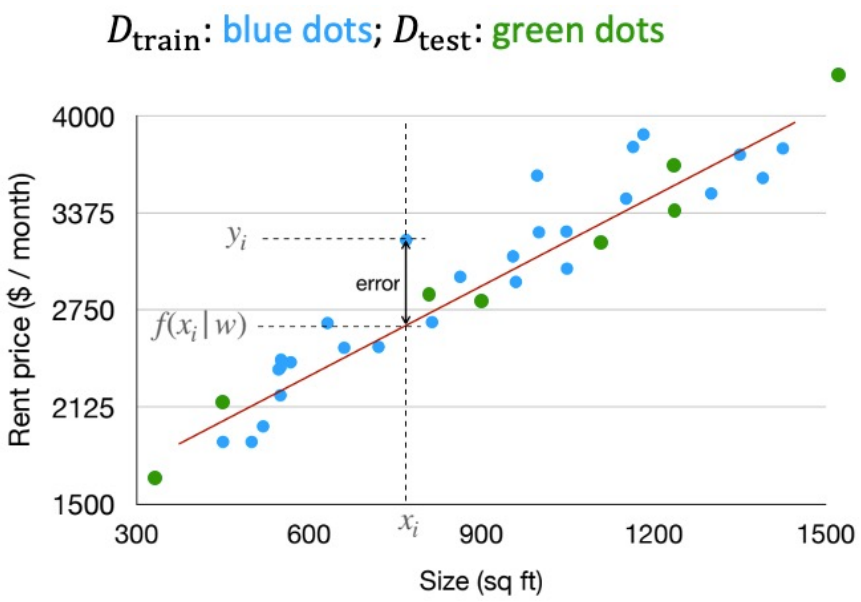

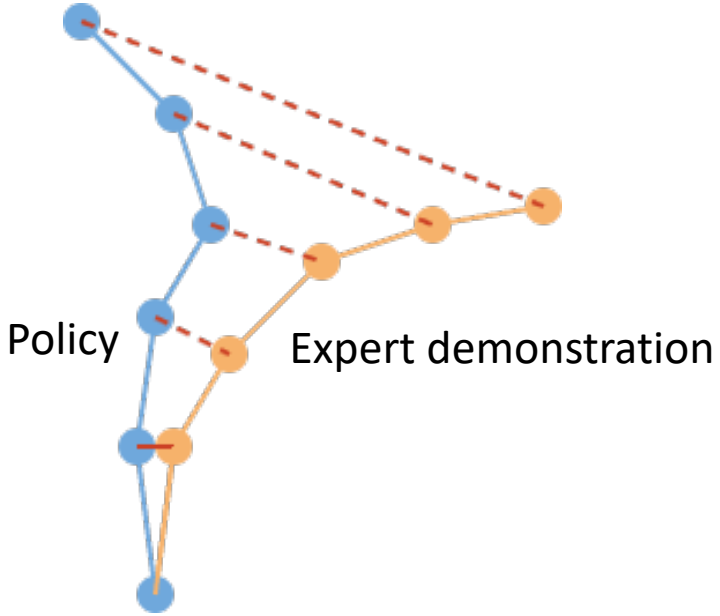

- Even worse in sequential decision making! The domain shift is "**dynamic**" and "**fatal**"
  - Policy only trained with expert data
  - Expert has almost zero chance seeing "bad" state
  - Statistically speaking, imitation learning is **cliff walking**
  - Once we make one mistake, we are outside of the training distribution

Some Analysis

- Consider a "cliff walking" problem
  - Test error quadratic in # timesteps!

$$c(\mathbf{s}, \mathbf{a}) = \begin{cases} 0 \text{ if } \mathbf{a} = \pi^\star(\mathbf{s}) \\ 1 \text{ otherwise} \end{cases}$$

assume: $\pi_\theta(\mathbf{a} \neq \pi^\star(\mathbf{s}) | \mathbf{s}) \leq \epsilon$

for all $\mathbf{s} \in \mathcal{D}_{\text{train}}$

$$\underbrace{E\left[\sum_t c(\mathbf{s}_t, \mathbf{a}_t)\right]}_{O(\epsilon T^2)} \leq \epsilon T + \underbrace{\qquad\qquad\qquad\qquad}_{T \text{ terms, each } O(\epsilon T)}$$

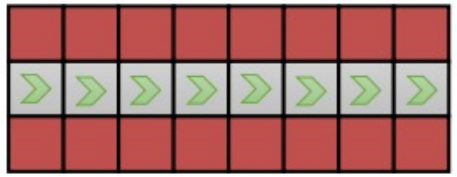

- Why is it so pessimistic?
  - In reality, we can often **recover** from mistakes
  - But this **paradox** still exists: IL could work better if the data has more mistakes!

For more analysis, see Ross et al. "A Reduction of Imitation Learning and Structured Prediction to No-Regret Online Learning"

This Issue is Also in Sequential Prediction

Ground Truth

Canonical Approach

Outline

- ❑ Notations, MDP, POMDP
- ❑ What is imitation learning?
- ❑ Why/how is imitation learning different from standard supervised learning?
  - Does behavior cloning (BC) work?
- ❑ How to address the issue?
- ❑ Deep imitation learning via generative models

(Some slides are from 22F, 23F, Berkeley CS 285, and CMU 10-703)

How to Address this Problem?

- ❑ Be smart about how we collect (and augment) our data
- ❑ Change the algorithm (DAgger)
- ❑ Next time: use very powerful models that make very few mistakes
- ❑ Lecture 23: use multi-task learning

How to Address this Problem?

- ❑ Be smart about how we collect (and augment) our data
- ❑ Change the algorithm (DAgger)
- ❑ Next time: use very powerful models that make very few mistakes
- ❑ Lecture 23: use multi-task learning

ALVINN:
AN AUTONOMOUS LAND VEHICLE IN A NEURAL NETWORK

Dean A. Pomerleau
Computer Science Department
Carnegie Mellon University
Pittsburgh, PA 15213

"…the network must not solely be shown examples of accurate driving, but also how to recover (i.e. return to the road center) once a mistake has been made."

What Makes BC Easy/Hard?

- ❑ Be smart about how we collect (and augment) our data
- ❑ Idea 1: Intentionally add mistakes and corrections
  - The mistakes hurt, but the corrections help, often more than the mistakes hurt
- ❑ Idea 2: Use data augmentation
  - Add some “fake” or “synthetic” data that illustrates corrections

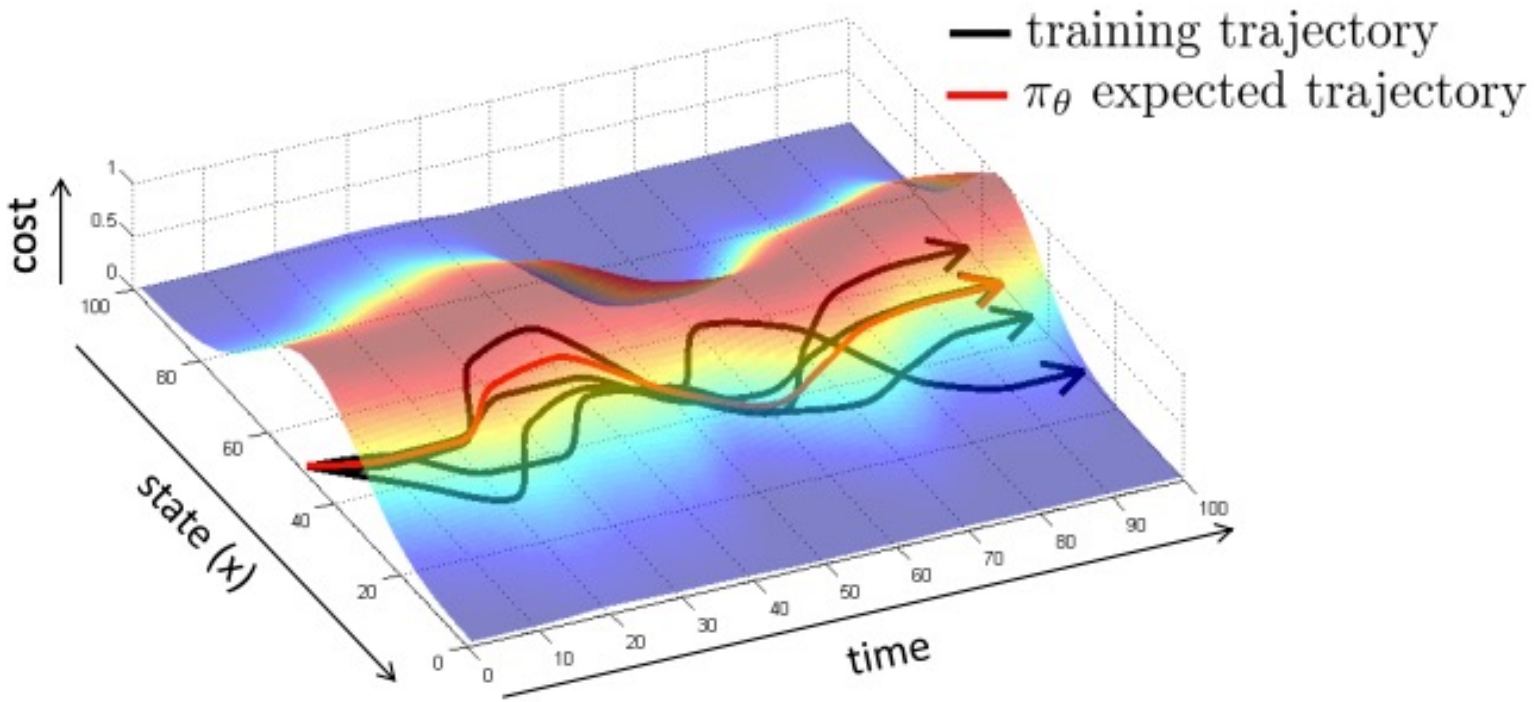

Data Augmentation Example

- Augment an MPC expert using a tube

Demonstration-Efficient Guided Policy Search via Imitation of Robust Tube MPC

Andrea Tagliabue, Dong-Ki Kim, Michael Everett, Jonathan P. How

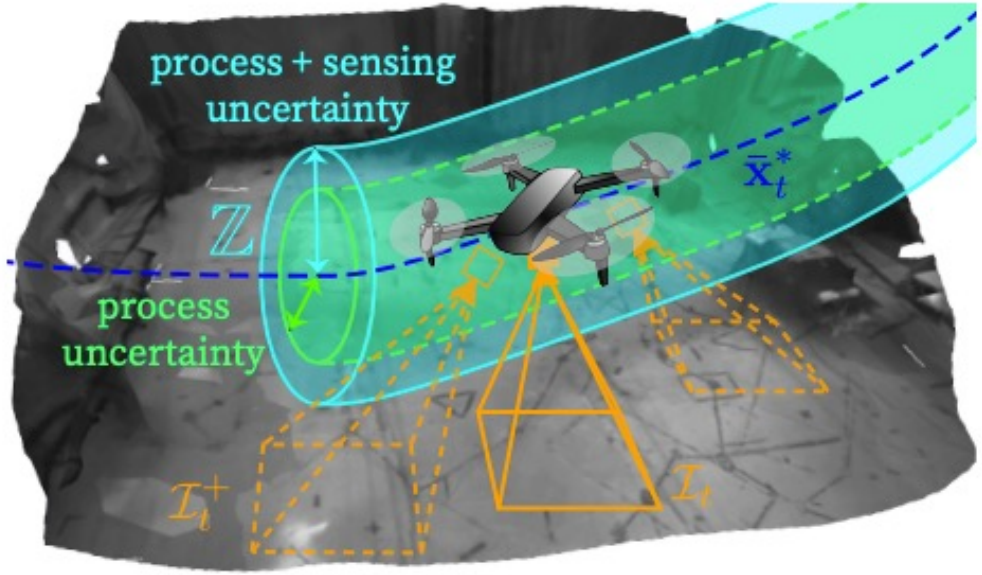

Data Augmentation Example

- Perturb the driver's steering signal

End-to-end Driving via Conditional Imitation Learning

Felipe Codevilla[1,2] Matthias Müller[1,3] Antonio López[2] Vladlen Koltun[1] Alexey Dosovitskiy[1]

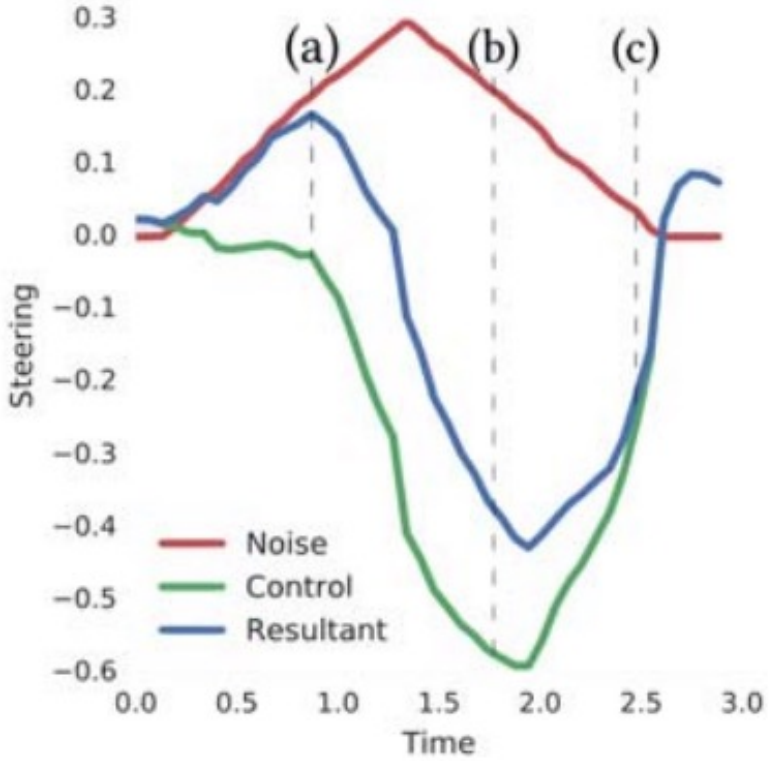

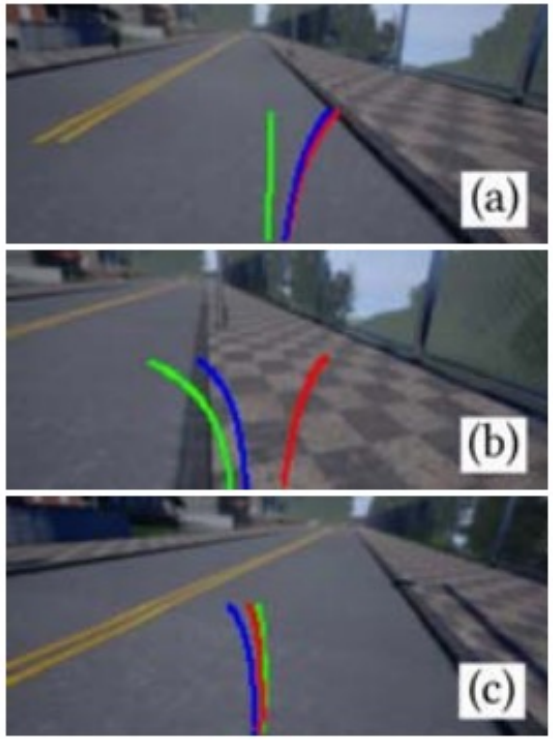

How to Address this Problem?

- ❑ Be smart about how we collect (and augment) our data
- ❑ Change the algorithm (DAgger)
- ❑ Next time: use very powerful models that make very few mistakes
- ❑ Lecture 23: use multi-task learning

Key Idea: Interaction

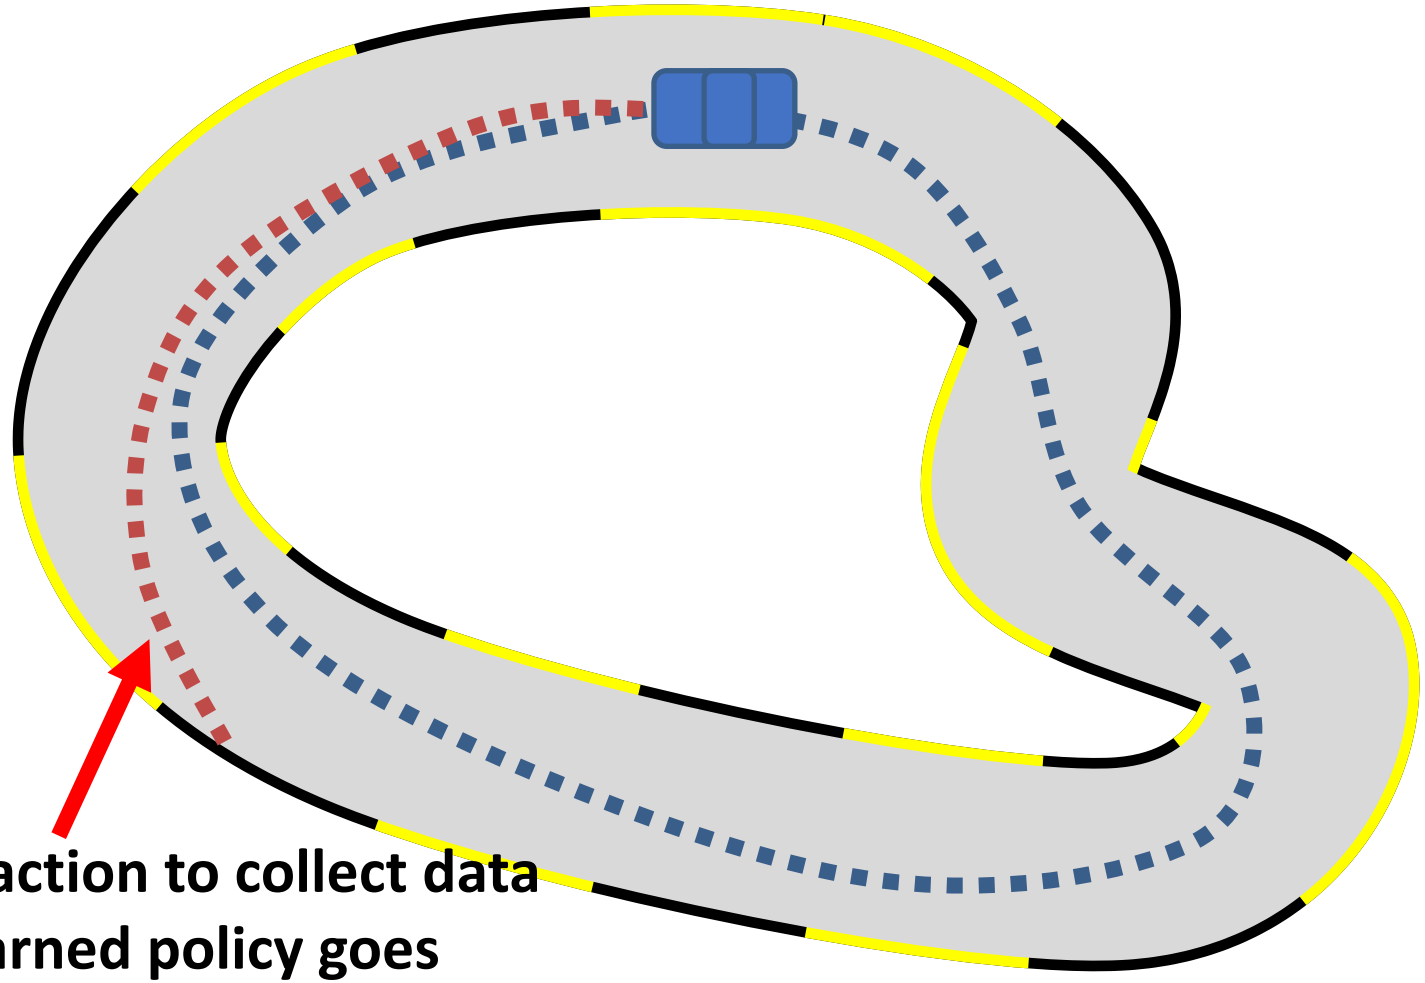

Use interaction to collect data where learned policy goes

Key Idea: Interaction

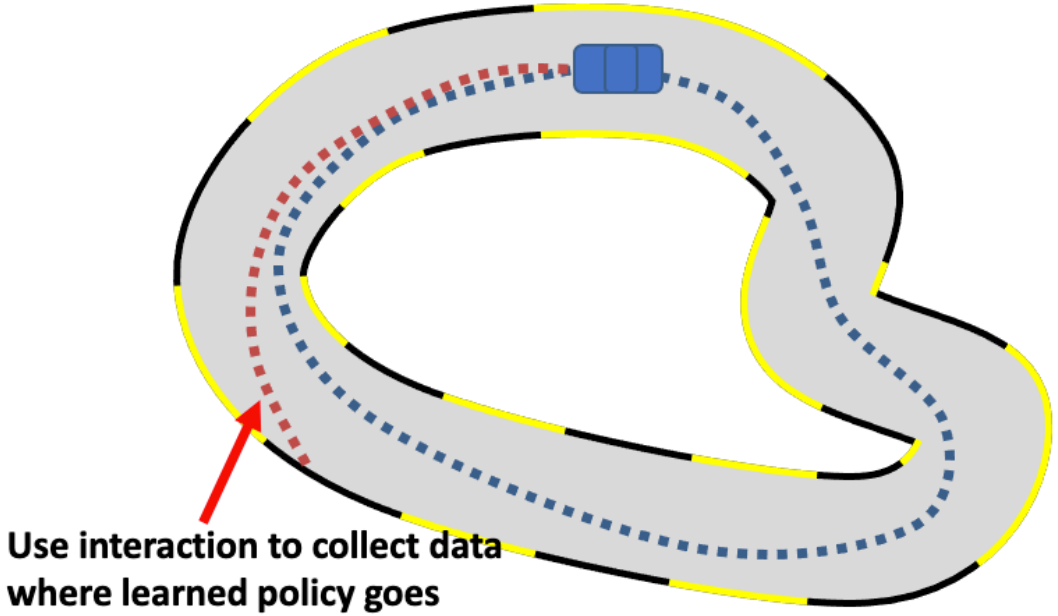

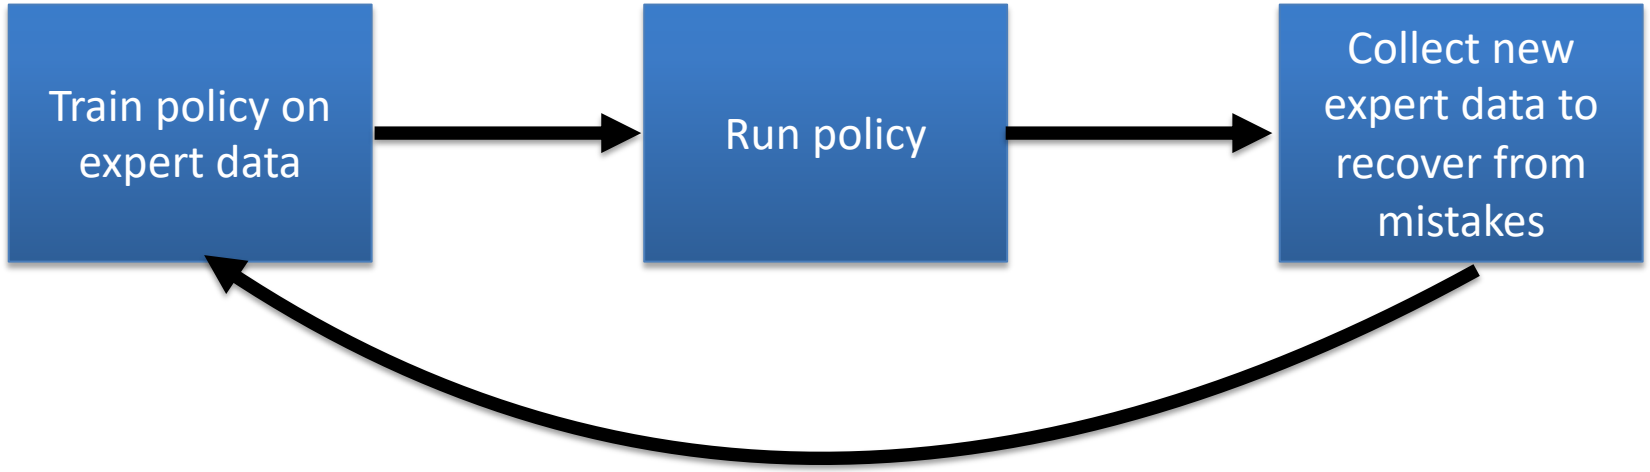

1st iteration

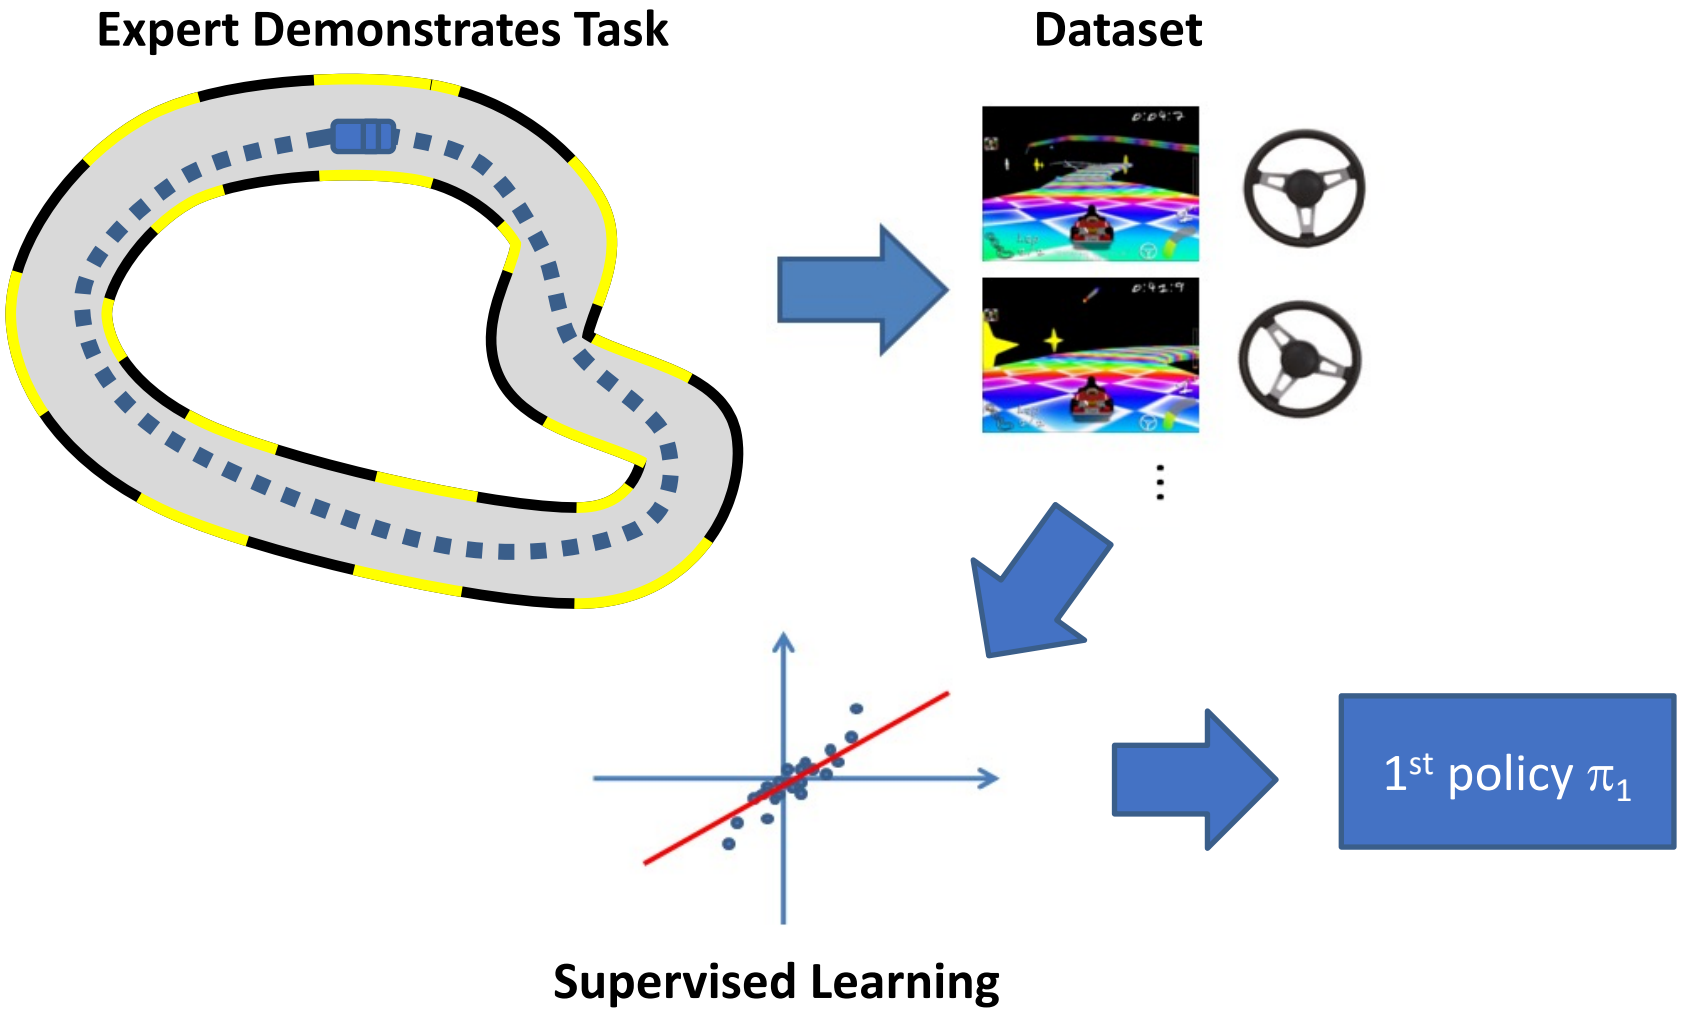

2nd iteration

Execute π_1 and Query Expert

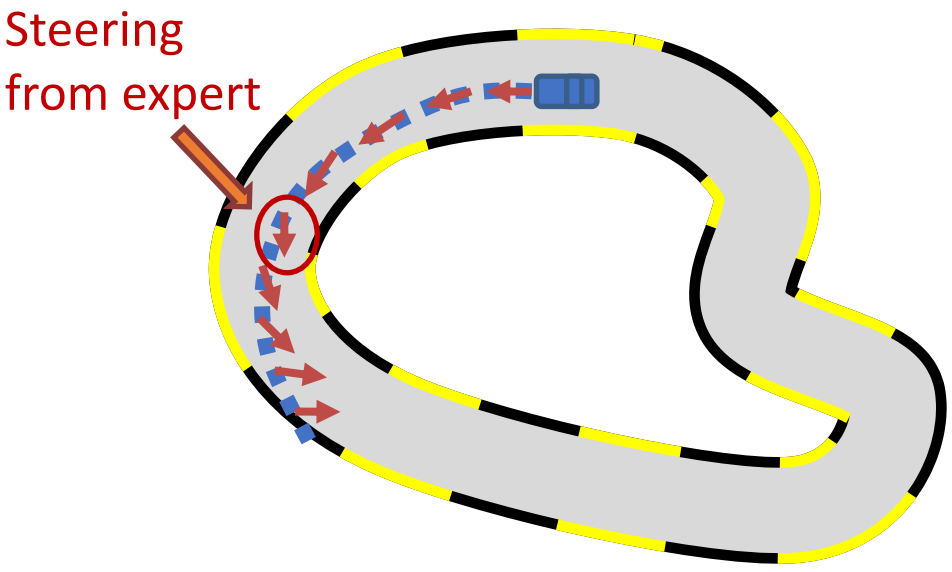

2nd iteration

Execute π_1 and Query Expert

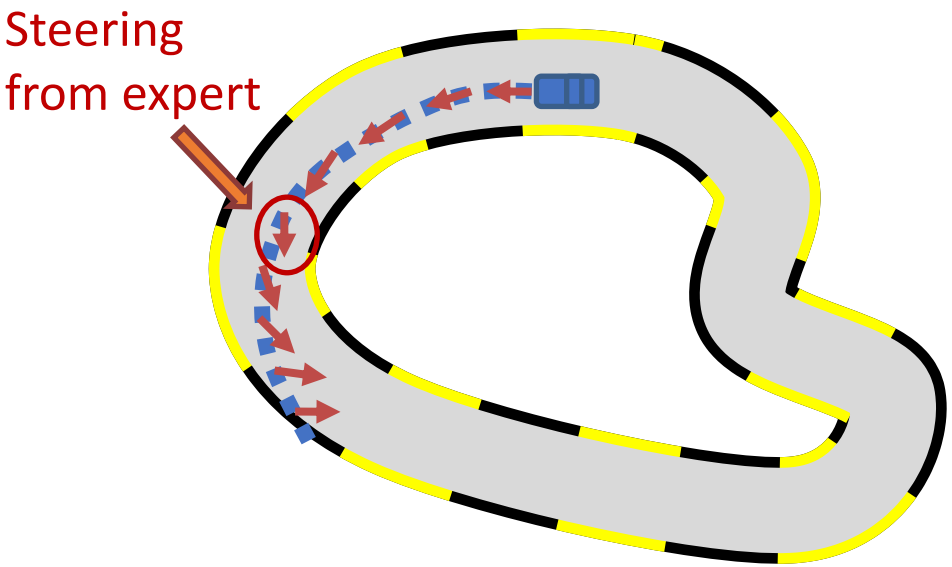

New Data

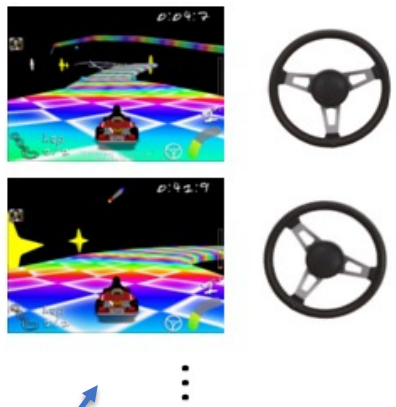

States from
the learned policy

[Ross11a]

DAgger: Dataset Aggregation

2nd iteration

Execute π_1 and Query Expert

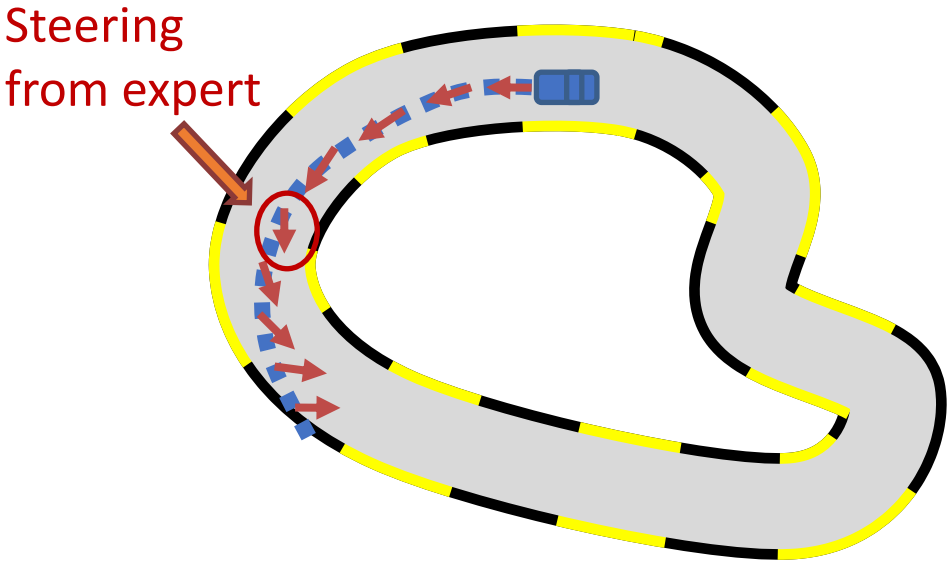

New Data

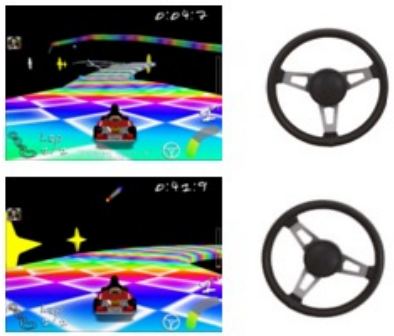

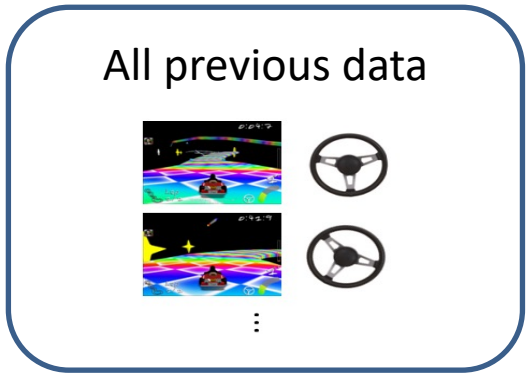

[Ross11a]

DAgger: Dataset Aggregation

2nd iteration

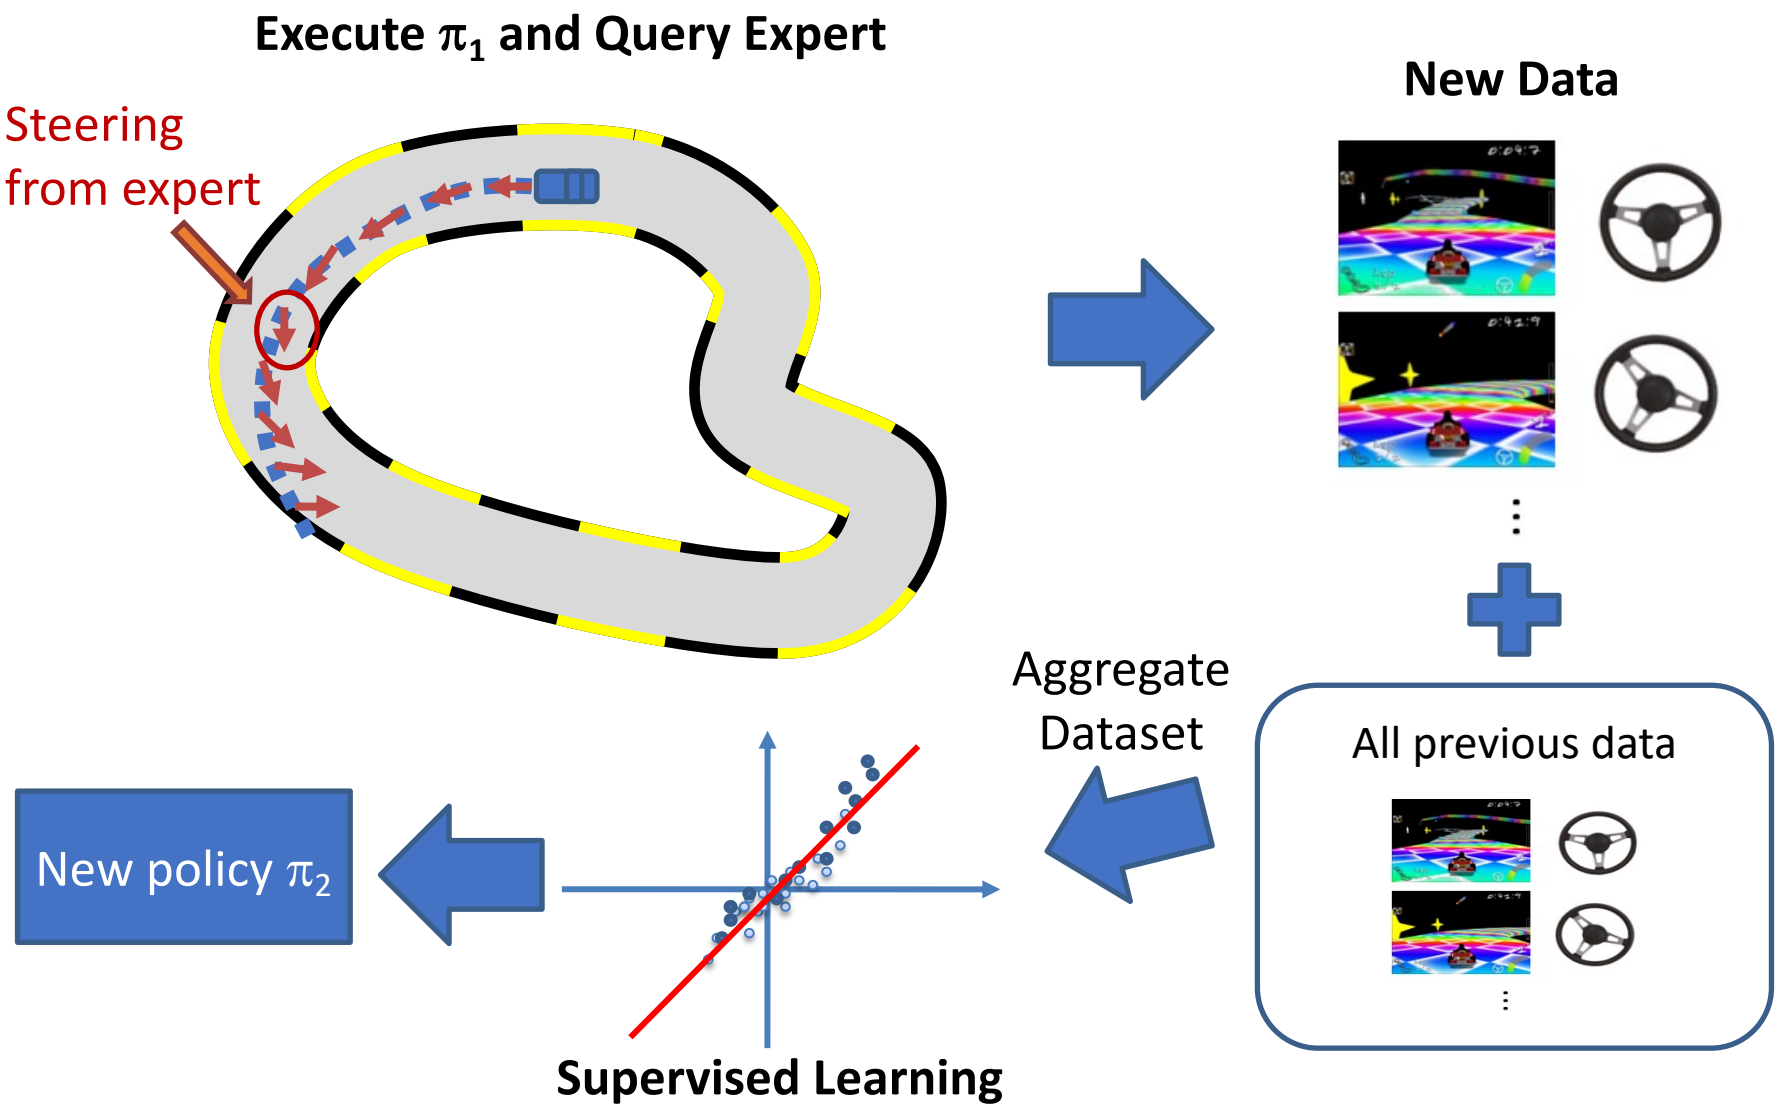

[Ross11a]

DAgger: Dataset Aggregation

3rd iteration

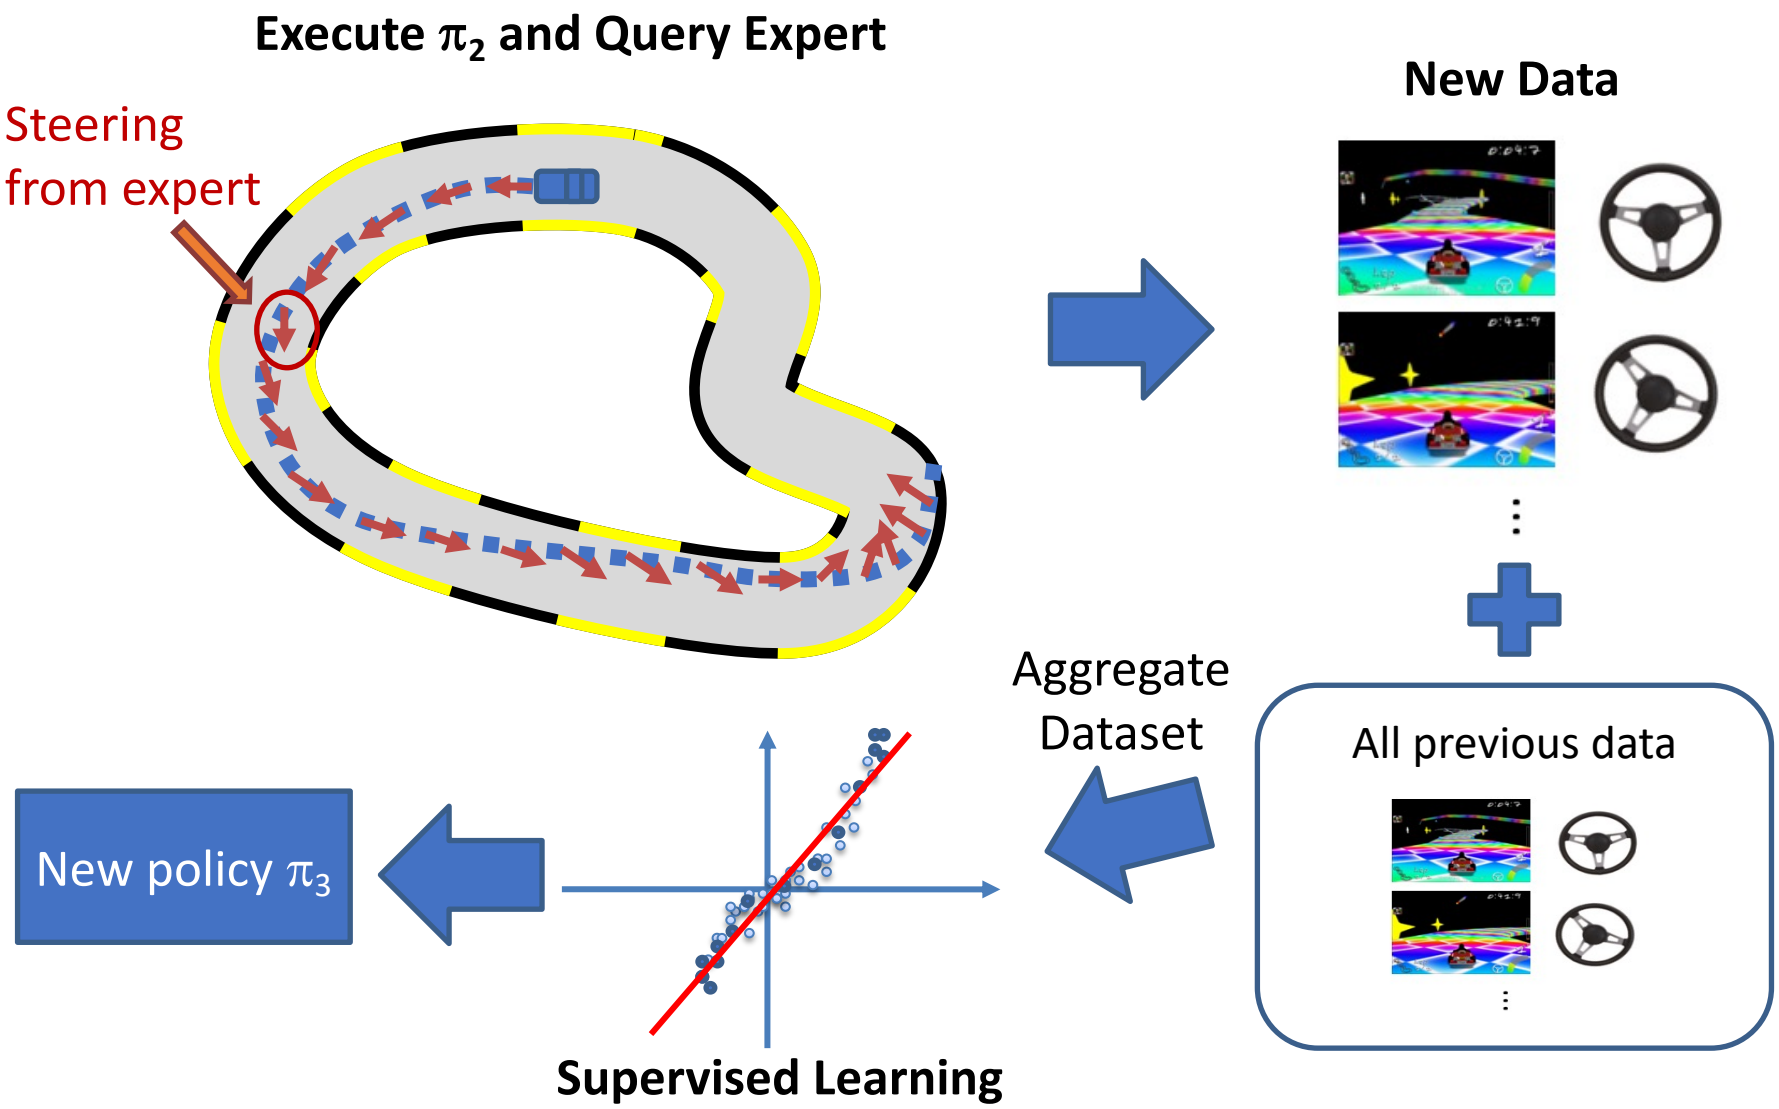

[Ross11a]

DAgger: Dataset Aggregation

n^{th} iteration

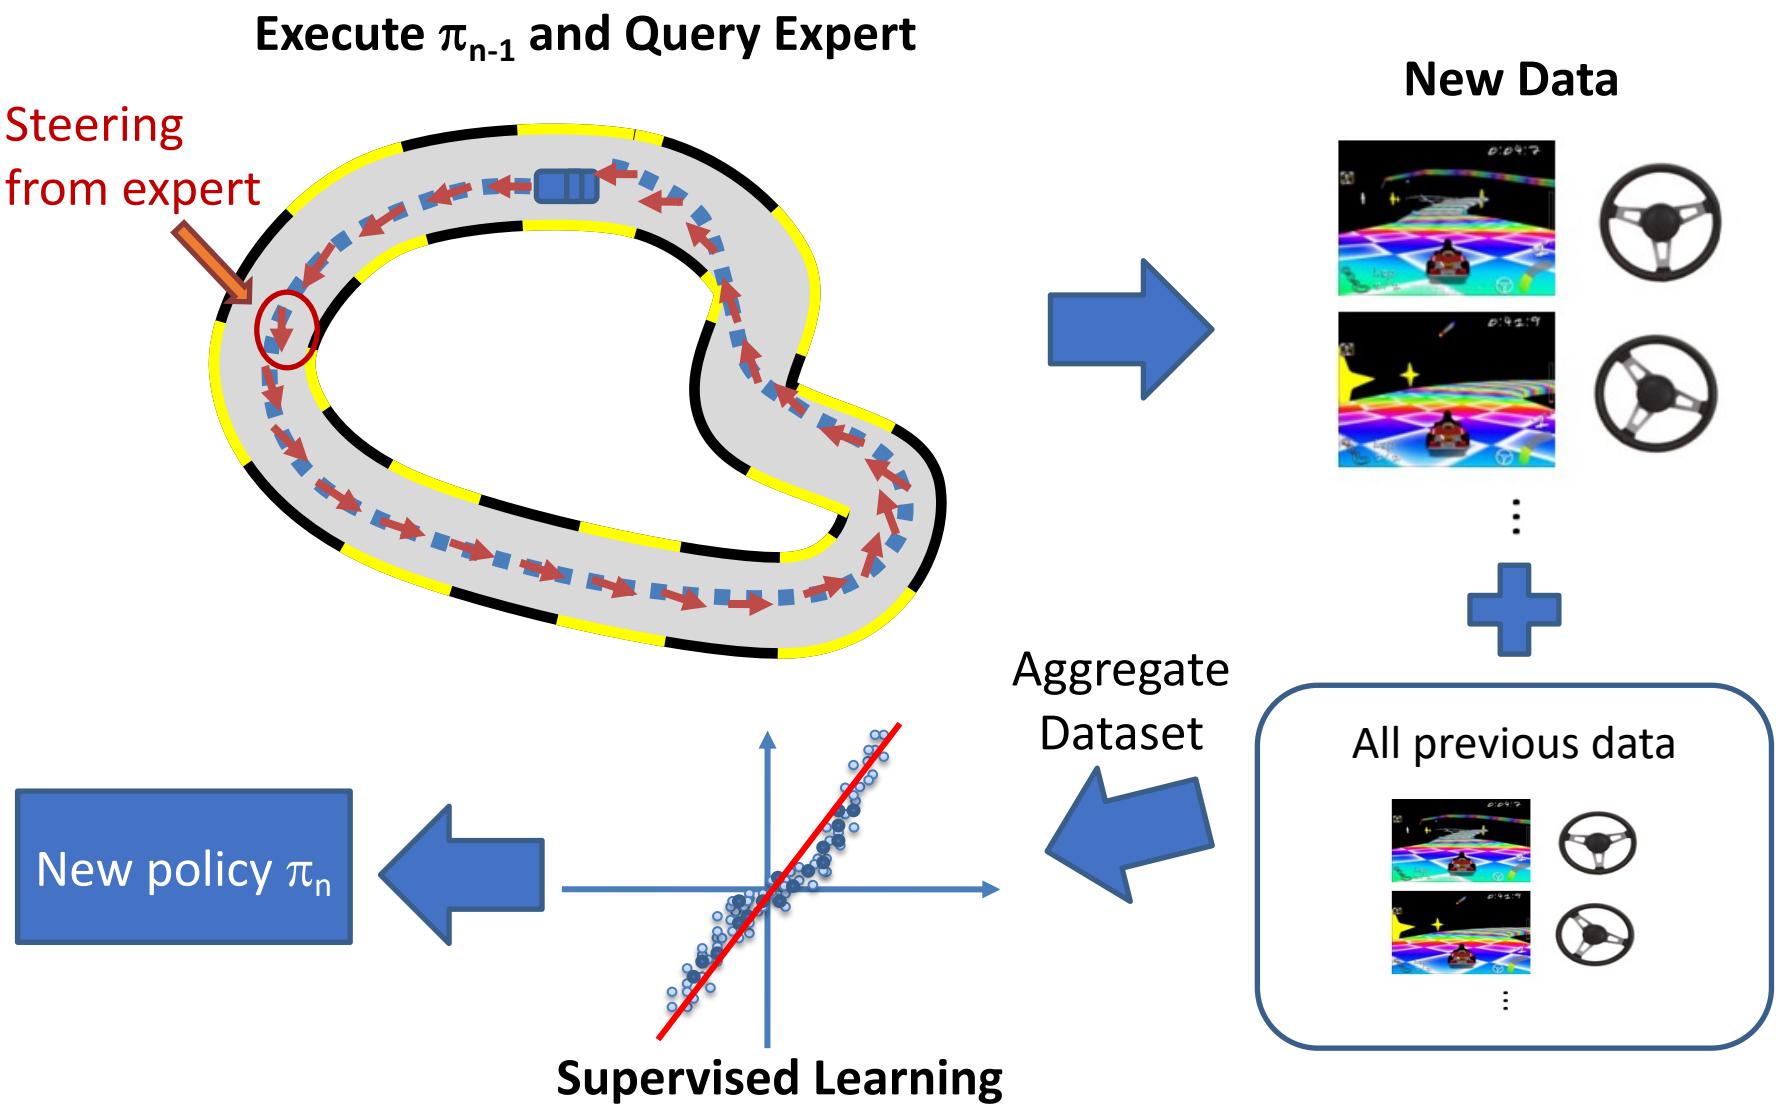

It Works!

- Left: BC; Right: DAgger

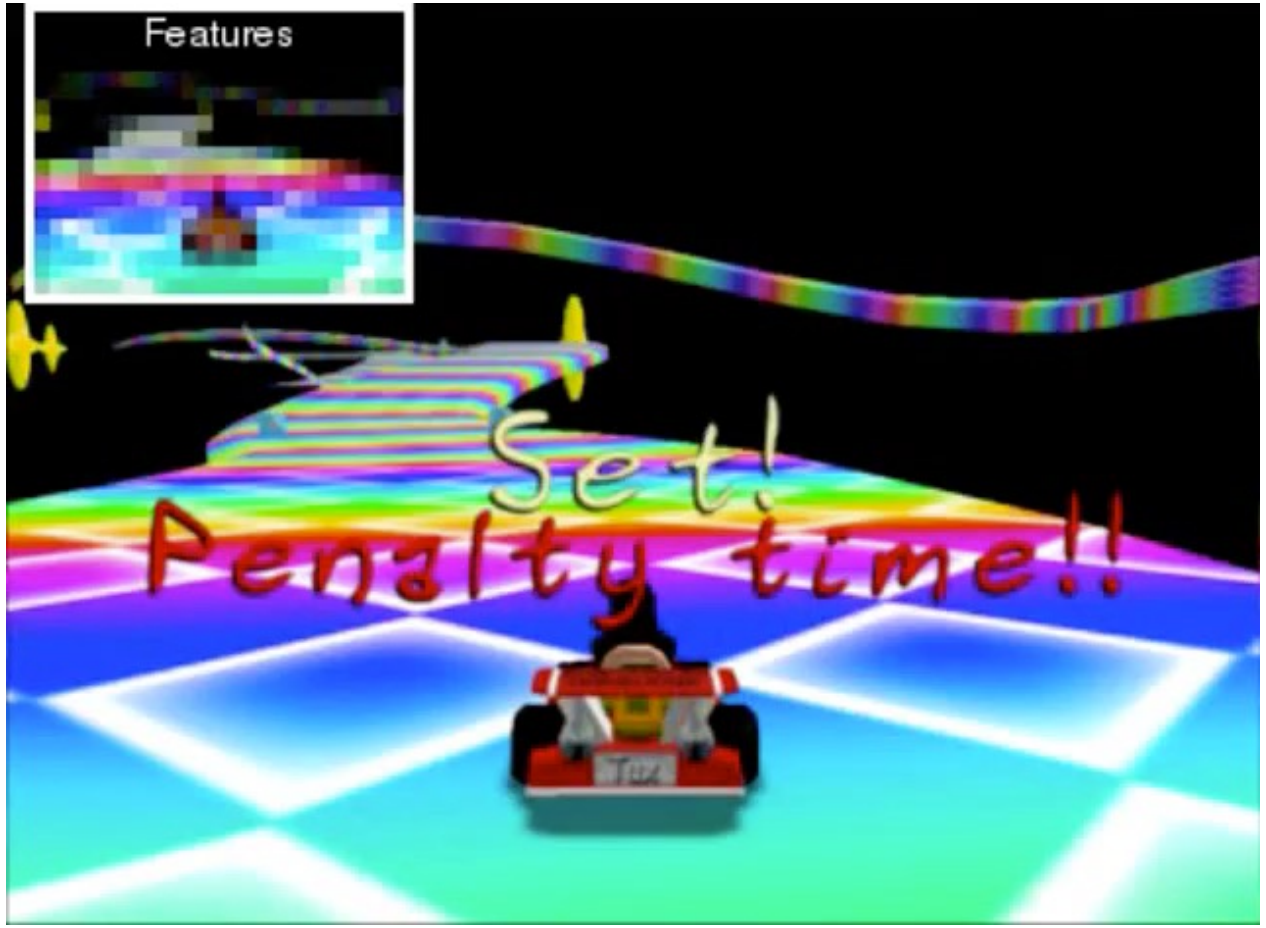

Summary of DAgger

- ❑ From CMU (2011)!
- ❑ It is essentially an online learning algorithm
  - With regret guarantees!
- ❑ Problem: need to keep querying the expert

1. train $\pi_\theta(\mathbf{a}_t|\mathbf{o}_t)$ from human data $\mathcal{D} = \{\mathbf{o}_1, \mathbf{a}_1, \ldots, \mathbf{o}_N, \mathbf{a}_N\}$
2. run $\pi_\theta(\mathbf{a}_t|\mathbf{o}_t)$ to get dataset $\mathcal{D}_\pi = \{\mathbf{o}_1, \ldots, \mathbf{o}_M\}$
3. Ask human to label $\mathcal{D}_\pi$ with actions $\mathbf{a}_t$
4. Aggregate: $\mathcal{D} \leftarrow \mathcal{D} \cup \mathcal{D}_\pi$

A Reduction of Imitation Learning and Structured Prediction to No-Regret Online Learning

Stéphane Ross
Robotics Institute
Carnegie Mellon University
Pittsburgh, PA 15213, USA
stephaneross@cmu.edu

Geoffrey J. Gordon
Machine Learning Department
Carnegie Mellon University
Pittsburgh, PA 15213, USA
ggordon@cs.cmu.edu

J. Andrew Bagnell
Robotics Institute
Carnegie Mellon University
Pittsburgh, PA 15213, USA
dbagnell@ri.cmu.edu

Thank You!