

RcourseRecap

Travis Park

19 January 2018

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

Clear R's brain

Install libraries

```
## -- Attaching packages ----- tidyverse 1.2.1 --
## v ggplot2 2.2.1      v purrr   0.2.4
## v tibble  1.4.1      v dplyr   0.7.4
## v tidyr   0.7.2      v stringr 1.2.0
## v readr   1.1.1      v forcats 0.2.0

## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()    masks stats::lag()
```

Reading in compensation dataset

Add image from the internet


Make 3 graphs from the compensation dataset

Graph1


```
## Warning: Removed 1 rows containing missing values (geom_point).
```




Figure 1: Whale_memes_are_the_best

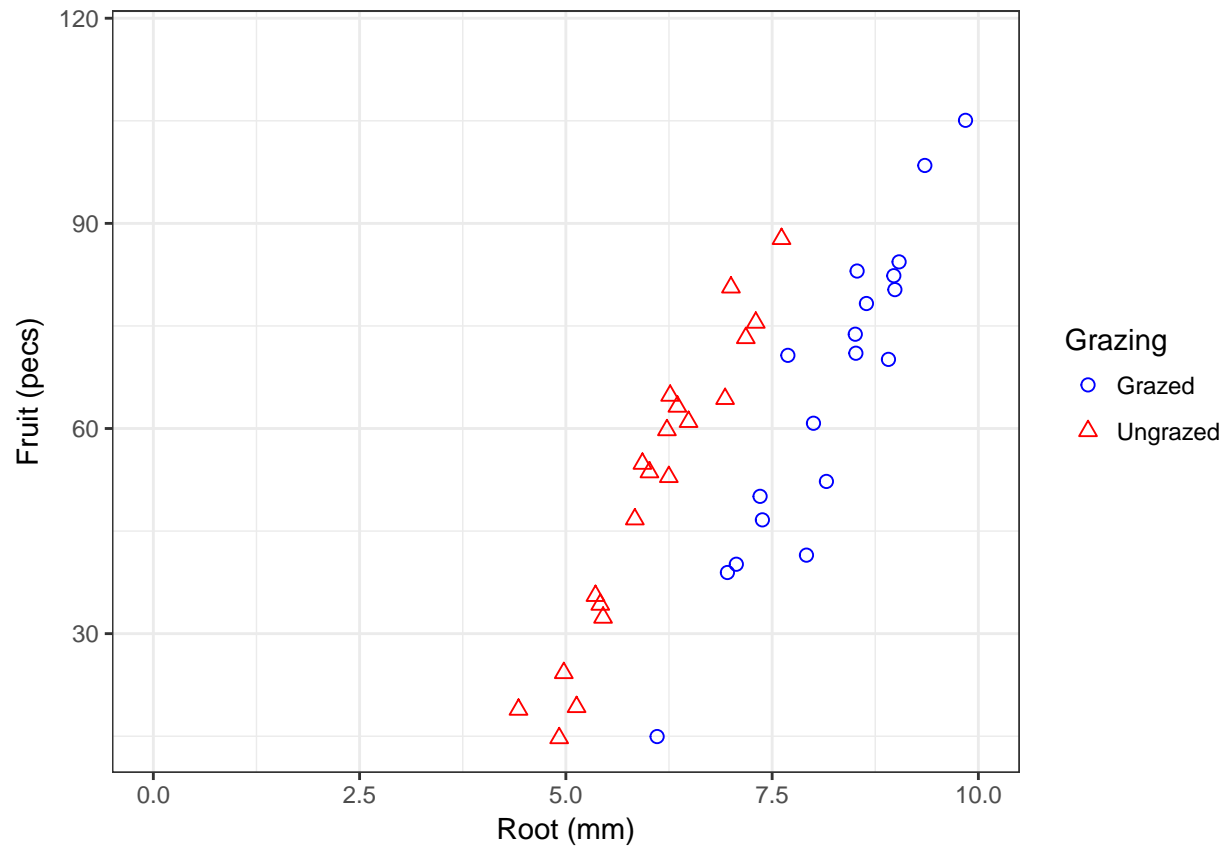

Graph2

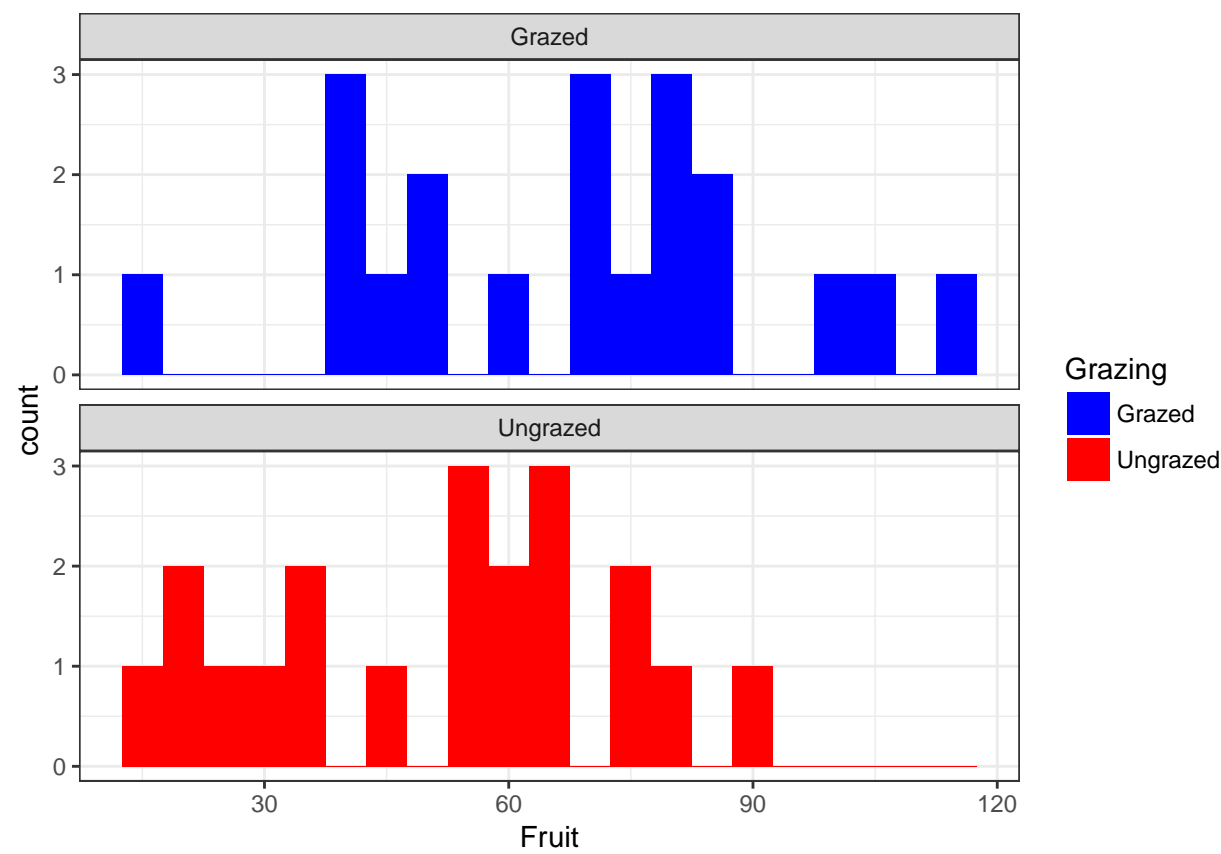

Graph3

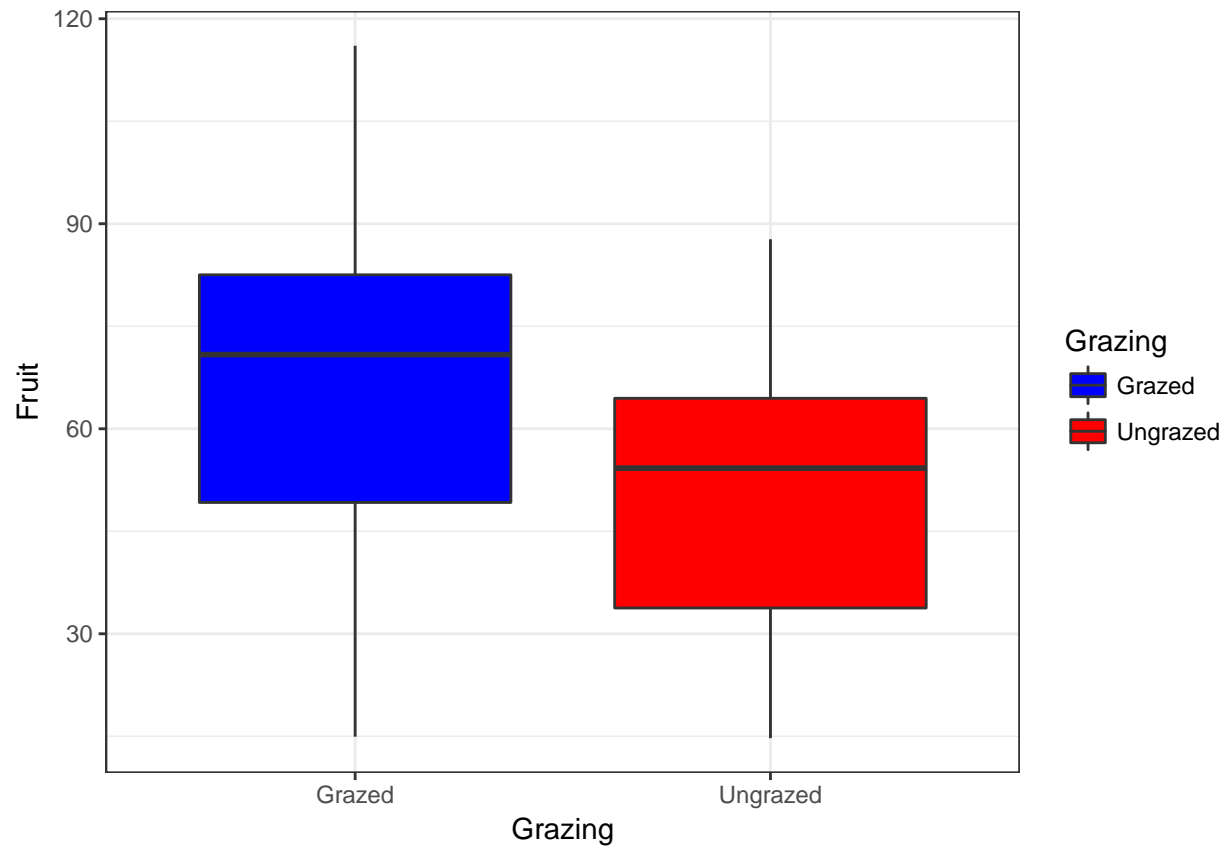

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.