



2012
INTERNATIONAL
PRODUCT
CATALOGUE
E9000.0047G

The Bunn-O-Matic® Corporation

A History of Innovation and Commitment

Understanding and responding to customer requirements has always been important to the Bunn-O-Matic Corporation (BUNN®). Founded upon five generations of family entrepreneurship, BUNN has become a global partner you can count on for reliable beverage equipment and outstanding post-purchase support wherever customers are served.

Since 1957, BUNN has been at the forefront of beverage equipment innovation: inventing the flat-bottom paper filter for commercial use, the pour-over coffee brewer, and the first commercial iced tea brewer that uses fresh leaves versus instant mix. As customers entered the digital age, BUNN also embraced sophisticated new technology to meet changing needs.

The company is committed to delivering the highest possible quality beverage in each cup for every occasion through its home brewer collection and a full line of dispensed beverage commercial solutions including coffee and iced tea brewers for multi-cup and single-cup use; compact super-automatic espresso machines; coffee bean grinding systems; dispensers for exceptional tasting cold or hot beverages such as juice, lemonade, hot chocolate, cappuccino and iced coffee; liquid coffee dispensers; gourmet ice systems; precise temperature water systems; water quality systems; paper filters and other related products.

Recognizing that the business operation impacts the total environment, BUNN maintains a focus on preserving the earth for future generations throughout the supply chain. The company is driven to continually identify ways to incorporate this respect for our natural resources into daily business practices and products. BUNN also actively engages with professional industry organizations to support important educational and legislative initiatives, including support through volunteerism and sponsorship of organizations doing important work in coffee- and tea-producing countries.

The BUNN core values of honesty, integrity, and courtesy have created a network of thousands of loyal commercial and home customers who are served by the company's brand promise, A Partner You Can Count On™. The global headquarters are located in Springfield, Illinois, USA, where employees strive for total customer satisfaction through superior equipment and unmatched customer service with support from five additional United States locations, as well as warehouses or offices in Canada, Mexico, Brazil, Germany, China and the United Kingdom.

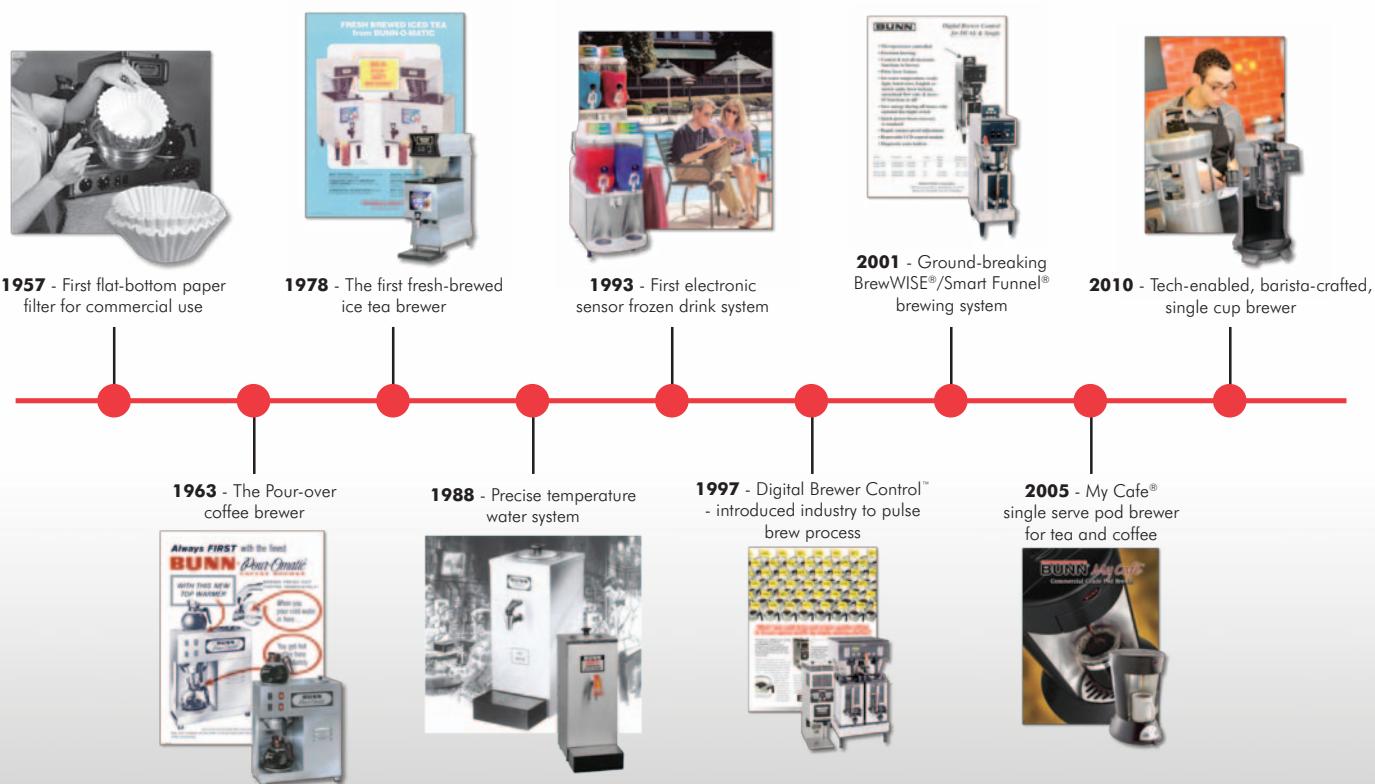


TABLE OF CONTENTS


1

Air Infusion Brewer


2

Pourover Brewers


6

 Automatic Decanter
Brewers and Urns

10

 Thermal Coffee
Brewers

19

 Satellite Coffee
Brewers

34

Coffee Grinders


40

 Liquid Coffee High
Volume Systems

42

 Iced Tea and Coffee
Brewers

46

Hot Beverage Systems


50

 Cold Beverage
Systems

54

 Frozen Beverage
Systems

56

 Precise Temperature
Water Dispensers

60

Related Products

Coffee Servers	16,18,23-24,29,32
Iced Tea/Coffee Dispensers.....	45
Decanters and Warmers	62-63
Universal Airpot Racks	63
Stock Funnels.....	64
Special Purpose Funnels	65
Drip Trays	65-67

CATALOG ICON LEGEND


 Detailed descriptions are
available on pages 70-71.

AGENCY SYMBOLS



NSF International


 Electrical Testing
Labs Sanitation

 Electrical Testing
Labs Safety

 GOST-R Russia
Safety, Sanitation, EMC

 KETI
South Korea Safety

 Kingdom of
Saudi Arabia


CE Listed



Argentina Safety


 China Compulsory
Certification


UL Listed



C-TICK



INMETRO

FEATURED ITEMS



1

**trifecta® Single Cup
Air Infusion™ Brewer**



2

**392®
Coffee Brewers**



36

**Weight Driven
Grinder**



43

**Infusion Series®
Iced Tea and Coffee**



47

**iMIX®-3S
Oatmeal Dispenser**



49

**iMIX-14
Hot Beverage**



56

**H5E Element
Hot Water Dispenser**



trifecta



AIR
INFUSION
BREWER

trifecta® Single Cup Air Infusion™ Brewer



Tech-enabled, barista-crafted single cup brewer that heightens the quality of coffee and tea


Every coffee has a voice. With the trifecta, the barista creates an experience which unlocks the nuances of that coffee. Using an Air Infusion single cup process, the trifecta brews so that each coffee's unique voice resonates.

trifecta BREWING PHASES

- Wetting:** The saturation of the coffee grounds can be controlled to get the percentage of water and pause appropriate for that coffee.
- Extraction:** Air is injected into a pressurized chamber so that the grounds are agitated -- the result: uniformity of extraction and a complex beverage that will be enjoyed by a coffee lover.
- Hydrolysis:** Air presses the beverage through a metal screen that filters out coffee grounds while preserving coffee oils and aromatics for a deep-bodied, unique coffee experience.

See *trifecta grinder* on page 39.

Visit www.trifectaexperience.com for more information.

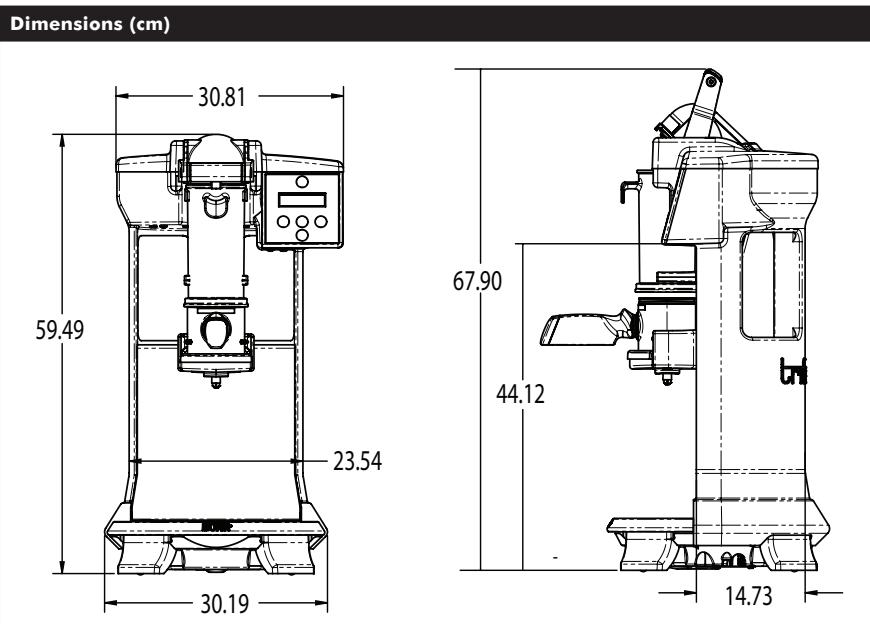

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agencies
41200.0001	trifecta	18.9 kg	230	5.8	1330	50/60	1	Yes	CE
41200.0002			100	14	1400				KC
41200.0004			220	6.0	1330	60			UL
41200.0003			230	5.8	1330	60			

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

POUROVER BREWER



392*

Coffee Brewers with 2 Warmers

- Space saving 21.1 cm wide.
- Pourover brewer requires no plumbing – completely portable.
- Consistently brews perfect coffee in about 3 minutes at 92°C.
- All stainless steel tank construction.
- Two separately controlled warmers.
- Includes paper filter pack and pour-in pitcher .
- Ready light.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



Warmer Stands

See page 63 for details




Decanters

See page 62 for details



Dimensions (cm)

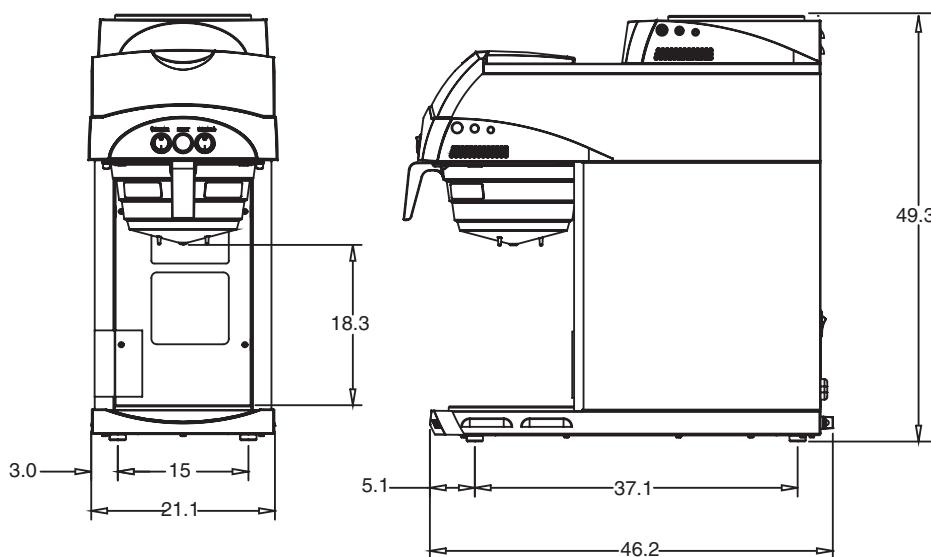

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
37800.0106	392		100	14.3	1425	60		NEMA	
37800.0107								UK	CE KSA
37800.0108	392	10.9 kg	220-240	9.6-10.5	2300	50/60	1	EURO	CE PG
37800.0110								No	CE CCC

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

POUROVER BREWER



VP17-1*

Coffee Brewers with 1 Warmer

- Under 45.2 cm tall.
- Brews up to 22 litres of coffee per hour.
- Pourover brewer requires no plumbing – completely portable.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS

SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



Power Cord

Product No.: 27728.0005

Warmer Stands

See page 63 for details




Decanters

See page 62 for details



Dimensions (cm)

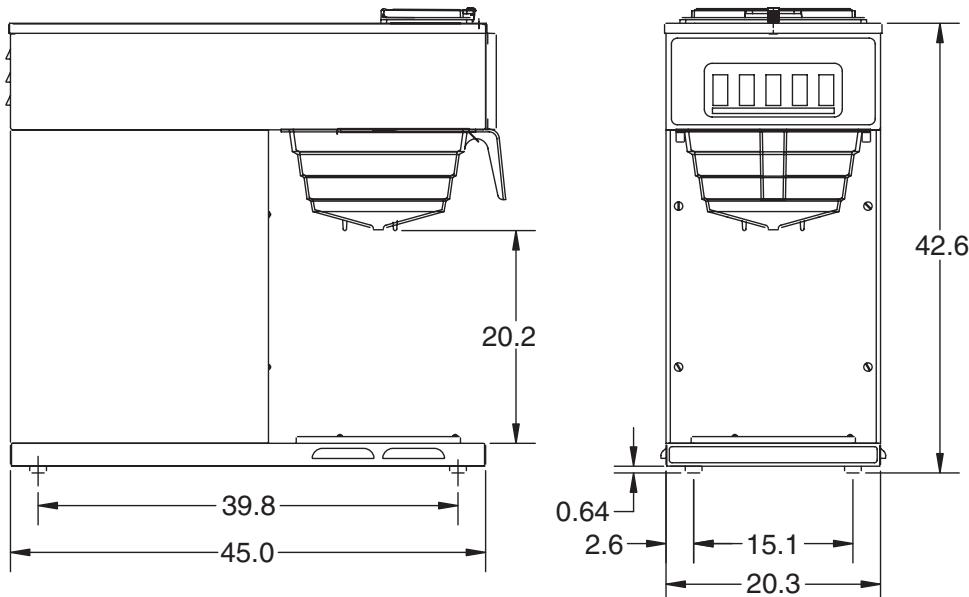

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
13300.0024	VP17A-1, black, plastic funnel	9.6 kg	220-230	9-9.5	2000-2160	50/60	1	No	CE KSA

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

POUROVER BREWER



VP17-2*

Coffee Brewers with 2 Warmers

An integral part of any office coffee service program

- Brews 17.4 to 22 litres of coffee per hour.
- Requires no plumbing – completely portable.
- Just pour cold water in top and coffee brews immediately.
- Two separately controlled warmers.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



Power Cord

Product No.: 27728.0005

Warmer Stands

See page 63 for details




Decanters

See page 62 for details



Dimensions (cm)

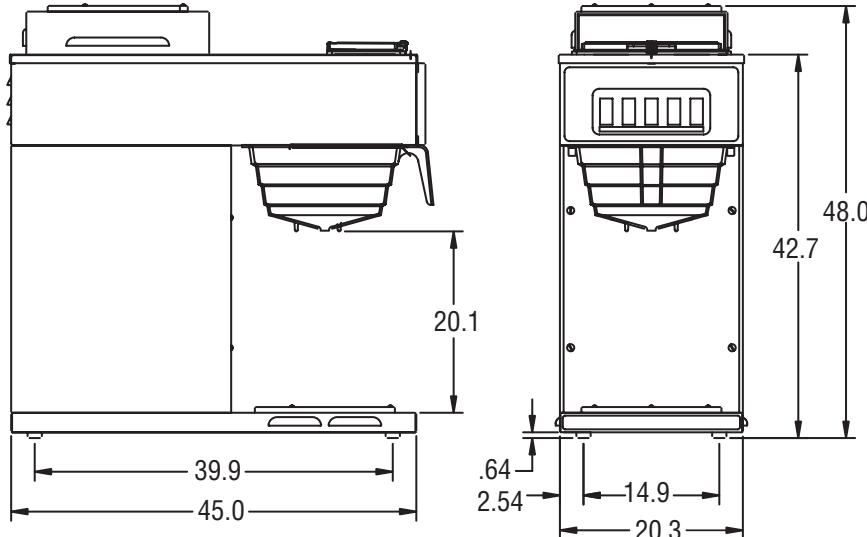

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
13300.0015	VP17A-2	11.3 kg	230	9.8	2260	50/60		No	CE KSA
13300.0038	VP17A-2	10.9 kg	220	9.5	2100	60			
13300.0041	VP17A-2, Master ON/OFF		220-230	9.5-10	2100-2260	50/60	1	UK	CE KSA
13300.0053	VP17A-2, IRAM	11.3 kg	230	9.8	2260			No	
13300.0054	VP17A-2, INMETRO					60			

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

POUROVER BREWER



VP17-3*
2 Upper Warmers



VP17-3*
3 Lower Warmers

Coffee Brewers with 3 Warmers

An integral part of any office coffee service program

- Brews 13.6 to 28.4 litres of coffee per hour.
- Requires no plumbing – completely portable.
- Just pour cold water in top and coffee brews immediately.
- Three separately controlled warmers.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



Warmer Stands

See page 63 for details




Decanters

See page 62 for details



Dimensions (cm)

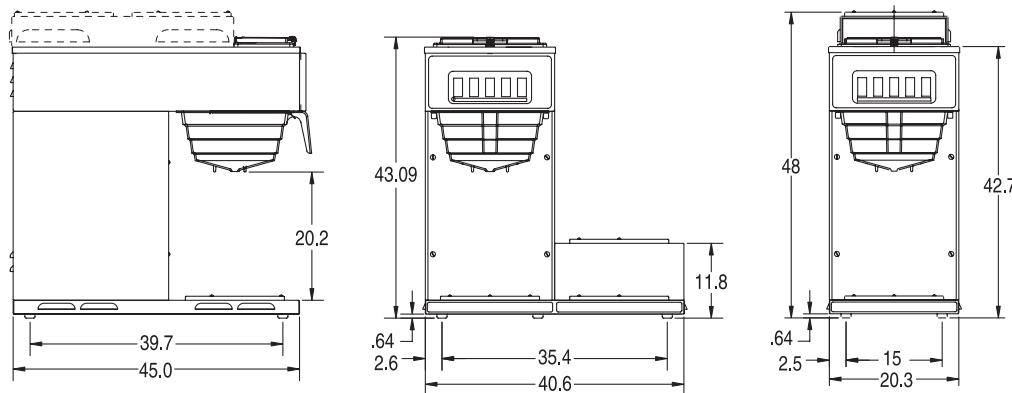

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
13300.0020	VP17A-3, 3 lower warmers	14.1 kg	220-230	15-15.5	3290-3560	50/60	1	No	CE
13300.0028	VP17B-3, 1 lower/2 upper warmers	12.7 kg	100	15	1495	50		Yes	
13300.0049	VP17A-3, 3 lower warmers SST, Korea	14.1 kg	230	15.5	3290-3560	60		No	CE

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

AUTOMATIC DECANTER COFFEE BREWERS AND URNS



AXIOM*
3 Lower Warmers



AXIOM*
2 Upper Warmers

AXIOM® Coffee Brewers

Medium volume brewing solution featuring simple operation, precise extraction control

- Brews up to 28 litres of coffee per hour.
- Large 5.9 litres tank provides back-to-back brewing capacity.
- Digital display in English/Spanish for easier programming and control. Display capable of showing English or Metric measurements.
- BrewWIZARD® technology incorporates simplified programming with a LCD display.
- BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- Digital temperature control for accuracy

- Adjusts automatically to varying water pressure.
- Pot level, cold brew lock-out and tank temperature set easily from advanced touch pad on front of machine.
- Electronic diagnostics and built in tank drain make service easier.
- Coffee extraction controlled with pre-infusion or pulse brew and digital temperature control.
- Automatic warmer shut-off.
- Energy Saver Mode.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



ED-17-TL

Product No.: 30201.1001

Product No.: 30200.1000



Inlet Hose Assembly


Product No.: 32865.1001

Decanters

See page 62 for details



Dimensions (cm)

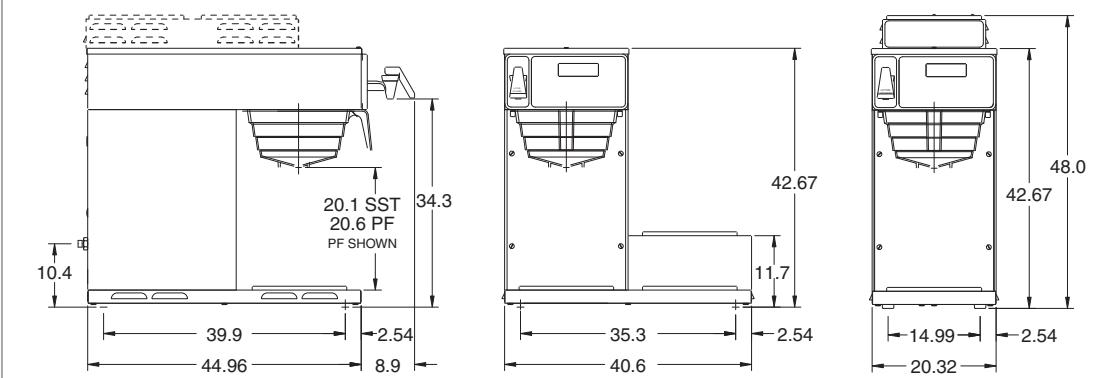

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
38700.0004	AXIOM 1 lower warmer, 2 upper warmers	13.6 kg	230	9	2100				
38700.0005	AXIOM 3 lower warmers	14.1 kg							
38700.0033	AXIOM-3, 1 upper warmer, 2 lower warmers	13.6 kg	220 - 230	15.4 -16	3400 -3600	50/60	1	Yes	
38700.0051	AXIOM 1 upper warmer, 2 lower warmers, 1/2 batch, SST funnel	13.6 kg	200	19	3800				
38700.0055	AXIOM 1 upper warmer, 2 lower warmers, 1/2 batch, SST funnel	14.1 kg	100	15	1500				

Plumbing: 138-621 kPa. Machines supplied with 1/4" male flare fitting. All plumbed models that are CE listed feature backflow prevention.

AUTOMATIC DECANTER COFFEE BREWERS AND URNS



CWTF*
2 Upper Warmers



CWTF*
3 Lower Warmers

Coffee Brewers with Upper/Lower Warmers

- Brews up to 28.4 litres of coffee per hour.
- Hot water faucet and pourover feature on most models.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



Inlet Hose Assembly

Product No.: 32865.1001

ED-17-TL

Product No.: 30201.1001

Product No.: 30200.1000




Decanters

See page 62 for details



Dimensions (cm)

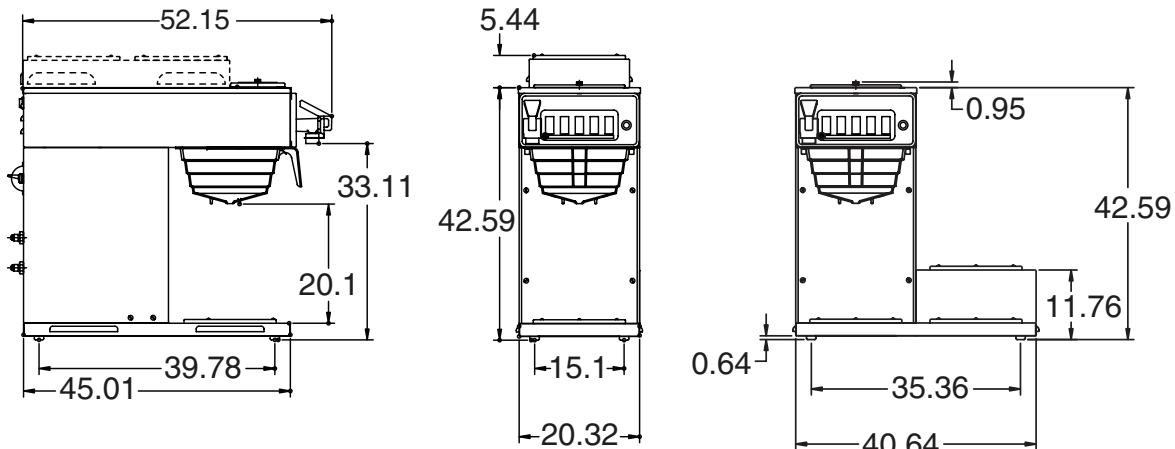

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
12950.0277	CWTF35A, 1 lower/2 upper warmers, plastic funnel	13.6 kg	220-230	15	3300	50/60	1	No	CE
12950.0317	CWTFA, 1 lower/2 upper warmers, plastic funnel		230	10.4	2400				CE
12950.0413	CWTF35A, 1 lower/2 upper warmers	14.5 kg	220	15	3300	60		Yes	KC CE
12950.0414	CWTFA, 1L/2U warmers, plastic funnel			10	2200				
12950.0448	CWTF35A, 1 lower/2 upper warmers, plastic funnel	14.5 kg	230	10.4	2400	50/60		Yes	
12950.0502	CWTF35A, 1 lower/2 upper warmers			14.2	3260				
12950.0501	CWTFA, 1 lower/2 upper warmers, gourmet funnel	14.1 kg							

Plumbing: 138-621 kPa. Machines supplied with 1/4" male flare fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

AUTOMATIC DECANTER COFFEE BREWERS AND URNS

Coffee Urns

- Brews up to 43.2 litres of coffee per hour.
- Automatic drip brewing of delicious coffee every time.
- Large water tank - holds 37.9 litres.
- Draw off hot water during brewing cycle without affecting delivery of coffee.
- Can brew full or half batches.
- Top mounted components for ease of service.



SRU*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Urn Filter Pack

Product No.: 20109.0000



EQHP-10

Product No.: 39000.0004



EQHP-25

Product No.: 39000.0005



Product No.: 39000.0002

Drip Tray

Product No.: 06465.0000



Inlet Hose Assembly


Product No.: 32865.1002

Decanters

See page 62 for details



Dimensions (cm)

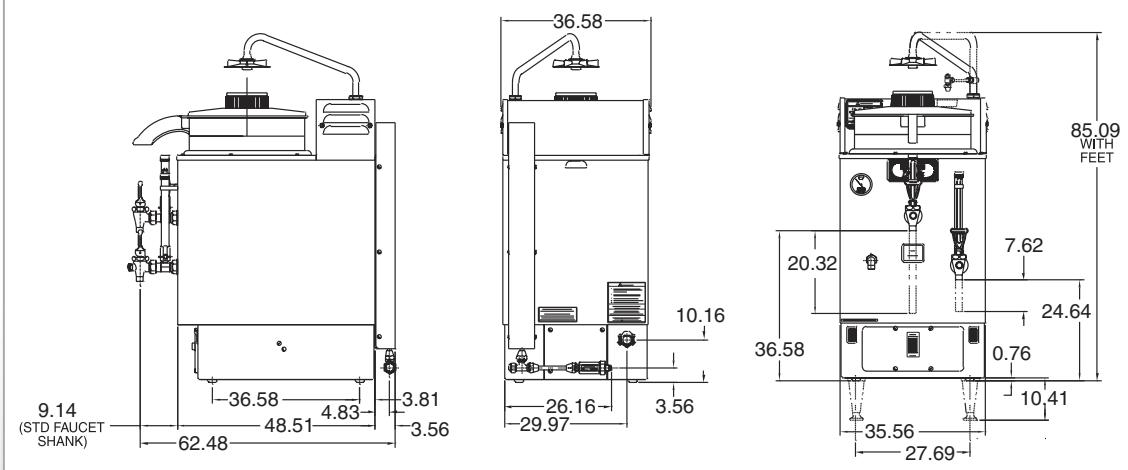

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
06325.0016	SRUA with shroud	37.2 kg	230	24	5500	50	1	No	CE

Plumbing: 138-621 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

AUTOMATIC DECANTER COFFEE BREWERS AND URNS

Coffee Urns

- Brews 61.7 to 71.2 litres of coffee per hour.
- Automatic drip brewing of delicious coffee every time.
- Large water tank - holds 75.7 litres.
- Draw off hot water during brewing cycle without affecting delivery of coffee.
- Can brew full or half batches.
- Top mounted components for ease of service.



RELATED PRODUCTS SOLD SEPARATELY

Urn Filter Pack

Product No.: 20109.0000



Drip Tray

Product No.: 07284.0000



EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.001

EQHP-25

Product No.: 39000.0005

Inlet Hose Assembly

Product No.: 32865.1002

EQHP-25L

Product No.: 39000.0002




Decanters

See page 62 for details



Dimensions (cm)

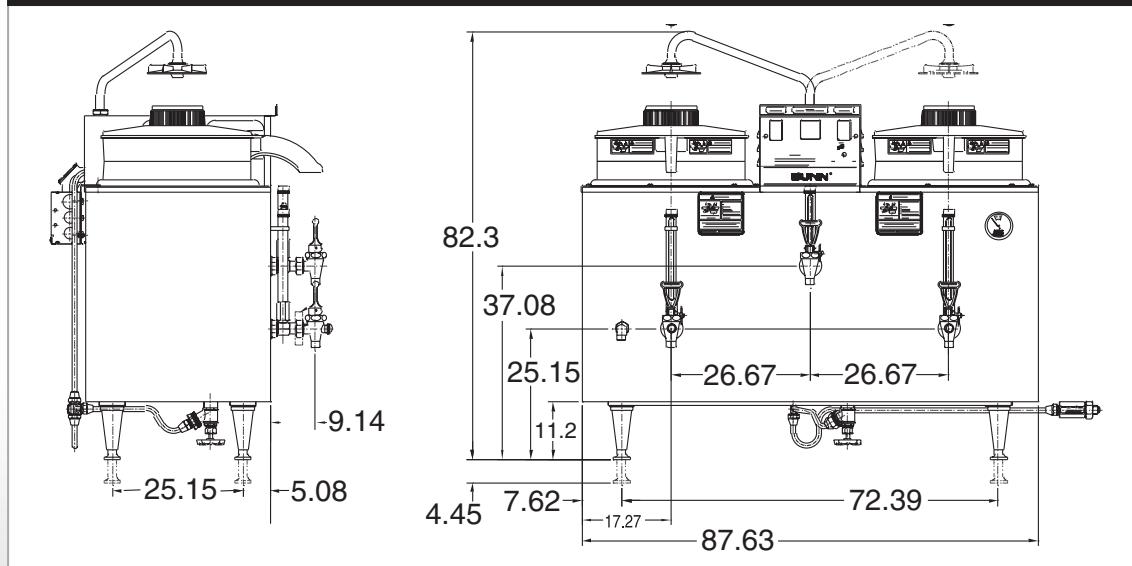

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
20500.0016	U3A with shroud	37.2 kg	230	26.5	6100	50/60	1	No	CE

Plumbing: 138-621 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.



THERMAL COFFEE BREWERS

Infusion Coffee Brewers

- Large 11.36 litre tank provides back-to-back brewing capacity.
- Three brew buttons allow for 3 separate brewing profiles. Two programmable batch switches allow full and half batch brewing.
- Brews into 2.5 to 3.8 litre airpots and 3.8 and 5.7 litre baseless ThermoFresh® servers.
- BrewWISE® intelligence with pre-infusion, pulse brew and by-pass for maximum flavour extraction. 
- Energy Saver Mode. 
- Digital display in English/Spanish/Katakana for easier programming and control. Advertising messages and machine status also displayed.
- Display capable of showing English or Metric measurements.



ICB*



ICB TWIN*

ICB TWIN

- Large 21.2 litre tank allows brewing up to 71.5 litres per hour of perfect coffee.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS

SOLD SEPARATELY

Single/Dual Filter Pack
Product No.: 20138.0000



EQHP-10
Product No.: 39000.0004




EQHP-10L
Product No.: 39000.0001

Inlet Hose Assembly
Product No.: 32865.1002



Servers and Stands
See pages 16, 23-24 for details

Dimensions (cm)

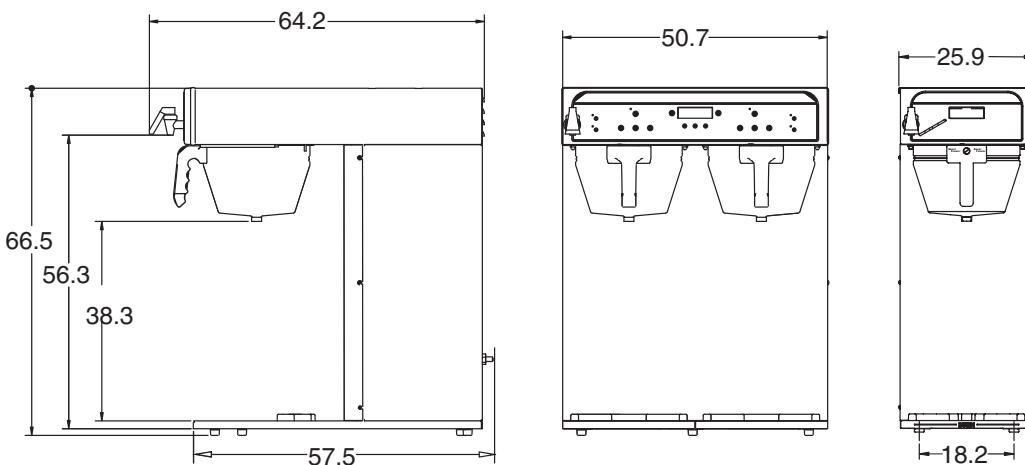

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency	
36600.0001	ICBA	21.5 kg	230	13	3000	50/60	1	No		
36600.0003	ICBA, INMETRO			60				Yes		
36600.0013	ICBA, IRAM		200	14	3200	50/60				
36600.0002	ICBB			18	3600			No		
37600.0008	ICBA-Twin	21.5 kg	230	26	6000					

Plumbing: 138-621 kPa. Machine supplied with 3/4" hose thread adapter and fitting. All plumbed models that are CE listed feature backflow prevention.

SmartWAVE® Low Profile Brewers

Low profile brewer featuring SmartWAVE technology, simple operation, and flexible server options

- Brews up to 14.8 litres of coffee per hour.
- Brew into 1.9L thermal carafe utilizing the slide-out booster tray.
- Adjustable legs to accommodate up to 3.0L[†] lever action, 2.5L push button BUNN airpots, and 2.5L thermal server. ([†]Due to brewer's capacity, it's recommended you not brew larger than 2.5 litres of finished product.)
- Low profile brewer ideal for counter top applications, adjustable height dimensions from 43cm to 47.5cm, fixed 22.2cm width and 43.8cm depth.
- SmartWAVE® technology increases turbulence in the brew funnel. 
- Ensures coffee brew quality with cold brew lock out capability.
- Hot water faucet.
- Energy Saver Mode. 
- Analog switches accompanied by red/green LED for programming.
- LED provide brewer status (ready, heating, brewing).
- Choice of three pulse brew routines to adjust your flavour profile.



THERMAL COFFEE BREWERS



WAVE-S*

RELATED PRODUCTS SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



ED-17-TL

Product No.: 30201.1001



EQ-17-TL

Product No.: 30200.1000


Servers

See pages 16 and 18 for details



*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

Dimensions (cm)

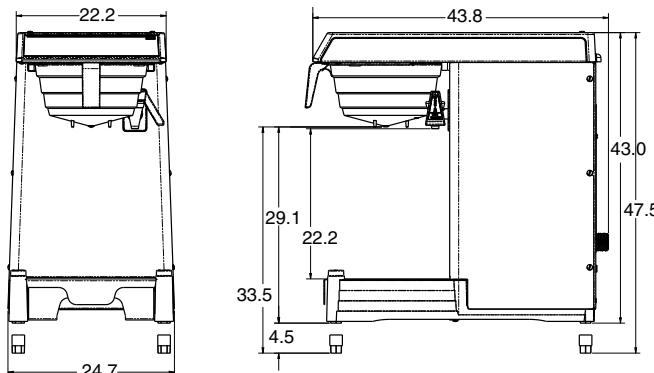

Brewer Position	BUNN Part #	Description	Brewer Height
Utilizing thermal carafe tray	36029.0001	1.9L deluxe thermal carafe	42.93cm
Utilizing thermal carafe tray	40163.0000	1.9L economy thermal carafe	42.93cm
LP feature (lowest)	39430.0000	1.9L thermal pitcher	42.93cm
LP feature (lowest)	32125.0000	2.5L lever-action airpot	42.93cm
Extend legs	32130.0000	*3.0L lever-action airpot	44.45cm
Extend legs	28696.0002	2.2L push-button airpot	45.72cm
Extend legs	13041.0001	2.5L push-button airpot	46.99cm
Extend legs	23300.0010	2.5L thermal server	46.99cm

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency		
39900.0007	WAVE-S-BF-APS	11 kg	220-230	8 - 8.5	1800-2000	50/60	1	Yes	  		
39900.0016	WAVE-S-BF-APS										
39900.0017	WAVE-S-BF-APS, gourmet funnel		230	8.5	2000	60			 		
39900.0018	WAVE-S-BF-APS										

Plumbing: 138-621 kPa. Machine supplied with 1/4" male flare fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

THERMAL COFFEE BREWERS

AXIOM® Airpot Brewers

Medium volume brewing solution featuring simple operation, precise extraction control

- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels. 
- BrewWIZARD® technology simplifies brewer programming. 
- Brews directly into 1.9 to 3 litre airpots.
- Convenient airpots keep coffee hot for hours.
- Ensures coffee brew quality with cold brew lock out capability.
- Electronic diagnostics and built in tank drain for ease of service.
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature control.
- Hot water faucet.
- Energy Saver Mode. 



AXIOM-APS*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



ED-17-TL

Product No.: 30201.1001



EQ-17-TL

Product No.: 30200.1000

Inlet Hose Assembly

Product No.: 32865.1001

Gourmet Funnel Filter Pack

Product No.: 20157.0000



Gourmet Funnel

Product No.: 34559.0000




Airpots

See pages 16 for details



Dimensions (cm)

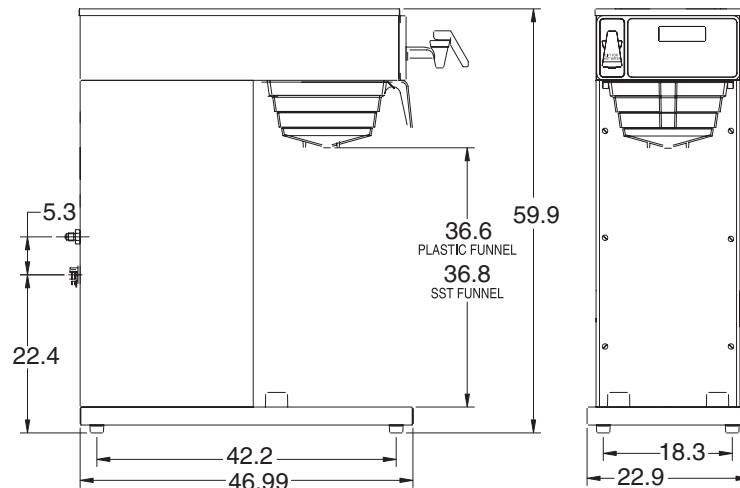

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
38700.0035	AXIOM-APS	16.3 kg	220 - 230	15.4 - 16	3400 - 3600	50/60	1	Yes	
38700.0037	AXIOM-APS		230	15.7	3600	50/60			

Plumbing: 138-621 kPa. Machine supplied with 3/8" male flare fitting. All plumbed models that are CE listed feature backflow prevention.

THERMAL COFFEE BREWERS



CWTF-APS*

Airpot Brewers

- Brews 14.6 to 28.4 litres of coffee per hour.
- Brews directly into 1.9 to 3 litre airpots.
- Convenient airpots keep coffee hot.
- Airpots are easily transported to remote meeting rooms, breakfast bars, etc.
- Pourover model available.
- Pourover feature included on automatics.
- Digital timer enables users to make brew cycle adjustments from the front panel.
- Gourmet funnel available for use with heavier throw weights of coffee.
- Hot water faucet on CWTF models.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



ED-17-TL

Product No.: 30201.1001



EQ-17-TL

Product No.: 30200.1000

Gourmet Funnel Filter Pack

Product No.: 20157.0000



Gourmet Funnel

Product No.: 34559.0000




Inlet Hose Assembly

Product No.: 32865.1001



Dimensions (cm)

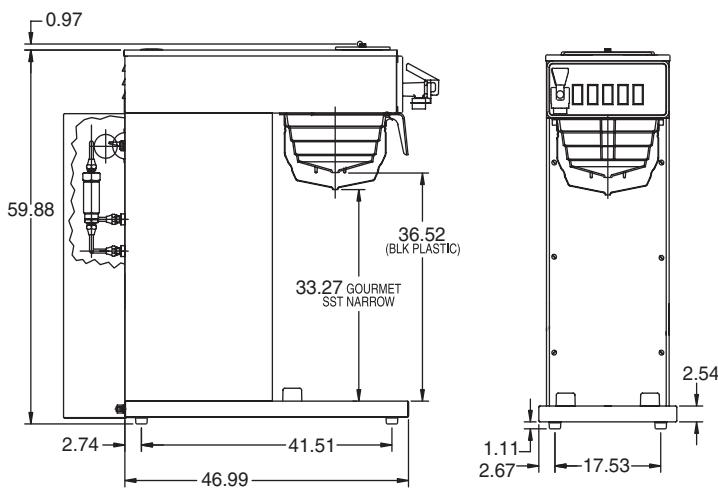

Airpots

See pages 16 for details

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
POUROVER									
23001.0024	CWA-APS, pourover, no faucet, plastic funnel	12.7 kg	230	9.0	2075	50/60	1	No	CE
23001.0064	CWA-APS, pourover, no faucet, plastic funnel		220	8.6	1900	60			CE
23001.0074	CWA-APS, pourover, plastic funnel, Master On/Off			9.0	2075	50/60	UK Plug	CE	
23001.0093	CWA-APS, pourover, no faucet, plastic funnel		230	8.3	1900	50			CE
23001.0094	CWA-APS, pourover, no faucet, gourmet funnel			14.2	3260	60	Yes		
AUTOMATIC									
23001.0019	CWTFA35-APS, plastic funnel	16.8 kg	230	14.2	3260	50/60	1	No	CE
23001.0021	CWTFA-APS, plastic funnel			9.0	2075				CE

Plumbing: 138-621 kPa. Machine supplied with 1/4" male flare fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

THERMAL COFFEE BREWERS



CWTF Twin APS*
Pictured with standard funnel

Twin Airport Brewers

- Brews up to 56 litres of perfect coffee per hour.
- Convenient airpots keep coffee hot and are easily transported.
- Accommodates two 1.9 to 3.0 litre airpots.
- Equipped with tank drain.
- Gourmet funnel allows for heavier throw weights of coffee.
- Hot water faucet

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Gourmet Funnel Filter Pack

Product No.: 20157.0000



Inlet Hose Assembly

Product No.: 32865.1002

EQHP-10

Product No.: 39000.0004





Airpots

See pages 16 for details



Dimensions (cm)

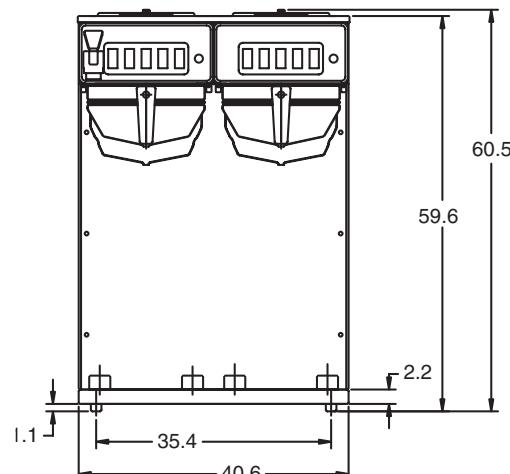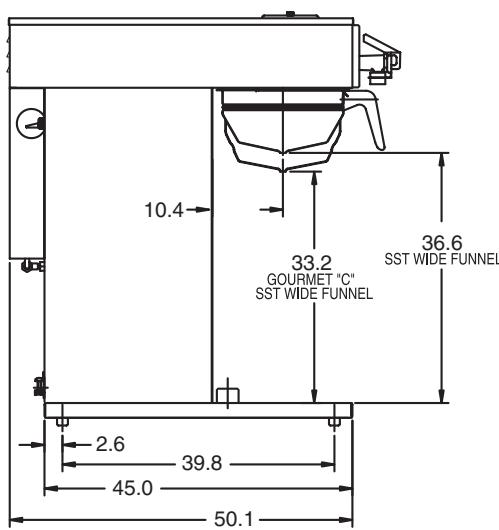

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
23400.0044	CWTFA TWIN-APS, gourmet funnel	29.1 kg	230	24	5500	50/60	1	Yes	CE

Plumbing: 138-621 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.



CWTF-TC*

Thermal Carafe Coffee Brewers

- Brews up to 22 litres of coffee per hour.
- Accepts thermal carafe up to 21.6cm tall.
- Use in quick-turn environment where high quality coffee is continuously refreshed.
- Pour-over feature on automatic models.
- Hot water faucet on CWTF models

RELATED PRODUCTS

SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



Thermal Carafes

See pages 16 for details



ED-17-TL

Product No.: 30201.1001




EQ-17-TL

Product No.: 30200.1000



*All decanters, airports, servers and holding devices are sold separately unless stated otherwise.

Dimensions (cm)

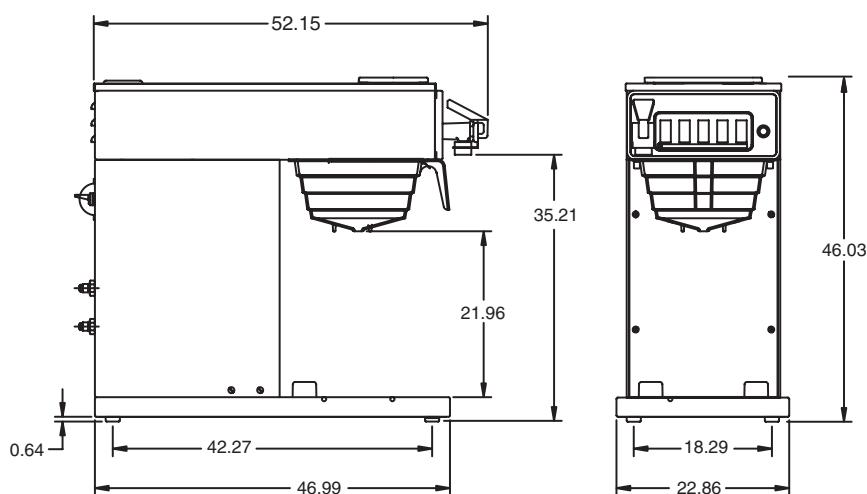

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
POUROVER									
23001.0067	CWA-TC, pourover, no faucet, plastic funnel	12.7 kg	230	9.0	2075	50/60	1	UK Plug	
AUTOMATIC									
12950.0362	CWTFA-TC, plastic funnel	14.1 kg	230	9.0	2075	50/60	1	No	

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

THERMAL COFFEE BREWERS



Lever-Action Airpot



Economy Thermal Carafe



Push-Button Airpot



Thermal Carafe



Thermal Pitcher

Airpots and Thermal Carafes

PUSH-BUTTON AIRPOT

- Brew-through pump assembly - no need to remove for brewing.
- Just close the lid after brewing - dispenses up to 112 ml at the first pump.
- Glass insulation keeps beverage hot.
- Attractive, chrome finish with black trim.
- Available in 2.2 litre and 2.5 litre.

LEVER-ACTION AIRPOT

- Stainless steel lining ensures hot coffee for hours.
- Brew-through lid with lever-action for easy use.
- Available in 2.5 litre, 3.0 litre and 3.8 litre.

THERMAL CARAFE

- Holds 1.9 litres of coffee or other hot beverage.
- Unbreakable stainless steel interior and exterior.
- Superior vacuum insulation keeps beverages hot.
- Brew-through lid allows direct brewing.

THERMAL PITCHER

- Stainless steel lining ensures hot coffee for hours.
- Brew-through lid feature.
- Available in 1.9 liters

Product #	Description	Weight	Liner	Quantity	Capacity	Agency	
28696.0002	2.2 litre Push-Button Airpot	2.04 kg	Glass	single unit	2.2 litre		
28696.0006	2.2 litre Push-Button Airpot	10.9 kg		6 units/case			
13041.0001	2.5 litre Push-Button Airpot	2.3 kg		single unit	2.5 litre		
13041.0101	2.5 litre Push-Button Airpot	11.3 kg		6 units/case			
32125.0000	2.5 litre Lever-Action Airpot	2.4 kg		single unit	3.0 litre		
32125.0100	2.5 litre Lever-Action Airpot	14.6 kg		6 units/case			
32130.0000	3.0 litre Lever-Action Airpot	2.6 kg	Stainless Steel	single unit			
32130.0100	3.0 litre Lever-Action Airpot	15.9 kg		6 units/case			
36725.0000	3.8 litre Lever-Action Airpot	3.2 kg		single unit		3.8 litre	
36725.0100	3.8 litre Lever-Action Airpot	18.6 kg		6 units/case			
36029.0001	1.9 litre Thermal Carafe, black lid	1.36 kg		single unit	1.9 litre		
36252.0001	1.9 litre Thermal Carafe, orange lid	1.36 kg		single unit			
36252.0000	1.9 litre Thermal Carafe, orange lid	15.4 kg		12/case			
40163.0000	1.9 litre Economy Thermal Carafe black lid	1.1 kg		single unit			
40163.0100	1.9 litre Economy Thermal Carafe black lid	13.6 kg		12/case			
40163.0001	1.9 litre Economy Thermal Carafe orange lid	1.36 kg		single unit			
40163.0101	1.9 litre Economy Thermal Carafe orange lid	12/case		12/case			
39430.0000	1.9 litre Deluxe Thermal Pitcher, black lid	1.36 kg		single unit			
39430.0100	1.9 litre Deluxe Thermal Pitcher, black lid	7.71 kg		6 units/case			

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

THERMAL COFFEE BREWERS

CWTF - TS*



Thermal Server Coffee Brewers

- Brews up to 28 litres of coffee per hour.
- Accommodates 2.5L thermal server.
- Accommodates up to 10 cm tall cup.
- Pour-over feature included on automatic brewer models.
- Hot water faucet.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS

SOLD SEPARATELY

Regular Filter Pack

Product No.: 20115.0000



EQ-17-TL

Product No.: 30200.1000



ED-17-TL

Product No.: 30201.1001

Inlet Hose Assembly


Product No.: 32865.1001

Thermal Servers

See pages 18 for details



Dimensions (cm)

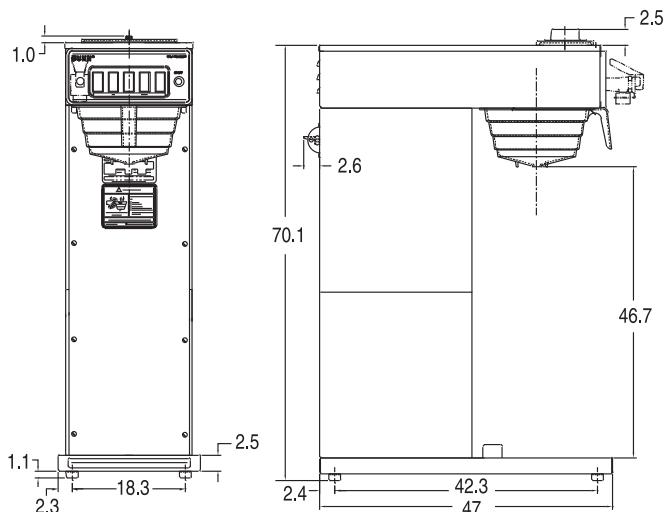

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
23000.0023	CWTFA20-TS, plastic funnel	14.6 kg	230	9.0	2075	50/60	1	No	CE
23000.0034	CWTFB-TS, plastic funnel	15.4 kg	200	18	3600	50/60		No	

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

THERMAL COFFEE BREWERS

Thermal Coffee Servers and Stands

Thermal Server

- Convenient for keeping coffee hot for hours.
- Easily transported to remote locations.
- Depending on base, server can accommodate up to 16.51 cm cup.
- Glass-lined 2.5L capacity servers.



TSR-1 and TSR-2
(shown with TS servers no base)

Thermal Server Rack


- Holds one or two 2.5 litre thermal servers without base.
- Made of durable, easy-to-clean plastic.
- Drip trays to catch spills and keep serving areas clean.



TS Booster

(Raised)

Dimensions (cm)

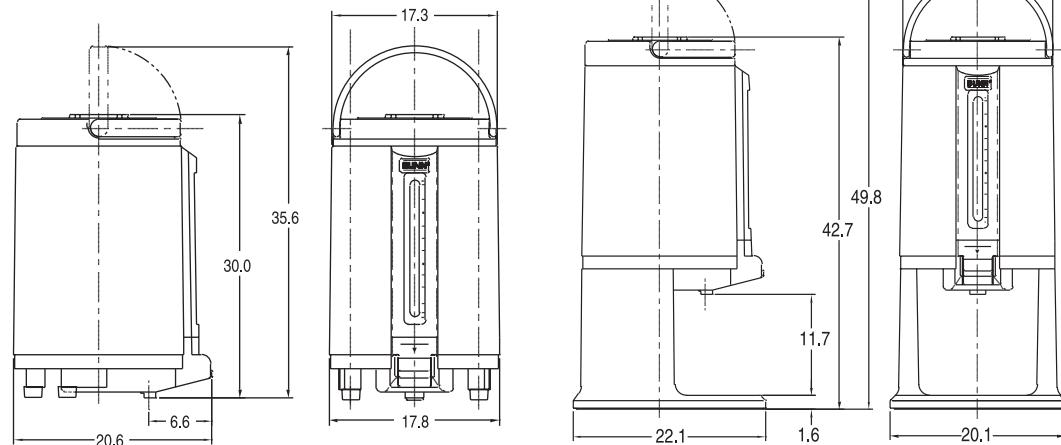

Product #	Description	Weight	Capacity	Quantity	Agency
45882.0002	TS, thermal server, single unit	2.7 kg	2.5 litres	single unit	
45882.0000	TS, thermal server, 6/case	15 kg	2.5 litres	6/case	
23300.0009	TS RAISED, thermal server, raised	2.7 kg	2.5 litres	single unit	
23300.0010	TS, thermal server, no base, single unit	1.8 kg	2.5 litres	single unit	
22964.0000	BUNN safety-fresh lid (kit)	.5 kg		single unit	
18008.6001	TSR-1, thermal server rack, 1 position	2.1 kg		single unit	
18008.6002	TSR-2, thermal server rack, 2 position	3.6 kg		single unit	
18010.6000	Thermal server booster	.9 kg		single unit	



Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

Titan® Single Coffee Brewer and Server

High-volume brewing solution featuring simple operation, precise extraction control and portable servers

- Brews up to 85 litres of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew; variable by-pass controls coffee strength.
- BrewMETER® allows automatic programming of pulse routine. 
- Funnel has 750 gram capacity and paper filter retainers to eliminate fold-over.
- Left or right faucet for hot water.
- Display in English, Spanish, or Katakana
- Large sprayhead.
- Energy Saver Mode. 
- Digital temperature control.

TITAN TF SERVER

- 12 litre capacity
- ThermoFresh® servers are insulated to keep coffee hot for hours.
- Large cup clearance allows for dispensing into cups, decanters and thermal carafes.
- Brew-through lid.
- Integrated sight gauge assembly allows for easy cleaning.
- Innovative fast flow faucet design.




Titan TF Server



Titan Single Brewer*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

Dimensions (cm)

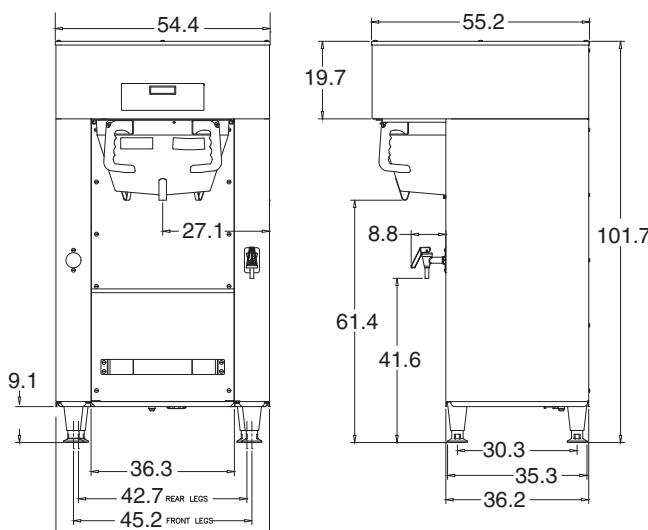

RELATED PRODUCTS

Titan/Urn Filter Pack
Product No.: 20111.0000 

Titan Funnel
Product No.: 40114.0000 

EQHP-54
Product No.: 39000.0006 

EQHP-54L
Product No.: 39000.0003 

Flavour Label
Product No.: 41745.1000

Inlet Hose Assembly
Product No.: 32865.1002

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agencies
39300.0002	Titan Single	48.5 kg	400 230	16 32.0	11125 7360	50/60	3 1	No	
39300.0004	Titan Single	48.5 kg	230	32	7360	60	1	Yes	
39400.0001	Titan Server	5.4 kg							

Plumbing: 138-621 kPa. Machine supplied with 3/8" male flare fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

SATELLITE
COFFEE BREWERS




SATELLITE COFFEE BREWERS



Titan Dual Brewer*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

Dimensions (cm)

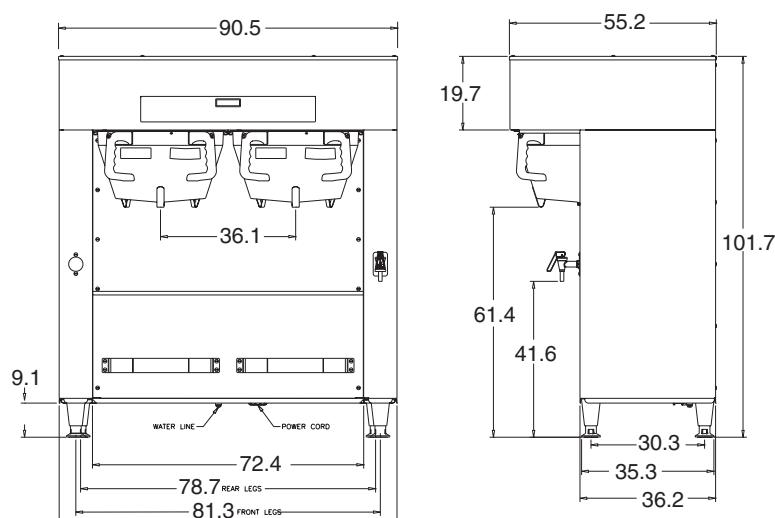

Titan® Dual Coffee Brewer and Server

High-volume brewing solution featuring simple operation, precise extraction control and portable servers

- Brews up to 120 litres of coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; variable by-pass controls coffee strength.
- BrewMETER® allows automatic programming of pulse routine.
- Funnel has 750 gram capacity and paper filter retainers to eliminate fold-over.
- Left or right faucet for hot water.
- Display in English, Spanish, or Katakana.
- Large sprayhead.
- Energy Saver Mode.
- Digital temperature control.

TITAN TF SERVER

- 12 litre capacity
- ThermoFresh® servers are insulated to keep coffee hot and fresh for hours.
- Large cup clearance allows for dispensing into cups, decanters and thermal carafes.
- Brew-through lid.
- Integrated sight gauge assembly allows for easy cleaning.
- Innovative fast flow faucet design.

RELATED PRODUCTS

Titan/Urn Filter Pack
Product No.: 20111.0000



Titan Funnel
Product No.: 40114.0000



EQHP-54
Product No.: 39000.0006



EQHP-54L
Product No.: 39000.0003

Flavour Label
Product No.: 41745.1000

Inlet Hose Assembly
Product No.: 32865.1002

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
39200.0002	Titan Dual	67.1 kg	400 230	16 32	11125 7360	50/60	3 1	No	
39200.0006	Titan Dual	67.1 kg	230	32	7360	60	1	Yes	
39400.0001	Titan Server	5.4 kg							

Plumbing: 138-621 kPa. Machine supplied with 3/8" male flare fitting. All plumbed models that are CE listed feature backflow prevention.



BrewWISE Single TF DBC*

BrewWISE® Single ThermoFresh® DBC® Brewers

- Brews up to 43.2 litres of coffee per hour with three variable batch sizes.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavour extraction.
- Coffee strength controlled with variable by-pass.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGard®.
- Metric volume and Celsius temperature settings.
- Equipped with tank drain.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS

SOLD SEPARATELY

Single/Dual Filter Pack
Product No.: 20138.0000



EQHP-10
Product No.: 39000.0004



EQHP-10L
Product No.: 39000.0001



BrewWISE Recipe Writer
Product No.: 34444.0001

BrewWISE Recipe Card
Product No.: 34447.0000




Inlet Hose Assembly
Product No.: 32865.1002



ThermoFresh servers
See page 23-24 for details.

Dimensions (cm)

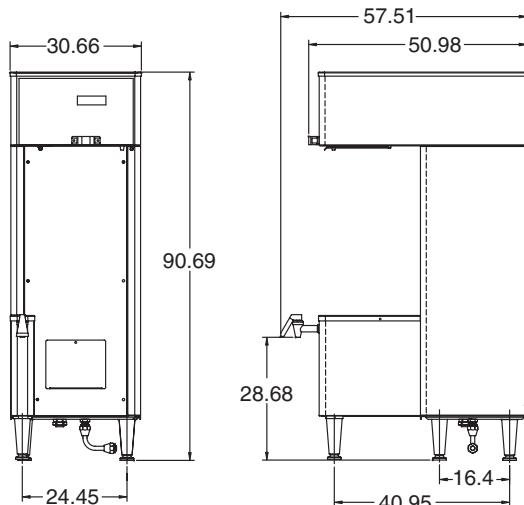

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
34800.0009	SINGLE TF DBC, black, funnel locks	26.8 kg	230	16.6	4000	50/60	1	No	CE KSA
34800.0012	SINGLE TF DBC, funnel locks		200	18.5	3700	60			
34800.0016	SINGLE TF DBC, funnel locks								

Plumbing: 138-621 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

SATELLITE COFFEE BREWERS



BrewWISE
Dual TF DBC*

BrewWISE® Dual ThermoFresh® DBC® Brewers

- Brews up to 61.7 to 71.5 litres of coffee per hour with three variable batch sizes.
- Multi-phase brewer brews 65.5 to 98 litres of coffee per hour, and can be field converted to operate on either 3 phase or 1 phase.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavour extraction.
- Coffee strength controlled with variable by-pass.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGard®.
- Metric volume and Celsius temperature settings.
- Equipped with tank drain.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Single/Dual Filter Pack
Product No.: 20138.0000



EQHP-10
Product No.: 39000.0004




EQHP-10L
Product No.: 39000.0001

Inlet Hose Assembly
Product No.: 32865.1002

ThermoFresh servers
See page 23-24 for details.



Dimensions (cm)

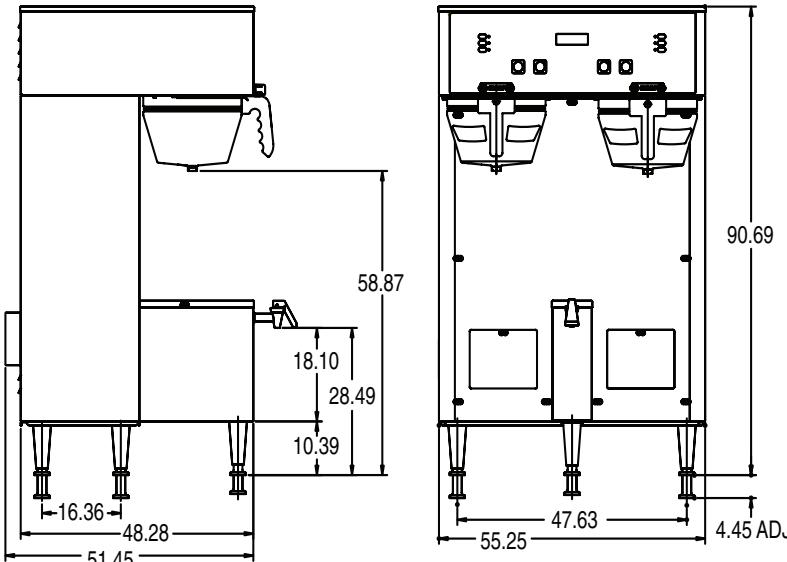

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
34600.0011	DUAL TF DBC, funnel locks	41.96 kg	230	26.5	6100	50/60	1	No	CE KSA
34600.0013	DUAL TF DBC, funnel locks		200	26.5	5300	60			
34600.0015	DUAL TF DBC, black, funnel locks		230	26.5	6100	50/60			CE KSA
34600.0020	DUAL TF DBC, SST, 3 phase/1 phase, funnel locks, Master On/Off switch	42 kg	230 400	26.9 16	6200 11125	50/60	1 3	No	CE

Plumbing: 138-621 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Digital ThermoFresh® Servers and Stand

ThermoFresh servers hold beverages at optimum flavour profile for hours without requiring the energy consumption of traditional warming plates

- Four-hour digital count-up timer.
- Volume indicator display.
- Vacuum insulated.
- Unique lid design features a pour spout for easy emptying and cleaning.
- Contemporary styling and wrap program for maximum merchandising.
- Digital sight gauge has a count-up timer that begins to count-up in one minute increments to specifically display how long the brewed beverage has been stored. Operates on four AAA batteries with an average 1-year lifespan. Display shows low battery symbol.
- Translucent faucet guard provides increased visibility while dispensing.
- Brew-through lid.
- Soft grip handle for easy transportation.

TF SERVER WITH BASE

- Built-in drip tray is easily removed for cleaning or providing extra clearance for large vessels.
- Large cup clearance.
- Ideal for use with Single or Dual DBC Brewers.

TF BASELESS SERVER

- 17.9 cm cup clearance.
- Ideal for use with the Infusion Coffee Brewer (ICB)
- Use with the TF Server Stand for easy dispensing.
Product No. 39795.0003



Digital Sight Gauge
with Count-up Timer



5.7 Litre TF Server



Baseless 5.7 Litre
TF Server



TF Server Stand

SATELLITE
COFFEE BREWERS

Product #	Description	Dimension	Weight	Agency
42700.0000	DSG TF Server, 3.8 litre, SST	52.3cm H x 23.6cm W x 33cm D	6.8 kg	
42700.0001	DSG TF Server, 3.8 litre, black			
42750.0000	DSG TF Server, 5.7 litre, SST	57.7cm H x 23.6cm W x 33cm D	7.3 kg	
42750.0001	DSG TF Server, 5.7 litre, black			
42700.0050	Baseless DSG TF Server, 3.8 litre, SST	32cm H x 23.1cm W x 32.3cm D	4.9 kg	
42700.0051	Baseless DSG TF Server, 3.8 litre, black			
42750.0050	Baseless DSG TF Server, 5.7 litre, SST	37.3cm H x 23.1cm W x 32.3cm D	5.4 kg	
42750.0051	Baseless DSG TF Server, 5.7 litre, black			
39795.0003	TF Server Stand	22.1cm H x 23.9cm W x 32.8cm D	1.9 kg	

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

ThermoFresh® Servers and Stand

ThermoFresh servers hold beverages at optimum flavour profile for hours without requiring the energy consumption of traditional warming plates

- Vacuum insulated.
- Easily transport coffee to remote locations.
- Fast flow faucet.
- Brew-through lid.

TF SERVER WITH BASE

- Built-in drip tray is easily removed for cleaning or providing extra clearance for large vessels.
- Large cup clearance.
- Ideal for use with Single or Dual TF DBC Brewers.



5.7 Litre TF Server



Baseless 3.8 Litre TF Server



TF Server Stand

RELATED PRODUCTS ■

Flavour Label

Product No.: 41745.1000

Product #	Description	Dimension	Weight	Agency
44000.0000	TF Server, 3.8 litre, SST	52.8cm H x 23.6cm W x 33cm D	5.9 kg	
44000.0001	TF Server, 3.8 litre, black			
44050.0000	TF Server, 5.7 litre, SST	58.2cm H x 23.6cm W x 33cm D	6.4 kg	
44050.0001	TF Server, 5.7 litre, black			
44000.0050	Baseless TF Server, 3.8 litre, SST	32.5cm H x 23.11cm W x 33.3cm D	5.9 kg	
44000.0051	Baseless TF Server, 3.8 litre, black			
44050.0050	Baseless TF Server, 5.7 litre, SST	37.8cm H x 23.11cm W x 33.3cm D	6.4 kg	
44050.0051	Baseless TF Server, 5.7 litre, black			
39795.0003	Stand assembly, TF Server	22.1cm H x 23.9cm W x 32.8cm D	1.9 kg	



BrewWISE® Single Soft Heat® DBC® Brewers

SATELLITE
COFFEE BREWERS

Soft Heat technology automatically manages heat in the server docking system to ensure optimum flavour profile for hours

- Brews up to 43.2 litres of coffee per hour with three variable batch sizes.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavour extraction.
- Coffee strength controlled with variable by-pass.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGard®.
- Metric volume and Celsius temperature settings.

Single SH DBC*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Single/Dual Filter Pack
Product No.: 20138.0000



EQHP-10
Product No.: 39000.0004



EQHP-10L
Product No.: 39000.0001



BrewWISE Recipe Writer
Product No.: 34444.0001

BrewWISE Recipe Card
Product No.: 34447.0000



One Position Drip Tray
For use with Single/Single SH
Product No. : 26830.0000




Inlet Hose Assembly
Product No.: 32865.1001



Soft Heat Server and Stands
See page 29 for details.



Dimensions (cm)

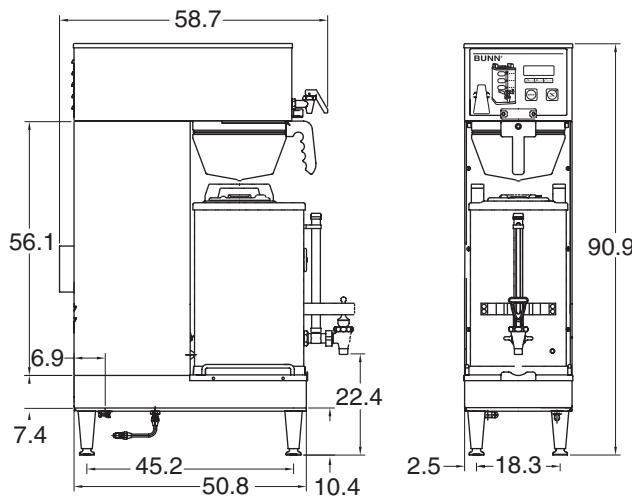

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
33600.0003	SINGLE SH DBC, funnel locks	26.8 kg	230	16.6	4000	50/60	1	No	CE KSA
33600.0005	SINGLE SH DBC, 17 hole spray head		200	19	3800				CE
33600.0012	SINGLE SH DBC, funnel locks		220	12.7	2800	60			CE
33600.0027	SINGLE SH DBC, funnel locks		230	19	4400	60			Yes

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

BrewWISE® Dual Soft Heat® DBC® Brewers

Soft Heat technology automatically manages heat in the server docking system to ensure optimum flavour profile for hours

- Brews up to 71.5 L of coffee per hour with three variable batch sizes.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavour extraction. 
- Coffee strength controlled with variable by-pass.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGard®. 
- Metric volume and Celsius temperature settings.



Dual SH DBC*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS BOLD SEPARATELY

Single/Dual Filter Pack
Product No.: 20138.0000



BrewWISE Recipe Card
Product No.: 34447.0000



EQHP-10
Product No.: 39000.0004



One Position Drip Tray
For use with Dual/Dual SH
Product No. : 27150.0000



EQHP-10L
Product No.: 39000.0001




Inlet Hose Assembly
Product No.: 32865.1001



BrewWISE Recipe Writer
Product No.: 34444.0001

Soft Heat Server and Stands
See page 29 for details.

Dimensions (cm)

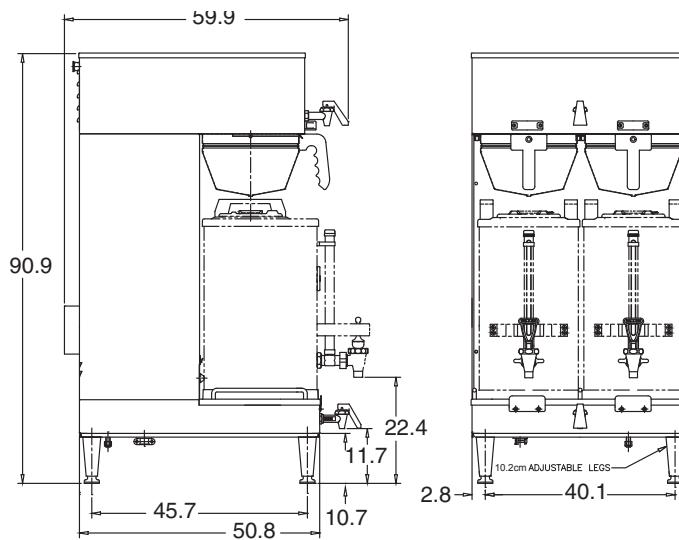

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
33500.0008	DUAL SH DBC, funnel locks	26.8 kg	230	26.9	6200	50/60	1	No	
33500.0014	DUAL SH DBC, 17 hole spray head		200	28	5600				

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.



Single SH*

Single® Soft Heat® Brewers

- Brews up to 40.1 litres of coffee per hour with three variable batch sizes.
- Electronic grinder interface instructs G9T-2 grinder on exact amount of coffee for selected brew batch size.
- Soft Heat® server heat control automatically shuts off once target temperature is reached. Can be set to 79.4° - 87.8°C.
- Holds one 5.7 litre SH server, sold separately.
- Remote one or two server dock stations, sold separately.

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Single/Dual Filter Pack
Product No.: 20138.0000



EQHP-10
Product No.: 39000.0004



EQHP-10L
Product No.: 39000.0001

One Position Drip Tray
For use with Single/Single SH
Product No. : 26830.0000




Inlet Hose Assembly
Product No.: 32865.1001

Soft Heat Server and Stands
See page 29 for details.



Dimensions (cm)

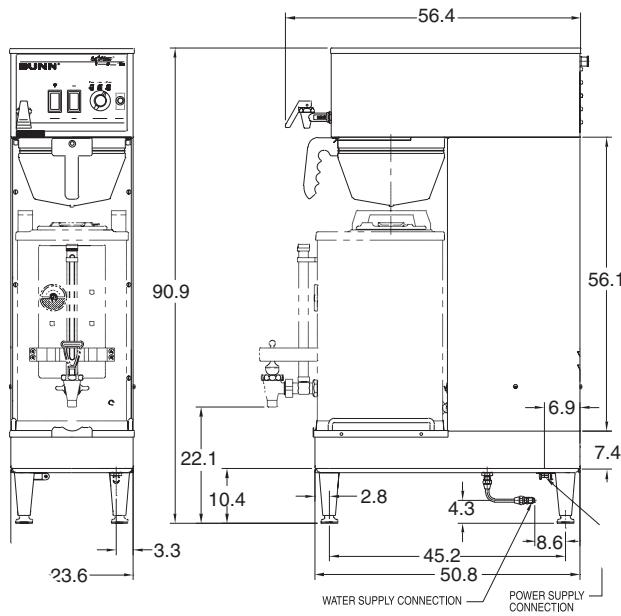

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
27800.0006	SINGLE SH	26.8 kg	230	13.5	3100	50/60	1	No	

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

Dual® Soft Heat® Brewers

- Brews up to 61.7 litres of coffee per hour with three variable batch sizes.
- Multi-phase brewer brews 65.5 to 98.4 litres of perfect coffee per hour, and can be converted to operate on either 3 phase or 1 phase.
- Electronic grinder interface instructs grinder on exact amount of coffee for selected brew batch size.
- Soft Heat® server heat control automatically shuts off once target temperature is reached. Can be set to 79.4° - 87.8°C.
- Holds two 5.7 litre SH servers, sold separately.



Dual SH*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Single/Dual Filter Pack
Product No.: 20138.0000



EQHP-10
Product No.: 39000.0004



EQHP-10L
Product No.: 39000.0001

One Position Drip Tray
For use with Dual/Dual SH
Product No. : 27150.0000





Inlet Hose Assembly
Product No.: 32865.1001

Soft Heat Server and Stands
See page 29 for details.



Dimensions (cm)

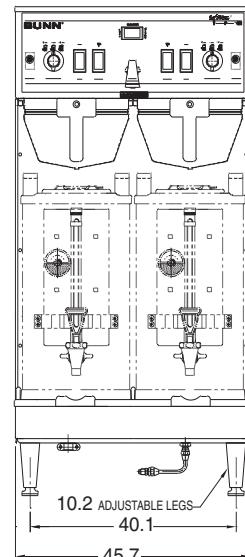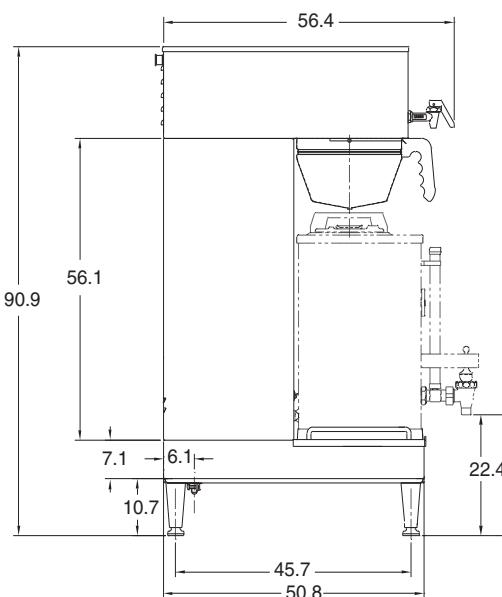

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
27900.0006	DUAL SH, mechanical thermostat	26.8 kg	230	26.9	6200	50/60	1	No	
27900.0037	DUAL SH, mechanical thermostat		220	25.5	5600	60			

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Soft Heat® Servers and Stands

Soft Heat technology automatically manages heat in the server docking system to ensure optimum flavour profile for hours

SH SERVER

- Soft Heat® servers supply controlled heat to coffee to maintain flavour and temperature.
- LED power indicator shows server is operational.
- Safety-Fresh® brew-through lid with vapour seal and spill prevention.
- For use with Single/Dual SH and Single/Dual SH DBC



SATELLITE
COFFEE BREWERS

SH Server and 1SH Stand




2SH Stand

SH STAND

- Remote one and two server docking stations for additional satellite coffee serving.
- Docking stations have instant power contact with servers.

Dimensions (cm)

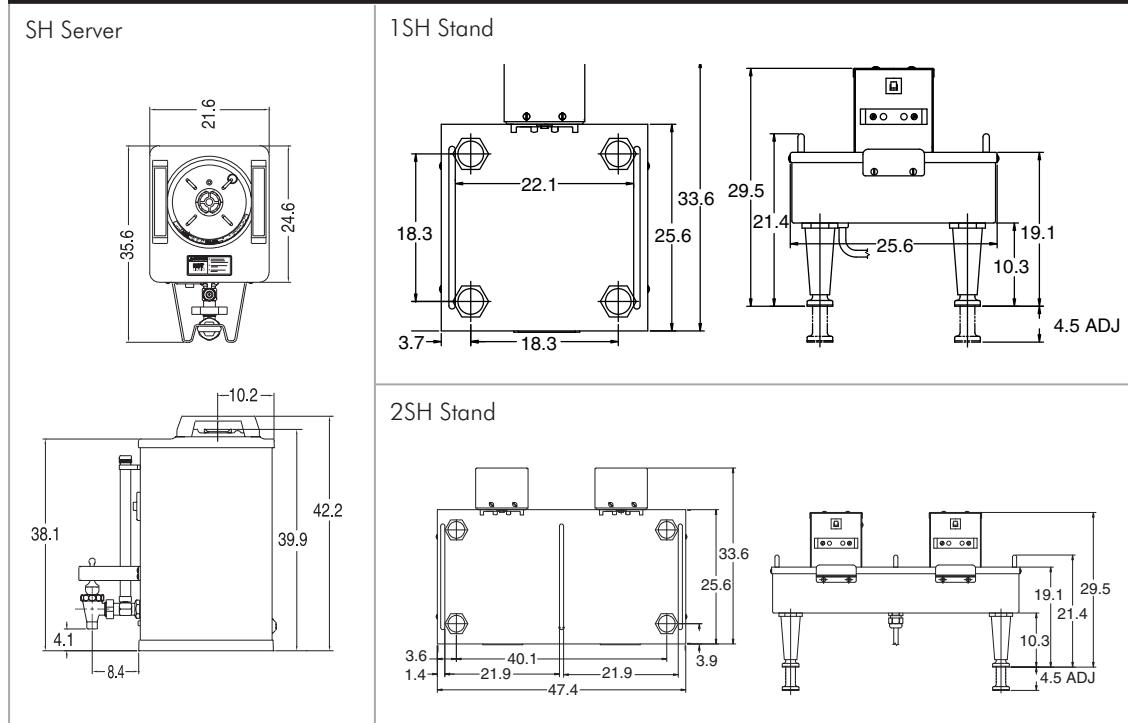

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
27850.0001	SH SERVER, 5.7 litre capacity, no flashing lamp	7.7 kg							 KSA
27850.0006	SH SERVER, 5.7 litre capacity, 45 minute								
27850.0009	SH SERVER, 5.7 litre capacity, adjustable timer								
27850.0016	SH SERVER, 5.7 litre capacity, 240 minute								
27825.0001	1SH STAND, holds 1 SH server	5.9 kg	220-230	0.35	75	50/60	1	Yes	
27825.0002	1SH STAND, holds 1 SH server, UK plug							UK Plug	KSA
27825.0006	1SH STAND, holds 1 SH server		230			60			
27875.0001	2SH STAND, holds 2 SH servers	10 kg	220-230	0.7	150	50/60	Yes		KSA
27875.0005	2SH STAND, holds 2 SH servers								

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

Single® Brewers with Portable Server

- Brews 19.3 to 43.2 litres of coffee per hour with three variable batch sizes.
- Adjustable bypass ensures perfect coffee regardless of batch size.
- Upper hot water faucet on all models does not affect brew level.
- Electronic timer ensures fast set up and accurate brew levels.
- Electronic grinder interface instructs grinder on exact amount of coffee for selected brew batch size.
- 5.7 litre, 1.5 GPR portable server has Safety-Fresh® brew-through lid with vapour seal and spill protection. 
- Equipped with tank drain.



Single
(server included)

RELATED PRODUCTS

Single/Dual Filter Pack

Product No.: 20100.0000



EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001

One Position Drip Tray

For use with Single/Single SH
Product No. : 26830.0000



Inlet Hose Assembly


Product No.: 32865.1001

GPR Server and Warmers

See page 32 for details.



Dimensions (cm)

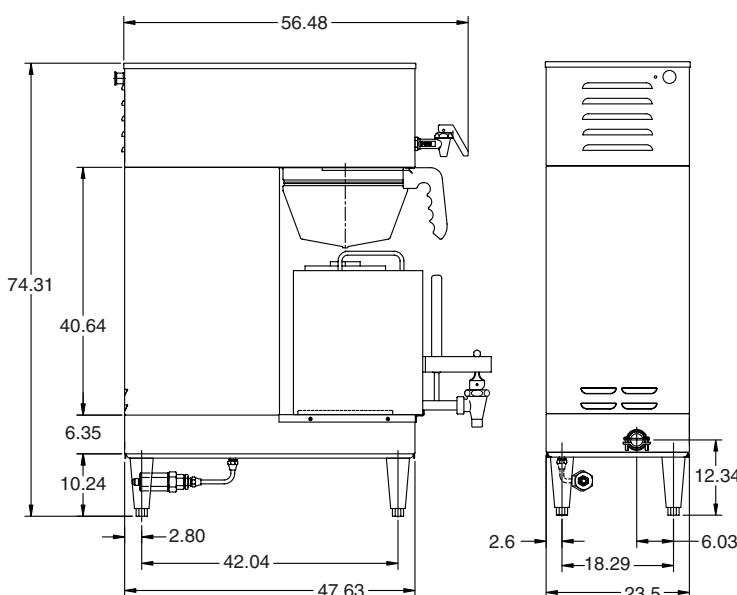

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
23050.0049	SINGLE, mech thermostat, stainless funnel	26.3 kg	230	13.7	3150	50/60	1	No	 
23050.0047	SINGLE, mech thermostat, stainless funnel		200	19.3	3850	50			
23050.0058	SINGLE, mech, stainless funnel, Korea		220-230	13.2-13.7	2900-3150	50/60			

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.



Dual
(servers included)

Dual® Brewers with Portable Server

- Brews 61.7 to 71.5 litres of coffee per hour with three variable batch sizes.
- Adjustable bypass ensures perfect coffee regardless of batch size.
- Upper hot water faucet on all models does not affect brew level.
- Electronic timer ensures fast set up and accurate brew levels.
- Electronic grinder interface instructs grinder on amount of coffee for selected brew batch size.
- 5.7 litre, 1.5 GPR portable servers have a Safety-Fresh® brew-through lid with vapour seal and spill protection. 
- Equipped with tank drain.

RELATED PRODUCTS

Single/Dual Filter Pack
Product No.: 20100.0000



EQHP-10
Product No.: 39000.0004



EQHP-10L
Product No.: 39000.0001

Two Position Drip Tray
For use with Dual/Dual SH
Product No. : 27150.0000




Inlet Hose Assembly
Product No.: 32865.1001



GPR Server and Warmers
See page 32 for details.

Dimensions (cm)

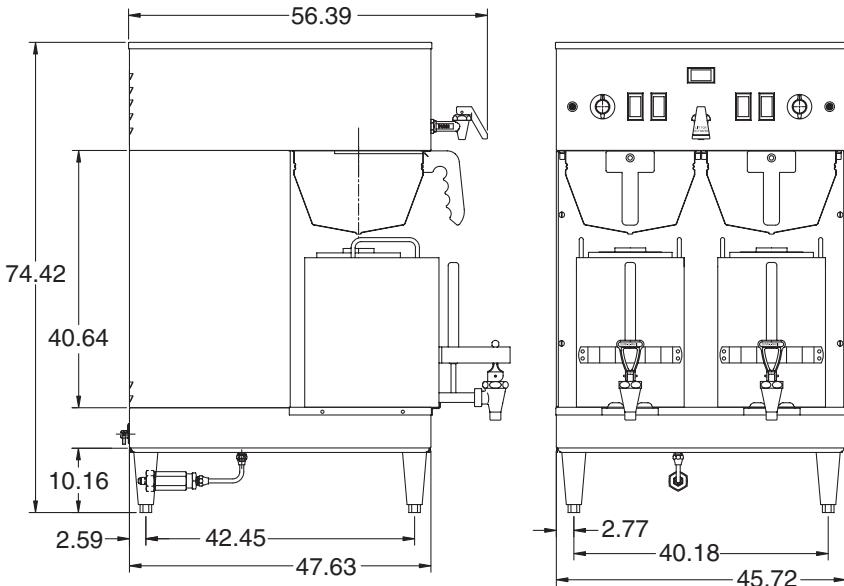

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
20900.0055	DUAL, mech thermostat, stainless funnel	44.5 kg	220-230	25.5-26.9	5600-6200	50/60	1	No	 
20900.0084	DUAL, mech, SST, Korea								

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

Portable Servers and Warmers for Satellite Brewers




1.5GPR with RWS1

PORTABLE SERVER

- Models available with capacities up to 5.7 litres.
- Portable servers for remote service.
- Safety-Fresh® brew-through lid with vapour seal and spill protection. 

WARMER

- Models available to accommodate 5.7 litre servers.
- Legs are adjustable on RWS1.
- For use with Single and Dual.

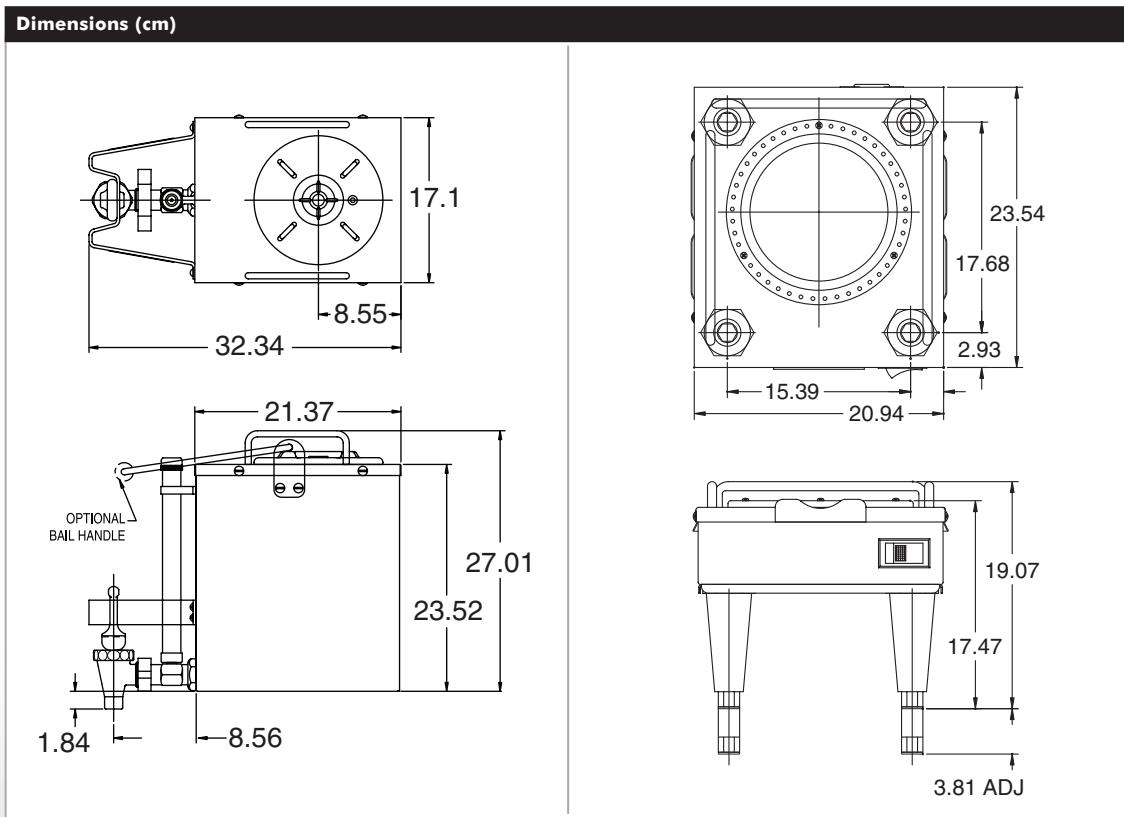

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
20950.0004	1.5GPR-FF, 5.7 litre, fast flow faucet, top handle	4.5 kg							
12203.0012	RWS1B	4.1 kg	100	0.9	91	50	1	Yes	

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

BrewWISE® Hot Beverage Systems



- Perfect for Hot Milk Tea or Hot Milk Coffee.
- Single brews up to 43.2 litres and Dual brews up to 71.5 litres of tea or coffee per hour with three variable batch sizes.
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present.
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools.
- Consistently brew perfect tea using Digital Brewer Control with pulse brew.
- Metric volume and Celsius temperature settings.
- Holds tea or coffee at just the right temperature for preparing superior Hot Milk beverages.

SATELLITE
COFFEE BREWERS



Dual SH DBC*

Single SH DBC*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Single/Dual Filter Pack

Product No.: 20138.0000



EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001

Single Position Drip Tray

For use with Single/Single SH

Product No. : 26830.0000



Two Position Drip Tray

For use with Dual/Dual SH

Product No. : 27150.0000




Soft Heat Servers

Specifically designed for use with Hot Beverage Systems

Product No. : 27850.0023



Dimensions (cm)

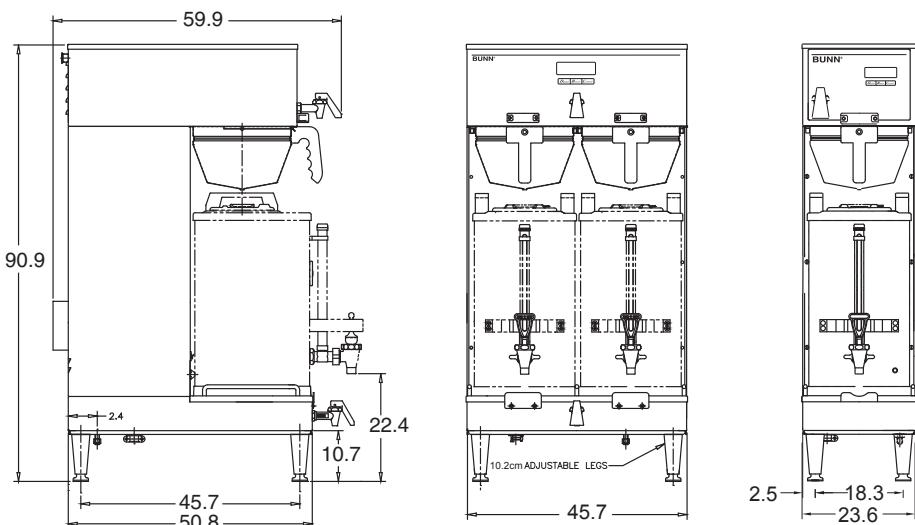

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
33600.0006	SINGLE SH DBC, funnel lock	26.8 kg	230	19	4400	50/60	1	No	CE
33500.0034	DUAL SH DBC, lower faucet	40.8 kg		26.9	6200				CE

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

GRINDERS

Multi-Hopper Grinders

A superior coffee grinding system combines the ability to grind multiple coffees with BrewWISE® Technology


- Convenient, front-loading hoppers. Allows grinding of a wide variety of coffees.
- Hoppers hold up to 2.75 kg each of regular, decaf or speciality beans.
- Stores individual coffee grind weight profiles.
- Portion controlled for the right amount of coffee, with three batch sizes per hopper.
- Precision burrs for consistent, commercial quality grind.
- Easy-to-clean removable hoppers.
- LCD alphanumeric display shows coffee names and diagnostics.
- Accommodates all BrewWISE® Smart Funnels®. 
- BrewWISE® intelligence means the Smart Hopper manages the grinding and brewing process from start to finish. 
- Smart Hopper tells the grinder what coffee is in it through a microchip in the hopper.



MHG*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

Dimensions (cm)

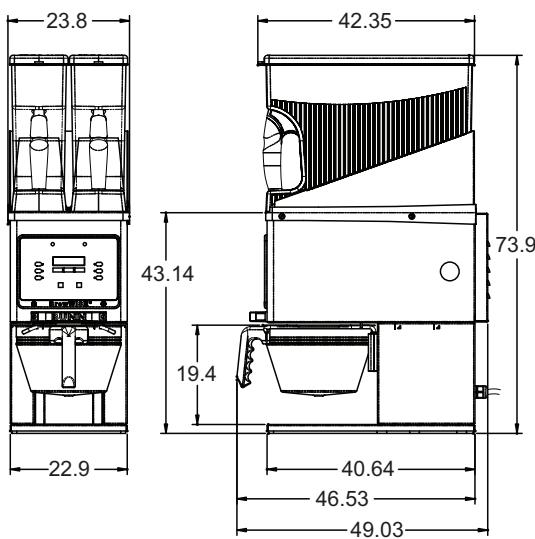

RELATED PRODUCTS

SOLD SEPARATELY

2 Position Rack

Product No.: 36760.0000



4 Position Rack

Product No.: 36760.0001



Hopper/Lid Assembly

Product No.: 36845.0000



Hopper Partition

Product No.: 36053.0000



BrewWISE Recipe Writer

Product No.: 34444.0001



BrewWISE Recipe Card

Product No.: 34447.0000



Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency		
35600.0021	MHGA, SST, EURO	31.8 kg	230	4.5	1035	50	1	Yes	CE		
35600.0137	MHGA, SST, UK										
35600.0140	MHGA, SST, C-TICK										
35600.0135	MHGA, SST, INMETRO					60					
35600.0023	MHGA, BLK, EURO										
35600.0037	MHGA, BLK, UK										
35600.0040	MHGA, BLK, C-TICK										
35600.0035	MHGA, BLK, INMETRO										
35600.0033	MHGA, SST, IRAM					50/60					
					4						

GRINDERS



G9WD-RH*

Weight Driven Grinder

Weight-based, portion-control for the right amount of coffee every time, with 3 batch sizes

- Unparalleled grind weight accuracy.
- Hopper holds up to 2.72 kg.
- Precision burrs for consistent, commercial quality grind.
- LCD alphanumeric display shows machine status and diagnostics.
- Removable hopper for easy cleaning.

RELATED PRODUCTS

SOLD SEPARATELY

2 Position Rack

Product No.: 36760.0000



4 Position Rack

Product No.: 36760.0001



Hopper/Lid Assembly

Product No.: 36845.0000



Hopper Partition

Product No.: 36053.0000



BrewWISE Recipe Writer

Product No.: 34444.0001




BrewWISE Recipe Card

Product No.: 34447.0000

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

Dimensions (cm)

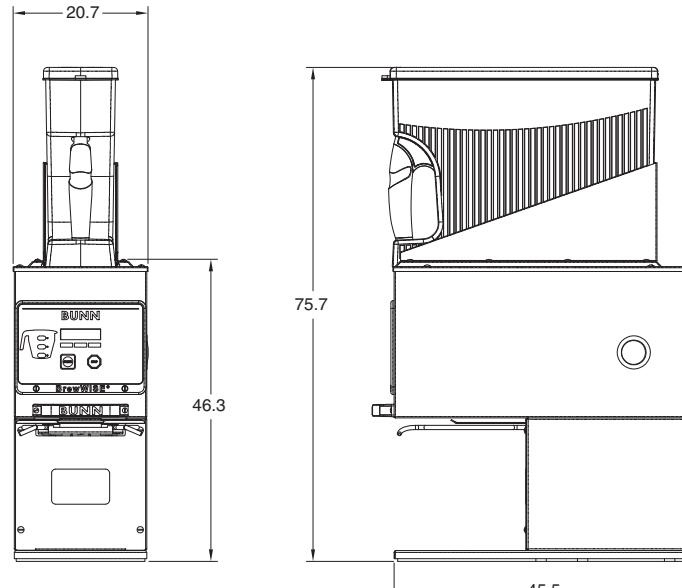

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
40700.0132	G9WD-RH, EURO	31.8 kg	230	4.5	1035	50	1	Yes	CE
40700.0137	G9WD-RH, UK								

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

GRINDERS

Portion Control Grinders with 2 Hoppers



PORTION CONTROL GRINDER

- Two hoppers hold 2.7 kg each.
- Selected models interface to compatible BUNN brewers with interface cable.
- Portion controlled for the right amount of coffee every time.
- Precision burrs for consistent, commercial-quality grind.




G9-2T DBC

BREWWISE® DBC GRINDER

- Two hoppers hold 2.7 kg each.
- Stores individual coffee grind profiles.
- Operate any combination of BrewWISE® equipment error-free with wireless brewer-grinder interface via Smart Funnel®.
- Portion controlled for the right amount of coffee every time with 3 batch sizes per hopper.

Dimensions (cm)

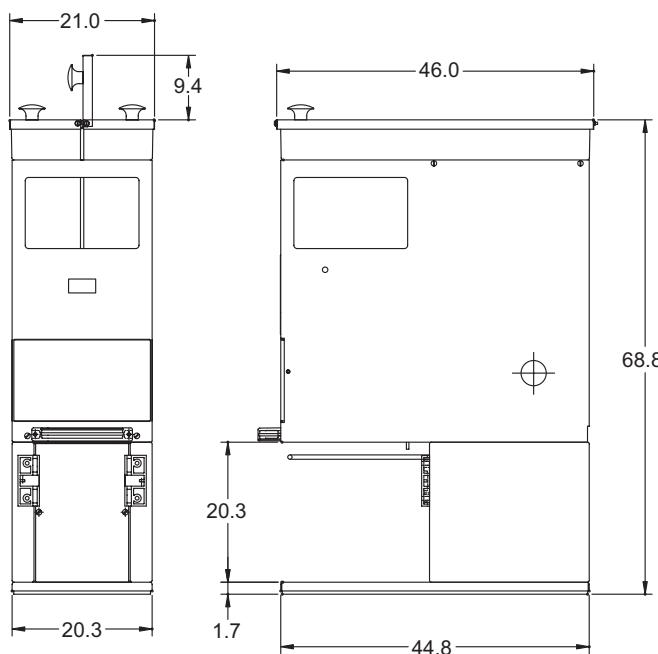

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
33700.0007	G9-2TB DBC	30.4 kg	100	9.4	940	50	1	No	
33700.0121	G9-2T DBC, SST, IRAM								
33700.0132	G9-2T DBC, SST, EURO		230	4.5	1035				
33700.0137	G9-2T DBC, SST, UK					60	1	Yes	
33700.0035	G9-2T DBC, BLK, INMETRO								

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

GRINDERS




LPG

Low Profile Portion Control Grinders

- Professional grind provided by large 81mm diameter burrs.
- Powered by quiet, high-torque motor.
- Large, clear bean hopper merchandises 2.75 kg of fresh coffee beans.

Dimensions (cm)

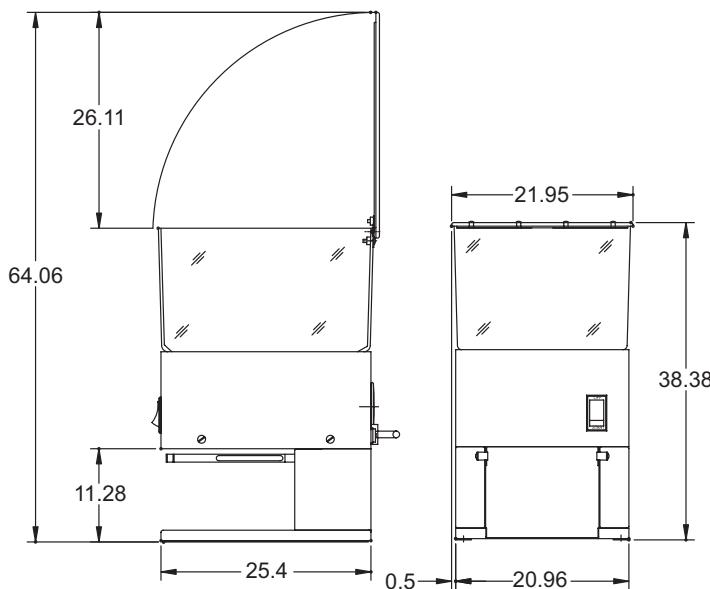

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
20580.0121	LPGA, IRAM	10.5 kg	230			50	1	Yes	
20580.0123	LPGA, KETI		220-230	1.5	360				
20580.0132	LPGA, EURO		230			50/60			
20580.0137	LPGA, UK								

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

GRINDERS

French Press Portion Control Grinders

- Accommodates up to 20.3 cm tall cafetière or funnel for drip-style brewer.
- Multi-batch setting allows users to specify a French press brew size or grind enough coffee into a funnel to brew up to 3.0 litres of drip-style coffee.
- Large commercial 81 mm diameter burrs provide maximum grinding precision for small amounts of coffee.
- Quiet, low speed, high torque motor.
- Can accommodate gourmet funnel for heavier throw weights.

FPG-2 DBC GRINDER

- Digital touch pad for front of machine programming and LCD readout.
- Two hoppers hold 1.36 kg each of beans.




FPGA



FPGA-2 DBC

Dimensions (cm)

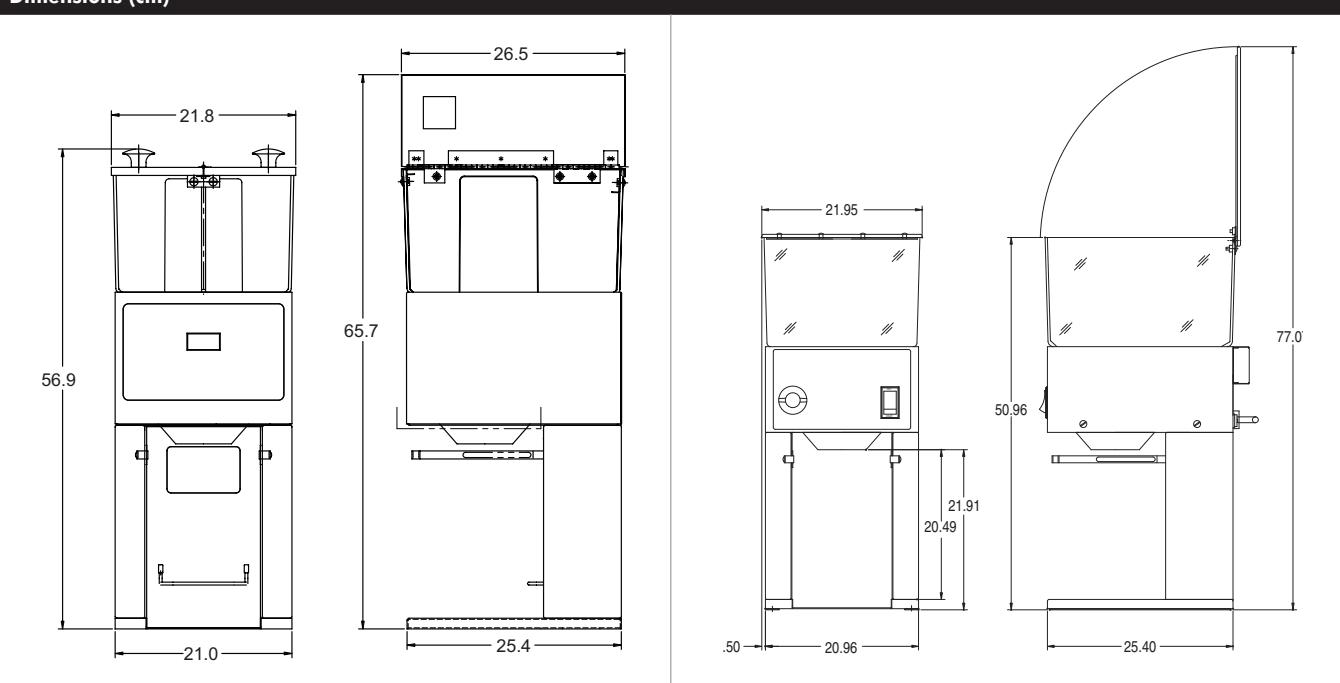

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
36400.0132	FPGA-2 DBC, EURO	13.4 kg	230			50/60			CE
36400.0137	FPGA-2 DBC, UK								KC
36800.0123	FPGA, KETI		220	1.5	360	60	1	Yes	
36800.0132	FPGA, EURO					50/60			CE
36800.0137	FPGA, UK	11.2 kg	230						

Bulk Coffee Grinders

G2, G3 HD GRINDERS

- G2 hopper holds .91 kg of fresh coffee beans.
- G3 hopper holds 1.36 kg of fresh coffee beans.
- Turbo action draws coffee through grind chamber for greater grinding efficiency.
- Fast grinding .45 kg in under 30 seconds.
- Wide range of grinds can be selected.
- Convenient cleaning lever ensures complete clean out of coffee from grind chamber.
- Bag switch stops motor when bag is removed and prevents grinding before bag is in place.
- Heavy-duty precision burrs for quality, finer grinds.

G2 TRIFECTA® GRINDER

- Chute assembly accommodates trifecta brew cup.
- Expanded range of precise grinds can be selected.
- May be used as a bulk grinder in behind-the-counter applications.
- Hopper holds .91 kg of fresh coffee beans.


GRINDERS



G2 HD



Dimensions (cm)

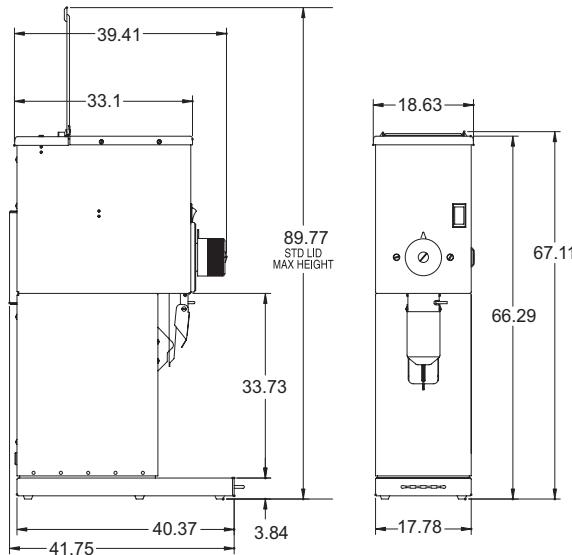

G2 trifecta



G3 HD

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency			
22100.0032	G3A HD, black, EURO	26.8 kg	220-230	4.5	990-1035	50/60	1	Yes	CE			
22100.0037	G3A HD, black, UK								CE			
22100.0021	G3A HD, black, IRAM								IV			
22100.0035	G3A HD, black, INMETRO		230	4.5	1035	60			N			
22100.0023	G3A HD, black, KETI		220-230		990-1035	50/60			K			
22102.0032	G2A HD, black, Turkish Burrs, EURO								CE			
22102.0037	G2A HD, black, Turkish Burrs, UK								CE			
41900.0023	G2A trifecta, silver, KETI		230	4.5	1035	60			K			
41900.0032	G2A trifecta, silver, EURO								CE			
41900.0035	G2A trifecta, silver, INMETRO								N			
41900.0037	G2A trifecta, silver, UK		220-230	4.5	990-1035	50/60			CE			


Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

LIQUID COFFEE SYSTEMS



LCA-2

Dimensions (cm)

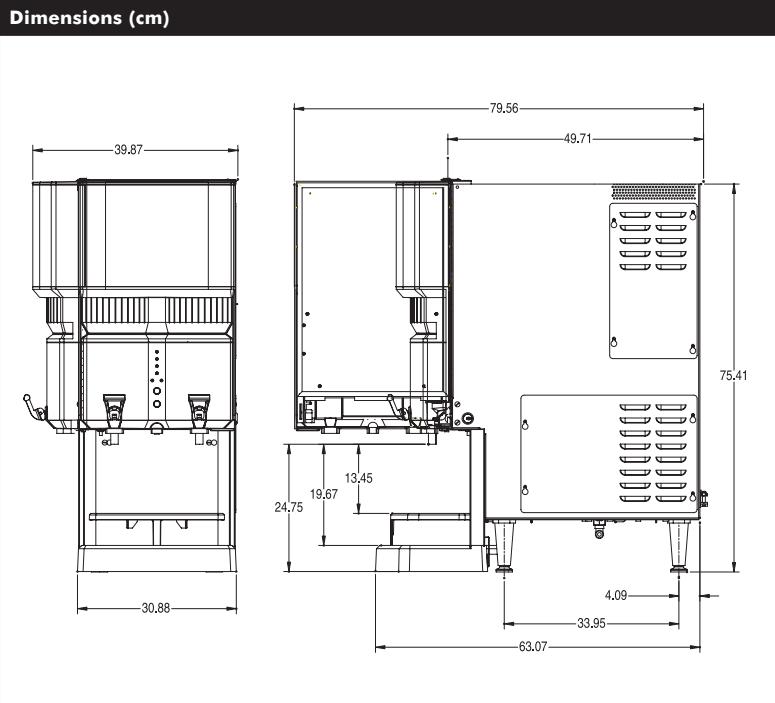

Liquid Coffee Ambient Systems

Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels

- Attractive, narrow unit.
- Accommodates 2 litre and most 4 litre bag-in-box (BIB) containers.
- Insulated product cabinet assures maximum product life.
- FlavorGard® technology continuously monitors extract-to-water ratio and assures flavour consistency.
- Dispenses easily into carafes by flipping tray.
- Equipped with tank drain.
- Hot water dispense.

RELATED PRODUCTS SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001

EQHP-25

Product No.: 39000.0005



EQHP-25L

Product No.: 39000.0002



Inlet Hose Assembly

Product No.: 32865.1002

1/8" Replacement Tube Kits

Product No.: 34728.1000



3/16" Replacement Tube Kits

Product No.: 34727.1000

Scholle BIB connector

Product No. : 35057.0000



LiquiBox QC/D II BIB connector

Product No. : 35055.0000



Product #	Description	Dispense Rate/Sec.		Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
		1.8 oz.	2.5 oz.								
34000.0009	LCA-2A, 1/8" scholle kit	45:1 - 100:1	65:1 - 100:1	37.2 kg	230	20	4000	50/60	1	No	
34000.0010	LCA-2A, 3/16" scholle kit										

Plumbing: 140-620 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Liquid Coffee Refrigerated Systems

Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels

- Refrigerated product cabinet extends product flavour profile, maintains 3.3 – 5.5° C in product compartment.
- Attractive, narrow unit.
- Easy to program, one-touch portion control for self-serve applications.
- Accommodates 2 litre and most 4 litre bag-in-box (BIB) containers.
- FlavorGard® technology continuously monitors extract-to-water ratio and assures flavour consistency.
- Dispenses easily into carafes by flipping tray.
- Equipped with tank drain.
- Hot water dispense.



LCR-2

RELATED PRODUCTS SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001



EQHP-25

Product No.: 39000.0005



EQHP-25L

Product No.: 39000.0002



Inlet Hose Assembly

Product No.: 32865.1002



1/8" Replacement Tube Kits

Product No.: 34728.1000



3/16" Replacement Tube Kits

Product No.: 34727.1000



Scholle BIB connector


Product No. : 35057.0000



LiquiBox QC/D II BIB connector

Product No. : 35055.0000

Dimensions (cm)

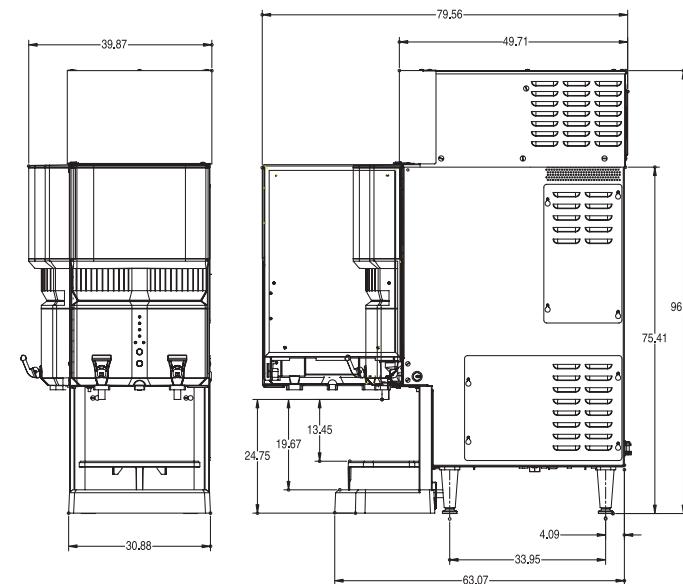


Product #	Description	Dispense Rate/Sec.		Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
		1.8 oz.	2.5 oz.								
34400.0040	LCR-2A, 1/8" scholle kit	45:1 - 100:1	65:1 - 100:1	37.2 kg	230	20	4000	50/60	1	No	CE
34400.0041	LCR-2A, 3/16" scholle kit										

Plumbing: 140-620 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

**LIQUID
COFFEE
SYSTEMS**

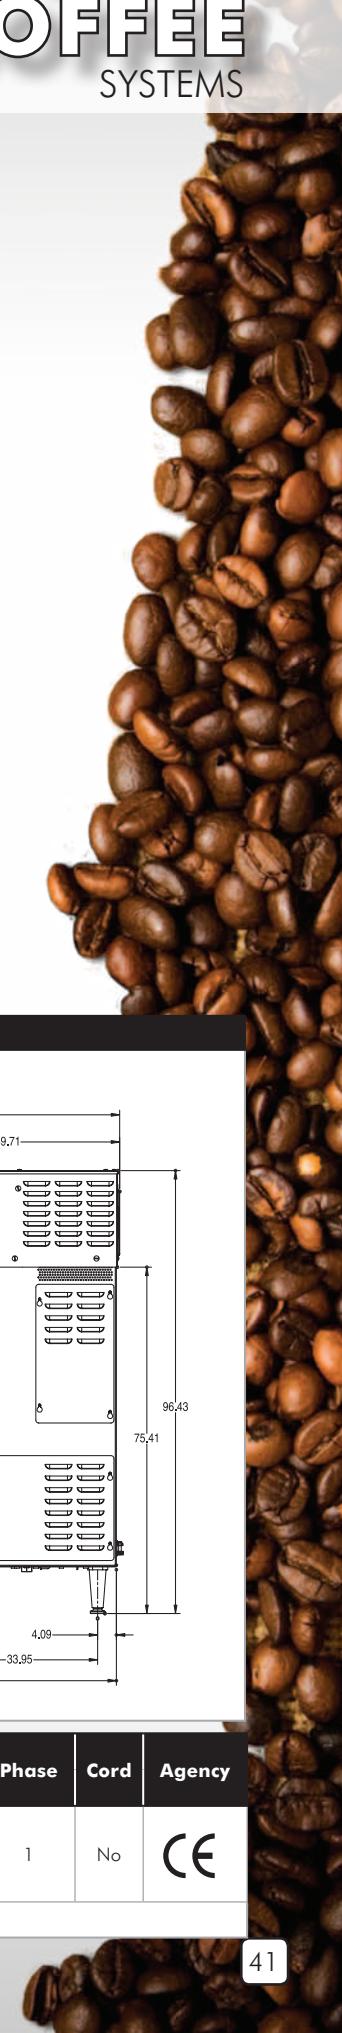

ICED TEA & COFFEE

Infusion Series® Iced Tea and Coffee Brewers

Space-saving combination brewer yields a variety of beverages with simple operation and precise extraction control

- Brew three beverages (iced tea, hot tea, hot coffee) from one model.
- Back-to-back brewing capability and allows 11.4 to 18.9 litre tea batches.
- Brews 17-28 litres of hot coffee per hour.
- Brews into most BUNN iced tea dispensers, 1.9 to 3.8 litre airpots, and 1.9 litre thermal carafes.
- BrewWISE® intelligence. 
- Alphanumeric display communicates advertising messages and machine status in English, Spanish and Katakana.
- Brew counter keeps track of batches brewed.
- Can brew full or half batches.
- Additional iced coffee recipe included.
- Equipped with tank drain.
- Black plastic coffee funnel and separate tea funnel.
- Integrated flip tray converts to three positions: thermal carafe, airpot and tea dispenser.



ITCB*

RELATED PRODUCTS SOLD SEPARATELY

Tea Filter Pack

Product No.: 20100.0000



Stainless Steel Smart Funnel®

Product No.: 32643.0000



Inlet Hose Assembly

Product No.: 32865.1001



Tea Dispensers


See page 45 for details.



Airpots and Thermal Carafes

See pages 16 for details.

ITCB	Tea Dispensers
25.75" trunk	TD4, TDS-3, TDO-3.5, TDO-4
29" trunk	TD4, TD4T, TDO-3.5, TDO-4, TDO-5, TDO-N-3.5, TDO-N-4

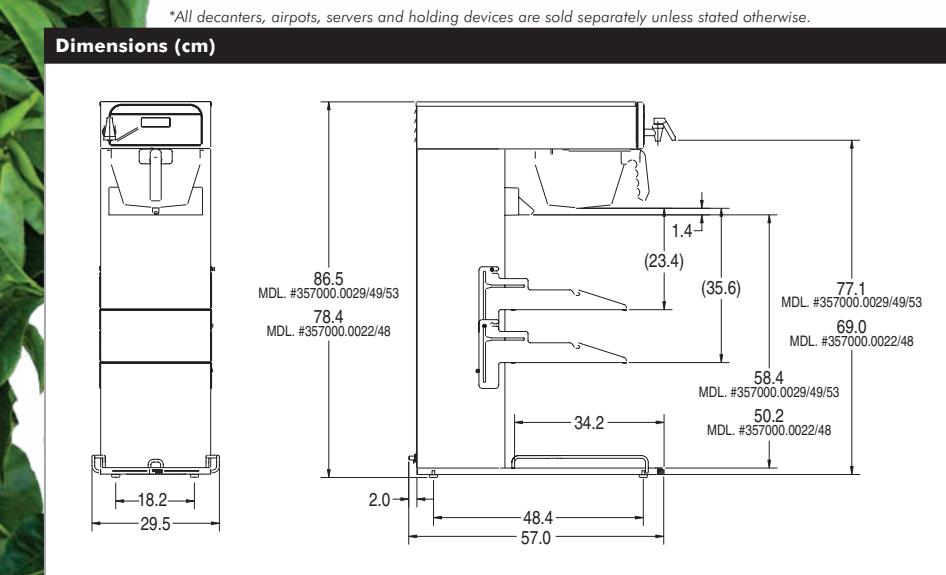

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
35700.0022	ITCBA, 25.75" (65.4 cm), with tray					50/60		No	
35700.0029	ITCBA, 29" (73.7 cm), with tray	22.7 kg	230	14	3200	60	1		
35700.0048	ITCBA, 25.75" (65.4 cm), with tray, INMETRO					50/60		Yes	
35700.0049	ITCBA, 29" (73.7 cm), with tray, INMETRO								
35700.0053	ITCBA, 29" (73.7 cm), with tray, IRAM								

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Infusion Series®

High Volume Tea and Coffee Brewer



Perfect coffee or iced or hot tea from a brewer less than 30.5cm" wide

- Large 11.36 litre tank provides back-to-back brewing capacity
- Brews 37 litres of perfect coffee per hour and 101 litres of iced tea per hour
- BrewWISE® intelligence with pre-infusion and pulse brew for maximum flavor extraction. DBC grinder communicates with brewer through Smart Funnel®
- Tea brewing capability built-in with integrated dilution nozzle, software and Quick Brew tea brewing funnel
- Three brew buttons allow for 3 separate brewing profiles. Two programmable batch switches allow full and half batch brewing
- Digital temperature control and cold brew lockout.
- Energy-saver mode reduces tank temperature during idle periods.
- Digital display in English/Spanish for easier programming and control. Advertising messages and machine status also displayed.
- Dilution feature also allows for brewing iced coffee.
- Includes both coffee and tea funnels.
- Includes overlay kit for customization of brewer interface.
- Brews into 5.7L and 3.8L BUNN ThermoFresh® servers for coffee and TD4T, TDO and TDO-N tea dispensers.
- Optional side mount for hot water faucet.
- Compatible with BUNNlink®.

ICED TEA & COFFEE



ITCB-HV*

RELATED PRODUCTS SOLD SEPARATELY

Coffee Filter Pack

Product No.: 20138.0000



Tea Filter Pack

Product No.: 20100.0000

EQHP-10

Product No.: 39000.0000



EQHP-10 Cartridge

Product No.: 39000.1000

EQHP-TEA

Product No.: 39000.0007



EQHP-TEA Cartridge

Product No.: 39000.1007

Inlet Hose Assembly

Product No.: 32865.1002



Tea Dispensers



See page 45 for details.

Airpots and Thermal Carafes

See pages 16 for details.



Dimensions (cm)

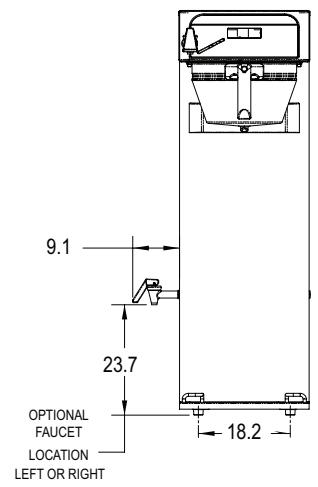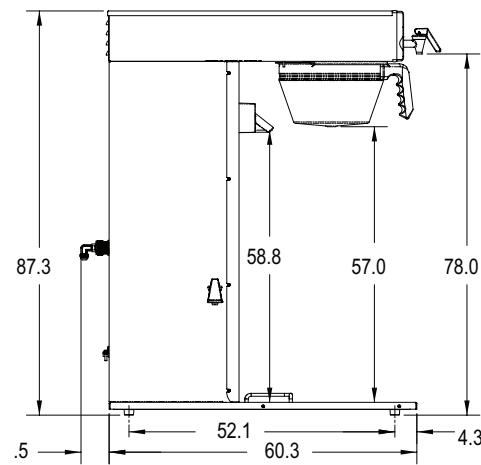

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
43000.0001	ITCBA-HV	22.7 kg	220-240	11-12	2400-2900	50/60	1	No	CE

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

ICED TEA & COFFEE

Iced Tea Brewers ☀

Fresh iced tea brewing solution with simple operation for a wide variety of dispensers

TB3 AND TB3Q

- Brews 61.7 to 101.1 litres per hour from tea leaves.
- Brews directly into any style server.
- Meet your volume needs; brew 11.6 litres of iced tea at a time.
- Quickbrew (Q) models available for shorter brewing cycles.



TB3*

*All decanters, airpots, servers and holding devices are sold separately unless stated otherwise.

RELATED PRODUCTS SOLD SEPARATELY

Tea Filter Pack

Product No.: 20100.0000



Tea Dispensers



See page 45 for details.



Inlet Hose Assembly

Product No.: 32865.1001

Dimensions (cm)

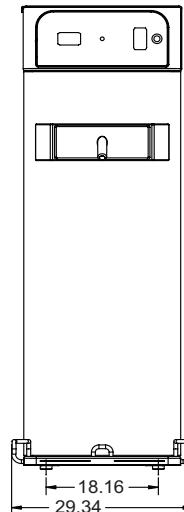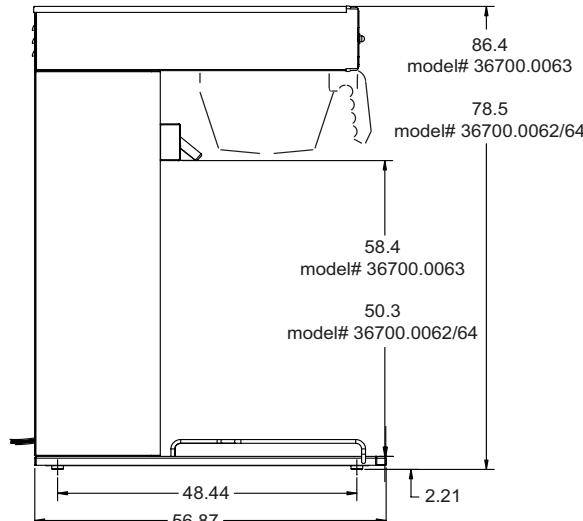

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
36700.0062	TB3QA, 25.75" (65.4 cm) trunk	18.6 kg	230	8	1800	50/60	1	Yes	KSA CE
36700.0063	TB3A, 29" (73.7 cm) trunk	11.2 kg							CE
36700.0064	TB3QA, 25.75" (65.4 cm) trunk, INMETRO	18.6 kg				60			N
36700.0108	TB3QA, 25.75" (65.4 cm) trunk, IRAM					50/60			IRAM

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

ICED TEA & COFFEE



Iced Tea Dispensers

CYLINDER STYLE DISPENSER

- Dispensers available in 13.2, and 15.1 litres.
- Sump dispense valve assures complete dispensing of tea.
- TDO-5, TDO-4, and TDO-3.5 models have plastic lid and oval shape.
- Handles labeled "sweetened" and "unsweetened".
- Handles are mounted offset for closer side-by-side positioning.

SQUARE ICED TEA DISPENSER

- Dispensers have 15.14 litre capacity.
- Sight gauges shows tea volume.
- Available with solid or brew-through lids.

NARROW ICED TEA DISPENSER

- Dispensers have 15.14 litre capacity.
- Two dispensers, placed side-by-side, allow added flexibility and twice the capacity within the same footprint as one TDO-4.
- Front - back handles for reduced counter space usage.

TB3/TB3Q	Tea Dispensers
25.75" trunk	TD4, TDS-3, TDO-4
29" trunk	TD4, TD4T, TDS-3, TDS-3.5, TDO-4, TDO-5, TDO-N-3.5, TDO-N-4

ITCB	Tea Dispensers
25.75" trunk	TD4, TDS-3, TDO-3.5, TDO-4
29" trunk	TD4, TD4T, TDS-3, TDO-3.5, TDO-4, TDO-5, TDO-N-3.5, TDO-N-4

Product #	Description	Weight	Dimensions	Cord	Agency
03250.0003	TD4, sight gauge, solid lid	5.4 kg	43.4cm H x 23.1cm W x 39.9cm D		
03250.0006	TD4, brew-through lid	5.0 kg			
03250.0004	TD4T, sight gauge, solid lid, tall				
03250.0005	TD4T, brew-through lid, tall				
03250.0018	TD4T, brew-through lid, tall, no decal	5.9 kg	55.9cm H x 23.1cm W x 39.9cm D		
03250.0042	TD4T, solid lid, tall, new handle				
03250.0043	TD4T, brew-through lid, tall, new handle				
34100.0000	TDO-4, solid lid	5.4 kg	48.3cm H x 27.2cm W x 34.8cm D		
34100.0001	TDO-5, solid lid	6.4 kg	55.9cm H x 27.2cm W x 34.8cm D		
34100.0002	TDO-4, brew-through lid	5.4 kg	48.3cm H x 27.2cm W x 34.8cm D		
34100.0020	TDO-4, brew-through lid, new handle				
34100.0003	TDO-5, brew-through lid	6.4 kg	55.9cm H x 27.2cm W x 34.8cm D		
37100.0000	TDO-3.5, low profile, brew-through lid	5.0 kg	25.4cm H x 24.9cm W x 40.9cm D		
33000.0000	TDS-3	9.4 kg	48.3cm H x 24.9cm W x 32.5cm D		
33000.0008	TDS-3.5	10 kg	51.8cm H x 24.9cm W x 32.5cm D		
39600.0001	TDO-N-3.5				
39600.0025	TDO-N-3.5, with feet	5.6 kg	54.9cm H x 15.7cm W x 34.3cm D		
39600.0031	TDO-N-3.5, new handle				
39600.0002	TDO-N-4	5.6 kg	53.3cm H x 15.2cm W x 60cm D		
37675.0001	LP Server Stand	3.9 kg	23.5cm H x 29.2cm W x 35.6cm D		

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.



HOT BEVERAGE SYSTEMS

iMIX® Dispensers with 3 Hoppers

Sleek, eye-catching powdered beverage dispenser featuring advanced mixing technology delivers exceptional hot drinks

- Three, 3.6 kg hoppers
- Lighted front graphics for merchandising.
- Large 16.66 litre hot water tank.
- Cup clearance of 18.4 cm.
- High speed, heavy-duty whipper for complete product mixing.
- Front of machine access for easy service, set up and calibration.
- Variable speed motors allow control of product consistency (.75 to 6.6 grams of powder per second).
- Low powder product detection system.
- Alphanumeric display in English and Spanish.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- RPM feedback. 



iMIX-3 PC

RELATED PRODUCTS SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



Chai Display

Product No.: 37457.0001



EQHP-10L

Product No.: 39000.0001

Steamer Display

Product No.: 37457.0003

Inlet Hose Assembly



Product No.: 32865.1001

Hot Chocolate Display

Product No.: 37457.0002



Dimensions (cm)

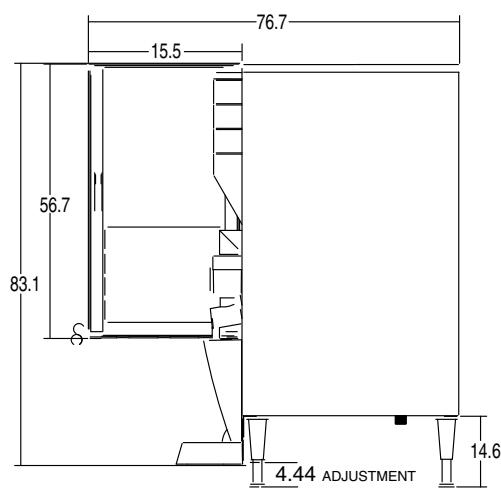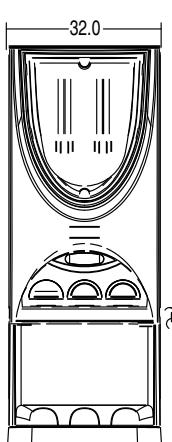

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
36900.0014	iMIX-3A, portion control	40.8 kg	220-240	13.6-14.5	3000-3500	50/60	1	No	CE

Plumbing: 138-624 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

iMIX® Oatmeal Dispensers with 3 Hoppers

- Three, 3.6 kg hoppers.
- Serves three instant oatmeals.
- Top-hinged design minimizes machine footprint.
- Lighted front graphics for merchandising.
- Large 16.66 litre hot water tank.
- Cup clearance of 18.4 cm.
- High speed, heavy-duty whipper for complete product mixing.
- Front of machine access for easy service, set up and calibration.
- Variable speed motors allow control of product consistency (.75 to 6.6 grams of powder per second).
- Low powder product detection system.
- Alphanumeric display in English and Spanish.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- RPM feedback. 

HOT BEVERAGE SYSTEMS



iMIX-3S Oatmeal

RELATED PRODUCTS SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004




EQHP-10L

Product No.: 39000.0001

Inlet Hose Assembly

Product No.: 32865.1001

Dimensions (cm)

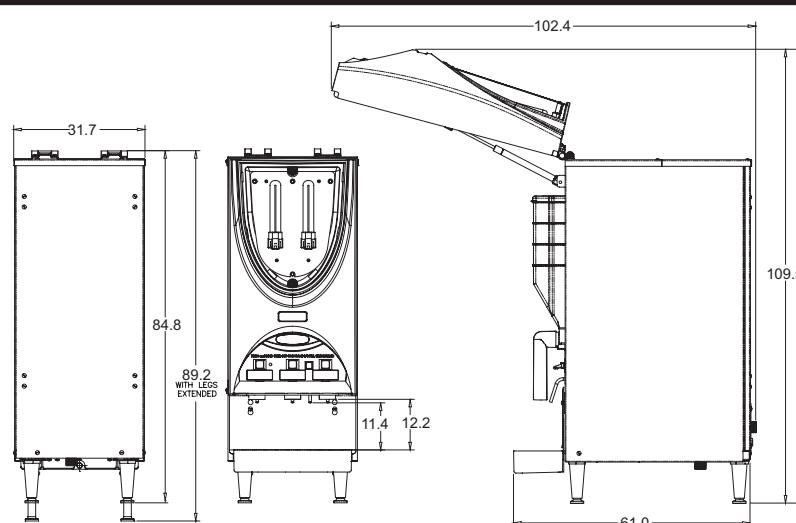

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
38600.0055	iMIX-3SA Oatmeal	40.8 kg	220-240	13.6-14.5	3000-3500	50	1	Yes	CE

Plumbing: 138-624 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

HOT BEVERAGE SYSTEMS

Fresh Mix Dispensers with 3 Hoppers

- Three 1.81 kg hoppers.
- Variable speed hopper motors offer control of product consistency.
- Lighted graphics for merchants.
- Adjustable legs and drip tray allow up to 17.8 cm opening for serving cup.
- Specially designed mixing system delivers perfect beverages every time.
- Improved automatic rinse reduces run-on after beverage is dispensed.
- Easy-to-program, one-touch portion control for three cup sizes.
- Fast fill - perfect for quick service applications.
- Each mixing chamber has independent powder to water ratio.
- System setup is password protected for safety and security.
- Simple setup and hopper throw calibration system.
- Hot water dispense.



FMD-3 DBC

RELATED PRODUCTS

SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004




EQHP-10L

Product No.: 39000.0001

Inlet Hose Assembly

Product No.: 32865.1001

Dimensions (cm)

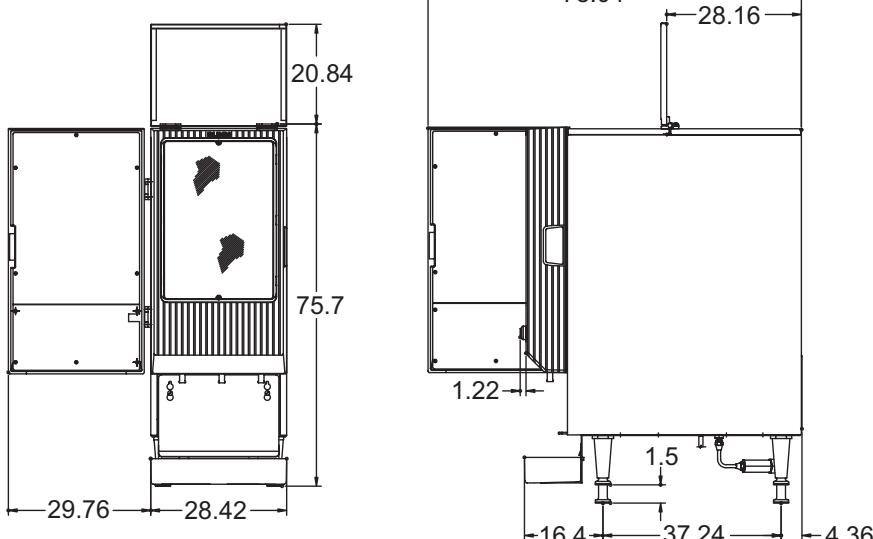

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
29250.0010	FMDA-3 DBC, hot water dispense	39.9 kg	230	15	3600	50/60	1	Yes	CE
SET00.0174	FMDA-3 DBC, hot water disp., German literature								

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

iMIX®-14 Hot Beverage System

Expands hot powdered offerings and promotes increased customer attention with contemporary styling and digital advertising board

- Capacity: Four 2.94 kg hoppers for base powders
Two 0.91 kg hoppers for flavor concentrate powders
- 17.8 cm diagonal touch screen communicates advertising messages, machine status, technical support contact information and provides programming for settings and service adjustment.
- LED backlit door and contemporary styling create striking counter top presence.
- 7-gallon hot water tank to meet peak serving times.
- Cup clearance at 17.1cm to accommodate popular cup sizes.
- Front of machine access for set up and calibration, tank drain, dump valves, auger and whipper motors and control board for easy service.



iMIX-14

RELATED PRODUCTS SOLD SEPARATELY

EQHP-25

Product No.: 39000.0005




EQHP-25 CRTG

Product No.: 39000.1005

Inlet Hose Assembly

Product No.: 32865.1001

Dimensions (cm)

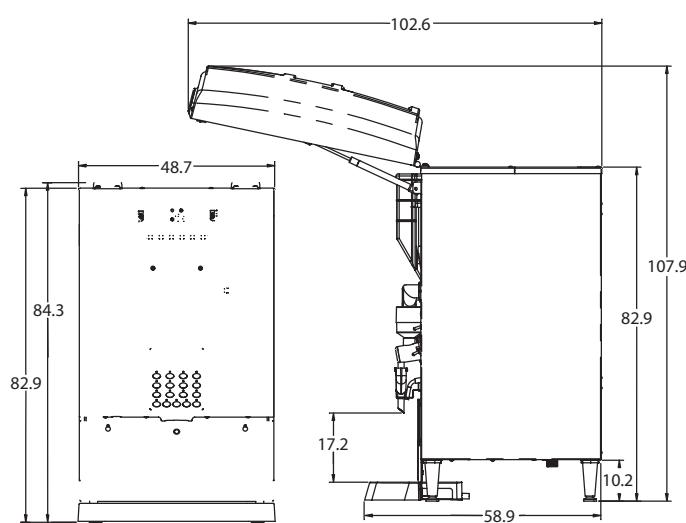

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
36900.0104	iMIX-14A	60.8 kg	220-240	13.2-14.5	2900-3500	50/60	1	Yes	CE

Plumbing: 138-624 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

COLD BEVERAGE SYSTEMS

Cold Beverage Systems



Cold beverage dispenser with High Intensity® mixing delivers superior drinks consistently


- One dispenser delivers both frozen and ambient products.
- Quick dispense with 44.4 to 59.2 ml per second flow rate.
- 20.8 cm cup clearance accommodates most juice containers.
- 4.5 kg ice bank assures cold product.
- Drink consistency and quick dispense assured by the High Intensity® mixing chamber's "stay clean" valve design.
- Pumps and mixes 4:1 high viscosity and 5:1 juices accurately and consistently.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Equipped with tank drain.
- Dual dispense allow simultaneous dispense from both dispense heads (juice display only).



JDF-2S

JDF-2S IC

Dimensions (cm)

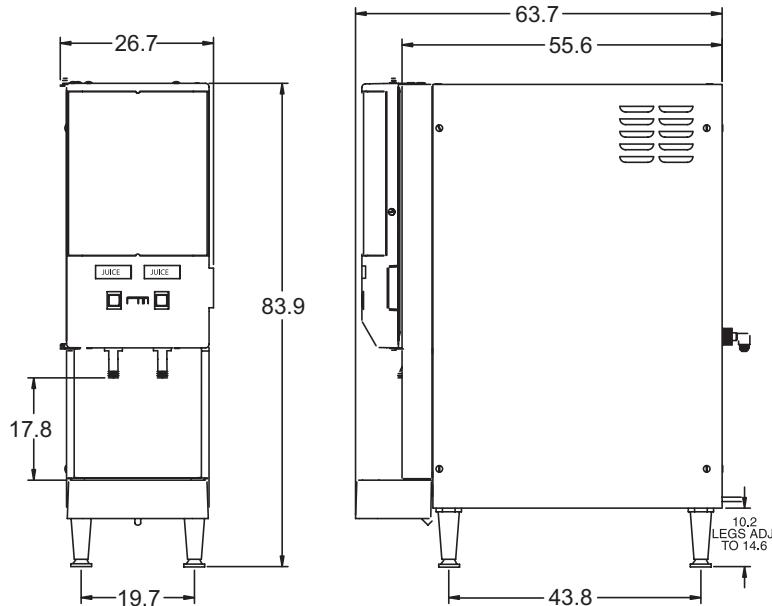

RELATED PRODUCTS SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001

Inlet Hose Assembly

Product No.: 32865.1002



Refillable juice container

Product No.: 39302.0000

Ambient concentrate conversion kit

Product No.: 33699.0001

*24°C incoming water for 190 drinks without exceeding 4.4°C finished drink temperature.

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
NON-LIGHTED DOOR									
37900.0003	JDF-2SA, pushbutton				920	50			
37900.0007	JDF-2SA, pushbutton, iced coffee (IC) display	46.7 kg	230	4			1	Yes	
37900.0041	JDF-2SA, pushbutton, INMETRO				900	60			

Plumbing: 138-690 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Cold Beverage Systems

Cold beverage dispenser with High Intensity mixing delivers superior drinks consistently


- One dispenser delivers both frozen and ambient products.
- Quick dispense with 44.4 to 59.2 ml per second flow rate.
- 20.8 cm cup clearance accommodates most juice containers.
- 4.5 kg ice bank assures cold product.
- Drink consistency and quick dispense assured by the High Intensity® mixing chamber's "stay clean" valve design. 
- Pumps and mixes 4:1 high viscosity and 5:1 juices accurately and consistently.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Equipped with tank drain.
- Three size portion control model available (juice only).
- Dual dispense allow simultaneous dispense from both dispense heads (juice display only).
- Lighted door units use high efficiency LED lighting.



JDF-2S LD



JDF-2S IC LD



JDF-2S PC LD
(Lighted door with portion control)

RELATED PRODUCTS SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001

Inlet Hose Assembly

Product No.: 32865.1002





Refillable juice container

Product No.: 39302.0000

Ambient concentrate conversion kit

Product No.: 33699.0001

Dimensions (cm)

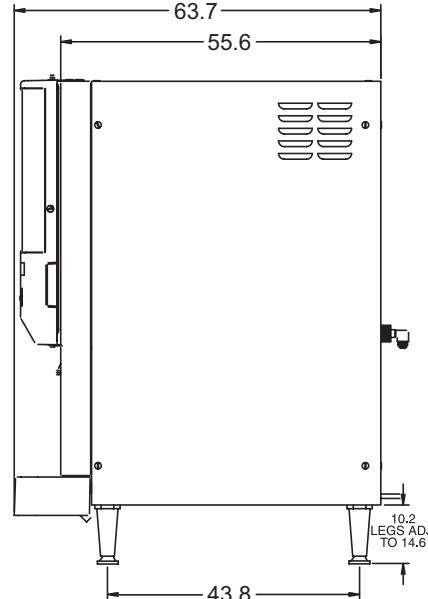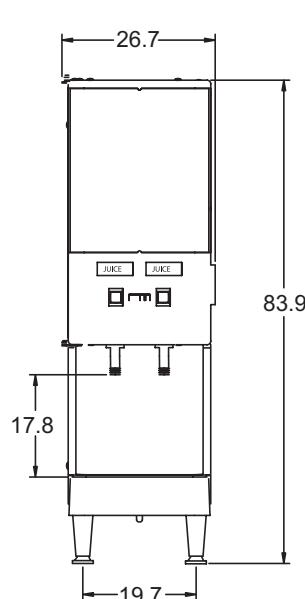

*24°C incoming water for 190 drinks without exceeding 4.4°C finished drink temperature.

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
LIGHTED DOOR									
37900.0010	JDF-2SA, pushbutton	46.7 kg	230	4	920	50	1	Yes	
37900.0011	JDF-2SA, pushbutton, iced coffee (IC) display								
37900.0017	JDF-2SA, portion control								

Plumbing: 138-690 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

COLD BEVERAGE SYSTEMS

Cold Beverage Systems



Cold beverage dispenser with High Intensity mixing delivers superior drinks consistently

- One dispenser delivers both frozen and ambient products.
- Frost-free refrigerated compartment holds up to 15.1 litres of frozen concentrate.
- 8.2 kg ice bank assures cold product.
- Drink consistency and quick dispense assured by the High Intensity® mixing chamber's "stay clean" valve design.
- Pumps and mixes 4:1 high viscosity and 5:1 juices accurately and consistently.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Equipped with tank drain.
- Cold water feature on some models.




JDF-4S



JDF-4S IC

Dimensions (cm)

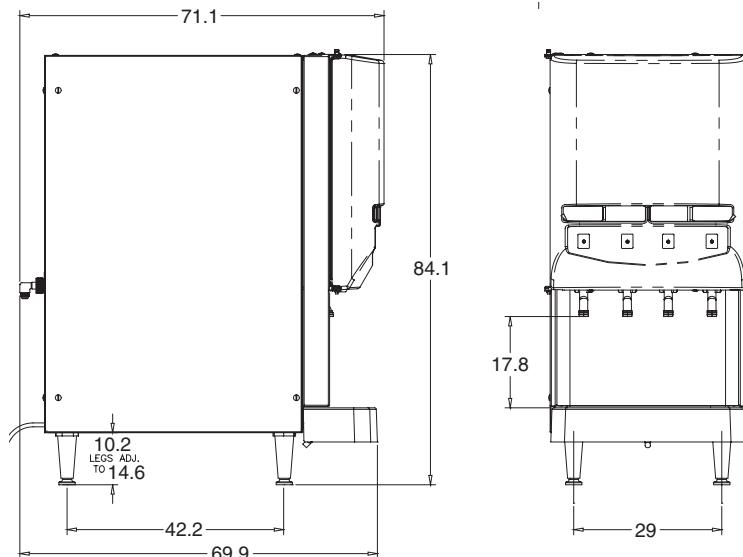

RELATED PRODUCTS SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001

Inlet Hose Assembly

Product No.: 32865.1002



Refillable juice container

Product No.: 39302.0000

Ambient concentrate conversion kit

Product No.: 33699.0001

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
NON-LIGHTED DOOR									
37300.0003	JDF-4SA, pushbutton, juice display, cold water dispense	58.5 kg	230	4	920	50	1	Yes	CE
37300.0021	JDF-4SA, pushbutton, iced coffee(IC) display, cold water dispense								

Plumbing: 138-690 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Cold Beverage Systems



Cold beverage dispenser with High Intensity mixing delivers superior drinks consistently

- One dispenser delivers both frozen and ambient products.
- Frost-free refrigerated compartment holds up to 15.1 litres of frozen concentrate.
- 8.2 kg ice bank assures cold product.
- Drink consistency and quick dispense assured by the High Intensity® mixing chamber's "stay clean" valve design.
- Pumps and mixes 4:1 high viscosity and 5:1 juices accurately and consistently.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Equipped with tank drain.
- Cold water feature on some models.
- Three size portion control, lighted door models available. (juice only)
- Lighted door units use high efficiency LED lighting.

COLD BEVERAGE SYSTEMS



JDF-4S LD LD

JDF-4S LD IC



JDF-4S PC LD

RELATED PRODUCTS

SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001



Inlet Hose Assembly

Product No.: 32865.1002


Refillable juice container

Product No.: 39302.0000

Ambient concentrate conversion kit

Product No.: 33699.0001

Dimensions (cm)

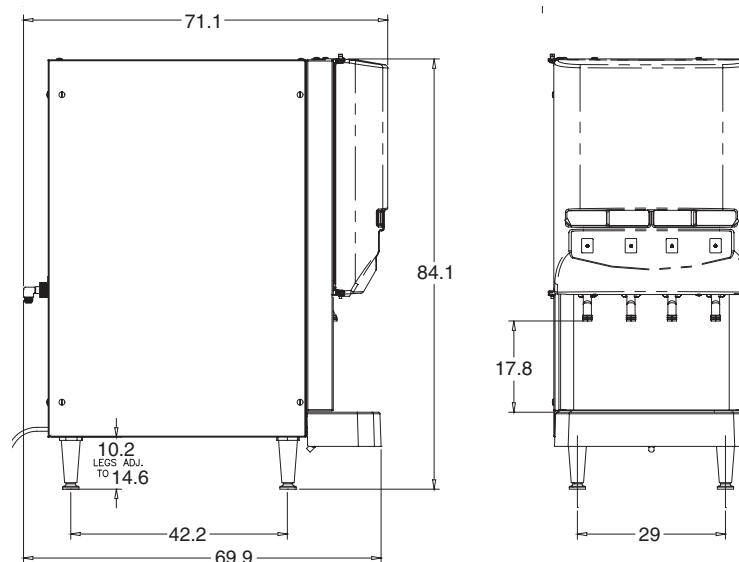

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency	
LIGHTED DOOR										
37300.0005	JDF-4SA, pushbutton, juice display	58.5 kg	230	4	920	50	1	Yes	NSF CE	
37300.0007	JDF-4SA, pushbutton, juice display, cold water dispense				900	60			CE	
37300.0022	JDF-4SA, pushbutton, iced coffee (IC) display									NSF CE
37300.0024	JDF-4SA, portion control, juice display									
37300.0040	JDF-4SA, pushbutton, juice display, INMETRO									

Plumbing: 138-690 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

FROZEN BEVERAGE SYSTEMS

Ultra® Gourmet Ice® Systems

Frozen beverage dispenser with reversing auger technology for superior mixing and freezing


- Reversing auger design quickens freeze time and reduces air mixing with product.
- Two large 11.4 litre hoppers for optimum cooling and serving capacity.
- Very simple to program and run with touchpad display, which also guides cleaning and preventive maintenance.
- Internally monitored refrigeration system to ensure long lasting performance.
- Lighted displays for merchant graphics.
- English/Spanish/French display.
- Autofill models (AFI) include autofill hoppers and factory installed liquid autofill kit for use with third party brix pumps.



Ultra-2

Ultra-1

Dimensions (cm)

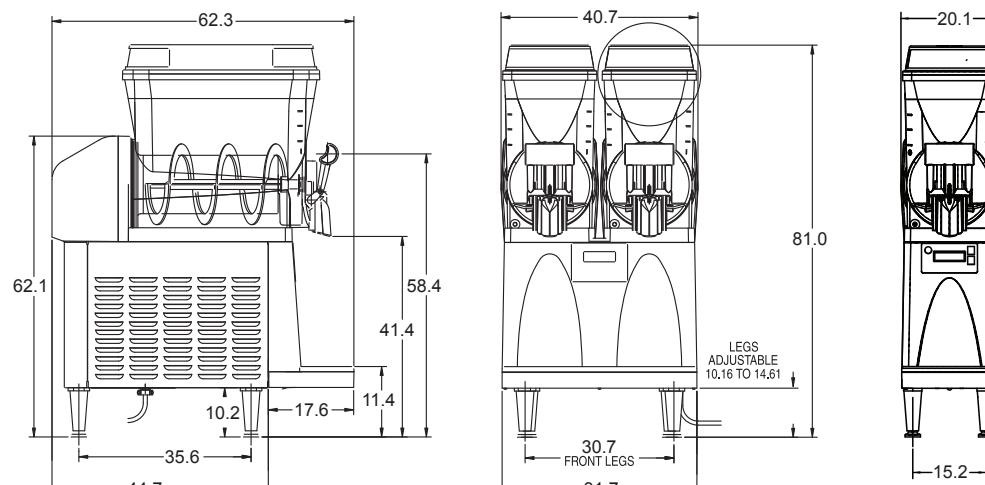

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
39800.0001	Ultra-1A, white/stainless	34.7 kg	230	4	600	50			
39800.0005	Ultra-1A, black								
39800.0009	Ultra-1B, white/stainless	62.1 kg	100	6					
34000.0002	Ultra-2A, all black								
34000.0003	Ultra-2A, white/stainless	55 kg	220-240	4.5-5.1	980-1100	50	1	Yes	
34000.0066	Ultra-2A, black/stainless, AFI								
34000.0071	Ultra-2, white/stainless, painted frame, Spanish	62.1 kg	100	12	1200				
34000.0074	Ultra-2B, black/stainless								
34000.0084	Ultra-2B, white/stainless	220-240	4.5-5.1	980-1100					
34000.0091	Ultra-2A, black/stainless								
34000.0095	Ultra-2A, white/stainless, coated parts	230	6.5	1500		60			
34000.0518	Ultra-2A, white/stainless, IRAM								
34000.0529	Ultra-2A, white/stainless, INMETRO	220-240	4.5-5.1	980-1100					
39800.0020	Ultra-1A, black/stainless, INMETRO								
39800.0021	Ultra-1A, white/stainless, INMETRO	34.7 kg	230	4	600				

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

Powdered Ultra® Gourmet Ice® Systems

Frozen beverage dispenser with reversing auger technology for superior mixing and freezing

- Powdered product autofill hoppers refill product at a rate of .03 litre/second.
- Two large 7.57 litre hoppers for optimum cooling and serving capacity.
- Reversing auger design quickens freeze time and reduces air mixing.
- Very simple to program and run with touchpad display, which also guides cleaning and preventive maintenance.
- Internally monitored refrigeration system ensure long lasting performance.
- High efficiency LED lighting systems for merchant graphics.
- Alphanumeric display communicates advertising messages, machine status and technical support contact information in English, Spanish and French. Display capable of showing English or Metric measurements.

FROZEN BEVERAGE SYSTEMS




Ultra-2 PAF

RELATED PRODUCTS SOLD SEPARATELY

Inlet Hose Assembly

Product No.: 32865.1001

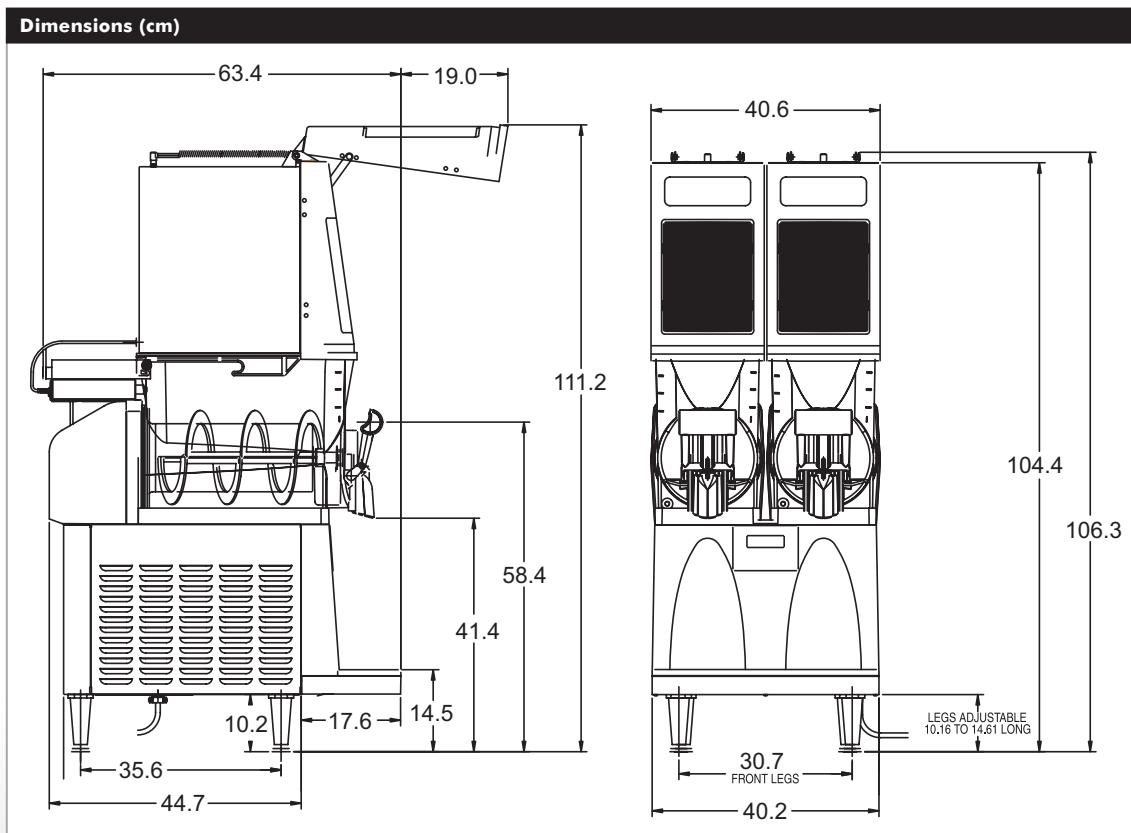

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.


PRECISE TEMPERATURE SYSTEMS

Precise Temperature Water Dispensers

- Digital thermostat provides consistent and accurate temperatures of 15.6°-100°C.
- New contemporary, space-saving design.
- LED display provides simple temperature adjustment.
- Programmable "Energy Saver Mode" reduces operating cost during idle periods.
- Thinsulate® tank insulation provides over increased energy efficiency.
- The perfect tool for added control over quality coffee and tea.



Dimensions (cm)

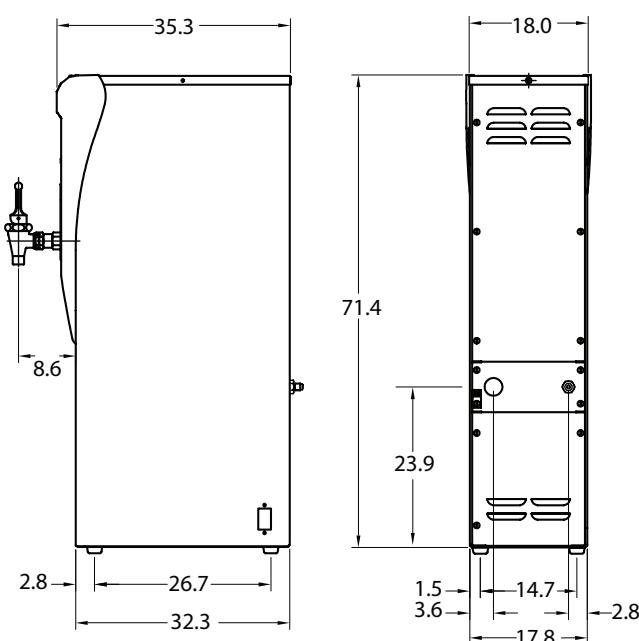

H5E/X Element

RELATED PRODUCTS SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001

Inlet Hose Assembly

Product No.: 32865.1001

Drip Tray

Product No.: 02497.0000

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
43600.0012	H5E Element, 200°F (93.3°C) - Stainless	14.5 kg	220-230	15.5-16.0	3400-3700	50/60	1	No	 KSA
43600.0013	H5X Element, 212°F (100°C) - Stainless								
43600.0016	H5E Element, 200°F (93.3°C) - Red								
43600.0020	H5X Element, 212°F (100°C) - Red								
43600.0017	H5E Element, 200°F (93.3°C) - Copper								
43600.0021	H5X Element, 212°F (100°C) - Copper								
43600.0018	H5E Element, 200°F (93.3°C) - Black								
43600.0022	H5X Element, 212°F (100°C) - Black								
43600.0019	H5E Element, 200°F (93.3°C) - White								
43600.0023	H5X Element, 212°F (100°C) - White								

Plumbing: 138-621 kPa. Machine supplied with 1/4 inch OD male flare fitting.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.



PRECISE TEMPERATURE SYSTEMS

Precise Temperature Water Dispensers



- Dispenses up to 30.7 litres of hot water per hour
- Space-saving machine just 18cm wide to fit any counter.
- High quality, easy-to-clean stainless steel exterior and tank for a long life.
- Includes drip tray.
- Temperature setting at 93.3°C.
- Perfect for food prep and cleaning.

RELATED PRODUCTS SOLD SEPARATELY

ED-17-TL

Product No.: 30201.1001



Inlet Hose Assembly

Product No.: 32865.1001


EQ-17-TL

Product No.: 30200.1000

Power Cord

Product No.: 01716.0000

Dimensions (cm)

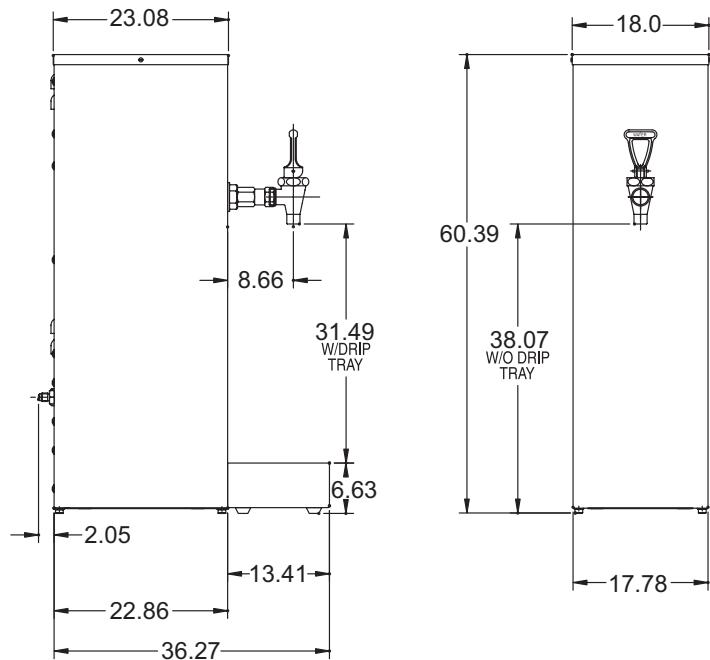

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
02500.0002	HW2A	10 kg	230	7.6	1750	50/60	1	No	CE KSA PG
02500.0006	HW2A			13.1	3000				
02500.0008	HW2A, KETI		220	7	1530	60		Yes	KC

Plumbing: 138-621 kPa. Machine supplied with 1/4 inch OD male flare fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

PRECISE TEMPERATURE SYSTEMS




H5E PC

Precise Temperature Water Dispensers



- Dispenses up to 68.14 litres of boiling water per hour.
- Precise temperature ensures consistent results.
- High quality, easy-to-clean stainless steel exterior and tank for a long life.
- Can be front or side wall mounted for space savings.
- Perfect for preparing large amounts of mashed potatoes, gravy, cheese sauce, gelatin, oatmeal and many more foods.
- Precise electronic temperature control 18.3°C - 96.1°C ensures consistent water temperature.
- Three programmable volume settings and one push and hold continuous dispense button.
- Front of machine volume programming.

Dimensions (cm)

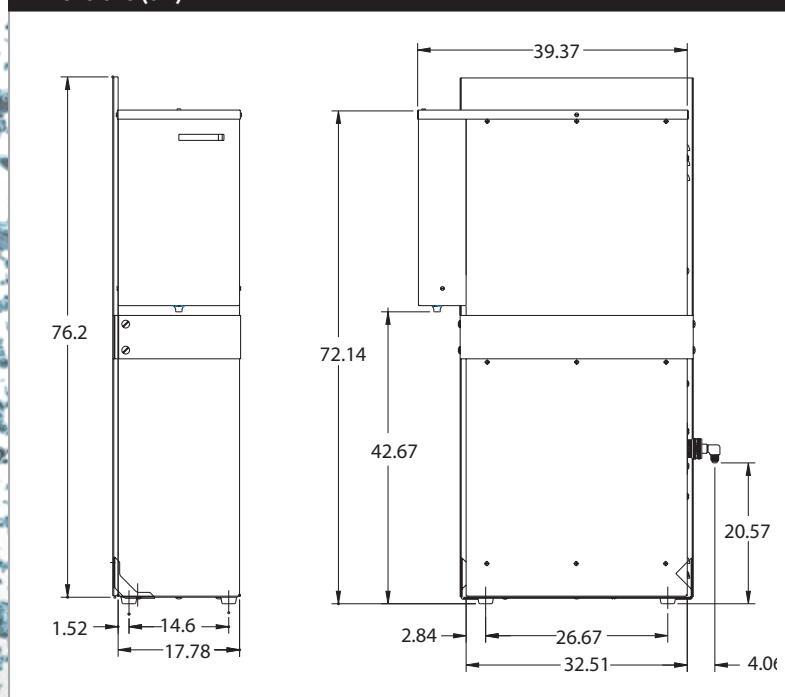

RELATED PRODUCTS

SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001

Inlet Hose Assembly

Product No.: 32865.1001

Drip Tray

Product No.: 02497.0000

Wall Mount Bracket (side)

Product No.: 12542.0000

Wall Mount Bracket (front)

Product No.: 13125.0001

Shelf Kit

Product No.: 12599.0000

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
39100.0003	H5EA, portion control, 18.3°C - 96.1°C (64.9°F - 205°F)	14.5 kg	230	16	3700	50/60	1	No	

Plumbing: 138-621 kPa. Machine supplied with 1/4 inch OD male flare fitting. All plumbed models that are CE listed feature backflow prevention.



H10X

PRECISE TEMPERATURE SYSTEMS

Precise Temperature Water Dispensers



- Dispenses up to 90.85 litres of boiling water per hour.
- Precise temperature 100°C ensures consistent, high quality results.
- Ideal for preparation of large amounts of mashed potatoes, gravy, cheese sauce, gelatin, oatmeal, and many more foods.
- Includes dry-plug prevention for easy installation.

RELATED PRODUCTS SOLD SEPARATELY

EQHP-10

Product No.: 39000.0004



EQHP-10L

Product No.: 39000.0001


Inlet Hose Assembly

Product No.: 32865.1001

Drip Tray

Product No.: 02497.0000

Dimensions (cm)

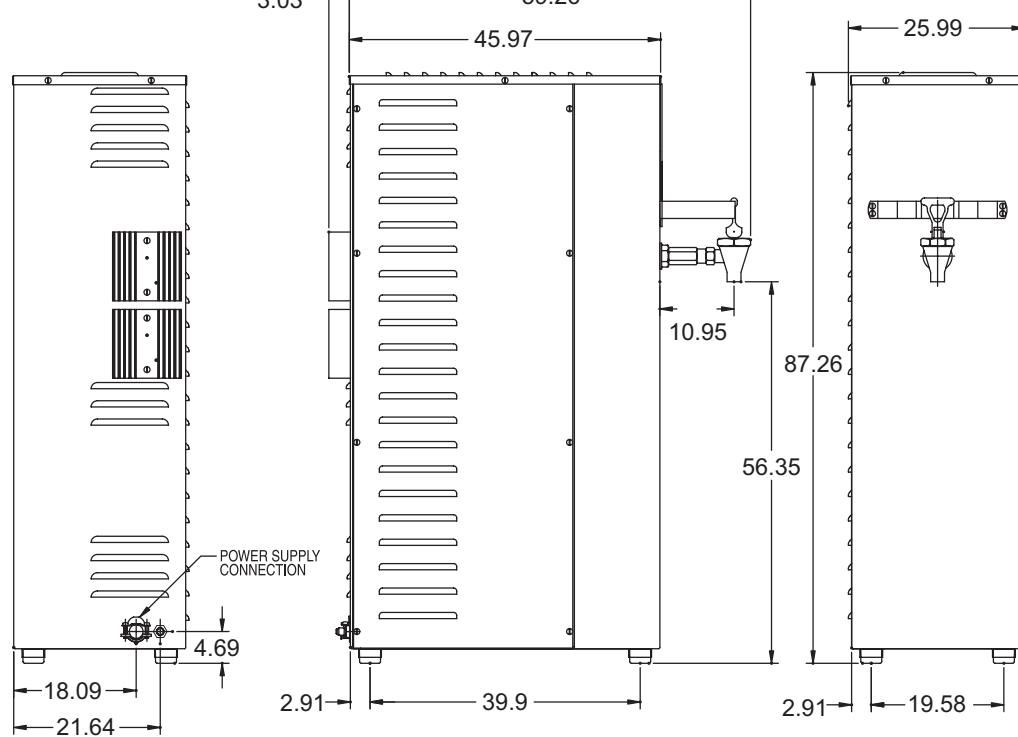

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
26300.0000	H10X-80-240, 100°C (212°F)	30.26 kg	240	33.5	8050	50/60	1	No	

Plumbing: 138-621 kPa. Machine supplied with 1/4 inch OD male flare fitting.

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

RELATED PRODUCTS



Water Quality Filter Systems

Quality beverages begin with quality water

BUNN® water quality filtration systems, when used with BUNN brewing equipment, ensure that your customers are getting the best tasting beverage possible. The Easy Clear® filters are manufactured to BUNN specifications and address water problems such as taste and odor; sediment, limescale and hardness.

Model #	Part #	Capacity @ Flow Rate	Taste & Odor	Sediment	Lime	Softwater	Replacement Cartridges
EQ-17-TL	30200.1000	5678 gal @ 1.9 gpm	•		•		30200.1001
EQHP10L	39000.0001	10000 gal @ 1.5 gpm	•	•	•		39000.1001
EQHP10	39000.0004	10000 gal @ 1.5 gpm	•	•			39000.1004
EQHP25L	39000.0002	25,000 gal @ 2.1 gpm	•	•	•		39000.1002
EQHP25	39000.0005	25,000 gal @ 2.1 gpm	•	•			39000.1005
EQHP35L	39000.0011	35,000 gal @ 3.34 gpm	•	•	•		39000.1011
EQHP54L	39000.0003	54,000 gal @ 5 gpm	•	•	•		39000.1003
EQHP54	39000.0006	54,000 gal @ 5 gpm	•	•			39000.1006
EQHP-TWIN 70L*	39000.0012	70,000 gal @ 6.68 gpm	•	•	•		(2) 39000.1011
EQHP-TWIN 108SP**	39000.0013	108,000 gal @ 10 gpm	•	•	•		(2) 39000.1006, (1) 39000.1010
Scale-Pro®	39000.0010	Recommended 6 month change-out			•		39000.1010
EQHP-ESP	39000.0008	422 gal @ 10.5 gpg @ .5gpm	•				39000.1008
EQHP-SFTN	39000.0009	1350 grains	•			•	39000.1009
EQHP-TEA	39000.0007	4350 grains	•				39000.1007

*Requires two (2) cartridges. **Requires two (3) cartridges

Cleaners

Cleaning Product	Product #	Description	For use with
Coffee Wipes	38450.0000	Coffee Wipe single pack	coffee satin remover
Kay-5®	24634.0001	Box of 50 individual packs	coffee brewers, servers, juice and granita dispensers
	24634.0000	Box of 200 individual packs	
Dezcal™	37306.0000	Cleaning powder (individual pack)	
TABZ™	39637.0000	Cleaning tablets (individual pack)	coffee brewers and servers
	39637.0001	Cleaning tablets (case of twelve)	
GRINDZ™	39159.0000	Grinder cleaner (individual pack)	grinders
	39159.0001	Grinder cleaner (case of twelve)	
Cafiza™	36000.1189	Cleaning tablets (individual pack)	espresso system
	36000.1188	Cleaning tablets (case of twelve)	
Rinza™	39265.0000	Milk froth cleaner (individual pack)	
	39265.0001	Milk froth cleaner (case of six)	
Complete Café™	39265.0010	Espresso machine sanitizer (individual pack)	
	39265.0010	Espresso machine sanitizer (case of six)	

Accessories

Product	Product #	Capacity @ Flow Rate
FLOWJET® System	29875.0001	1.0 GPM (3.8 LPM) at open flow
Frothaway	24700.0000	

RELATED PRODUCTS



Paper Filters



Selection of coffee filters is a vital step in brewing perfect coffee - don't settle for anything less than BUNN® quality coffee filters. Using the results of years of research, BUNN manufactures the best filters from high quality, heavy weight paper, so the water flows properly through the coffee. BUNN filters are uniquely designed for strength so the sides are taller, and you don't end up with overflow and grounds in your coffee.

BUNN's paper stock used in the manufacturing of our coffee filters is produced using an elemental chlorine-free (ECF) bleaching method.

Filter Type	Product Number	Description	Number per Bag	Bags per Case	Number Cluster	Overall Measure x Base Diameter (millimetres)	Packed per Case	Case Weight (lbs/kg)
Decanter Filters	20115.0000	Regular C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	247.65 x 107.95	1000	4.2/1.91
	20116.0000	Regular Narrow C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	241.3 x 82.55	1000	4.2/1.91
	20122.0000	Regular Fast Flow C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	247.65 x 107.95	1000	4.5/2.04
Urn Filters	20109.0000	Urn - U3, SRU, IC-3	252	1	36	450.85 x 184.15	252	5.5/2.49
	20112.0000	Narrow Base Urn	250	1	25	469.9 x 158.75	250	5.5/2.49
	20124.0000	Urn, 11.4 litres	252	1	36	482.6 x 184.15	252	6.1/2.77
	17104.0001	Urn, 11.4 litres	250	1	25	457.2 x 228.6	250	5.5/2.49
	20111.0000	Titan/Urn, 22.7 litres	252	1	36	508 x 196.85	252	6.6/2.99
	20125.0000	Urn, 22.7 litres	250	1	25	533.4 x 222.25	250	7.5/3.4
	17117.0001	Urn, 22.7 litres	250	1	25	533.4 x 279.4	250	7.5/3.4
	20113.0000	Urn, 37.9 litres	250	1	25	603.25 x 222.25	250	9.3/4.22
	20131.0000	Urn, 37.9 litres	252	1	36	615.95 x 273.05	252	9.7/4.40
Other Filters	20120.0000	System III	252	2	36	384.18 x 136.53	504	8.5/3.86
	20100.0000	Tea - Tea Brewers, Single & Dual Coffee brewers, 5.7L urns, ITCB	500	1	50	323.85 x 133.35	500	4.7/2.13
Gourmet Filters	20100.0010	Gourmet Funnels	500	2	50	323.9 x 133.4	1,000	4.7/2.13
	20138.0000	Gourmet - Iced Tea, system II, Dual, Dual SH, Dual TF, 5.7L urns	252	2	36	349.25 x 133.35	504	5.5/2.49
	20157.0000	BUNN Gourmet C Funnel	500	2	50	349 x 133	1,000	11/4.99

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

RELATED PRODUCTS



Easy Pour®
(regular)



Easy Pour®
(decaf)



Glass Decanter
(regular)



Glass Decanter
(decaf)

Coffee Decanters

Easy Pour® is an exclusive BUNN design that assures convenient serving with a drip-proof, fast pouring lip from front or either side

- Glass and Easy Pour® decanters can be private labeled. Please contact your BUNN sales representative for more information.
- All decanters have 1.9L capacity.

EASY POUR®

- Container and handle core are molded as sturdy, extra-strength, one-piece construction for longest life.
- Clear, high-impact-resistant material
- Base is high quality stainless steel.
- Drip-proof, fast-pour lip – an exclusive BUNN design to assure convenient serving. Fast, clean pouring from front or either side.



(regular)



(decaf)

Stainless Steel Decanter

Model	Product #	Number in Case	Handle	Weight
Easy Pour 1.89 litre	06100.0101	1	Black	1.0 lb. (0.5 kg)
	06100.0102	2		2.0 lbs. (0.9 kg)
	06100.0103	3		3.0 lbs. (1.4 kg)
	06100.0106	6		6.0 lbs. (2.7 kg)
	06100.0112	12		12.0 lbs. (5.5 kg)
	06100.0124	24		23.0 lbs. (10.4 kg)
	06100.0156	6 ea. Case of 1		8.0 lbs. (3.6 kg)
Glass Decanter 1.89 litre	06101.0101	1	Orange	1.0 lb. (0.5 kg)
	06101.0102	2		2.0 lbs. (0.9 kg)
	06101.0103	3		3.0 lbs. (1.4 kg)
	06101.0106	6		6.0 lbs. (2.7 kg)
	06101.0112	12		12.0 lbs. (5.5 kg)
	06101.0124	24		22.5 lbs. (10.2 kg)
	42400.0101	1		1.0 lb. (0.5 kg)
Stainless Steel Decanter 1.89 litre	42400.0103	3	Black	4.5 lbs. (2.1 kg)
	42400.0024	24		26.0 lbs. (11.8 kg)
	42401.0101	1		1.0 lb. (0.5 kg)
	42401.0103	3	Orange	4.5 lbs. (2.1 kg)
	42401.0024	24		26.0 lbs. (11.8 kg)
Stainless Decanter 1.89 litre	06026.0000	1	Black	1.5 lbs. (0.7 kg)
	06041.0000		Orange	

RELATED PRODUCTS

Coffee Decanter Warmers

- Warmers are an ideal way to merchandise the aroma and appearance of your fresh-brewed coffee in decanters at remote serving stations.
- Each warmer has a separate "on/off" switch and maintains coffee at optimum serving temperature.




WX2

RELATED PRODUCTS SOLD SEPARATELY

Power Cord

Product No.: 01716.0000

Dimensions (cm)

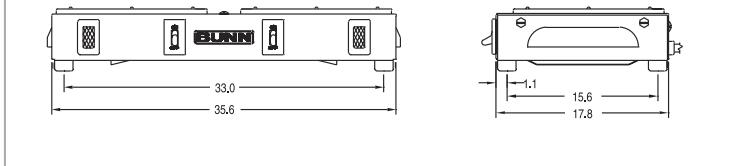

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
06310.0006	WX2A, 2 position warmer	1.8 kg	230	1	200	50/60	1	No	

Airpot Racks

- Holds either push-button or lever-action airpots.
 - Designed to display 2, 3, 4, 5 or 6 airpots.
 - Sturdy, carbon-steel wire construction with vinyl coating resists corrosion and is easy to clean.
 - Sponge-lined trays to catch drips and spills.
- * For detailed drawings, please refer to on-line spec sheets at www.bunn.com



UNIV-3 APR



UNIV-2 APR
(2 lower)



UNIV-2 APR



UNIV-4 APR



UNIV-6 APR

Product #	Description	Weight	Capacity	Dimensions	Agency
35728.0000	UNIV-2 APR, 1 upper, 1 lower	2.3 kg	2 airpots	35.8 H x 19.1 W x 61.2 D	
35728.0001	UNIV-2 APR, 2 lower	2.0 kg	2 airpots	17.5 H x 37.9 W x 28.5 D	
35728.0002	UNIV-3 APR, 3 lower	2.7 kg	3 airpots	17.5 H x 58.2 W x 28.5 D	
35728.0003	UNIV-4 APR, 2 upper, 2 lower	4.5 kg	4 airpots	35.6 H x 37.9 W x 63.3 D	
35728.0004	UNIV-5 APR, 3 upper, 2 lower	5.9 kg	5 airpots	35.6 H x 58.2 W x 63.3 D	
35728.0005	UNIV-6 APR, 3 upper, 3 lower	6.8 kg	6 airpots	35.6 H x 58.2 W x 63.3 D	

Dimensions shown in centimetres. For capacities, additional specs, manuals, care & cleaning, visit www.bunn.com.

RELATED PRODUCTS



BLACK PLASTIC SPLASHGARD® FUNNEL WITH DECALS

Product #: 20583.0003

- For use with CDBC, CWT, AXIOM® and SmartWAVE® brewers.



BLACK PLASTIC ITCB FUNNEL

Product #: 03021.0008

- For use with ITCB when brewing coffee.



BLACK PLASTIC SINGLE/DUAL FUNNEL

Product #: 22735.0000

- For use with Single®, Dual® and Soft Heat® brewers.



STAINLESS STEEL SPLASHGARD® FUNNEL

Product #: 20216.0000 (7.12 inch width)

- For use with CDBC, CWT AXIOM® and SmartWAVE® brewers.



STAINLESS STEEL DUAL/SINGLE FUNNEL

Product #: 20201.1201

- For use with Single®, Dual®, and Soft Heat® brewers.

Stock Funnels



SMART FUNNEL®

Product #: 32643.0000

- For use with BrewWISE® ThermoFresh®, Soft Heat®, DBC® and ICB brewers.



TITAN™ FUNNEL

Product #: 40114.0000

- For use with Titan® brewers



URN FUNNEL

Product #: 07022.0012

- For use with SRU and U3 brewers



GOURMET C FUNNEL

Product #: 34559.0000 (7.12 inch width)

- For use with CDBC, CWT AXIOM® and SmartWAVE® brewers
- Universal design – handle may be moved to appropriate side
- Allows brewing with heavier throw weights of coffee.



TRANSLUCENT COFFEE FUNNEL

Product #: 20583.0002 (standard)

- For use with S, VP, and CWT brewers



TRANSLUCENT TEA FUNNEL

Product #: 03021.0004 (standard)

- For use with ITCB, TB3 and TU3 brewers

Product #: 03021.0005 (quick dispense)

- For use with ITB, TB3Q and TU3Q brewers

NOTE: All funnels shown are designed with SplashGard® to help deflect hot liquids away from the hand.

Special Purpose Funnels



TRANSLUCENT POUCH PACK FUNNEL

Product #: 35282.0001

- For use with TU3Q.

Product #: 35282.0002

- For use with TU3, TB3.
- Use with rectangular tea pouch pack.
- See through material guards against hot water spills when removed.



UNIVERSAL STAINLESS POUCH PACK FUNNEL

Product #: 29151.0000 (black handle)

Product #: 29151.0001 (orange handle)

- Interchangeable handle allows use in all BUNN decanter brewers.



POUCH PACK FUNNEL FOR SATELLITE BREWERS

Product #: 35282.0000 (black)

- For Duals and Singles.



POUCH PACK FUNNEL - SMALL BREW CHAMBER

Product #: 04274.0012 (black)

Product #: 04274.0010 (brown)

- For use with S, VP, & CWTF brewers.



POUCH PACK FUNNEL - LARGE BREW CHAMBER

Product #: 02774.0011 (black)

Product #: 02774.0010 (brown)

- For use with S, VP, & CWTF brewers.

Drip Trays (Coffee)



SINGLE®, SINGLE SH BREWERS AND SINGLE SH STAND

Product #: 26830.0000 Kit

Product #: 26918.1000 Drip Tray

Product #: 26801.0000 Drip Tray Cover



RWS2 WARMER

Product #: 20213.0100 Kit

Product #: 20213.0200 Bracket

Product #: 20213.0200 Drip Tray

Product #: 03229.0000 Drip Tray Cover



RWS1 WARMER

Product #: 20213.0103 Kit

Product #: 20213.0301 Bracket

Product #: 20213.0200 Drip Tray

Product #: 03229.0000 Drip Tray Cover



DUAL® BREWERS

Product #: 20213.0101 Kit

- Includes Drip Tray, Drip Tray Cover, and Bracket.



DUAL®, DUAL SH BREWERS AND 2SH STAND

Product #: 27150.0000 Kit

Product #: 26971.1000 Drip Tray

Product #: 26916.0000 Drip Tray Cover



THERMOFRESH® SERVER

Product #: 35008.0000 Drip Tray

Product #: 35014.0000 Drip Tray Cover

RELATED PRODUCTS

Drip Trays (Coffee) cont.



U3 COFFEE URN

Product #: 07284.0000 Kit

Product #: 07286.0000 Drip Tray

Product #: 07285.0000 Drip Tray Cover



NEW THERMOFRESH® SERVER

Product #: 38931.0000 Drip Tray

Product #: 38932.0000 Drip Tray Cover



AIRPOT RACK

Product #: 25368.0000 Drip Tray

Product #: 25367.0000 Drip Tray Sponge Liner



SRU COFFEE URN

Product #: 06465.0000 Kit

• Includes everything shown.

Drip Trays (Hot Water)



HW2, H5M, H5E, AND H5X

Product #: 02497.0000 Kit

Product #: 02545.0000 Drip Tray Only

Product #: 02546.0000 Drip Tray Cover

Product #: 02547.0000 Foot, Rubber
(Not pictured. Four (4) are required.)

Drip Trays (Tea)



TCD AND TDO

Product #: 38029.1000 Kit

Product #: 03207.0004 Drip Tray

Product #: 26801.0000 Drip Tray Cover



TDO-N

Product #: 39626.0000 Drip Tray

Product #: 39627.0000 Drip Tray Cover

RELATED PRODUCTS

Drip Trays (Fresh Mix)



FMD-1 AND FMD-2

Product #: 02571.0000 Drip Tray



Product #: 28966.0000 Drip Tray Cover



FMD-3

Product #: 28699.0000 Drip Tray



Product #: 28267.0000 Drip Tray Cover



FMD-4 AND FMD-5

Product #: 34716.0000 Drip Tray



Product #: 34717.0000 Drip Tray Cover



IMIX-3

Product #: 36984.0000 Drip Tray



Product #: 36985.0000 Drip Tray Cover



IMIX-4 AND IMIX-5

Product #: 36670.0000 Drip Tray



Product #: 36739.0000 Drip Tray Cover

Drip Trays (Gourmet Juice)



JDF-2 S

Product #: 38765.1000 Kit



Product #: 38764.0000 Drip Tray




Product #: 26801.0000 Drip Tray Cover



JDF-4 S

Product #: 38764.1001 Kit



JDF-2 S EXTENDED

Product #: 44015.1000 Kit



Product #: 26801.0000 Drip Tray Cover

- Increases cup clearance to 26 cm.



JDF-4 S EXTENDED

Product #: 40789.1000 Kit



JDF-4

Product #: 33814.1001 Drip Tray



Product #: 33811.0000 Drip Tray Cover



ULTRA-2 WHITE

Product #: 28086.0000 Drip Tray



Product #: 32068.0000 Drip Tray Cover



ULTRA-2 BLACK

Product #: 28086.0001 Drip Tray

Product #: 32068.0001 Drip Tray Cover

Sales/Service/Support - Offices

CORPORATE OFFICES

1400 Stevenson Drive
Springfield, Illinois 62703 USA
(800) 637-8606 or (+1) 217-529-6601

INTERNATIONAL OFFICE

1400 Stevenson Drive
Springfield, Illinois 62703 USA
(+1) 217-529-6601
Fax: (+1) 217-529-2827
international@bunn.com

WESTERN REGIONAL OFFICE

16431 Carmenita Road
Cerritos, California 90701 USA

CANADA OFFICE

280 Industrial Parkway
South Aurora, Ontario, L4G 3T9 Canada
(+1) 905-841-2866

MEXICO OFFICE

Aniceto Ortega #817
Col. Del Valle, Del. Benito Juarez
CP 03100 Mexico, D.F.
(+52) (555) 575-7961
Fax: (+52) (555) 559-1608

UNITED KINGDOM OFFICE

7 Beaufort Court,
Roebuck Way, Knowhill
Milton Keynes, MK5 8HL
United Kingdom
(+44) 1908 241 222
Fax: (+44) 1908 241 224

GERMANY OFFICE

Paul-Gerhardt-Allee 49/1
81245 München Germany
(+49) 89-896-09950
Fax: (+49) 89-896-09999

CHINA OFFICE

Room 1503
Block E, No. 82
Caobao Rd.
Shanghai, China

REPRESENTATIVE OFFICE

China, Shenzhen

DISTRIBUTION FACILITIES

Springfield, Illinois USA
Moonachie, New Jersey USA
Cerritos, California USA
Manchester, United Kingdom
Mexico City, Mexico
Hong Kong, China
São Paulo, Brazil

USA Technical Service Department

(+1) 217-585-5903
Fax: (+1) 217-529-2177
tech.service@bunn.com

EMEA Technical Service Department

(+44) 1908 241 222
Fax: (+44) 1908 241 224
emea.warranty@bunn.com

Sales/Service/Support - Contacts

Brian Wisniewski, Senior Vice President & General Manager

(+1) 217-585-3238 office • Fax: (+1) 312-296-8277 • brian.wisniewski@bunn.com

EUROPE, MIDDLE EAST & AFRICA

Lina Chiodo, VP Sales & Marketing

(+1) 416-233-1200 office
(+44) 1908 241 222 UK office
(+1) 647-998-4809 cell
Fax (+1) 217-585-7390
lina.chiodo@bunn.com

David Locker, Sales Manager

UK, Ireland, Netherlands
(+44) 1908 241 222 UK office
(+44) 7787 510 062 cell
Fax: (+1) 217-585-4592
david.locker@bunn.com

Giulia Spanio, Area Manager

Europe
(+39) 3316746274 cell
Fax: (+1) 217-585-5958
giulia.spanio@bunn.com

Keith Collins, Director Technical Services

(+44) 1908 241 222 UK office
(+44) 7792 052 386 cell
Fax: +1 217-585-7052
keith.collins@bunn.com

Mike Khan, Technical Manager

(+44) 1908 241 222 UK office
(+44) 7966 067 172 cell
Fax: (+1) 217-585-3041
mike.khan@bunn.com

Sales/Service/Support - Contacts

LATIN AMERICA, CARIBBEAN, SOUTH AMERICA

Sam Grasinger, VP International Sales

Latin America, Caribbean
(+1) 217-585-4553 voice mail
Fax: (+1) 217-585-4965
sam.grasinger@bunn.com

Avi Sandler, VP Sales & GM

Mexico
(+52) (555) 575-7961 office
avi.sandler@bunn.com

Jimmy Avendano, Sales Manager

Mexico
(+52) (555) 575-7961 office
(+52) (555) 966-5893 cell
jimmy.avendano@bunn.com

Victor Rodriguez, Sales Director

Andean, Caribbean
(+1) 305-588-0350 cell
(+1) 217-585-4554 voice mail
Fax: (+1) 217-585-5958
victor.rodriguez@bunn.com

Luiz Salomão, Commercial Representative

South America Southern Cone
(+55) 11-9452-4312 cell
Fax: (+1) 217-585-3049
luiz.salomao@bunn.com

ASIA PACIFIC

CheeWu Ho, VP Sales & Marketing

(+65) 67954871 cell
Fax: (+1) 217-585-5958
cheewu.ho@bunn.com

Billy Chang, VP Service & Marketing

(+1) 217-306-3554 cell
(+1) 562-926-0764 office
Fax: (+1) 217-585-4958
billy.chang@bunn.com

Dago Castro, Service Director

Latin America, Caribbean
(+1) 305-439-9462 cell
(+1) 217-585-4555 voice mail
Fax: (+1) 217-585-4957
dago.castro@bunn.com

Ventura Ordonez, Director Technical Support

Mexico
(+52) (555) 575-7961 office
Fax: (+52) (555) 559-1608
ventura.ordonez@bunn.com

Luis Martinez, Technical Manager

Mexico
(+52) (555) 575-7961 office
Fax: (+52) (555) 559-1608
luis.martinez@bunn.com

Adre Silva, Technical Manager

Brazil
(+55) 97303876 cell
andre.silva@bunn.com

INTERNATIONAL & US GOVERNMENT SALES

Lisa Burchfield, Manager

(+1) 217-306-3546 cell
Fax: (+1) 217-585-5968
lisa.burchfield@bunn.com

ELECTRICAL REQUIREMENTS

Please refer to installation manuals for complete specifications and instructions. 230 Volt 50/60Hz models require 2 wires plus ground service rated 220-240V, single phase. 220 Volt 60Hz models require 2 wires plus ground service rated 220-240V, single phase. 100 or 200 Volt 50Hz or 50/60Hz models require 2 wires with ground, single phase. Multi-Phase models: 3-Phase to phase = 400V (will work on any voltage rated 380-415). Phase to neutral = 230V; 4 wire plus ground, 50/60Hz, 3 active heaters.; 1-Phase - Voltage = 230, 2 wire plus ground, 50/60Hz, 2 active heaters.

TRADEMARKS

392; AutoPOD, AXIOM, BrewLOGIC, BrewMETER, Brew Better Not Bitter, BrewWISE, BrewWIZARD, BUNN Espresso, BUNN Family Gourmet, BUNN Gourmet, BUNN Pour-O-Matic, BUNN, BUNN with the stylized red line, BUNNlink, Bunn-O-Matic, Bunn-O-Matic, BUNNserve, BUNN-SERVE with the stylized wrench design, Cool Froth, DBC, Dr. Brew stylized Dr. design, Dual, Easy Pour, EasyClear, EasyGard, FlavorGard, Gourmet Ice, Gourmet Juice, High Intensity, iMIX, Infusion Series, Intellisteam, My Café, PowerLogic, Quality Beverage Equipment Worldwide, Safety-Fresh, savemycoffee.com, Scale-Pro, Silver Series, Single, Smart Funnel, Smart Hopper, SmartWAVE, Soft Heat, SplashGard, The Mark of Quality in Beverage Equipment Worldwide, ThermoFresh, A Partner You Can Count On, Air Brew, Air Infusion, Beverage Bar Creator, Beverage Profit Calculator, Brew better, not bitter., BUNNSource, Coffee At Its Best, Cyclonic Heating System, Digital Brewer Control, Nothing Brews Like a BUNN, Pouring Profits, Respect Earth, Respect Earth with the stylized leaf and coffee cherry design, Signature Series, Tea At Its Best, Phase Brew, The Horizontal Red Line, Titan, trifecta, Ultra, Velocity Brew are either trademarks or registered trademarks of Bunn-O-Matic Corporation.

BUNN SUSTAINABILITY FEATURES



RoHS Compliant: In keeping with our Sustainability Mission, BUNN electronics design can be made with NO hazardous substances and part assemblies are recyclable wherever possible.

Lead-free Solder is specified in the production of all electronic control boards.

Energy Saver Modes will lower power usage by disabling warmers and tank heater during periods of inactivity.

LED Lighting is being specified where possible for product displays. LED lights use considerably less energy than fluorescent or incandescent lighting and have a longer life.

Corrugated, Biodegradable Materials are gradually replacing Styrofoam packing.

HFC-free Foam Insulation (no hydro fluorocarbons) is now used exclusively to insulate Soft Heat® servers and the cabinets of liquid coffee and cold beverage dispensers.

GENERAL TERMS

Bypass (and variable bypass): A function, like dilution, that reduces strength of a concentrate but it is intended for hot beverages. Generally, hot water is blended with coffee concentrate. Variable bypass allows different bypass rates for various brew volumes (small, medium and large) within a recipe.

Cold brew lock-out: A programming feature that prevents brewing when actual water temperature is below the Ready temperature.

Dilution: A function used to reduce strength of a concentrate for cold beverages. Generally ambient tap water is blended with tea or coffee concentrate.

Drip Time: Setting of time from the end of the spray head flow until the funnel flow stops (also applies to funnel lock).

Easy Pulse: This is a simplified version of Pulse Brew. It is programmed by selecting the time period of brew water dispense. Easy Pulse allows the operator to input a set time for which the brewer software will determine a pulse sequence.

Extraction: Water-soluble materials dissolve and move out of the coffee grounds and into the water. Part of the brewing process that includes Wetting and Hydrolysis.

Funnel lock: A safety feature to prevent funnel removal during drip time.

Hydrolysis: A chemical reaction where the materials created during extraction break down further into water-soluble proteins and sugars. Part of the brewing process that includes Wetting and Extraction.

Pre-Infusion: A minor adjustment to a brew cycle when an initial volume is dispensed, followed by a pause to allow for saturation of the material, then the remainder of the brew cycle progresses. This is also described as a "pre-soak."

Pulse Brew: A method used to increase the water contact time during a brew cycle. Pulse Brew can be programmed manually, by set time or through BrewMETER adjustments. This method is very useful for smaller volumes.

Satellite Brewer: A system that includes a mother brewing system that remains in one location (e.g., kitchen) and dispenses into portable, or removable, servers for remote service.

Wetting: Grounds begin to absorb hot water from the sprayhead and release gasses from the coffee. Part of the brewing process that includes Extraction and Hydrolysis.

EXCLUSIVE BUNN PROGRAMMING AND DESIGN FEATURES

BrewLOGIC®: A programming feature that compensates for flow rate variations to maintain consistent dispense levels when water quality is a consideration.

BrewMETER®: A programming feature that simplifies Pulse Brew and allows extraction manipulation with the touch of a button.

BrewWISE®: A programming feature with Radio Frequency Identification (RFID) communications between grinder, funnel and brewer for custom warmer and recipe management without error. Works in conjunction with SMART Hopper, SMART Funnel, and a Recipe Writer/Card.

BrewWISE® Recipe Writer/Card: Creates recipe cards or dedicated funnels for coffees, dramatically reducing equipment installation and calibration time. A box connects to a English Windows® PC with a standard serial port and uses BUNN software to transfer information to the cards or a SMART Funnel, then to-and-from the BUNN BrewWISE brewer and grinder. Ensures consistently high quality coffee flavour at every location and can also make cards for advertising messages onto the brewer's display.

BrewWIZARD® – A programming feature that provides quick access to the most utilized setup parameters including a lock-out feature to prevent brewing when actual water temperature is below the Ready temperature. Features include: brew lock-out, brew ounces, enable ads, enter service number, and BrewMETER®.

BUNNIlink®: An automated monitoring and communication system that detects pending service problems and forwards alerts for service.

DBC®: Digital Brewer Control. BUNN was among the first in the dispensed beverage industry to introduce advanced beverage technology to the industry with Digital Brewer Control systems that allow users to precisely and consistently meet specific flavour profiles while also reducing training and labour costs.

Easy Pour®: An exclusive design used in decanters to assure convenient serving with a drip-proof, fast pouring lip from front or either side.

FlavorGard®: Technology that continuously monitors extract-to-water ratio and assures flavour consistency.

High Intensity®: Technology that mixes high viscosity concentrates thoroughly, consistently, and accurately to the required brix setting. The consistent results ensure the best quality beverage in the cup and contribute to maximum profits in the beverage program.

Infusion Series®: A product line of coffee/tea brewers that allow different brewing profiles from the same machine/footprint, saving valuable counter space.

RPM Feedback: Technology on auger motors in BUNN specialty drink systems that monitor the auger revolutions per minute (RPM) and controls powder dosing for each beverage, eliminating product waste and ensuring consistency cup-to-cup.

Safety-Fresh®: A brew-through lid with a vapor seal to maintain freshness and a spill prevention design.

Smart Funnel®: A funnel designed with a microchip that can receive information from an enabled grinder and transfer that information to an enabled brewer, managing the grinding and brewing process from start to finish. A SMART Funnel can be programmed to accept dedicated recipe information, reducing labour costs and minimizing brewing errors. Used in conjunction with BrewWISE technology.

Smart Hopper®: A hopper designed with a microchip that communicates the type of coffee contained in the hopper to an enabled grinder, managing the grinding and brewing process from start to finish. Used in conjunction with BrewWISE technology.

SmartWAVE®: Turbulence is an important element in brewing perfect coffee. SmartWAVE is a BUNN exclusive product design that uses technology to increase turbulence in the brew funnel, providing more contact between water and coffee and uniformity of extraction.

Soft Heat®: A docking server system with technology that thermostatically controls and automatically shuts off heat in the docking system once the preset temperature is reached and additionally monitors server volume. This is more beneficial than traditional warmer plates that heat continuously.

SplashGard®: An exclusive design with a shield next to the funnel handle that deflects hot liquids away from the user's hand.

ThermoFresh®: BUNN offers a full line of vacuum-insulated servers and brewers that brew directly into these servers that keep coffee at optimal flavour for hours and save on energy consumption and by not requiring warming plates.

ABBREVIATION KEY FOR MODEL DESCRIPTIONS

1L/2U – 1 Lower, 2 Upper Warmers	GRY – Gray	PWR CRD – Power Cord
2W1PH – 2 Wire 1 Phase	GP – Group	QTEA FNL – Quick Tea Funnel
3L – 3 Lower Warmers	HDL – Handle	QK CONN – Quick Connect
3W3PH – 3 Wire 3 Phase	HALT – High Altitude	RSD – Raised
6HL – 6 Hole	HILM – High Lime	RDY LT – Ready Light
7HL – 7 Hole	HL – Hole	REM – Removable
ADP – Adapter	HPR – Hopper	RSVR – Reservoir
AFI – Auto Fill Installed	HWV – Hot Water Valve	RT – Right
APS – Airport Server	INTFC – Interface	SRVR – Server
ASSY – Assembly	LAF – Liquid autofill	SB – Shipboard
AUX – Auxiliary	LTD SW – Lighted Switch	SIDEHNDL – Side Handle
BASE, BA – Base	L – Litres	SNGL – Single
BLK – Black Finish	LEV – Lever Action	SMT FNL – Smart Funnel
BRKT – Bracket	LF – Lower Faucet	SMK FNL – Smoked Funnel
BRW – BrewWise Recipe Writer	LP – Low profile	SH – Soft Heat
BW – BrewWise	H&C – Hot and cold	SPHD – Sprayhead
CS – Case	MB – MultiBrewWISE	SF – Stainless Steel
CL – Cluster	MECH – Mechanical	Funnel
CWV – Cold Water Valve	MHG – Multi hopper grinder	SS – Self Serve
CONN – Connect	MNL – Manual	SST – Stainless Steel Finish
CTNR – Container	MP – Multi Phase	SWTR – Sweetener
CONC – Concentrate	MTG – Mounting	TC – Thermal Carafe
CVRSN – Conversion	NKL – Nickel	TS – Thermal Server
DGT – Digital	NO LITE – No Fresh Light	TF – Thermo Fresh
DBC – Digital Brewer Control	NO BASE – Without Base	TRK – Trunk
DT – Drip Tray	NODTRAY – No Drip Tray	WB – Wall Bracket
DV – Dual voltage	NO WRM – No Warmer	WD – Weight driven
EXP – Export	ORN – Orange	WRMR – Warmer
FF – Fast Flow	PAF – Powder autofill	WHT – White
FTG – Fitting	PC – Portion Control	WHT/SST – White/Stainless
FLSH – Flashing Lamp	PF – Plastic Funnel	
FR – Front	PK – Pack	
FNL KIT – Funnel Kit	PKG – Package, Packaging	
FLK – Funnel Locks	POSN – Position	
FMD – Fresh mix dispenser	PO – Pourover Feature	
G – Gallon	PR – Pourover	
GF – Gourmet Funnel		



Quality Beverage Equipment Worldwide®

A Partner You Can Count On™

Corporate Headquarters: 1400 Stevenson Drive • Springfield, Illinois USA 62703 • (+1) 217-529-6601 • www.BUNN.com 
Canada - South Aurora • Mexico - Mexico City • United Kingdom - Milton Keynes • Germany - Munich • Brazil - São Paulo • China - Shenzhen, Hong Kong
international@bunn.com