

# Creating Interactivity with JavaScript

---



**Craig Shoemaker**

SENIOR WEB DEVELOPER

@craigshoemaker craigshoemaker.net



# Debugging

---



# Selecting Elements

---



# Working with Elements

---



# classList Property

---



# Window

---



# Script Tag

---



# Events

---

















DOMConentLoaded



**SUBMIT**







**SUBMIT**



**SUBMIT**



click











orientationchange



# addEventListener

---







addEventListener

```
window.addEventListener
```

addEventListener

```
window.addEventListener("    ", );
```

Event name



addEventListener

```
window.addEventListener("click", function(e) {  
  
});
```

Anonymous function



addEventListener

```
window.addEventListener("    ", function(e) {  
  
});
```

Event object



addEventListener

```
window.addEventListener("    ", function(e) {  
    ← Logic  
});
```















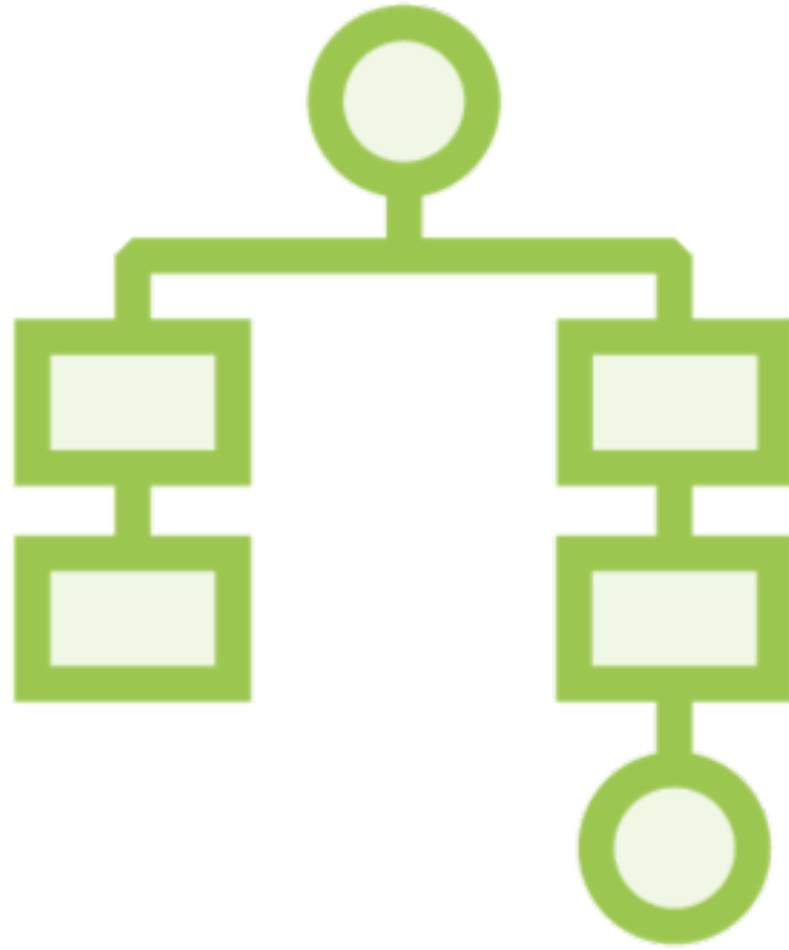





# Browser APIs

---





<https://developer.mozilla.org/docs/Web/API>



# Fallbacks and Polyfills

---







A large teal circle is positioned on the left side of the slide.

**Fallback**





**Fallback**





**Fallback**



**Polyfill**




# Determining Browser Support


---



# html5please.com

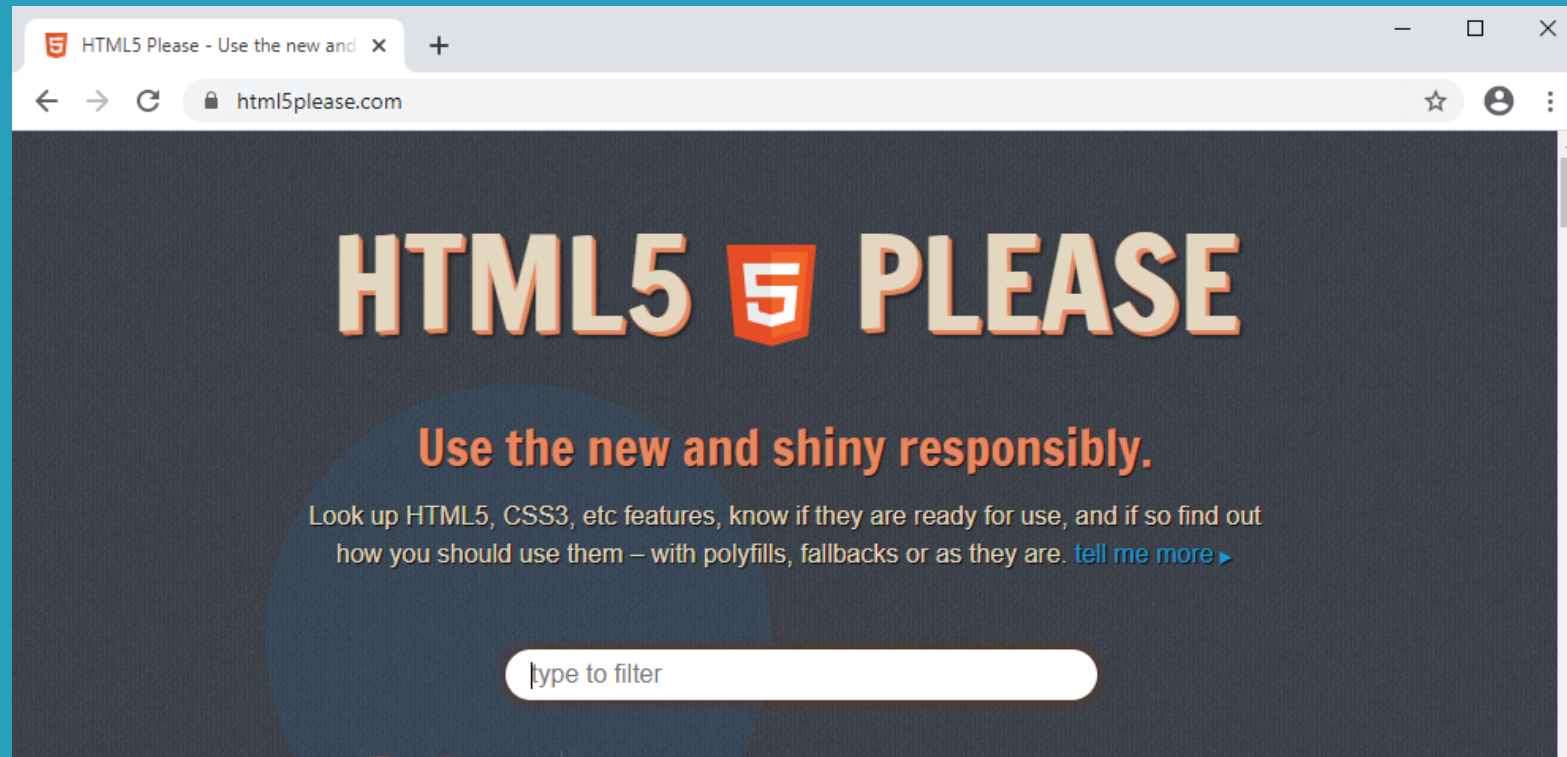

# caniuse.com

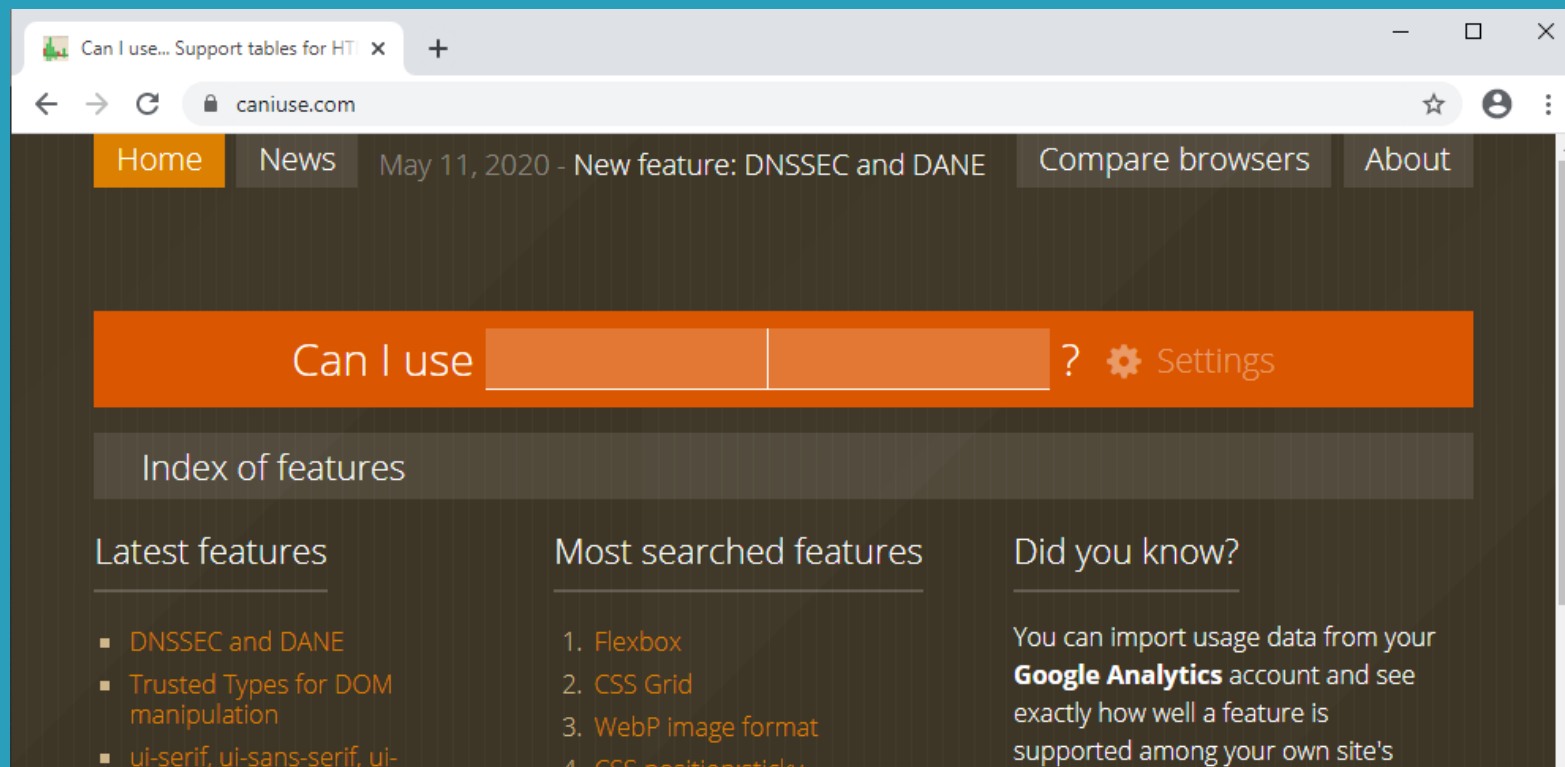

# Up Next:

## Collecting User Data

---

