

[Home](#)

Feature Engineering for Images: A Valuable Introduction to the HOG Feature Descriptor

Aishwarya Singh – September 4, 2019

[Computer Vision](#) [Deep Learning](#) [Image](#) [Intermediate](#) [Libraries](#) [Programming](#) [Python](#) [Techniques](#)

Overview


- Learn the inner workings and math behind the HOG feature descriptor
- The HOG feature descriptor is used in computer vision popularly for object detection
- A valuable feature engineering guide for all computer vision enthusiasts

Introduction

Feature engineering is a game-changer in the world of machine learning algorithms. It’s actually one of my favorite aspects of being a data scientist! This is where we get to experiment the most – to engineer new features from existing ones and improve our model’s performance.

Some of the top data scientists in the world rely on feature engineering to boost their leaderboard score in hackathons. I’m sure you would even have used various feature engineering techniques on structured data.

Can we extend this technique to unstructured data, such as images? It’s an intriguing riddle for [computer vision](#) enthusiasts and one we will solve in this article. Get ready to perform feature engineering in the form of feature extraction on image data!

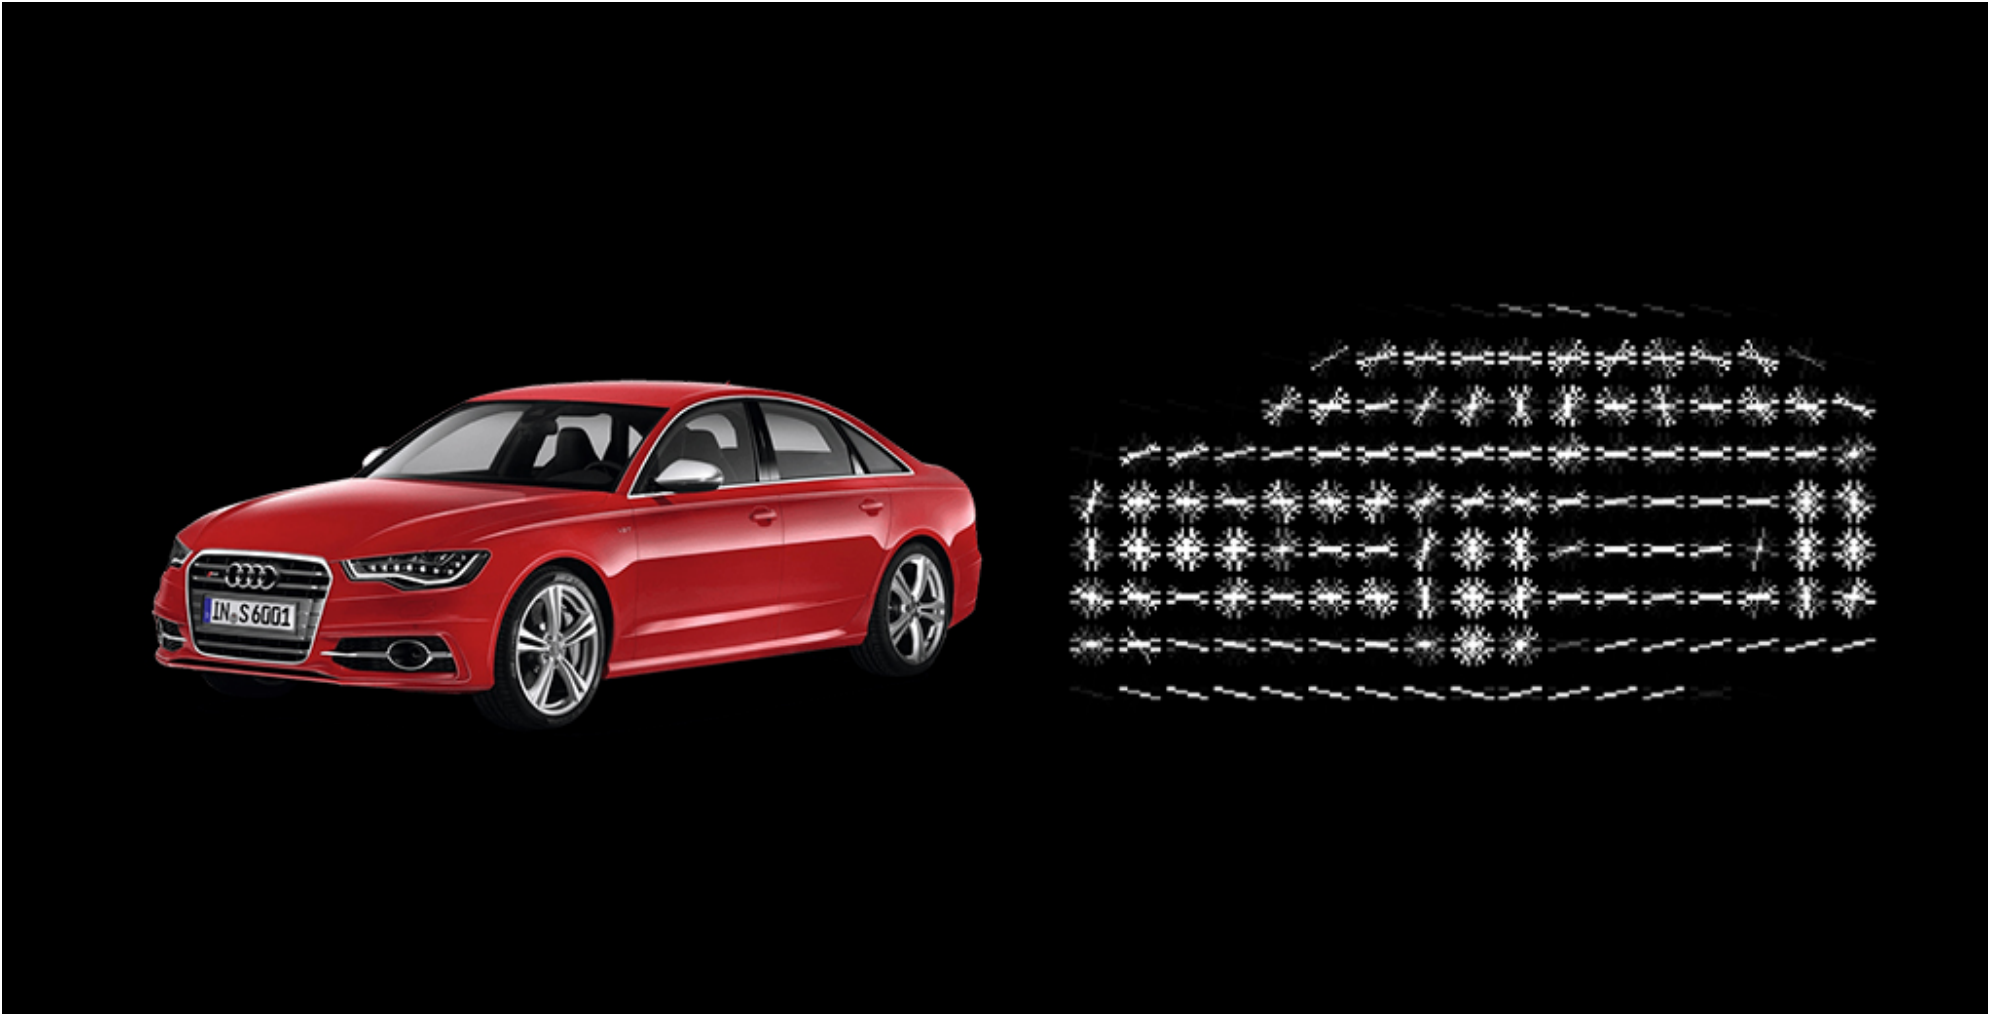

There are actually multiple techniques for feature extraction. I covered three basic ones in my previous article which you should read before proceeding:

- [3 Beginner-Friendly Techniques to Extract Features from Image Data using Python](#)

We use cookies on Analytics Vidhya websites to deliver our services, analyze web traffic, and improve your experience on the site. By using Analytics Vidhya, you agree to our [Privacy Policy](#) and [Terms of Use](#). Accept

In this article, I will introduce you to a popular feature extraction technique for images – Histogram of Oriented Gradients, or HOG as its commonly known. We will understand what is the HOG feature descriptor (the algorithm), and finally, implement it in Python.

Table of Contents

1. What is a Feature Descriptor?
2. Introduction to the HOG Feature Descriptor
3. Process of Calculating HOG
 1. Preprocessing Data
 2. Calculating Gradients
 3. Calculating Magnitude & Orientation
4. Methods to create Histograms using Gradients and Orientation
5. Process of Calculating HOG
 1. Calculate Histogram of Gradients
 2. Normalize Gradients
 3. Features for Complete Image
6. Implementing the HOG Feature Descriptor in Python


What is a Feature Descriptor?

You might have had this question since you read the heading. So let's clear that up first before we jump into the HOG part of the article.

Take a look at the two images shown below. Can you differentiate between the objects in the image?



We can clearly see that the right image here has a dog and the left image has a car. Now, let me make this task slightly more complicated – identify the objects shown in the image below:

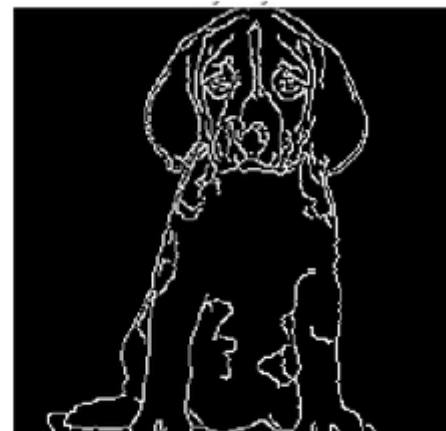

On the other hand, the second pair had much less information (only the shape and the edges) but it was still enough to differentiate the two images.

Do you see where I am going with this? We were easily able to differentiate the necessary information we would need to identify the object. And that is exactly

It is a simplified representation of the image that contains only the most important

There are a number of feature descriptors out there. Here are a few of the most common:

- HOG: Histogram of Oriented Gradients
- SIFT: Scale Invariant Feature Transform
- SURF: Speeded-Up Robust Feature

In this article, we are going to focus on the HOG feature descriptor and how it works. Let’s get started!

Introduction to the HOG Feature Descriptor

HOG, or Histogram of Oriented Gradients, is a feature descriptor that is often used to extract features from image data. It is widely used in [computer vision](#) tasks for [object detection](#).

Let’s look at some important aspects of HOG that makes it different from other feature descriptors:

- The HOG descriptor focuses on the structure or the shape of an object. Now you might ask, how is this different from the edge features we extract for images? In the case of edge features, we only identify if the pixel is an edge or not. HOG is able to provide the edge direction as well. This is done by extracting the **gradient and orientation** (or you can say magnitude and direction) of the edges
- Additionally, these orientations are calculated in **‘localized’ portions**. This means that the complete image is broken down into smaller regions and for each region, the gradients and orientation are calculated. We will discuss this in much more detail in the upcoming sections
- Finally the HOG would generate a **Histogram** for each of these regions separately. The histograms are created using the gradients and orientations of the pixel values, hence the name ‘Histogram of Oriented Gradients’

To put a formal definition to this:


The HOG feature descriptor counts the occurrences of gradient orientation in localized portions of an image.

Implementing HOG using tools like OpenCV is extremely simple. It’s just a few lines of code since we have a predefined function called *hog* in the *skimage.feature* library. Our focus in this article, however, is on how these features are actually calculated.


Process of Calculating the Histogram of Oriented Gradients (HOG)

We should now have a basic idea of what a HOG feature descriptor is. It’s time to delve into the core idea behind this article. Let’s discuss the step-by-step process to calculate HOG.

Consider the below image of size (180 x 280). Let us take a detailed look at how the HOG features will be created for this image:



Sign in to analyticsvidhya.com with Google




Trent Leslie

trentleslie@gmail.com

Continue as Trent

To create your account, Google will share your name, email address, and profile picture with analyticsvidhya.com. See analyticsvidhya.com's [privacy policy](#) and [terms of service](#).

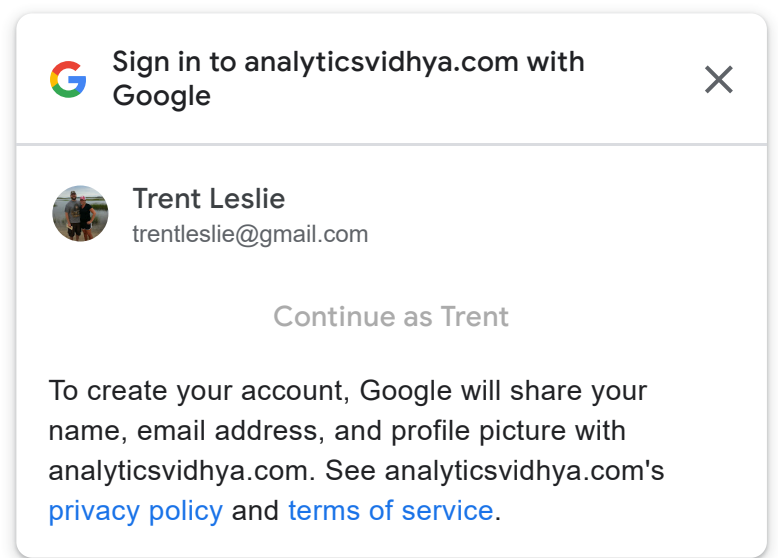


Step 1: Preprocess the Data (64 x 128)

This is a step most of you will be pretty familiar with. Preprocessing data is a crucial step in any machine learning project and that's no different when working with images.


We need to preprocess the image and bring down the width to height ratio to 1:2. The image size should preferably be 64 x 128. This is because we will be dividing the image into 8*8 and 16*16 patches to extract the features. Having the specified size (64 x 128) will make all our calculations pretty simple. In fact, this is the exact value used in the [original paper](#).

Coming back to the example we have, let us take the size 64 x 128 to be the standard image size for now. Here is the resized image:

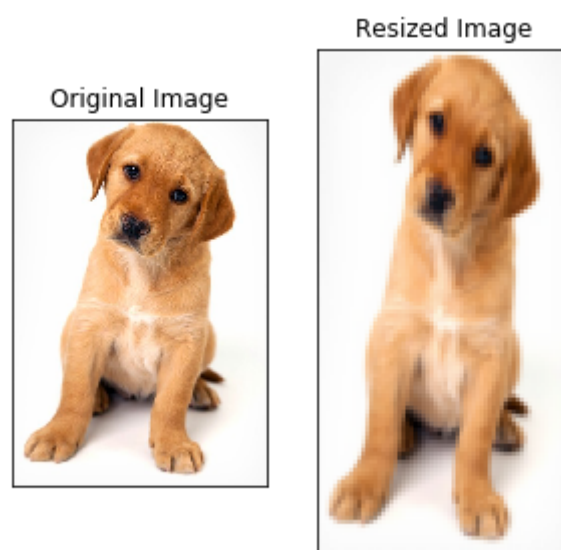

Step 2: Calculating Gradients (direction x and y)

The next step is to calculate the gradient for every pixel in the image. **Gradients are the small change in the x and y directions.** Here, I am going to take a small patch from the image and calculate the gradients on that:

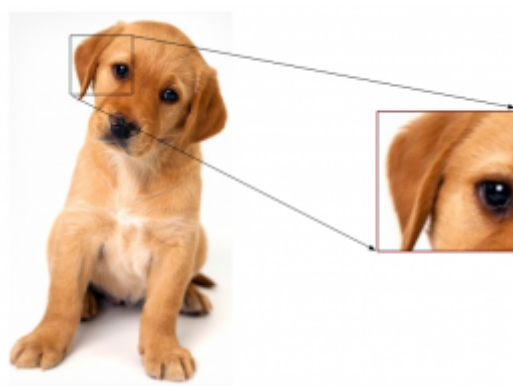


We will get the pixel values for this patch. Let's say we generate the below pixel matrix for the given patch (*the matrix shown here is merely used as an example and these are not the original pixel values for the given patch*):

121	10	78	96	125
48	152	68	125	111
145	78	85	89	65
154	214	56	200	66
214	87	45	102	45

Source: [Applied Machine Learning C](#)

Sign in to analyticsvidhya.com with Google



Trent Leslie

trentleslie@gmail.com

Continue as Trent

To create your account, Google will share your name, email address, and profile picture with analyticsvidhya.com. See analyticsvidhya.com's [privacy policy](#) and [terms of service](#).

I have highlighted the pixel value 85. Now, to determine the gradient (or change) in the x-direction, we need to subtract the value on the left from the pixel value on the right. Similarly, to calculate the gradient in the y-direction, we will subtract the pixel value below from the pixel value above the selected pixel.

Hence the resultant gradients in the x and y direction for this pixel are:

- Change in X direction(G_x) = 89 – 78 = 11
- Change in Y direction(G_y) = 68 – 56 = 8


This process will give us two new matrices – one storing gradients in the x-direction and the other storing gradients in the y direction. This is similar to using a Sobel Kernel of size 1. **The magnitude would be higher when there is a sharp change in intensity, such as around the edges.**

We have calculated the gradients in both x and y direction separately. The same process is repeated for all the pixels in the image. The next step would be to find the magnitude and orientation using these values.

Step 3: Calculate the Magnitude and Orientation

Using the gradients we calculated in the last step, we will now determine the magnitude and direction for each pixel value. For this step, we will be using the Pythagoras theorem (yes, the same one which you studied back in school!).

Take a look at the image below:

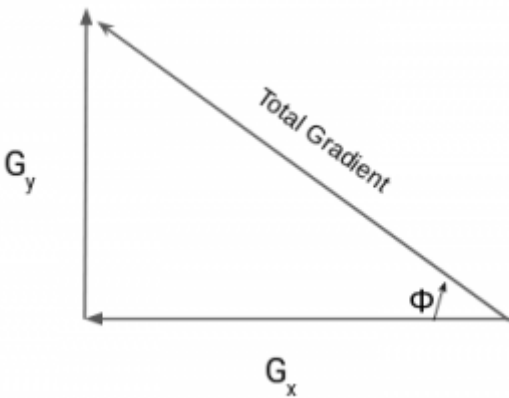

The gradients are basically the base and perpendicular here. So, for the previous example, we had G_x and G_y as 11 and 8. Let’s apply the Pythagoras theorem to calculate the total gradient magnitude:

$$\text{Total Gradient Magnitude} = \sqrt{[(G_x)^2+(G_y)^2]}$$

$$\text{Total Gradient Magnitude} = \sqrt{[(11)^2+(8)^2]} = 13.6$$


Next, calculate the orientation (or direction) for the same pixel. We know that we can write the tan for the angles:

$$\tan(\Phi) = G_y / G_x$$


$\Phi = \text{atan}(G_y / G_x)$


The orientation comes out to be 36 when we plug in the values. So now, for every pixel value, we have the magnitude (G) and the orientation (direction). We need to generate the histogram.

But hang on – we need to take a small break before we jump into how histogram is generated. Consider this a small step in the overall process. And we'll start this by discussing how to calculate orientation using the two values that we have – gradients and orientation.



Sign in to analyticsvidhya.com with Google





Trent Leslie

trentleslie@gmail.com

Continue as Trent

To create your account, Google will share your name, email address, and profile picture with analyticsvidhya.com. See analyticsvidhya.com's [privacy policy](#) and [terms of service](#).


Different Methods to Create Histograms using Gradients and Orientation

A histogram is a plot that shows the frequency distribution of a set of continuous data. We have the variable (in the form of bins) on the x-axis and the frequency on the y-axis. Here, we are going to take the angle or orientation on the x-axis and the frequency on the y-axis.

Method 1:

Let us start with the simplest way to generate histograms. We will take each pixel value, find the orientation of the pixel and update the frequency table.

Here is the process for the highlighted pixel (85). Since the orientation for this pixel is 36, we will add a number against angle value 36, denoting the frequency:

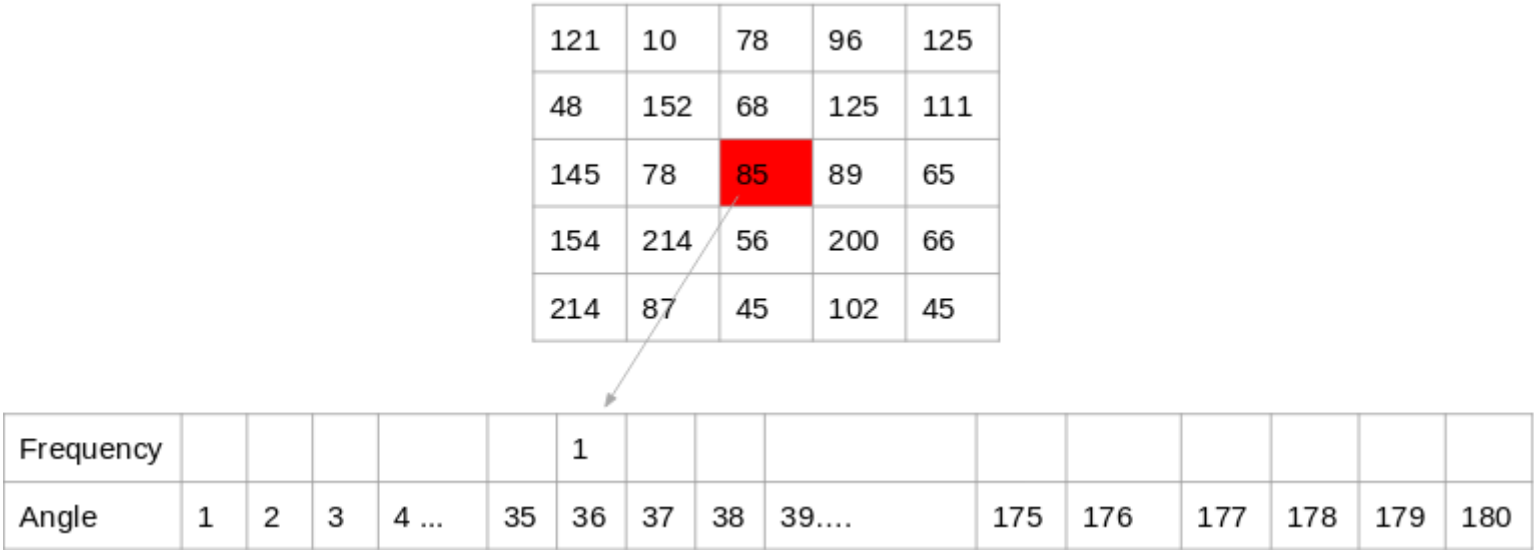

Source: [Applied Machine Learning Course](#)


The same process is repeated for all the pixel values, and we end up with a frequency table that denotes angles and the occurrence of these angles in the image. This frequency table can be used to generate a histogram with angle values on the x-axis and the frequency on the y-axis.

That's one way to create a histogram. Note that here the bin value of the histogram is 1. Hence we get about 180 different buckets, each representing an orientation value. Another method is to create the histogram features for higher bin values.

Method 2:

This method is similar to the previous method, except that here we have a bin size of 20. So, the number of buckets we would get is 9.


Again, for each pixel, we will check the orientation, and store the frequency of the orientation values in the form of a 9 x 1 matrix. Plotting this would give us the histogram:

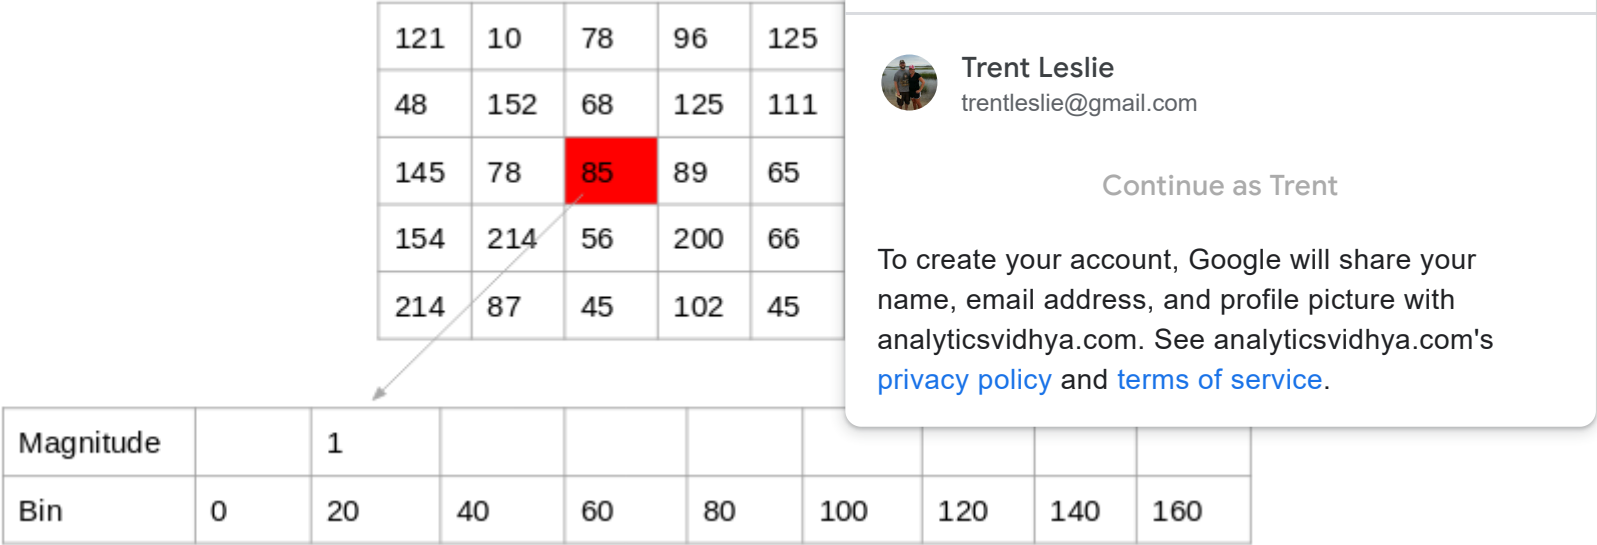

Source: [Applied Machine Learning Course](#)

Method 3:

The above two methods use only the orientation values to generate histograms and do not take the gradient value into account. Here is another way in which we can generate the histogram – **instead of using the frequency, we can use the gradient magnitude to fill the values in the matrix.** Below is an example of this:

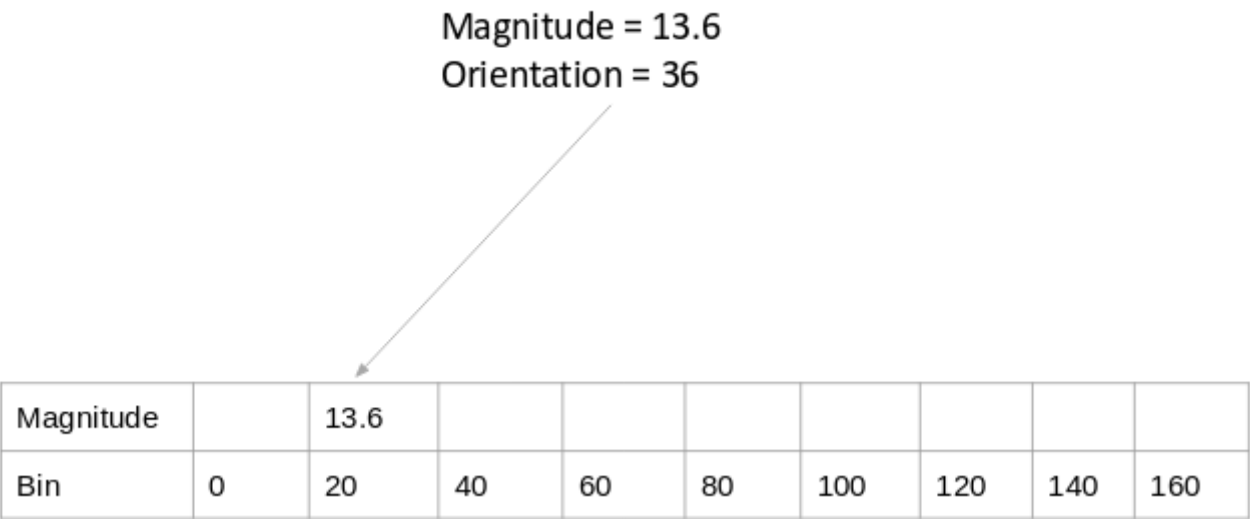


Source: [Applied Machine Learning Course](#)

You might have noticed that we are using the orientation value of 30, and updating the bin 20 only. Additionally, we should give some weight to the other bin as well.

Method 4:

Let’s make a small modification to the above method. Here, we will add the contribution of a pixel’s gradient to the bins on either side of the pixel gradient. Remember, the higher contribution should be to the bin value which is closer to the orientation.

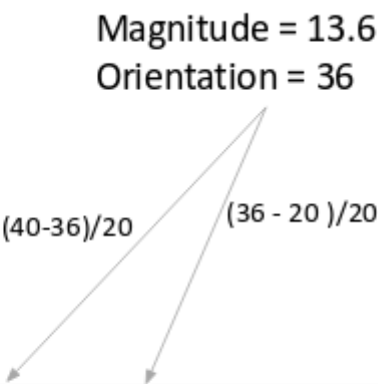

Source: [Applied Machine Learning Course](#)

This is exactly how histograms are created in the HOG feature descriptor.

Step 4: Calculate Histogram of Gradients in 8×8 cell

The histograms created in the HOG feature descriptor are not generated for the entire image, but for 8×8 cells, and the histogram of oriented gradients is computed for each cell. When we divide the image into 8×8 cells, we get a 9×1 matrix for each cell.

By doing so, we get the features (or histogram) for the smaller patches which in turn we can use to generate the final features. We can certainly change this value here from 8×8 to 16×16 or 32×32 .

If we divide the image into 8×8 cells and generate the histograms, we will get a 9×1 matrix for each cell. This matrix is generated using method 4 that we discussed in the previous section.




Once we have generated the HOG for the 8×8 patches in the image, the next step is to normalize the histogram.

Step 5: Normalize gradients in 16×16 cell (36×1)

Before we understand how this is done, it's important to understand why this is done in the first place.

Although we already have the HOG features created for the 8×8 cells of the image, the gradients of the image are sensitive to the overall lighting. This means that for a particular picture, some portion of the image would be very bright as compared to the other portions.

We cannot completely eliminate this from the image. But we can reduce this lighting variation by normalizing the gradients by taking 16×16 blocks. Here is an example that can explain how 16×16 blocks are created:

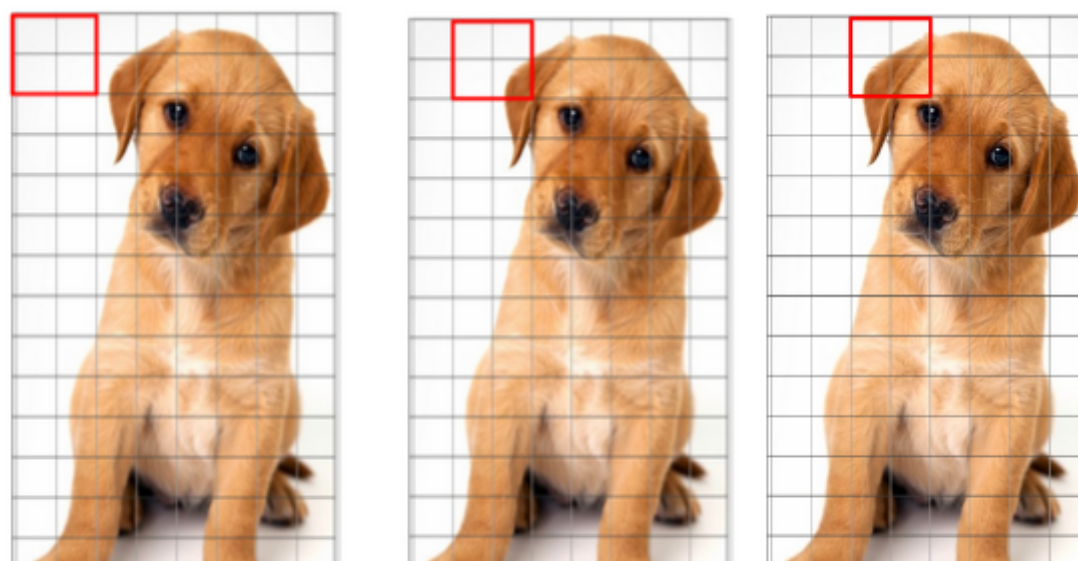

Here, we will be combining four 8×8 cells to create a 16×16 block. And we already know that each 8×8 cell has a 9×1 matrix for a histogram. So, we would have four 9×1 matrices or a single 36×1 matrix. To no values by the square root of the sum of squares of the values. Mathematically, for

$$V = [a_1, a_2, a_3, \dots, a_{36}]$$

We calculate the root of the sum of squares:

$$k = \sqrt{(a_1)^2 + (a_2)^2 + (a_3)^2 + \dots + (a_{36})^2}$$

And divide all the values in the vector V with this value k:

$$\text{Normalised Vector} = \left(\frac{a_1}{k}, \frac{a_2}{k}, \frac{a_3}{k}, \dots, \frac{a_{36}}{k} \right)$$

The resultant would be a normalized vector of size 36×1.

Step 6: Features for the complete image

We are now at the final step of generating HOG features for the image. So far, we have created features for 16×16 blocks of the image. Now, we will combine all these to get the features for the final image.

Can you guess what would be the total number of features that we will have for the given image? We would first need to find out how many such 16×16 blocks would we get for a single 64×128 image:



We would have 105 (7×15) blocks of 16×16. Each of these 105 blocks has a vector of 36×1 as features. Hence, the total features for the image would be 105 x 36×1 = 3780 features.


We will now generate HOG features for a single image and verify if we get the same number of features at the end.

Implementing HOG Feature Descriptor in Python


Time to fire up Python! This, I’m sure, is the most anticipated section of this article. So let’s get rolling.


We will see how we can generate HOG features on a single image, and if the same can be applied on a larger dataset. We will first load the required libraries and the image for which we are going to create the HOG features:

```
1 #importing required libraries
```



Sign in to analyticsvidhya.com with Google





Trent Leslie

trentleslie@gmail.com


Continue as Trent

To create your account, Google will share your name, email address, and profile picture with analyticsvidhya.com. See analyticsvidhya.com's [privacy policy](#) and [terms of service](#).

```
6 import matplotlib.pyplot as plt
7 %matplotlib inline
8
9
10 #reading the image
11 img = imread('puppy.jpeg')
12 imshow(img)
13 print(img.shape)
```

reading_image.py hosted with ❤ by GitHub

(663, 459, 3)

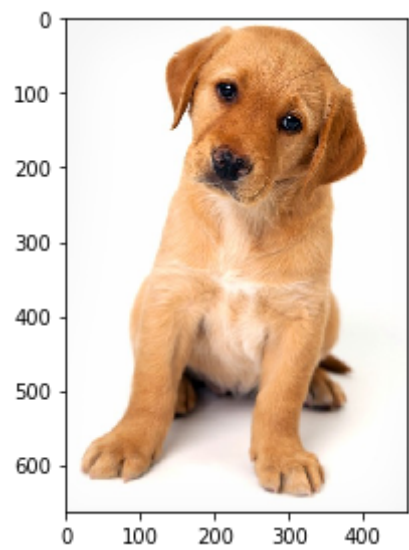


We can see that the shape of the image is 663 x 459. We will have to resize this image into 64 x 128. Note that we are using *skimage* which takes the input as height x width.

```
1 #resizing image
2 resized_img = resize(img, (128,64))
3 imshow(resized_img)
4 print(resized_img.shape)
```

resize_image.py hosted with ❤ by GitHub

[view raw](#)

(128, 64, 3)

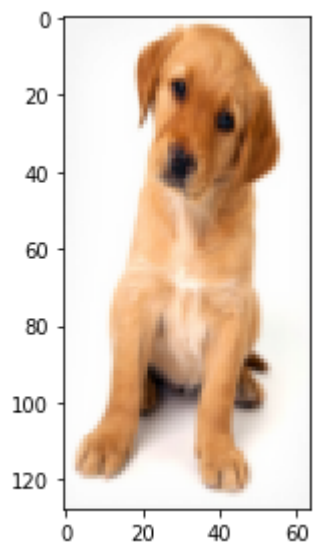

Here, I am going to use the hog function from *skimage.features* directly. So we don't have to calculate the gradients, magnitude (total gradient) and orientation individually. The hog function would internally calculate it and return the feature matrix.

Also, if you set the parameter 'visualize = True', it will return an image of the HOG.

```
1 #creating hog features
2 fd, hog_image = hog(resized_img, orientations=9, pixels_per_cell=(8, 8),
3                     cells_per_block=(2, 2), visualize=True, multichannel=True)
```

hog.py hosted with ❤ by GitHub

[view raw](#)

- The *orientations* are the number of buckets we want to create. Since I want to have a 9 x 1 matrix, I will set the orientations to 9
- *pixels_per_cell* defines the size of the cell for which we create the histogram. I used 8 x 8 cells and here I will set the same value. As mentioned previously
- We have another hyperparameter *cells_per_block* which is the size of the block. Here, we mention the cells per blocks and not the number of pixels. So, instead of 8 x 8, we mention 2 x 2. Here, we mention the cells per blocks and not the number of pixels. So, instead of 8 x 8, we mention 2 x 2.


The feature matrix from the function is stored in the variable *fd*, and the image is stored in the variable *img*. The feature matrix is:

```
1 fd.shape
```

hog_shape.py hosted with ❤ by GitHub

(3780,)

Sign in to analyticsvidhya.com with Google

 **Trent Leslie**
trentleslie@gmail.com

Continue as Trent

To create your account, Google will share your name, email address, and profile picture with analyticsvidhya.com. See analyticsvidhya.com's [privacy policy](#) and [terms of service](#).

view raw


As expected, we have 3,780 features for the image and this verifies the calculations we did in step 7 earlier. You can choose to change the values of the hyperparameters and that will give you a feature matrix of different sizes.

Let’s finally look at the HOG image:

```
1 fig, (ax1, ax2) = plt.subplots(1, 2, figsize=(16, 8), sharex=True, sharey=True)
2
3 ax1.imshow(resized_img, cmap=plt.cm.gray)
4 ax1.set_title('Input image')
5
6 # Rescale histogram for better display
7 hog_image_rescaled = exposure.rescale_intensity(hog_image, in_range=(0, 10))
8
9 ax2.imshow(hog_image_rescaled, cmap=plt.cm.gray)
10 ax2.set_title('Histogram of Oriented Gradients')
11
12 plt.show()
```


subplot.py hosted with ❤ by GitHub

view raw

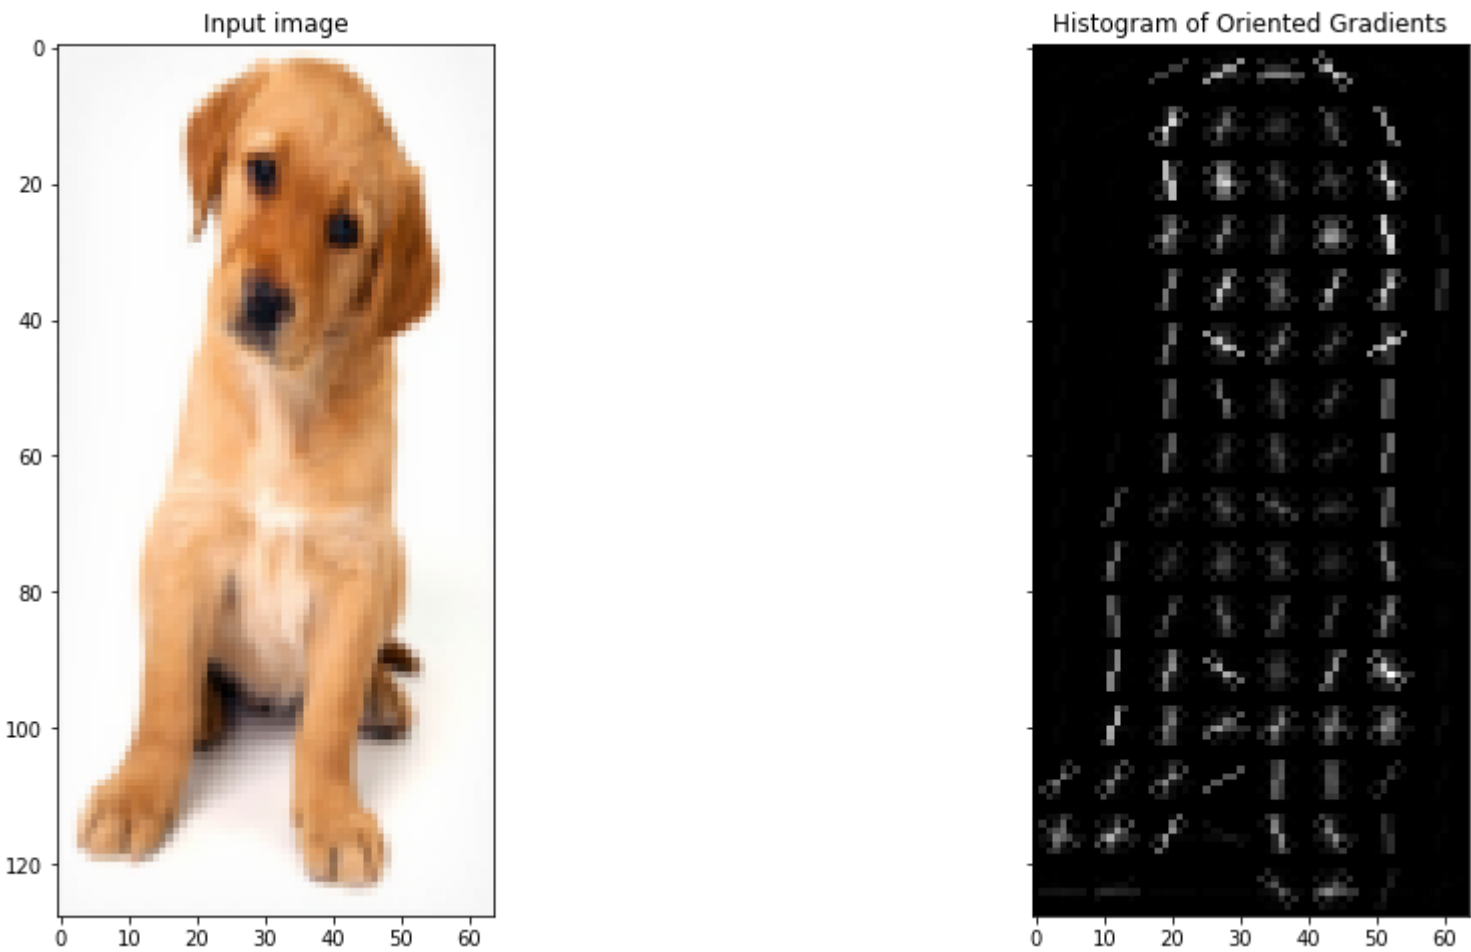



The idea behind this article was to give you an understanding of what is actually happening behind the HOG feature descriptor and how the features are calculated. The complete process is broken down into

As a next step, I would encourage you to try using HOG features on a simple [cor](#) performance improves. Do share your results in the comment section!



Sign in to analyticsvidhya.com with Google





Trent Leslie

trentleslie@gmail.com

Continue as Trent

To create your account, Google will share your name, email address, and profile picture with analyticsvidhya.com. See analyticsvidhya.com's [privacy policy](#) and [terms of service](#).

[Computer Vision](#) [deep learning](#) [feature engineering](#) [feature extraction](#)

[image data python](#) [image features](#) [image processing](#) [live coding](#) [pytho](#)


About the Author



[Aishwarya Singh](#)

An avid reader and blogger who loves exploring the endless world of data science and artificial intelligence. Fascinated by the limitless applications of ML and AI; eager to learn and discover the depths of data science.

Our Top Authors

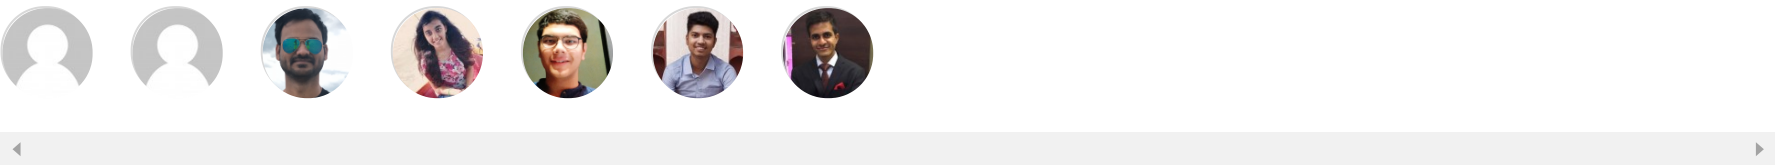

Download

Analytics Vidhya App for the Latest blog/Article



Previous Post

[Step-by-Step Deep Learning Tutorial to Build your own Video Classification Model](#)

Next Post

[Everything you Should Know about p-value from Scratch for Data Science](#)

9 thoughts on "Feature Engineering for Images: A Valuable Introduction to the HOG Feature Descriptor"



amruthakaur says:
September 09, 2019 at 1:35 pm

Great Post.

[Reply](#)



Sam says:
September 10, 2019 at 5:04 pm

Many thanks for a job well done, always remember you helped me.

[Reply](#)

Really glad you liked the article!

[Reply](#)



Kunal Bambardekar says:
October 15, 2019 at 8:50 pm

Hey Aishwarya, Although it was really a useful article, there was a slight mistake in the direction($G_y = 68 - 56 = 8$). The value should rather be 12. It would just change the direction.

[Reply](#)



shaheen says:
October 16, 2019 at 1:51 pm

May GOD Bless You for this useful tutorial

[Reply](#)



Aishwarya Singh says:
October 17, 2019 at 12:05 pm

Thanks shaheen

[Reply](#)



Aishwarya Singh says:
October 17, 2019 at 12:06 pm

Hey Kunal, Thanks for pointing it out. I'll update it.

[Reply](#)



Muhammad Assam says:
October 28, 2019 at 6:59 pm

May you live long....

[Reply](#)



ST says:
November 08, 2019 at 11:40 am

Great explanation.

[Reply](#)

Leave a Reply

Your email address will not be published. Required fields are marked *

Comment

Name*

Email*

Website

☐ Notify me of follow-up comments by email.

☐ Notify me of new posts by email.

Submit

Sign in to analyticsvidhya.com with Google

Trent Leslie

trentleslie@gmail.com

Continue as Trent

To create your account, Google will share your name, email address, and profile picture with analyticsvidhya.com. See analyticsvidhya.com's [privacy policy](#) and [terms of service](#).

Top Resources




A Beginner's Guide to Image Processing With OpenCV and Python

jissdeodates -_SEP 08, 2021




“Ok, Google. Learning.

Akash -_SEP 10, 2021

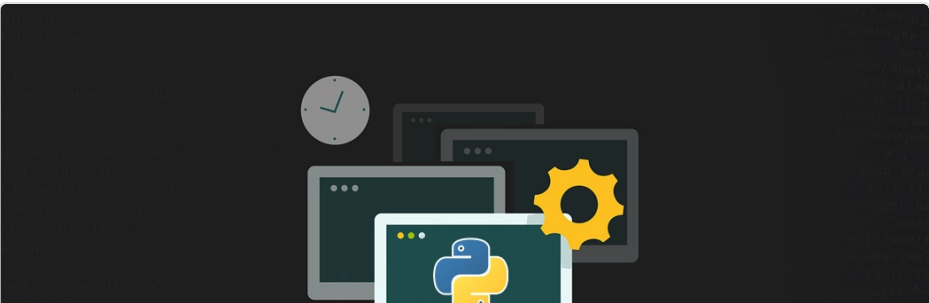

Basic Concepts of Object-Oriented Programming in Python

Himanshi Singh -_SEP 01, 2020

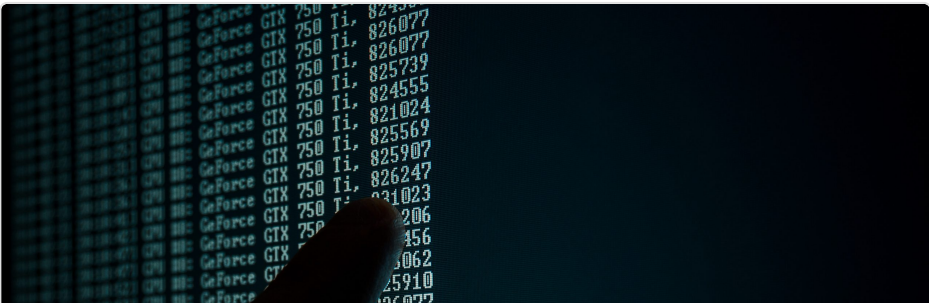

Beginner's Guide To Create PySpark DataFrame

Rahul Shah -_SEP 13, 2021

Download App



Analytics Vidhya

About Us

Our Team

Careers

Contact us

Companies

Post Jobs

Trainings

Hiring Hackathons

Advertising

Data Scientists

Blog

Hackathon

Discussions

Apply Jobs

Visit us

