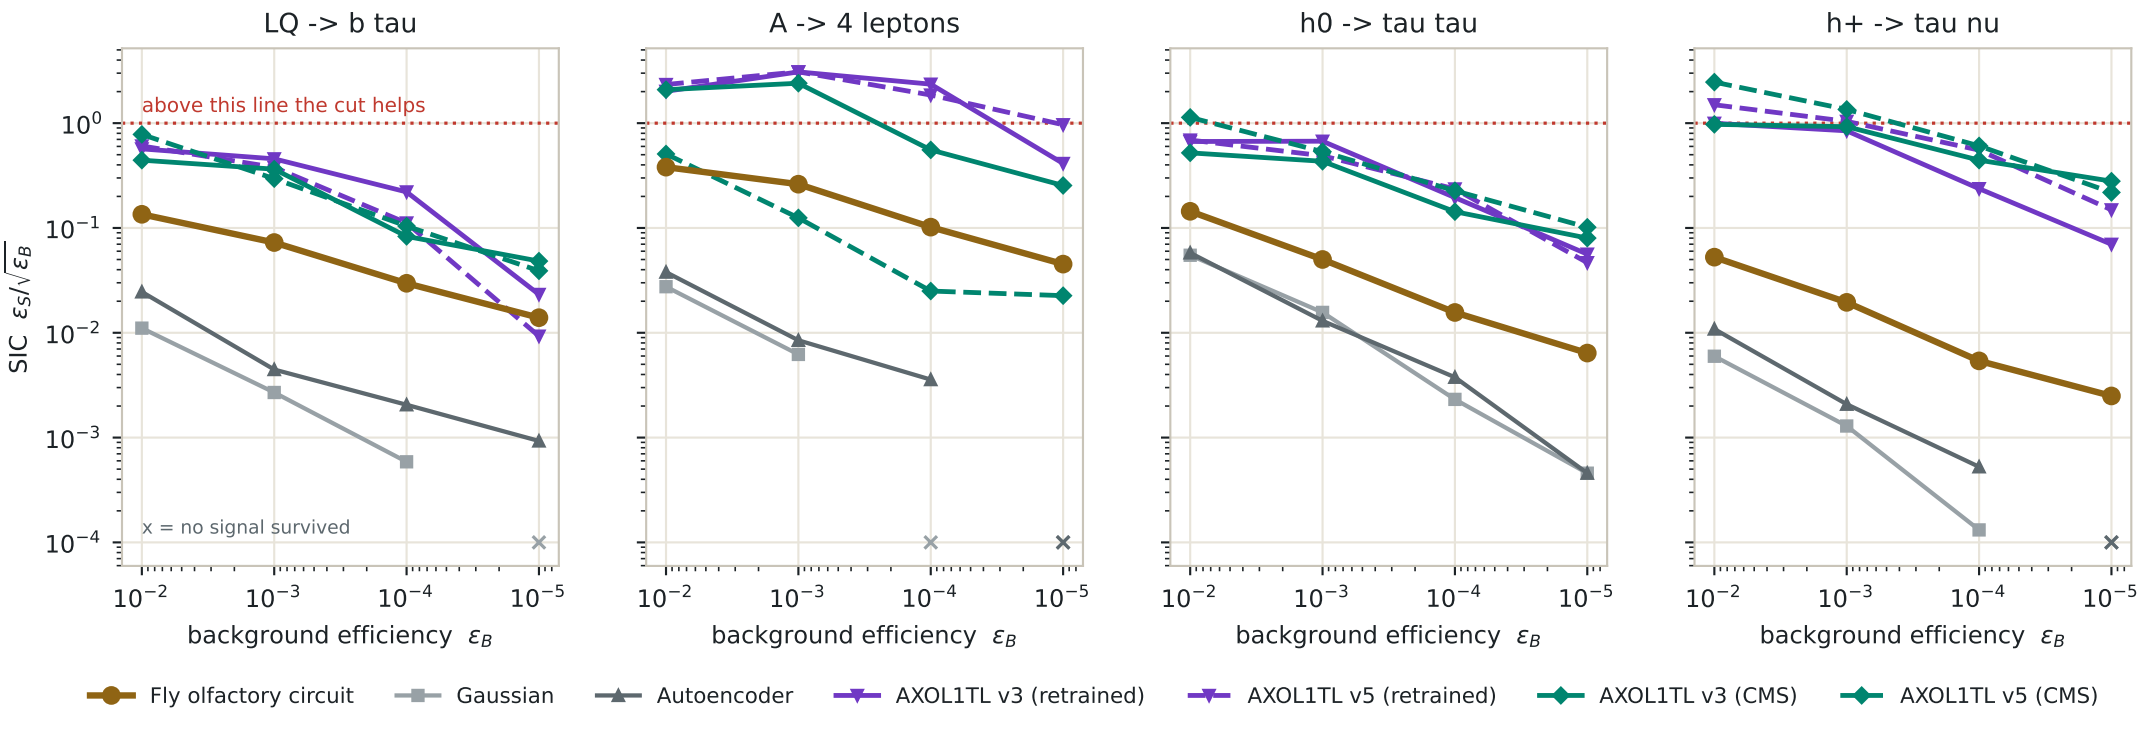
Does the cut actually improve the search? (ADC2021 trigger objects)
LQ -> b tau
A -> 4 leptons
h0 -> tau tau
h+ -> tau nu
above this line the cut helps
x = no signal survived
SIC $\varepsilon_S/\sqrt{\varepsilon_B}$
background efficiency ε_B
Fly olfactory circuit
Gaussian
Autoencoder
AXOL1TL v3 (retrained)
AXOL1TL v5 (retrained)
AXOL1TL v3 (CMS)
AXOL1TL v5 (CMS)
(CMS) = real emulator run OFF-DISTRIBUTION (trained on Zero Bias, evaluated on Delphes/lepton-filtered ADC2021). (retrained) = same topology refit here.