

Git and Github cheat sheet - Everything in less than 30 seconds

SE Foundations Average: 31.79%

Create and setup a new repository in 15 seconds

Go to [Github](#), log-in and find the green button to create a new repository. Click on it.

You should see this:

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository](#).

Create a new repository

Owner *

 holbertonschool ▾

Repository name *

/ boom ✓

Great repository names are short and memorable. Need inspiration? How about **cautious-octo-meme**?

Description (optional)

Create a new GitHub repository in 10 seconds



Public

Anyone on the internet can see this repository. You choose who can commit.



Internal

Holberton School [enterprise members](#) can see this repository. You choose who can commit.



Private

You choose who can see and commit to this repository.

Initialize this repository with:

Skip this step if you're importing an existing repository.



Add a README file

This is where you can write a long description for your project. [Learn more](#).



Add .gitignore

Choose which files not to track from a list of templates. [Learn more](#).




Choose a license

A license tells others what they can and can't do with your code. [Learn more](#).

Create repository

Fill in the repository name, and the description and click on the green button “**Create repository**”. Do not initialize this repository with a README.

You should see this now:

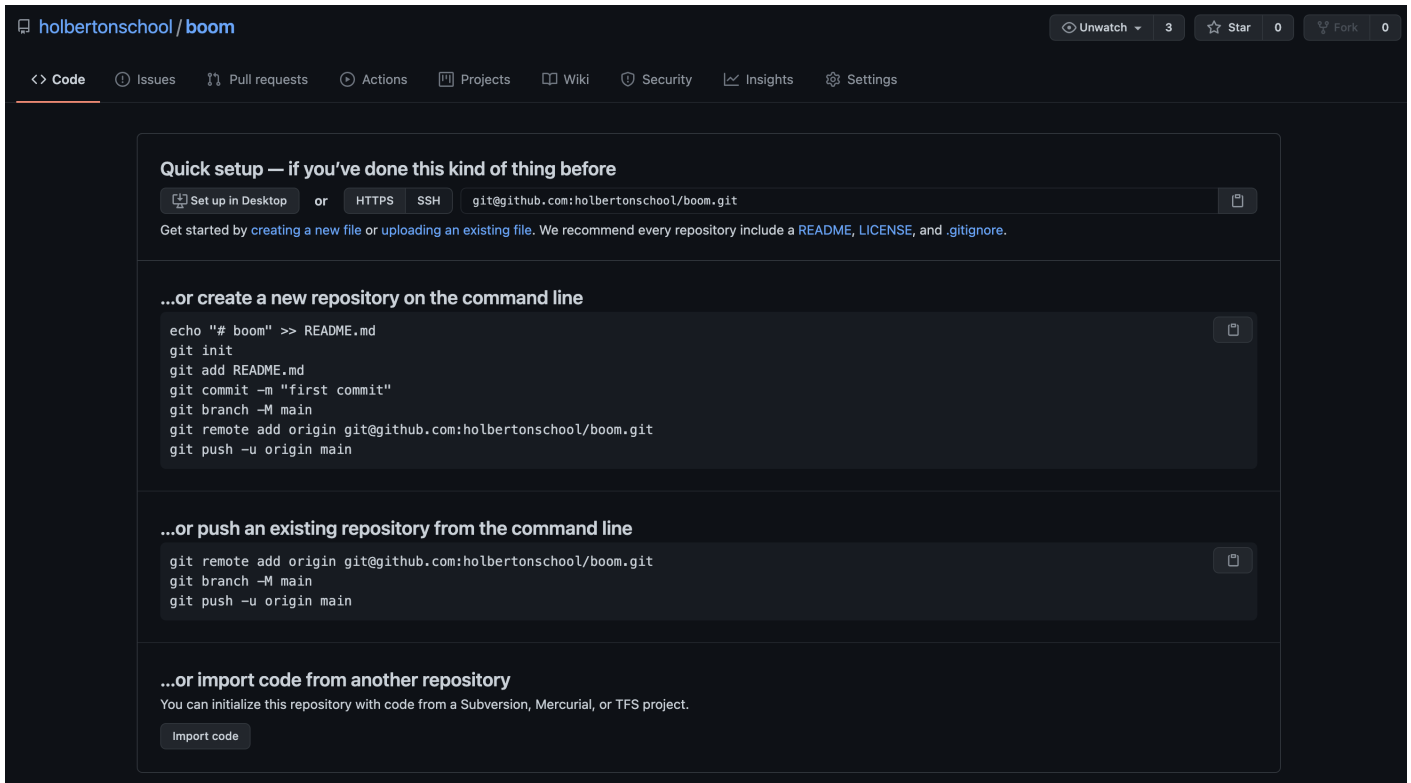


Now in your computer's terminal, create the directory that will contain your code and `cd` into it:

```
[✓]alex ~/Holberton/Repositories > mkdir boom
[✓]alex ~/Holberton/Repositories > cd boom
[✓]alex ~/Holberton/Repositories/boom > 
```

Now let's setup our repository, and push a very simple README file:

```
[✓]alex ~/Holberton/Repositories/boom > echo '# Boom!' > README.md
[✓]alex ~/Holberton/Repositories/boom > git init
Initialized empty Git repository in /Users/alex/Holberton/Repositories/boom/.git/
[✓]alex ~/Holberton/Repositories/boom > git add README.md
[✓]alex ~/Holberton/Repositories/boom > git commit -m "Add: README file"
[master (root-commit) 18e76ac] Add: README file
1 file changed, 1 insertion(+)
create mode 100644 README.md
[✓]alex ~/Holberton/Repositories/boom > git branch -M main
[✓]alex ~/Holberton/Repositories/boom > git remote add origin git@github.com:holbertonschool/boom.git
[✓]alex ~/Holberton/Repositories/boom > git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 889 bytes | 889.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To github.com:holbertonschool/boom.git
 * [new branch]      main -> main
Branch 'main' set up to track remote branch 'main' from 'origin'.
[✓]alex ~/Holberton/Repositories/boom > 
```

Now if you refresh your repository page on GitHub, you should see the `README.md` file there:

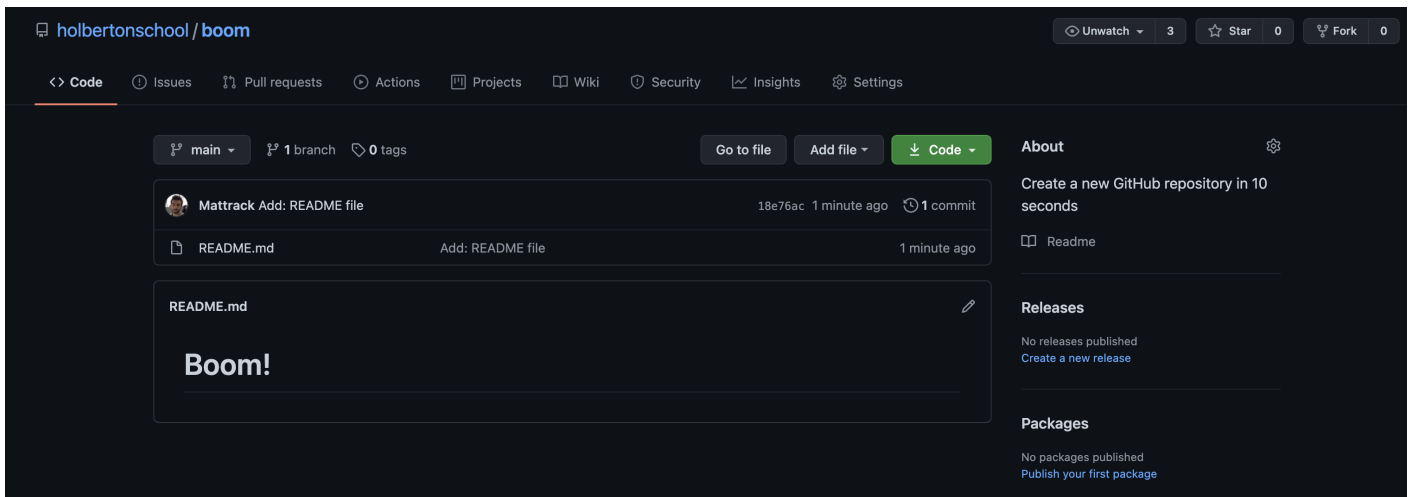

On your computer, you should have a `.git` directory inside your directory.

```
[√]alex ~/Holberton/Repositories/boom > ls -la
total 8
drwxr-xr-x  4 alex  staff   128B Jan 29 17:56 ./
drwxr-xr-x 21 alex  staff   672B Jan 29 17:56 ../
drwxr-xr-x 12 alex  staff   384B Jan 29 17:57 .git/
-rw-r--r--  1 alex  staff    8B Jan 29 17:56 README.md
[√]alex ~/Holberton/Repositories/boom > 
```

All done.

Add new (versions of) files and commit in 5 seconds

After working on your project, you can add, commit and push new and modified files to your GitHub, with 3 commands:

```
git add <file(s) to add>
git commit -m <A meaningful commit message>
git push
```

Here's an example. Let's say we created a `main.c` file, and we want to push it:

```

[✓]alex ~/Holberton/Repositories/boom > ls -l
total 16
-rw-r--r--  1 alex  staff    8B Jan 29 17:56 README.md
-rw-r--r--  1 alex  staff   33B Jan 29 18:00 main.c
[✓]alex ~/Holberton/Repositories/boom > git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
      main.c

nothing added to commit but untracked files present (use "git add" to track)
[✓]alex ~/Holberton/Repositories/boom > git add main.c
[✓]alex ~/Holberton/Repositories/boom > git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
      new file:   main.c

[✓]alex ~/Holberton/Repositories/boom > git commit -m "Add: main file"
[main 86a3c4e] Add: main file
 1 file changed, 4 insertions(+)
 create mode 100644 main.c
[✓]alex ~/Holberton/Repositories/boom > git push
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 980 bytes | 980.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To github.com:holbertonschool/boom.git
   18e76ac..86a3c4e  main -> main
[✓]alex ~/Holberton/Repositories/boom > git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
[✓]alex ~/Holberton/Repositories/boom > █

```

Now on GitHub, we can see that the file was correctly pushed:

holbertonschool / boom

<> Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

Unwatch3

Star0

Fork0

main1 branch0 tags

Go to fileAdd fileCode

Mattrack Add: main file86a3c4e 1 minute ago2 commits

README.mdAdd: README file5 minutes ago

main.cAdd: main file1 minute ago

README.md

Boom!

About

Create a new GitHub repository in 10 seconds

Readme

Releases

No releases published

Create a new release

Packages

No packages published

Publish your first package

Languages

C 100.0%

Copyright © 2025 ALX, All rights reserved.