

LAPORAN PRAKTIKUM PEMROGRAMAN MOBILE

Pertemuan 1




Disusun oleh:

1. Tri Aldy Kurniawan (244107020098)

**D-IV Teknik Informatika
Jurusan Teknologi Informasi
Politeknik Negeri Malang**

Membuka project pada code editor

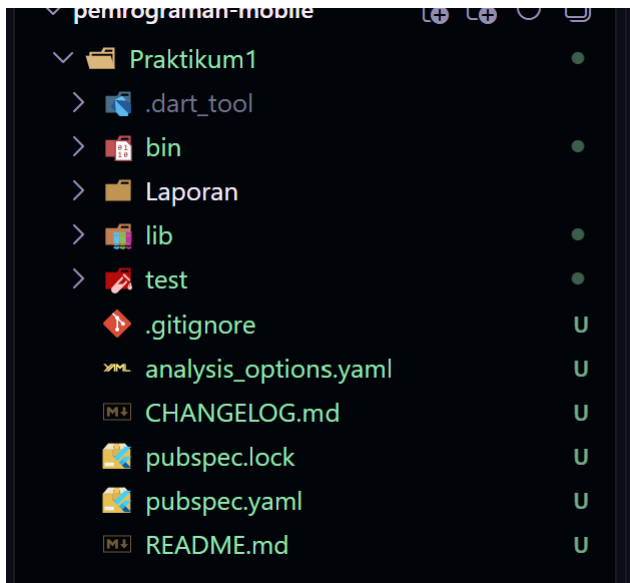

Melakukan percobaan menulis variabel dan print hasilnya

```
Praktikum1 > bin > Praktikum1.dart > main
1  import 'package:Praktikum1/Praktikum1.dart' as Praktikum1;
2
   Run | Debug
3  void main(List<String> arguments) {
4      print('Hello world: ${Praktikum1.calculate()}!');
5      var nama = "Aldy";
6      var usia = 20;
7      var tinggi = "170";
8      var iseng = usia + int.parse(tinggi);
9      var alamat = "malang";
10     print("nama: $nama");
11     print("usia: $usia");
12     print("alamat: $alamat");
13     print("hasil iseng: $iseng");
14 }
15
```

Problems 4 Output Debug Console Terminal Ports Filter (e.g.

```
Hello world: 42!
nama: Aldy
usia: 20
alamat: malang
hasil iseng: 190

Exited.
```

Menambahkan variabel tinggi dengan var lalu mencoba dijumlahkan

```
3
Run | Debug
4 void main(List<String> arguments) {
5     // print("nama saya $nama dan usia saya $umur");
6     final name = "Kurniawan";
7     final age = 20;
8     print("my name is $name and my age is $age");
9     var nama = "Aldy";
10    var usia = 20;
11    var tinggi = "170";
12    var iseng = usia + int.parse(tinggi);
13    var alamat = "malang";
14    print("nama: $nama");
15    print("usia: $usia");
...

Problems 3 Output Debug Console Terminal Ports

my name is Kurniawan and my age is 20
nama: Aldy
usia: 20
alamat: malang
hasil iseng: 190

Exited.
```

Mencoba membuat file baru dan dijalankan

```
Praktikum1 > bin > aldy.dart > ...
Run | Debug
1 void main(List<String> args) {
2     print("hallo aldy");
3 }
4

Problems 3 Output Debug Console Terminal Ports

hallo aldy

Exited.
```

Mencoba variabel const dan final

```
Praktikum1 > bin >  Praktikum1.dart > ...  
1  const nama = "Aldy";  
2  const umur = 21;  
3  
   Run | Debug  
4  void main(List<String> arguments) {  
5      print("nama saya $nama dan usia saya $umur");  
6      final name = "Kurniawan";  
7      final age = 20;  
8      print("my name is $name and my age is $age");  
9  }  
10
```

Problems **3** Output **Debug Console** Terminal Ports

```
nama saya Aldy dan usia saya 21  
my name is Kurniawan and my age is 20  
  
Exited.
```

Mencoba berbagai macam variabel

```
Praktikum1 > bin > variabel.dart > ...
2 void main(List<String> args) {
4     double b = 3.14;
5     String c = "hai";
6     bool d = true;
7     print(a);
8     print(b);
9     print(c);
10    print(d);
11    String e = "4";
12    int f = a + int.parse(e);
13    print(f);
14    List<String> names = ['alice', 'bob', 'charlie'];
15    print(names);
16    print("nama ke 0 adalah ${names[0]}");
17    List<int> numbers = [1, 2, 3, 4];
    ...
}

Problems 4 Output Debug Console Terminal Ports Filter
10
3.14
hai
true
14
[alice, bob, charlie]
nama ke 0 adalah alice
[1, 2, 3, 4]
jumlah elemen dalam numbers adalah 4
{alice: 20, bob: 21}
umur alice adalah 20
hello
32
true
[1, 2, 3]
{nama: rahma, usia: 20}

Exited.
```

Mencoba inputan scanner dart

```
Praktikum1 > bin > nullable.dart > main
1  import 'dart:io';
2
Run | Debug
3  void main(List<String> args) {
4      String? name;
5      name = null;
6      print(name);
7      print("nama saya ${name ?? "tidak diketahui"}");
8      print("masukkan nama anda");
9      String? nama = stdin.readLineSync();
10     print(
11         "nama anda adalah ${nama == null || nama.isEmpty ? "tidak diketahui" : nama}";
12     );
13     if (nama != null && nama.isNotEmpty) {
14         print("nama anda adalah $nama");
15     } else {
```

Problems 4 Output Debug Console Terminal Ports

PS D:\Project\Mobile\pemrograman-mobile\Praktikum1> dart run .\bin\operator.dart
masukan sebuah angka :
20
nilainya adalah 20
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1> dart run .\bin\nullable.dart
null
nama saya tidak diketahui
masukkan nama anda


Mencoba swicthcase

```
Praktikum1 > bin > switchcase.dart > ...
1  import 'dart:io';
2
Run | Debug
3  void main(List<String> args) {
4      print("masukkan nama");
5      String? nama = stdin.readLineSync();
6      switch (nama) {
7          case null:
8          case "":
9              print("nama anda tidak diketahui");
10             break;
11         default:
12             print("nama anda $nama");
13             break;
14     }
15 }
```

Problems 4 Output Debug Console Terminal Ports

PS D:\Project\Mobile\pemrograman-mobile\Praktikum1> dart run .\bin\switchcase.dart
masukkan nama
aldy
nama anda aldy
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1>

Mencoba checking

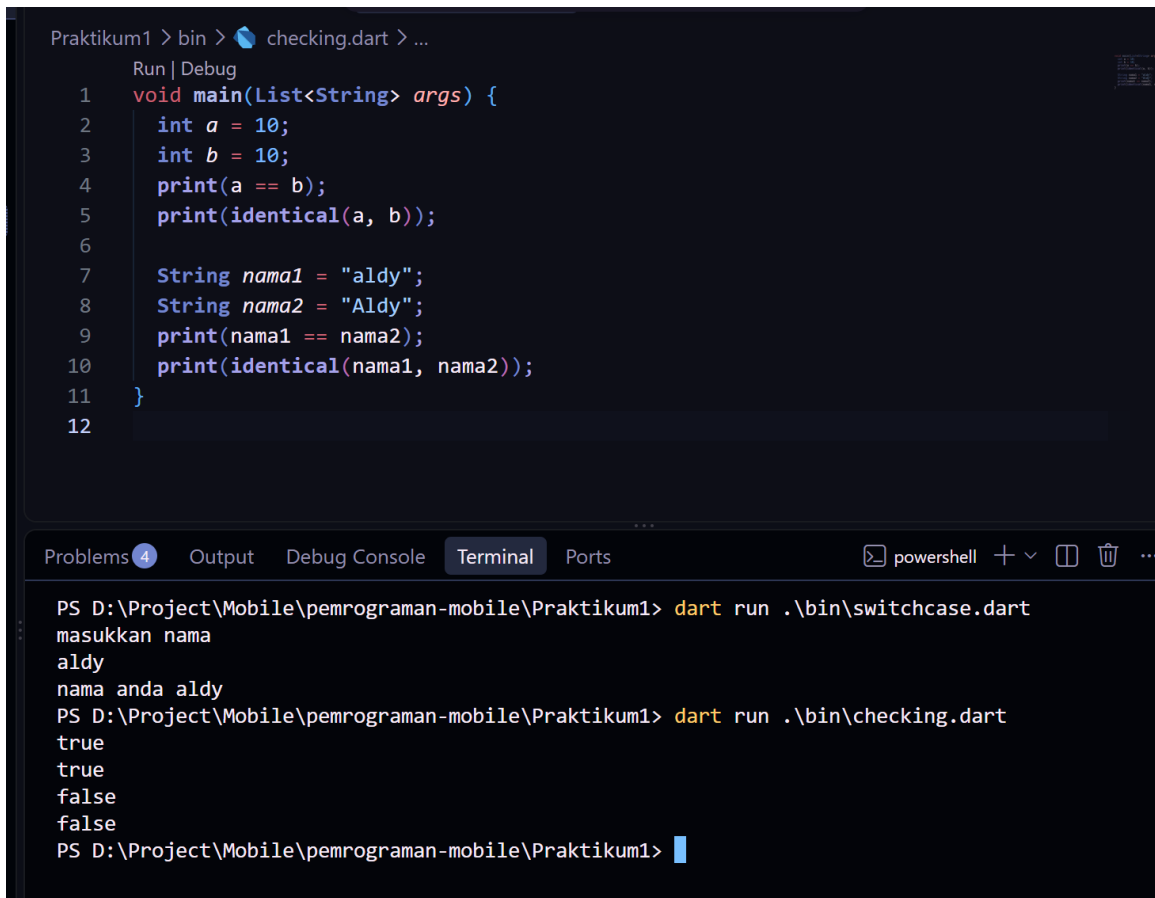


The screenshot shows an IDE with a Dart file named `checking.dart`. The code defines a `main` function that takes a list of arguments. It initializes two integers, `a` and `b`, both to 10, and prints the result of `a == b` and `identical(a, b)`. It then initializes two strings, `nama1` and `nama2`, with values "aldy" and "Aldy" respectively, and prints the result of `nama1 == nama2` and `identical(nama1, nama2)`.

```
Praktikum1 > bin > checking.dart > ...  
Run | Debug  
1 void main(List<String> args) {  
2   int a = 10;  
3   int b = 10;  
4   print(a == b);  
5   print(identical(a, b));  
6  
7   String nama1 = "aldy";  
8   String nama2 = "Aldy";  
9   print(nama1 == nama2);  
10  print(identical(nama1, nama2));  
11 }  
12
```

The terminal output shows the execution of the program. It prompts for input, which is "aldy". It then prints the results of the comparisons: `true` for `a == b`, `true` for `identical(a, b)`, `false` for `nama1 == nama2`, and `false` for `identical(nama1, nama2)`.

```
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1> dart run .\bin\switchcase.dart  
masukkan nama  
aldy  
nama anda aldy  
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1> dart run .\bin\checking.dart  
true  
true  
false  
false  
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1>
```

Mencoba perulangan while

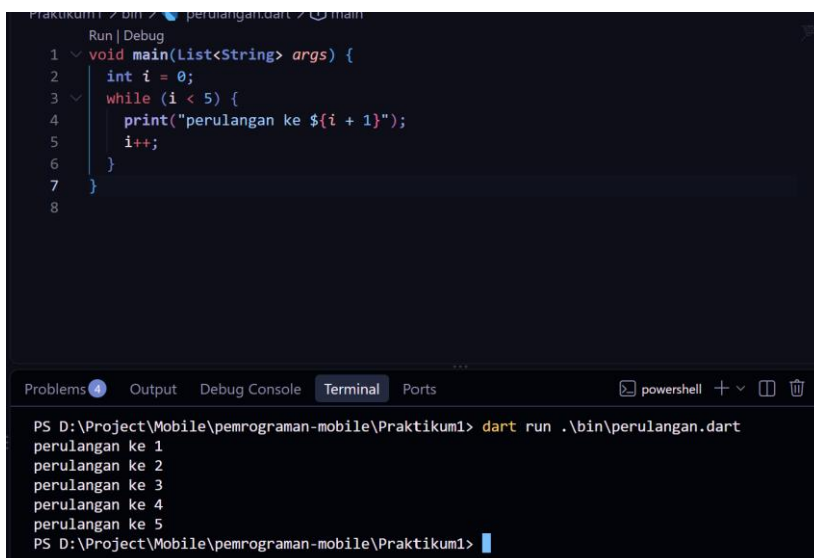

The screenshot shows an IDE with a Dart file named `perulangan.dart`. The code defines a `main` function that initializes an integer `i` to 0 and enters a `while` loop that continues as long as `i < 5`. Inside the loop, it prints "perulangan ke `i + 1`" and increments `i`.

```
Praktikum1 > bin > perulangan.dart > @main  
Run | Debug  
1 void main(List<String> args) {  
2   int i = 0;  
3   while (i < 5) {  
4     print("perulangan ke  $i + 1$ ");  
5     i++;  
6   }  
7 }  
8
```

The terminal output shows the execution of the program, which prints "perulangan ke 1" through "perulangan ke 5".

```
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1> dart run .\bin\perulangan.dart  
perulangan ke 1  
perulangan ke 2  
perulangan ke 3  
perulangan ke 4  
perulangan ke 5  
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1>
```


Mencoba perulangan do while

```
Praktikum1 > bin > perulangan.dart > ...  
Run | Debug  
1 void main(List<String> args) {  
2   int i = 0;  
3   do {  
4     print("perulangan ke ${i + 1}");  
5     i++;  
6   } while (i == 5);  
7  
8   for (int i = 0; i < 5; i++) {  
9     print("perulangan ke ${i + 1}");  
10  }  
11  
12 }  
13
```

Problems 4 Output Debug Console Terminal Ports powershell + -

```
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1> dart run .\bin\perulangan.dart  
perulangan ke 1  
perulangan ke 1  
perulangan ke 2  
perulangan ke 3  
perulangan ke 4  
perulangan ke 5  
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1>
```

Mencoba perulangan for

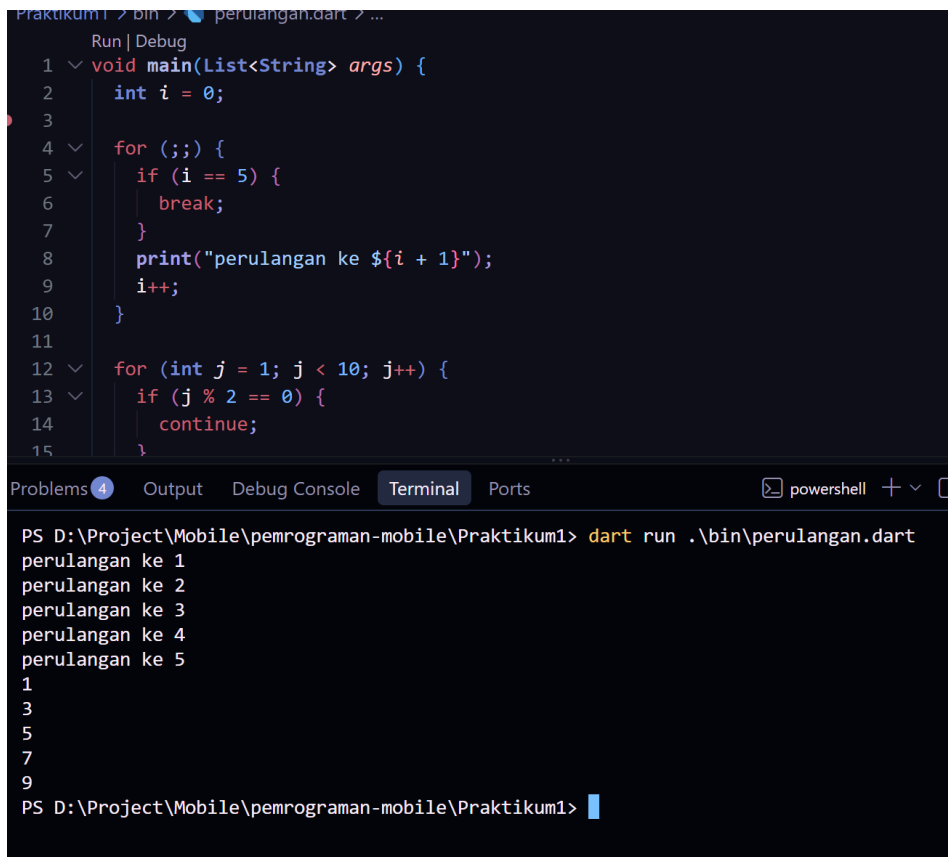

The image shows a screenshot of an IDE with a dark theme. The top pane displays Dart code for a program named 'perulangan.dart'. The code uses a 'for' loop to iterate from 1 to 10, printing the iteration number. It includes a 'break' statement at iteration 5 and a 'continue' statement for even numbers. The bottom pane shows the terminal output of the program, which matches the code's logic.

```
Praktikum1 > bin > perulangan.dart > ...  
Run | Debug  
1 void main(List<String> args) {  
2   int i = 0;  
3  
4   for (;;) {  
5     if (i == 5) {  
6       break;  
7     }  
8     print("perulangan ke ${i + 1}");  
9     i++;  
10  }  
11  
12  for (int j = 1; j < 10; j++) {  
13    if (j % 2 == 0) {  
14      continue;  
15    }  
16  }
```

Problems 4 Output Debug Console Terminal Ports powershell + -

```
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1> dart run .\bin\perulangan.dart  
perulangan ke 1  
perulangan ke 2  
perulangan ke 3  
perulangan ke 4  
perulangan ke 5  
1  
3  
5  
7  
9  
PS D:\Project\Mobile\pemrograman-mobile\Praktikum1>
```