

UNIVERSITÀ DEGLI STUDI DI FIRENZE
Scuola di Scienze Matematiche Fisiche e Naturali
Corso di Laurea Magistrale in Informatica



UNIVERSITÀ
DEGLI STUDI
FIRENZE

B-SPLINE METHODS FOR THE DESIGN OF
SMOOTH SPATIAL PATHS WITH OBSTACLE
AVOIDANCE

METODI B-SPLINE PER IL DISEGNO DI PERCORSI
REGOLARI IN AMBIENTI TRIDIMENSIONALI
CONTENENTI OSTACOLI

Tesi di Laurea Magistrale in Informatica

Relatore: Alessandra Sestini Correlatore: Carlotta Giannelli

Candidato: STEFANO MARTINA

Luglio 2016, Anno accademico 2015/16

Stefano Martina (stefano.martina@stud.unifi.it): *B-Spline methods for the design of smooth spatial paths with obstacle avoidance*, Corso di Laurea Magistrale in Informatica . © Copyright 2016 Stefano Martina - this work is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License .

ABSTRACT

Path planning problem consists in finding an interpolating curve between two points in a scene with obstacles. It has significant applications in robotics and scientific visualization. It is important to find a curve with certain qualities of smoothing, thus we focus on the curve fairing. Furthermore, for the representation, we use B-spline curves that are an affirmed standard in Computer-Aided Design (CAD) and Computer-Aided Geometric Design (CAGD).

We design different algorithms to solve the problem and we present their complexity analysis. The resulting work is highly interdisciplinary: we address different approaches, analytical and stochastic.

We realize an application in Python using Visualization Tool Kit (VTK) for the visualization that implements the presented algorithms. Finally, we systematically test the application with different scenarios.

Dedicated to a future of elevation for the human condition.

*I hear and I forget.
I see and I remember.
I do and I understand.*

— Confucius

ACKNOWLEDGMENTS

I would like to express my sincere gratitude to my coordinator Prof. Alessandra Sestini and my advisor Ph.D. Carlotta Giannelli for their patience and the priceless revision work. I want to thank them also for introducing me to this research area and for their guidance through the development of this project.

I also would like to thank all the professors for contributing, with their passion, to make me a better person and for instilling in me the passion for knowledge. Among them, a special mention goes to Prof. Pierluigi Crescenzi for the advice that he gave me for complexity analysis, Prof. Maria Cecilia Verri for the advice on the algorithms, Prof. Gregorio Landi and Prof. Franco Bagnoli for introducing me to stochastic methods.

I would like to thank all my friends for being life companions and for all the adventures that we had and we will continue to have.

A special loving thank goes to my parents Mauro and Rosa, and to my brother Simone, for patiently contributing to sustain me all this years, for tangible and intangible needs.

Finally, last but not least, I want to thank Federica, the woman of my life, for making the world a worthier place to live in and for the unconditional love that she gives to me everyday (and also for helping me to make this text more readable).

Stefano Martina

CONTENTS

1	INTRODUCTION	1
I	STATE OF THE ART	5
2	MOTION PLANNING	7
2.1	Problem types	8
2.2	Algorithm types	9
2.2.1	Roadmap methods	9
2.2.1.1	Visibility graph	9
2.2.1.2	Edge sample visibility graph	10
2.2.1.3	Voronoi roadmap	10
2.2.1.4	Silhouette method	10
2.2.2	Cell decomposition	10
2.2.3	Potential field methods	10
2.2.4	Probabilistic approaches	11
2.2.5	Rapidly-expanding Random Tree (RRT)	11
2.2.6	Decoupled trajectory planning	11
2.2.7	Mathematical programming	11
2.3	Path planning	11
II	PROJECT	13
3	PREREQUISITES	15
3.1	Splines and B-splines	15
3.1.1	Truncated-powers basis for classic splines	16
3.1.2	B-splines basis for classic splines	17
3.1.3	Spline curves	18
3.2	B-splines curves properties	19
3.2.1	Convex Hull Property (CHP)	19
3.2.2	Aligned vertices	20
3.2.3	Smoothness	20
3.2.4	End point interpolation	21
3.2.5	Curvature and torsion	21
3.2.6	Arc length	23
3.3	Voronoi Diagrams	23
3.4	Statistical methods	26
3.4.1	Notes on probabilities	26
3.4.1.1	Probable Error (PE)	26

3.4.1.2	Probability central limit theorem (PCLT)	27
3.4.2	Monte Carlo Method (MCM)	27
3.4.3	Simulated Annealing (SA)	29
3.4.3.1	Statistical thermodynamic	30
3.4.3.2	Simulated Annealing (SA) algorithm	30
3.4.4	Lagrangian Relaxation (LR)	32
3.5	Intersections in space	32
3.5.1	Point inside convex polyhedron in 3D space	33
3.5.2	Segment-triangle in 3D space	34
3.5.3	Triangle-triangle in 3D space	37
4	SCENE REPRESENTATION	41
4.1	Basic elements and path	41
4.2	Basic obstacle representation	42
4.3	Complex obstacles	42
4.4	Bounding box	43
5	ALGORITHMS	45
5.1	Polygonal chain	46
5.1.1	Base Graph	46
5.1.1.1	Complexity considerations	48
5.1.2	Graph's transformation	49
5.1.2.1	Complexity considerations	51
5.2	Obstacle avoidance	51
5.2.1	First solution: Dijkstra's algorithm in G_t	52
5.2.1.1	Complexity considerations	55
5.2.2	Second solution: Dijkstra's algorithm in G	56
5.2.2.1	Complexity considerations	60
5.3	Degree increase	61
5.4	Knots selection	63
5.5	Post processing	65
5.5.1	Complexity considerations	67
5.6	Third solution: Simulated Annealing	67
5.6.1	Lagrangian Relaxation (LR) applied to the project .	68
5.6.2	Annealing phase	69
5.6.2.1	Complexity considerations	71
	III EVALUATION	73
6	CODE STRUCTURE	75
7	TESTING	79
8	CONCLUSIONS	89
8.1	Tests analysis	89

8.2 Future improvements	91
IV APPENDICES	93
A TESTS RESULTS	95
B SOURCE CODE	195
B.1 Classes	195
B.1.1 voronizer.py	195
B.1.2 path.py	200
B.1.3 plotter.py	206
B.1.4 polyhedronsContainer.py	213
B.1.5 polyhedron.py	215
B.1.6 compositePolyhedron.py	218
B.1.7 tetrahedron.py	219
B.1.8 parallelepiped.py	219
B.1.9 convexHull.py	219
B.1.10 bucket.py	220
B.2 Scripts	220
B.2.1 makeRandomScene.py	220
B.2.2 makeBucketScene.py	222
B.2.3 plotScene.py	222
B.2.4 executeInScene.py	223
B.2.5 scene2coord.py	224
B.2.6 coord2scene.py	224
Bibliography	225
Acronyms	229
Index	230

1

INTRODUCTION

The design of *motion planning* strategies plays a fundamental role in different applications, from robotics to scientific visualization. *Path planning* problem is more specific, it consists in identifying paths that do not intersect any obstacle.

In this project we are interested in generating smooth paths. Smoothness is a desirable property that is frequently presented in literature for the planar case. Consider, for instance, the papers [28], [18], [27] and [16]. The first considers an interesting combined approach to the problem: analytical to find a smooth curve, and stochastic to locate a desired cusp on it. On the second, they concentrate in finding a curvature bounded path starting from a Voronoi Diagram (VD) constructed accordingly to the environment. The third work focuses on the process of transforming an existing polyline path in a smooth curve. In the last, they used Pythagorean Hodograph (PH) curves that have interesting features for the Computer-Aided Manufacturing (CAM) field [13].

In regards of spatial path planning, the smoothing problem is less covered in literature. For instance, in [20] it is not clear how a smooth path is obtained from the initial polynomial chain. In [40] the smoothness is considered, but the method is not optimal because it consists in alternating smoothing and obstacle-checking phases until an admissible solution is obtained. Other works, like [2] and [25], use stochastic methods to achieve smoothness.

B-spline curves are a reference standard in Computer-Aided Design (CAD) and Computer-Aided Geometric Design (CAGD) [21][22][12][15]. Thus, we decide to develop a 3D path planning application using this kind of curves, as [40] do. However, as earlier mentioned, [40] uses a *try and check* approach to the curve smoothing, we present a method that finds a smooth curve on the first attempt instead.

The considered topic is highly interdisciplinary. In fact we integrate in this project an extended set of competencies acquired during the courses.

We apply notions of *linear algebra* for the collision checks; *numerical analysis* for the curves design; *computational geometry*, *graph theory*, *probability* and *algorithm theory* for the algorithms design; and, finally, *theoretical computer science* for cost analysis.

We focus on finding a trade-off between having a short curve, a smooth curve, and keeping the time complexity low. Different solutions are explored, with different qualitative effects on the curve.

Regarding the scene representation, different kinds of polyhedral obstacle are considered.

A framework in Python is developed using Visualization Tool Kit (VTK) for the graphic output. We use a roadmap method based on Voronoi Diagrams (VDs) to create a graph (details in Section 5.1.1) that is the base structure for the project. Using such structure, three different solutions are presented.

1. The first method benefits from the Convex Hull Property (CHP) of B-spline curves (Section 3.2.1). A transformation is applied on the graph such that every path in it can be used as a control polygon for an obstacle-free curve (Section 5.1.2). Therefore, the algorithm selects the shortest path in the transformed graph and builds the curve on it (Section 5.2.1).
2. The second method still benefits from the CHP, but it picks the shortest path directly in the base graph. If violations of the CHP emerge in it, then rectification measures are taken (Section 5.2.2).
3. The third method uses a probabilistic approach. Starting from the shortest path in the original graph, it performs a simulated annealing optimization (Section 3.4.3) that converges in a state where we have an optimal trade-off between having a short curve, and low curvature and torsion peaks (Section 5.6).

This document consists of three parts. The first (Part I) is dedicated to the state of the art: we provide a survey of different topics and algorithms related to *motion planning*.

The second part (Part II) is committed to describing all the different parts of the algorithm. In detail:

- Chapter 3 gives to the reader all the necessary notions to understand the rest of the chapter;
- Chapter 4 describes how the environment and the resulting curve are represented;

- Finally in Chapter 5 we describe how to obtain the basic structures (Section 5.1), how to avoid the obstacles using the three methods described before (Section 5.2), and how to improve the obtained curve simplifying the control polygon (Section 5.5), increasing the curve degree (Section 5.3) and changing the B-spline knot vector (Section 5.4).

The third part (Part III) describes the instruments used to implement the algorithms (Chapter 6) and presents a series of tests with different scenes and configurations (Chapter 7) with their conclusions (Chapter 8).

In conclusion, Appendix B contains all the source code of the application.

Part I
STATE OF THE ART

2

MOTION PLANNING

The problem of *motion planning* consists in determining a set of low level tasks, given an high level goal to be fulfilled [7]. For instance, a classic motion planning problem is the *piano movers'* problem that involves the motion of a free flying rigid body in the 3-dimensional space from a start to a goal configuration by applying translations and rotations and by avoiding collisions with a set of obstacles [7][26]. Motion planning finds applications in different areas, like robotics, Unmanned Aerial Vehicles (UAVs) [17] and autonomous vehicles [30]. These are the most famous applications but it finds utilization also in other less common areas like motion of digital actors or molecule design [7].

Initially, the term motion planning referred only to the translations and rotations of objects, ignoring the dynamics of them, but lately research in this field started considering also the physical constraints of the object to be moved [26]. Usually, the term *trajectory planning* is used to refer to the problem of taking the path produced by a motion planning algorithm and determine the time law for moving a robot on it by respecting its mechanical constraints [26].

An important concept for motion planning problems is the *state space*, that can have different dimensions, one for each degree of freedom of the object to move. It can be a discrete or a continuous space [26]. We can call the space state S and, considering that there are obstacles or constraints on the scene, we can call $S_{\text{free}} \subseteq S$ the portion of the state space such that all its configurations are admissible. On this space state we have special states $s \in S$ and $e \in S$ for the desired *start* and *end* configurations, respectively.

Another concept is the geometric design of the scene and the actor. The obstacles can be represented as convex polygons/polyhedrons, or also as more complex shapes [26].

Furthermore, it is important to define the possible admissible transformations of the body, if it is possible only to translate and rotate it or if

its motion is composed of rigid kinematic chains or trees or if it is even possible to have not rigid transformations (flexible materials) [26].

2.1 PROBLEM TYPES

Many different problems related to motion planning have been introduced in literature. In this section we present a short survey of the most relevant problems in order of increasing complexity. Refer to [17] for details.

POINT VEHICLE The body of the object to be moved is represented as a point in the space. Thus the state space S consists in the euclidean space \mathbb{E}^2 if we consider land vehicles or \mathbb{E}^3 if we consider aerial vehicles.

POINT VEHICLE WITH DIFFERENTIAL CONSTRAINTS This problem extends the point vehicle's problem by adding the constraints of the physical dynamic. For instance, constraints on acceleration, velocity, curvature, etc... when we want to model a real vehicle (whose shape is still approximated with a point).

JOGGER'S PROBLEM This kind of problems concerns the dynamic of a jogger that has a limited field of view. Consequently, in this case, we do not have a complete view of the scene and the path is updated as soon as the knowledge of the scene increases.

BUG'S PROBLEM This problem is an extreme case of the jogger's problem with a null field of view. Thus the scene updating can be done only when an obstacle is touched.

WEIGHTED REGIONS' PROBLEM This problem considers some regions of the space as more desirable than others, rather than contemplate completely obstructive obstacles. For instance, this is the case of finding a path in an off-road environment where the vehicle can move faster on certain terrains and slower over different configurations.

MOVER'S PROBLEM The vehicle is modeled as a rigid body, thus, we need to add the dimensions for the spatial rotation of the body to the state space.

GENERAL VEHICLE WITH DIFFERENTIAL CONSTRAINTS This problem combines the *mover's problem* and the *point vehicle with differential constraints* by adding to the mover's problem the physical constraints on the motion dynamic.

TIME VARYING ENVIRONMENTS These problems regards moving obstacles.

MULTIPLE MOVERS This problem considers more than one vehicle. We need to manage different paths and the problem of avoiding possible collisions between different movers. As a matter of fact, we have to avoid collisions between the paths followed by different movers only if the collision point is reached by the movers simultaneously.

2.2 ALGORITHM TYPES

We can divide the algorithms for motion planning in different types taking into account the specific problem they resolve. The algorithms belonging to a certain type can be further divided in different categories. For more details on the different algorithms see [17] and [7].

2.2.1 Roadmap methods

This kind of algorithms reduces the problem of motion planning to graph search algorithms. The state space is approximated with a certain graph in order to find a solution in terms of a polygonal chain.

2.2.1.1 Visibility graph

The visibility graph is one of the most known roadmap methods. The nodes of the graph correspond to the vertices of each polygonal obstacles in the considered scenario. The edges of the graph correspond to linear segments between pair of vertices that do not intersect any obstacle. The Dijkstra's algorithm is then usually considered to compute the *shortest path* between two vertices of the graph [10]. Note that the shortest path associated to the visibility graph in a planar configuration is the absolute shortest path from the start to the goal position with respect to the considered scenario, see e.g., [8]. While this method finds the optimal solution (with respect to a *distance* criterion) in the planar case, it does not properly scale in a 3-dimensional setting.

2.2.1.2 Edge sample visibility graph

The edge sample visibility graph is an extension of the visibility graph method to the 3-dimensional case. The main idea consists in distributing a discrete set of points along the edges of the obstacles by considering a certain density. The visibility graph and the related shortest path of this configuration are then computed, but the corresponding solution is not as optimal as in the planar case.

2.2.1.3 Voronoi roadmap

This method builds a graph that is kept equidistant to the obstacles, using VDs as base method for constructing it. We discuss VDs in detail in Section 3.3 and Voronoi roadmap method in Section 5.1.

2.2.1.4 Silhouette method

This method was developed by Canny [6]. It is not useful for practical uses but just for proving algorithmic bounds because it is proven to be complete in any dimension. It works sweeping the space with a line (plane in 3-dimensional space) perpendicular to the segment between s and e and building the shape of the obstacles when the sweeping line intersects them.

2.2.2 Cell decomposition

This method decomposes S_{free} in smaller convex polygons - i.e. trapezoids cylinders or balls - that are connected by a graph, then searches a solution in such graph. A cell decomposition method can be exact or approximate, the former kind operates occupying all S_{free} with the graph structure, the latter one can occupy also portions of $S \setminus S_{\text{free}}$ or all S . Then the various polygons are labelled as obstacle-empty, inside obstacle or partially occupied by obstacles.

2.2.3 Potential field methods

This kind of methods operates assigning a potential field on every region of the space, the lowest potential is assigned to the goal point e and a high potential value is assigned to the obstacles. Then the path is calculated as a trajectory of a particle that reacts to those potentials, it is repelled by the obstacles and attracted by the end point.

2.2.4 Probabilistic approaches

This kind of methods uses probabilistic techniques for exploring the space of solutions and finding a good approximation of the optimal solution. In our project we provide also a mixed roadmap-probabilistic method, see Section 3.4 and Section 5.6 for further details.

2.2.5 Rapidly-expanding Random Tree (RRT)

This method operates by doing a stochastic search, starting from the reference frame of the object to be moved and expanding a tree through the random sampling of the state space.

2.2.6 Decoupled trajectory planning

This kind of algorithms operates in a two-step way. First a discrete path through the state space is found, then the path is modified to adapt it to the dynamics constraints - i.e. the trajectory is constructed.

2.2.7 Mathematical programming

This method manages the trajectory planning problem as a numerical optimization problem, using methods like nonlinear programming to find the optimal solution.

2.3 PATH PLANNING

In our project we concentrate on a subset of the motion planning problem, the *path planning* problem that consists [7] in determining a parametric curve

$$\mathbf{C} : [a, b] \subset \mathbb{R} \rightarrow \mathcal{S}$$

such that $\mathbf{C}(a) = \mathbf{s}$ coincides with the desired starting configuration, $\mathbf{C}(b) = \mathbf{e}$ the desired end configuration and the image of \mathbf{C} is a subset of $\mathcal{S}_{\text{free}}$, in other words

$$\mathbf{C}(u) \in \mathcal{S}_{\text{free}} \quad \forall u \in [a, b].$$

In principle the space of the states \mathcal{S} can be of any dimension, for instance if we focus on the piano movers' problem the state is composed

by 3 dimensions for the position and other 3 dimensions for the rotation of the object [26]. Also the curve \mathbf{C} can be parameterized in any way.

In this project we concentrate on the problem of path planning where the state space is $S = \mathbb{E}^3$ and the curve is parameterized in $[0, 1]$. Thus we find a curve from one point $s \in \mathbb{E}^3$ to another point $e \in \mathbb{E}^3$ avoiding obstacles. The object that we move is considered just as a point.

Part II
PROJECT

3

PREREQUISITES

3.1 SPLINES AND B-SPLINES

A *spline* is a piecewise polynomial function with prescribed regularity on its domain.

More formally we define a spline [9][12][34][33]

$$s : [a, b] \subset \mathbb{R} \rightarrow \mathbb{R}$$

as follows. We have a partition of that interval defined by the *breakpoints*

$$\tau = \{\tau_0, \dots, \tau_\ell\}$$

such that $a = \tau_0 < \tau_1 < \dots < \tau_{\ell-1} < \tau_\ell = b$. Such breakpoints define ℓ intervals

$$I_i = \begin{cases} [\tau_i, \tau_{i+1}) & \text{if } i = 0, \dots, \ell - 2 \\ [\tau_i, \tau_{i+1}] & \text{if } i = \ell - 1. \end{cases}$$

It is possible to define the following spaces:

PIECEWISE POLYNOMIAL FUNCTIONS SPACE $P_{m,\tau}$ is the space of the functions that are polynomials of maximum degree m in each interval I_i of the partition, formally:

$$P_{m,\tau} = \{f : [a, b] \rightarrow \mathbb{R} \mid \exists p_0 \dots p_{\ell-1} \in \Pi_m \text{ such that} \\ f(t) = p(t), \forall t \in I_i, i = 0 \dots \ell - 1\}$$

where Π_m is the space of the polynomials of degree $\leq m$. The dimension of $P_{m,\tau}$ is

$$\dim(P_{m,\tau}) = \ell(m + 1)$$

because the dimension of Π_m is $m + 1$.

CLASSIC SPLINE SPACE $S_{m,\tau}$ is the space of the piecewise polynomial functions of degree m that have continuity C^{m-1} in the junctions of the intervals, formally:

$$S_{m,\tau} = P_{m,\tau} \cap C^{m-1}[a, b].$$

The dimension of this space is

$$\ell(m+1) - (\ell-1) \cdot m = \ell + m. \quad (1)$$

GENERALIZED SPLINE SPACE $S_{m,\tau,M}$ is the space of piecewise polynomial functions of degree m with a prescribed regularity at each breakpoint ranging from -1 to $m-1$. The regularity is prescribed by the multiplicity vector

$$M = \{m_1, \dots, m_{\ell-1}\}, \quad m_i \in \mathbb{N}, \quad 1 \leq m_i \leq m+1$$

as follows,

$$\begin{aligned} S_{m,\tau,M} = & \{f : [a, b] \rightarrow \mathbb{R} \mid \exists p_0 \dots p_{\ell-1} \in \Pi_m \text{ such that} \\ & f(t) = p(t), \forall t \in I_i, i = 0 \dots \ell-1 \text{ and} \\ & p_{i-1}^{(j)}(\tau_i) = p_i^{(j)}(\tau_i), j = 0, \dots, m - m_i, i = 1, \dots, \ell-1\}. \end{aligned}$$

The dimension of the space is equal to

$$\dim(S_{m,\tau,M}) = \ell(m+1) - \sum_{i=1}^{\ell-1} (m - m_i + 1) = m + \mu + 1 \quad (\mu = \sum_{i=1}^{\ell-1} m_i)$$

and is true that

$$\Pi_m \subseteq S_{m,\tau} \subseteq S_{m,\tau,M} \subseteq P_{m,\tau},$$

in particular:

- if $m_i = 1$ for all $i = 1, \dots, \ell-1$, then $S_{m,\tau,M} = S_{m,\tau}$;
- if $m_i = m+1$ for all $i = 1, \dots, \ell-1$, then $S_{m,\tau,M} = P_{m,\tau}$.

3.1.1 Truncated-powers basis for classic splines

A truncated power $(t - \tau_i)_+^m$ is defined by

$$(t - \tau_i)_+^m = \begin{cases} 0, & \text{if } t \leq \tau_i \\ (t - \tau_i)^m, & \text{otherwise.} \end{cases}$$

It is possible to demonstrate that the functions

$$g_i(t) = (t - \tau_i)_+^m \in S_{m,\tau}, \quad i = 1, \dots, \ell - 1$$

are linearly independent, and that the set

$$1, t, t^2, \dots, t^m, (t - \tau_1)_+^m, \dots, (t - \tau_{\ell-1})_+^m$$

forms a basis for the classic spline space [9]. Then a generic element $s \in S_{m,\tau}$ can be expressed as follows,

$$s(t) = \sum_{i=0}^m c_i t^i + \sum_{j=1}^{\ell-1} d_j (t - \tau_j)_+^m \quad \begin{aligned} c_i &\in \mathbb{R}, \quad i = 0, \dots, m \\ d_j &\in \mathbb{R}, \quad j = 1, \dots, \ell - 1. \end{aligned} \quad (2)$$

3.1.2 B-splines basis for classic splines

B-splines are a specific basis which can be alternatively used to represent any generalized spline [9][12][34][33]. In this paragraph, however, we consider only their definition to generate the classic spline space $S_{m,\tau}$. Furthermore in some textbooks, for notational convenience, the $order = m + 1$ is considered.

For defining the B-splines [9] we need to extend the partition vector $\tau = \{\tau_0, \dots, \tau_\ell\}$ with m knots to the left and m to the right, thus we define a new vector, usually called *extended knot* vector,

$$\tau = \{t_0, \dots, t_{m-1}, t_m, \dots, t_{n+1}, t_{n+2}, \dots, t_{n+m+1}\}$$

such that

$$t_0 \leq \dots \leq t_{m-1} \leq \overset{\equiv \tau_0 \equiv a}{t_m} < \dots < t_{n+1} \leq \overset{\equiv \tau_\ell \equiv b}{t_{n+2}} \leq \dots \leq t_{n+m+1}.$$

Since τ has $\ell + 1$ elements, we can calculate the value of

$$n = \ell + m - 1.$$

Thus the dimension of $S_{m,\tau}$, for Eq. (1), is

$$\dim(S_{m,\tau}) = \ell + m = n + 1$$

The $n + 1$ basis $N_{i,m+1}(t)$ of the B-splines of degree m are defined, for $i = 0, \dots, n$, by the recursive formula:

$$N_{i,1}(t) = \begin{cases} 1, & \text{if } t_i \leq t < t_{i+1} \\ 0, & \text{otherwise} \end{cases} \quad i = 0, \dots, n + m$$

$$N_{i,r}(t) = \omega_{i,r-1}(t) \cdot N_{i,r-1}(t) + (1 - \omega_{i+1,r-1}(t)) \cdot N_{i+1,r-1}(t) \quad \begin{aligned} i &= 0, \dots, n + m - 3, \\ r &= 2, \dots, m + 1 \end{aligned}$$

where

$$\omega_{i,r}(t) = \begin{cases} \frac{t-t_i}{t_{i+r}-t_i}, & \text{if } t_i \neq t_{i+r} \\ 0, & \text{otherwise.} \end{cases}$$

Then any function $s \in S_{m,\tau}$ can be expressed also as a linear combination of B-splines,

$$s(t) = \sum_{i=0}^n v_i N_{i,m+1}(t) \quad , v_i \in \mathbb{R}, i = 0, \dots, n. \quad (3)$$

3.1.3 Spline curves

A *spline curve* in the affine space \mathbb{E}^d is the image of a parametric vector function $S : [a, b] \rightarrow \mathbb{E}^d$ whose components are all splines belonging to a fixed spline space $S_{m,\tau}$, for $d = 3$

$$S(u) = \begin{bmatrix} x(u) \\ y(u) \\ z(u) \end{bmatrix}. \quad (4)$$

$S(u)$ can be written as follows in the truncated-powers basis Eq. (2) replacing the coefficients c_i and d_j with points

$$S(u) = \sum_{i=0}^m c_i \cdot t^i + \sum_{j=1}^{\ell-1} d_j \cdot (u - \tau_j)_+^m \quad , c_i \in \mathbb{E}^d, d_j \in \mathbb{E}^d \quad (5)$$

$$i = 0, \dots, m; j = 0, \dots, \ell - 1.$$

This representation is not practical because there isn't an intuitive correlation between the points c_i, d_j and the curve itself. Moreover the determination of an interpolant to assess argued points in \mathbb{E}^d is not a well conditioned problem if this form is adopted [9]. To overcome those drawbacks the *B-splines basis* is adopted (Section 3.1.2).

We can apply control vertices to a spline expressed with the B-spline basis as in Eq. (3) replacing the coefficients v_i with points, in this case $S(u)$ is represented as follows

$$S(u) = \sum_{i=0}^n v_i \cdot N_{i,m+1}(u) \quad , v_i \in \mathbb{E}^d, i = 0, \dots, n. \quad (6)$$

The representation of Eq. (6) is more convenient than the previous one (Eq. (5)) because the curve $S(u)$ roughly follows the shape given by the

points v_i . Those points are called *control vertices* because they are used to control the curve shape. Conformally the polygon they define is called *control polygon*.

3.2 B-SPLINES CURVES PROPERTIES

In this section we describe some properties of B-spline curves that we use for the development of the project.

3.2.1 Convex Hull Property (CHP)

The Convex Hull Property (CHP) states that a B-spline curve $S(u)$ of order m , defined by the control polygon v_0, v_1, \dots, v_n , is contained inside the union of the convex hulls composed of $m+1$ vertices of the control polygon [12]. If we call $\text{Conv}(w_0, w_1, \dots, w_j)$ the convex hull of the vertices w_0, w_1, \dots, w_j then we have

$$\begin{aligned} C_0 &= \text{Conv}(v_0, v_1, \dots, v_m) \\ C_1 &= \text{Conv}(v_1, v_2, \dots, v_{m+1}) \\ &\dots \\ C_{n-m} &= \text{Conv}(v_{n-m}, v_{n-m+1}, \dots, v_n) \end{aligned}$$

and the area where S is contained is

$$C = C_0 \cup C_1 \cup \dots \cup C_{n-m}$$

or in other words must be true

$$S(u) \cap C = S(u) \quad \forall u \in [a, b]$$

whatever is the partition vector.

In Fig. 1 an example of control polygon is visible, together with the region C (in cyan) where an associated quadratic B-spline curve is located.

Note that the CHP holds also in 3-dimensional space - i.e. a quadratic B-spline in 3-dimensional space is contained inside a flat surface composed by the union of triangles. From degree 3 the area where S is contained is not plane anymore because it is composed by the union of solid polyhedrons.

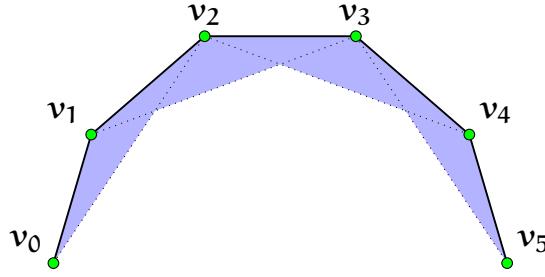


Figure 1.: Convex hull containing B-spline of degree 2

3.2.2 Aligned vertices

Because control polygons with sequences of aligned vertices have been adopted in some parts of this project, in this section their specific effect on the curve shape is analyzed.

We can have the following situations:

m ALIGNED CONTROL VERTICES If m control vertices v_i, \dots, v_{i+m-1} of the control polygon are on the same line then the curve S touches the segment joining those vertices.

$m+1$ ALIGNED CONTROL VERTICES If $m+1$ control vertices v_i, \dots, v_{i+m} of the control polygon are on the same line then a polynomial arc of the curve S lays on the segment joining those vertices.

3.2.3 Smoothness

A function is said smooth of class C^d if it is possible to calculate the d -th derivative of it and if such derivative is continue. A function f that is not continue is said to be of class C^{-1} , a function that is continue until derivative d is said to be of class C^d , a function that is always continue for every derivative is said to be of class C^∞ .

A B-spline curve of degree m with n control vertices is composed by $n-m$ polynomial segments, one for each interval

$$[t_i, t_{i+1}] \quad i = m, \dots, n+1;$$

this means that $S(u)$ is C^∞ for

$$u \in (t_i, t_{i+1}) \quad i = m, \dots, n+1.$$

Note that, if we use generalized B-spline curves, an interval $[t_i, t_{i+1}]$ can also degenerate in just a point if we have a knot multiplicity > 1 , in such case there isn't a polynomial segment. On every breakpoint τ_i with $i = 1, \dots, n+m$ we have that the curve has smoothness¹ C^{m-1} .

In our project we don't use generalized B-spline curves, thus a curve of degree m has global smoothness

$$C^{m-1}.$$

3.2.4 End point interpolation

In general a B-spline curve with control vertices

$$v_0, \dots, v_n$$

and extended knot vector

$$T = \{t_0, \dots, t_{m-1}, t_m, \dots, t_{n+1}, t_{n+2}, \dots, t_{n+m+1}\}$$

does not necessarily interpolate any control vertex v_i , neither the first nor the last one. But we are interested in using B-spline for representing paths from one point to another. Hence, it should be a nice feature to have that the curve defined in the domain $[a, b]$ is shaped such that

$$\begin{cases} S(u) = v_0 & \text{for } u = a \\ S(u) = v_n & \text{for } u = b. \end{cases} \quad (7)$$

We can obtain [9] the conditions of Eq. (7) if we impose

$$t_0 = \dots = t_{m-1} \stackrel{\equiv a}{=} t_m < \dots < t_{n+1} \stackrel{\equiv b}{=} t_{n+2} = \dots = t_{n+m+1}$$

on the extended partition vector T . In other words

$$T = \{\overbrace{a, \dots, a}^m, t_{m+1}, \dots, t_n, \overbrace{b, \dots, b}^m\}.$$

3.2.5 Curvature and torsion

Since we are interested in comparing different curves, we need to recognize if a certain curve is a *good* or a *bad* one. One factor that characterizes

¹ If we use generalized B-spline curves, it has smoothness C^{m-r} where r is the multiplicity of the knot [12].

a certain curve can be its smoothness (Section 3.2.3) - i.e. a C^3 curve is better than a C^2 curve - but this isn't enough for comparing curves. Usually *curvature* and *torsion* are used for this purpose [11][34]. Both are scalar quantities defined on sufficiently smooth parametric curves for each value of the parameter, and they do not depend on the selected parametrization.

For a generic parametric curve² $\mathbf{S}(u)$ defined for $u \in [a, b]$ given the notation \wedge for the vector product and for Eq. (4)

$$\dot{\mathbf{S}}(u) = \frac{d}{du} \mathbf{S}(u) = \begin{bmatrix} \frac{d}{du} \mathbf{x}(u) \\ \frac{d}{du} \mathbf{y}(u) \\ \frac{d}{du} \mathbf{z}(u) \end{bmatrix},$$

we define the curvature $\kappa(u)$ and, in points with non vanishing curvature, the torsion $\tau(u)$ as

$$\kappa(u) = \frac{\|\dot{\mathbf{S}}(u) \wedge \ddot{\mathbf{S}}(u)\|_2}{\|\dot{\mathbf{S}}(u)\|_2^3} \quad (8)$$

$$\tau(u) = \frac{\det[\dot{\mathbf{S}}(u), \ddot{\mathbf{S}}(u), \dddot{\mathbf{S}}(u)]}{\|\dot{\mathbf{S}}(u) \wedge \ddot{\mathbf{S}}(u)\|_2} = \frac{(\dot{\mathbf{S}}(u) \wedge \ddot{\mathbf{S}}(u)) \cdot \dddot{\mathbf{S}}(u)}{\|\dot{\mathbf{S}}(u) \wedge \ddot{\mathbf{S}}(u)\|_2}. \quad (9)$$

Equation (8) and Eq. (9) describe completely the behavior of $\mathbf{S}(u)$ locally for each value of u . Curvature and torsion have also a geometric interpretation: for each value \tilde{u} of the parameter u , the inverse $\frac{1}{\kappa(\tilde{u})}$ of the curvature is the radius of curvature of \mathbf{S} at $\mathbf{S}(\tilde{u})$ - i.e. the radius of the osculating circle tangent in that point. $\tau(\tilde{u})$ indicates (if $\kappa(\tilde{u}) \neq 0$) how sharply the plane where the curve lies is rotating.

The value of $\kappa(u)$ can be only non negative, while $\tau(u)$ is a signed quantity.

Two curves of same smoothness can be compared using the plots of curvature and torsion, in general curves that have lower peaks of $\kappa(u)$ and $\tau(u)$ are better than curves with higher peaks.

² Thus also a B-spline curve.

3.2.6 Arc length

Sometimes we are interested in evaluating the length of a generic parametric curve³ $\mathbf{S}(u)$ defined for $u \in [a, b]$. We can obtain such length, called *arc length*, calculating the integral

$$\int_a^b \|\dot{\mathbf{S}}(u)\|_2 du.$$

We can approximate this value using a discrete tabulation of the curve $\mathbf{S}(u)$ and an integrating method like the *trapezoidal rule* [31][37].

3.3 VORONOI DIAGRAMS

In this section we introduce Voronoi Diagrams (VDs), an important structure used in the project. VDs [8] provide a method to create a partition of the space using distances from a set of input points called *sites*. Formally we have a set

$$S = \{s_0, s_1, \dots, s_n\} \subset \mathbb{E}^d$$

of n sites in the euclidean space of dimension d , and we build a set of n Voronoi *cells*⁴

$$\text{Vor}(S) = \{V(s_0), \dots, V(s_n)\} \subset 2^{\mathbb{E}^d}$$

such that

$$V(s_i) = \{p \in \mathbb{E}^d : \|p - s_i\|_2 < \|p - s_j\|_2 \ \forall s_j \neq s_i\}$$

is the set of the points in \mathbb{E}^d closer to s_i than to any other site.

Figure 2 is an example of the VD built on some random sites, the dashed lines in the figure are edges that go to infinite.

The most important algorithm for calculating VDs is the *Fortune's sweeping line* algorithm that builds the diagram in $\mathcal{O}(n \log n)$ and it is optimal. The algorithm involves building $\text{Vor}(S)$ incrementally while sweeping the space, see Fig. 3. Every time that the sweeping line finds a site the algorithm creates a parabola using the site as focus and the sweeping line as directrix. Such parabolas, or better the arcs between each intersection of them, constitute the *beach line*. A parabola disappears from the scene

³ See Footnote 2.

⁴ $2^{\mathbb{E}^d}$ is the power set of \mathbb{E}^d , the set of all the subsets of \mathbb{E}^d .

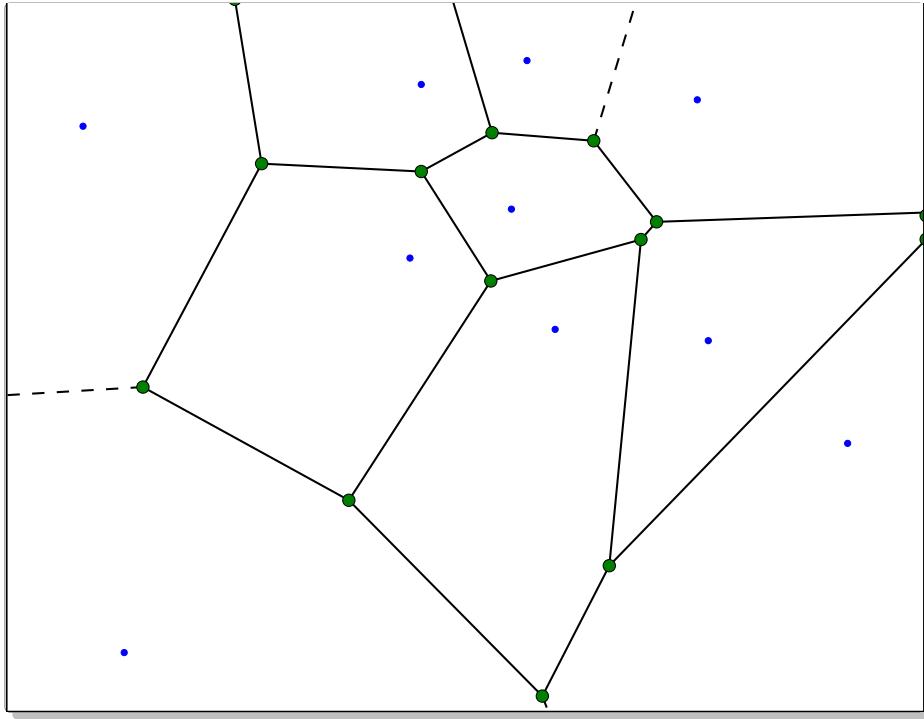


Figure 2.: Example of a VD, dashed lines are infinite edges.

when the associated arc vanishes. The evolution of the intersection points on the beach line constitutes the edges of the VD, and each point where an arc of the beach line disappears constitutes a vertex of the VD. Refer to [8] and [14] for details about the Fortune's algorithm.

One property of VDs is that $V(s_i)$ can be a closed or an open area - i.e. the edges of the cells can be infinite - it is important to keep this in mind if we want to interpret $\text{Vor}(S)$ as a graph. In that case the graph will have edges that go to infinite. We call such graph $G(\text{Vor}(S))$.

Another property is that, if we have $d + 1$ sites s'_0, \dots, s'_d that lay on the surface of a $(d - 1)$ -sphere⁵ that does not have any other site on the interior, then the center point of the $(d - 1)$ -sphere is the vertex shared only between the $d + 1$ cells $V(s'_0), \dots, V(s'_d)$ [8]. This is not true for less than $d + 1$ sites on a $(d - 1)$ -sphere because they are not enough to define it univocally, but is possible to have $n > d + 1$ sites on a $(d - 1)$ -sphere. In that case, the center of the $(d - 1)$ -sphere is the shared vertex of the cells corresponding to the n sites. This is important to reason about the

⁵ A circumference in 2-dimensional space, a sphere in 3-dimensional space, an hypersphere in n -dimensional space with $n \geq 3$.

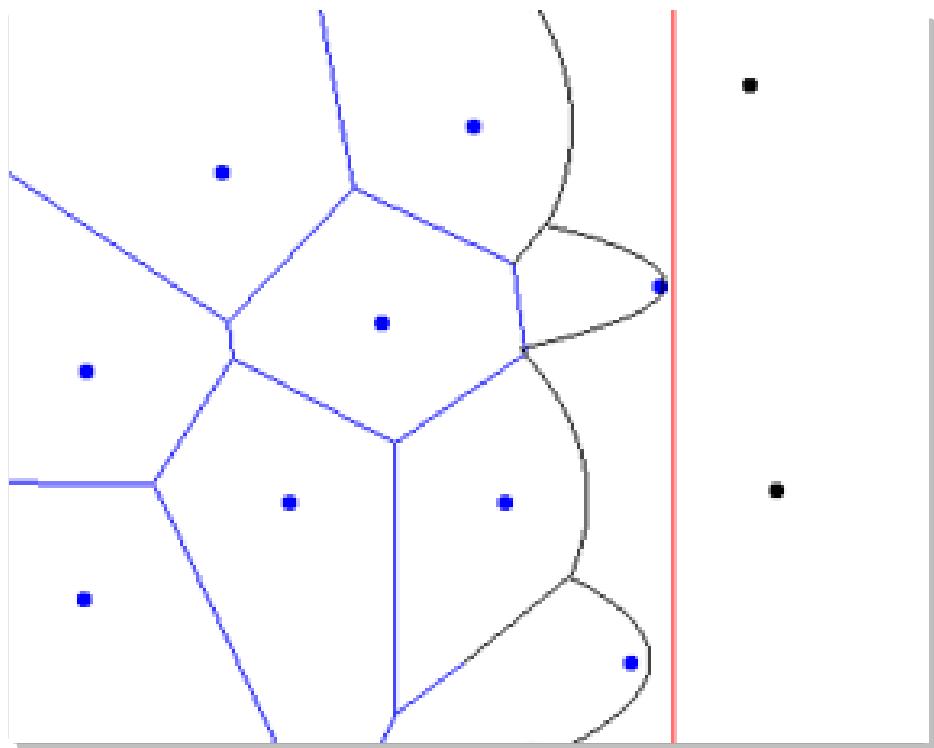


Figure 3.: Fortune's algorithm execution

topography of $G(Vor(S))$ because if we allow more than $d + 1$ sites on a $(d - 1)$ -sphere then the maximum degree $\Delta(G(Vor(S)))$ of the graph can be arbitrarily big (up to the number of vertices). However, the fact that we work with coordinates in \mathbb{E}^d legitimizes the restriction⁶ of not allowing more than $d + 1$ sites on an $(d - 1)$ -sphere, limiting $\Delta(G(Vor(S)))$ to $d + 1$.

3.4 STATISTICAL METHODS

In this section we briefly introduce the Monte Carlo Method (MCM) [29][36][3] and the Simulated Annealing (SA) [23][19], two statistical methods to calculate unknown quantities and to find functions minima. Additionally, we introduce Lagrangian Relaxation (LR) [39], a method to transform a constrained optimization problem in an unconstrained one by increasing the state space dimension.

3.4.1 Notes on probabilities

3.4.1.1 PE

For a random variable X normally distributed with

- mean μ ;
- variance σ^2 ;

for

$$r = 0.6745\sigma$$

we have that

$$\mathbf{P}(|X - \mu| < r) = \mathbf{P}(|X - \mu| > r) = 0.5.$$

Thus values of X that deviate from μ less or more than r have the same probability, and r identifies the most PE in a normal distribution.

⁶ We can also relax this restriction and in case create multiple nodes connected by zero-distance edges on the graph.

3.4.1.2 Probability central limit theorem (PCLT)

Consider N independent and *identically-distributed* random variables X_1, X_2, \dots, X_N , with same mean and same variance

$$\begin{aligned} E[X_1] &= E[X_2] = \dots = E[X_N] = m \\ \text{Var}(X_1) &= \text{Var}(X_2) = \dots = \text{Var}(X_N) = b^2. \end{aligned}$$

Consider the sum of those random variables:

$$Y = X_1 + X_2 + \dots + X_N;$$

we have that

$$\begin{aligned} E[Y] &= E[X_1 + X_2 + \dots + X_N] = Nm \\ \text{Var}(Y) &= \text{Var}(X_1 + X_2 + \dots + X_N) = Nb^2. \end{aligned}$$

Consider a normally distributed random variable Z with parameters:

$$\begin{aligned} \mu &= Nm \\ \sigma &= b\sqrt{N} \end{aligned}$$

with Probability Density Function (PDF) $p_Z(x)$.

The PCLT affirms that, for N big enough, and for every interval (x_1, x_2) , applies:

$$P(x_1 < Y < x_2) \approx \int_{x_1}^{x_2} p_Z(x) dx. \quad (10)$$

Thus, the sum of an elevate number of identically-distributed random variables is a random variable with normal distribution with mean Nm and variance Nb^2 , even if X_1, X_2, \dots, X_N aren't normally distributed.

3.4.2 Monte Carlo Method (MCM)

If we suppose to calculate an unknown quantity m , we need to find a random variable X such that:

$$E[X] = m.$$

If we have such distribution with variance:

$$\text{Var}(X) = b^2$$

it is possible to formalize the following passages.

Consider N random variables X_1, X_2, \dots, X_N that have distribution identical to the distribution of X . For the PCLT Eq. (10) we have that, for N big enough

$$Y = X_1 + X_2 + \dots + X_N$$

is normally distributed with parameters

$$\begin{aligned}\mu &= Nm \\ \sigma &= b\sqrt{N}.\end{aligned}$$

For the *three sigma rule* [32] we have that:

$$P(\mu - 3\sigma < Y < \mu + 3\sigma) \approx 0.997$$

that is

$$P(Nm - 3b\sqrt{N} < Y < Nm + 3b\sqrt{N}) \approx 0.997$$

dividing by N

$$P\left(m - \frac{3b}{\sqrt{N}} < \frac{Y}{N} < m + \frac{3b}{\sqrt{N}}\right) \approx 0.997$$

that is

$$P\left(\left|\frac{Y}{N} - m\right| < \frac{3b}{\sqrt{N}}\right) \approx 0.997$$

results in

$$P\left(\left|\frac{1}{N} \sum_{i=1}^N X_i - m\right| < \frac{3b}{\sqrt{N}}\right) \approx 0.997. \quad (11)$$

Equation (11) asserts that, if we extract a sample for each random variable X_i , the arithmetic mean of those values is approximately equal to m . Moreover, the error of such approximation is equal to $3b/\sqrt{N}$, that tend to 0 increasing N . It is also possible to further reduce the uncertainty ($1 - 0.997 = 0.003$) by increasing the number k of sigma used for the approximation and evaluating the error kb/\sqrt{N} .

In practice, since the random variables X_i have the same distribution of X , it is sufficient to extract N samples from X to reach the same conclusions.

The Monte Carlo Method (MCM) is constituted by the following procedure, to be adapted according to the problems:

1. find the distribution X having desired quantity m as mean value and b^2 as variance;
2. extract N samples from X , with N big enough to have an error as small as desired;
3. the arithmetic mean of those N samples is the approximation of the desired value m .

Essentially, we transforme the problem from *calculating m* to *finding the distribution X*, or anyway the N samples distributed accordingly to X .

If we want to characterize more in detail the error committed taking N samples, we can use to PE. If we set $k = 0.6745$ then we have that

$$P\left(\left|\frac{1}{N} \sum_{i=1}^N X_i - m\right| < \frac{0.6745 \cdot b}{\sqrt{N}}\right) \approx 0.5$$

and so

$$r_N = \frac{0.6745 \cdot b}{\sqrt{N}}$$

indicates how much the value $\frac{1}{N} \sum_{i=1}^N X_i$ deviates from the desired value m . Such value characterize the absolute error

$$\left| \frac{1}{N} \sum_{i=1}^N X_i - m \right|$$

committed taking N samples.

MCM is useful to simulate events that have an high degree of uncertainty in the inputs or an high degree of liberty in the state: for instance, numerically integrate a function with many dimensions or Simulated Annealing (SA) (Section 3.4.3).

3.4.3 Simulated Annealing (SA)

The SA is a method used to find the global maximum or minimum of a function. It is inspired by a method used in metallurgy that consists in heating and then cooling slowly a material to increase the size of the crystals and improving the chemico-physical properties. The function that must be optimized can be defined in a multiple-dimensional space.

3.4.3.1 Statistical thermodynamic

To describe the basic principles of statistical thermodynamic we consider the following example. In a one-dimensional lattice every point is a particle with a value of spin that can be *up* or *down*. If the lattice has N points then the system can be in 2^N different configurations, where each one of those configurations corresponds to a value of energy, for instance:

$$E = B(n_+ - n_-)$$

where B is some constant, n_+ is the number of particles with spin *up* and n_- is the number of particles with spin *down*.

The probability $P(\sigma)$ of finding the system in a certain configuration σ is given by the distribution of *Boltzmann-Gibbs*:

$$P(\sigma) = C e^{-E_\sigma/T} \quad (12)$$

where E_σ is the energy of the configuration, T is the temperature⁷ and C is a normalization constant.

The average energy of the system is then:

$$\begin{aligned} \bar{E} &= \frac{\sum_\sigma E_\sigma P(\sigma)}{\sum_\sigma P(\sigma)} \\ &= \frac{\sum_\sigma E_\sigma e^{-E_\sigma/T}}{\sum_\sigma e^{-E_\sigma/T}}. \end{aligned}$$

The computation of the value of \bar{E} can be difficult with an high number of states, but it is possible to create a MCM simulating the random fluctuation between the states such that the distribution given by Eq. (12) is respected. Starting from an arbitrary initial configuration, after a certain number of *Monte Carlo trials*, the method converges to the equilibrium status \bar{E} and it continues to fluctuate around it. SA is a method of this kind.

3.4.3.2 Simulated Annealing (SA) algorithm

SA operates on a system starting from a certain initial state s_0 , then it executes a series of iterations where a neighbour of the state is evaluated and, with a certain distribution of probability, the system is moved in the new state or not.

⁷ The real Boltzmann-Gibbs distribution is $P(\sigma) = C e^{-E_\sigma/kT}$ where k is the *Boltzmann constant* and T is the thermodynamic temperature, but for the example the temperature is a parameter not correlated to the physical world, thus it is possible to ignore k .

A possible algorithm for a SA method is Algorithm 1. s_0 is the initial state; temp is the function that assigns a temperature based on the current iteration number such that for low k the returned temperature is high and for high k the returned temperature is low; neighbour is the function that returns a random neighbour of the current state; uniform returns an uniformly-randomly chosen number in $[0, 1]$; P_a is the distribution of accepting probability that depends on the energy of the current state, on the energy of the neighbour, and on the current temperature. In case of acceptance, the neighbour becomes the current state and the process continues.

Algorithm 1 Simulated Annealing (SA)

```

1: function ANNEAL( $s_0$ )
2:    $s \leftarrow s_0$ 
3:   for  $k \leftarrow 0, k_{\text{Max}}$  do
4:      $T \leftarrow \text{temp}\left(\frac{k}{k_{\text{Max}}}\right)$ 
5:      $s_{\text{New}} \leftarrow \text{neighbour}(s)$ 
6:     if  $\text{uniform}(0, 1) < P_a(E(s), E(s_{\text{New}}), T)$  then
7:        $s \leftarrow s_{\text{New}}$ 
8:     end if
9:   end for
10:  return  $s$ 
11: end function

```

The relation with the statistical thermodynamic is that P_a is chosen such that Eq. (12) holds⁸, moreover temp returns decreasing values of temperature with the succession of iterations. This explains the comparison with the metallurgy annealing.

Initially P_a was chosen such that

$$P_a(E(s), E(s_{\text{New}}), T) = \begin{cases} 1, & \text{if } E(s_{\text{New}}) < E(s) \\ e^{-(E(s_{\text{New}}) - E(s))/T}, & \text{otherwise} \end{cases}$$

but this isn't strictly necessary to develop a SA method.

⁸ A similar distribution is enough.

3.4.4 Lagrangian Relaxation (LR)

A general constrained discrete optimization problem can be expressed in the form:

$$\begin{aligned} & \underset{x}{\text{minimize}} && f(x) \\ & \text{subject to} && g(x) = 0 \end{aligned} \tag{13}$$

where $x \in X$ is the state of the system in a discrete space X , $f(x)$ is the function to minimize, and $g(x) = 0$ is the constraint. The functions can also be in a multidimensional discrete space, in that case the x is a vector $x = (x_1, \dots, x_n)$ of variables.

To solve this class of problems a *Lagrange relaxation* method can be used [4]: it expands the variable space X by a *Lagrange multiplier* space Λ , equal in dimension to the number of constraints - one in the Problem 13.

The *generalized discrete Lagrangian function*, corresponding to the Problem 13, is:

$$L_d(x, \lambda) = f(x) + \lambda H(g(x)) \tag{14}$$

where λ is a variable in Λ ; if the dimension of Λ is more than one λ , it must be transposed in Eq. (14). $H(x)$ is a non negative function with the property that $H(0) = 0$ and aimed to transform g in a non negative function. For instance, it can be $H(g(x)) = |g(x)|$ or $H(g(x)) = g^2(x)$.

Under the previous assumptions, the set of *local minima* in Problem 13 - that respect the constraints - coincides with the set of *discrete saddle point* in the augmented space. A point (x^*, λ^*) is a discrete saddle point if:

$$L_d(x^*, \lambda) \leq L_d(x^*, \lambda^*) \leq L_d(x, \lambda^*)$$

for all $x \in N(x^*)$ and for all $\lambda \in \Lambda$, where $N(x^*)$ is the set of all x^* 's neighbours.

To solve the optimization Problem 13 it is necessary to calculate, among the saddle points, the global minimum for f . We can use an optimization method, like SA, that descends in X and ascends in Λ .

3.5 INTERSECTIONS IN SPACE

We work in a spatial environment with polyhedral obstacles. Thus, in order to define admissible paths, first of all we need routines performing the following three basic geometric tasks:

1. establish if a point is in or out of a convex polyhedron;
2. check if a segment intersects a triangle;
3. establish whether two triangles intersect.

In the project we need to consider three kinds of collision detection methods in 3-dimension euclidean space.

3.5.1 Point inside convex polyhedron in 3D space

To test if a point p is inside a convex polyhedron V with vertices v_1, v_2, \dots, v_n , we use a method that rely on convex hulls [8][35].

Algorithm 2 Check if point p is inside convex polyhedron V

```

1: function ISPOINTINPOLYHEDRON( $p, V$ )
2:    $inside \leftarrow True$ 
3:    $C \leftarrow \text{convexHullVertices}([p, v_1, v_2, \dots, v_n])$ 
4:   for all  $c \in C$  do
5:     if  $c = p$  then
6:        $inside \leftarrow False$ 
7:       break
8:     end if
9:   end for
10:  return  $inside$ 
11: end function

```

Algorithm 2 performs the first task. It first computes the vertices of the convex hull of all the vertices of V plus the point p and then checks if p is one of them or not. If p is on the convex hull that means that p is external⁹ to V because we have extended the convex hull formed by the vertices of V . Otherwise this means that p is inside V .

The cost of this algorithm is

$$\mathcal{O}(n \log n)$$

where n is the number of vertices of V , because the cost to construct the convex hull is [8] $\mathcal{O}(n \log n)$, and then we have another negligible term $\mathcal{O}(n)$ for the cycle on Line 4.

⁹ Or p coincides with a vertex of V .

3.5.2 Segment-triangle in 3D space

We need to deal with the intersection between a segment $S = \overline{\mathbf{a}_2\mathbf{b}_2}$ and a triangle $T = \triangle \mathbf{a}_1\mathbf{b}_1\mathbf{c}_1$. S and T can be in one of the following cases also summarized in Table 1:

- case 1** S and T do not intersect and the plane containing T is not in the sheaf of planes generated by the line containing S ;
- case 2** S and T do not intersect and the plane containing T is in the sheaf of planes generated by the line containing S ;
- case 3** S and T intersect only at one point and the plane containing T is not in the sheaf of planes generated by the line containing S ;
- case 4** S and T intersect in one or infinite points and the plane containing T is in the sheaf of planes generated by the line containing S .

The discriminating factors among the cases are two: the presence of intersection and coplanarity. Table 1.

	not coplanar	coplanar
not intersect	case 1	case 2
intersect	case 3	case 4

Table 1.: Relations between S and T

In Fig. 4 a **case 3** situation is shown where there is intersection in only one point x . To establish whether S and T intersect, we need to solve four equations in four unknowns [35] where we look for a point x being a convex linear combination of \mathbf{a}_2 and \mathbf{b}_2 and at the same time a convex linear combination of \mathbf{a}_1 , \mathbf{b}_1 and \mathbf{c}_1 . In other words, when there is a collision, then there is a solution for the unknowns $\alpha, \beta, \gamma, \delta, \zeta$ of the system

$$\begin{cases} \alpha\mathbf{a}_2 + \beta\mathbf{b}_2 = \gamma\mathbf{a}_1 + \delta\mathbf{b}_1 + \zeta\mathbf{c}_1 \\ \alpha + \beta = 1 \\ \gamma + \delta + \zeta = 1 \end{cases} \quad (15)$$

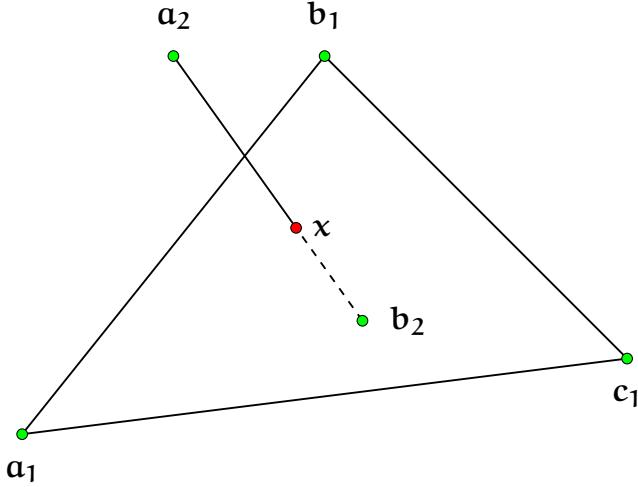


Figure 4.: Example intersection between a segment $\overline{a_2b_2}$ and a triangle $\triangle a_1b_1c_1$.

with the further conditions

$$\left\{ \begin{array}{l} \alpha \geq 0 \\ \beta \geq 0 \\ \gamma \geq 0 \\ \delta \geq 0 \\ \zeta \geq 0. \end{array} \right. \quad (16)$$

Note that the first equation of System 15 has vectorial coefficients a_2 , b_2 , a_1 , b_1 , c_1 , thus we have a system with five unknowns in five equations. If System 15 has just one solution then we are in **case 1** when System 16 is fulfilled or in **case 3** when it is not. If it has infinite solutions then we are on **case 2** or **case 4**, depending again on the fulfillment of System 16. Finally, if it has no solution, then S or T are degenerated.

We are interested in finding only **case 3** collisions because, for simplicity, we consider the special case of a segment that lays on the surface of

a triangle as nonintersecting with it, and, for coherence, we restrict the conditions of System 16 to

$$\begin{cases} \alpha > 0 \\ \beta > 0 \\ \gamma > 0 \\ \delta > 0 \\ \zeta > 0. \end{cases} \quad (17)$$

System 15 can be simplified in the three equations

$$\left\{ \begin{array}{l} \alpha \mathbf{a}_2 + (1 - \alpha) \mathbf{b}_2 = \gamma \mathbf{a}_1 + \delta \mathbf{b}_1 + (1 - (\gamma + \delta)) \mathbf{c}_1 \end{array} \right. \quad (18)$$

in the unknowns α, γ and δ with the relative conditions

$$\begin{cases} \alpha > 0 \\ \alpha < 1 \\ \gamma > 0 \\ \delta > 0 \\ \gamma + \delta < 1. \end{cases} \quad (19)$$

Algorithm 3 Find intersection between segment S and triangle T

```

1: function INTERSECT(S, T)
2:   intersect ← False
3:   coordinates ← ∅
4:   if  $(\alpha, \gamma, \delta) \leftarrow \text{solve}(\text{System 18})$  then
5:     if satisfy(System 19) then
6:       intersect ← True
7:       coordinates ←  $(\gamma, \delta, 1 - (\gamma + \delta))$ 
8:     end if
9:   end if
10:  return (intersect, coordinates)
11: end function
```

Thus, Algorithm 3 which performs Task 2 essentially consists in solving System 18 with the parameters $\mathbf{a}_2, \mathbf{b}_2, \mathbf{a}_1, \mathbf{b}_1$ and \mathbf{c}_1 from S and T; and

then in checking if the solution is admissible. The condition of Line 4 is True if System 18 has solution and if that is unique.

We also have the positive secondary effect that from the solution (α, γ, δ) of System 18 we can extract the barycentric coordinates $(\gamma, \delta, 1 - (\gamma + \delta))$ of the intersection point \mathbf{x} on the system of the vertices $\mathbf{a}_1, \mathbf{b}_1, \mathbf{c}_1$ of T .

3.5.3 Triangle-triangle in 3D space

We are interested in detecting collisions between two triangles $T_1 = \triangle \mathbf{a}_1 \mathbf{b}_1 \mathbf{c}_1$ and $T_2 = \triangle \mathbf{a}_2 \mathbf{b}_2 \mathbf{c}_2$ in 3-dimensional space. First of all consider the coplanarity relation between the two triangles, we have the cases:

case 1 T_1 and T_2 are contained by the same plane;

case 2 T_1 and T_2 are contained by different planes.

To simplify the problem we decide - similarly to the case of intersection between segment and triangle - that when we are on **case 1** we consider T_1 and T_2 not intersecting in any case, even if from a geometrical point of view they share points. After this premise we can assert that the possible relation between T_1 and T_2 can be exclusively one of the following types [35]:

type 0 T_1 and T_2 do not intersect;

type 1 two edges of T_1 intersect the plane section delimited by T_2 , or vice versa;

type 2 one edge of T_1 intersects the plane section delimited by T_2 and one edge of T_2 intersects the plane section delimited by T_1 .

On Fig. 5 and Fig. 6 we can see two examples of **type 1** and **type 2**, respectively. To establish if T_1 and T_2 intersect we need to check if every edge of T_1 intersects T_2 and if every edge of T_2 intersects T_1 . If we find at least one edge that intersects with one triangle, then T_1 and T_2 intersect. Algorithm 4 executes such check, the function intersect on Line 3 and Line 8 is the intersection check between a segment and a triangle done by Algorithm 3.

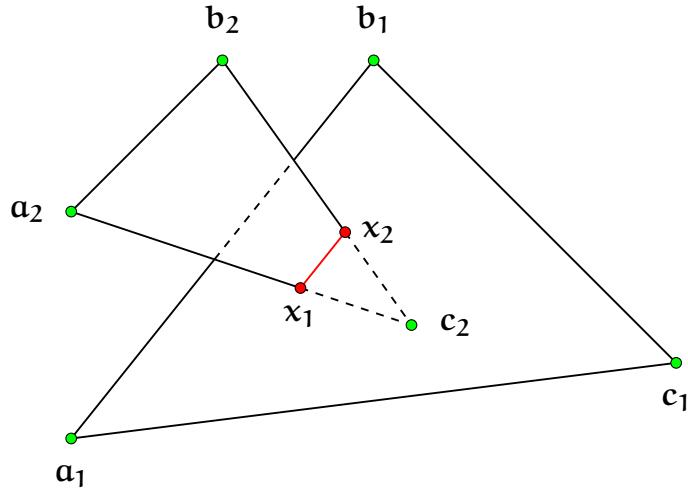


Figure 5.: Example of **type 1** intersection between a triangle $T_1 = \triangle a_1 b_1 c_1$ and another triangle $T_2 = \triangle a_2 b_2 c_2$.

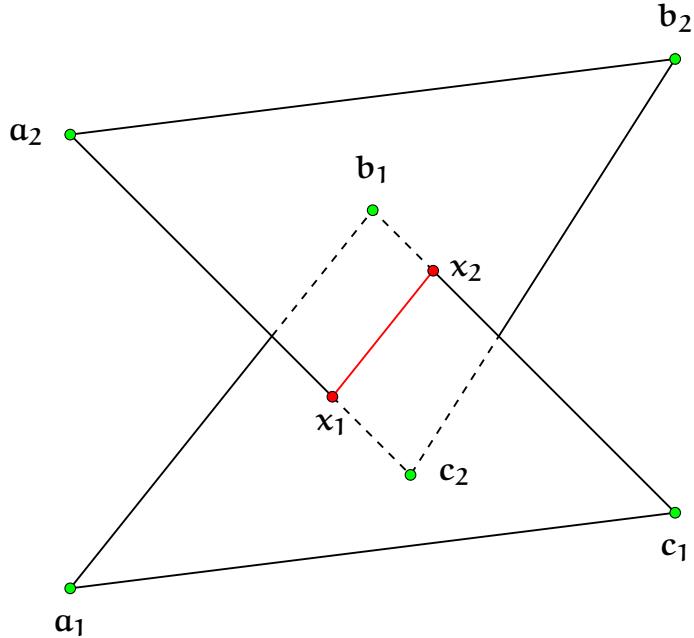


Figure 6.: Example of **type 2** intersection between a triangle $T_1 = \triangle a_1 b_1 c_1$ and another triangle $T_2 = \triangle a_2 b_2 c_2$.

Algorithm 4 Find intersection between triangle T_1 and triangle T_2

```
1: function INTERSECT( $T_1 = (\mathbf{a}_1, \mathbf{b}_1, \mathbf{c}_1)$ ,  $T_2 = (\mathbf{a}_2, \mathbf{b}_2, \mathbf{c}_2)$ )
2:   for all  $S \in \{\overline{\mathbf{a}_1\mathbf{b}_1}, \overline{\mathbf{b}_1\mathbf{c}_1}, \overline{\mathbf{c}_1\mathbf{a}_1}\}$  do
3:     if intersect( $S, T_2$ ) then
4:       return True
5:     end if
6:   end for
7:   for all  $S \in \{\overline{\mathbf{a}_2\mathbf{b}_2}, \overline{\mathbf{b}_2\mathbf{c}_2}, \overline{\mathbf{c}_2\mathbf{a}_2}\}$  do
8:     if intersect( $S, T_1$ ) then
9:       return True
10:    end if
11:   end for
12:   return False
13: end function
```

4

SCENE REPRESENTATION

The problem of scene description basically consists in fixing a representation of the obstacles and of the path, besides establishing the structures adopted for their storage.

4.1 BASIC ELEMENTS AND PATH

First of all, since we are interested in spatial path planning, all the point coordinates are in \mathbb{E}^3 . Furthermore, we concentrate on B-splines because we want a standard representation for the output of the algorithm, the path between a start point s and an end point e . B-spline curves are the standard adopted in CAD and CAGD systems [21][22].

The structures that uniquely identify a B-spline curve are three: its degree m , the associated control polygon and the extended knot vector.

Regarding the degree of the curve, we let the users choose among quadratics ($m = 2$), cubics ($m = 3$) and quartics ($m = 4$). The users choose also the starting and ending points, s and e respectively, associated to the parameter values $t_0 = \dots = t_m$ and $t_{n+1} = \dots = t_{n+m+1}$.

The number of vertices and the other vertices themselves come from the algorithm, and they depend on the position of s and e and on the obstacles, see Section 5.1 for details.

The knots are generated automatically using one of the two methods described in Section 5.4.

Thus, for the curve we memorize only the control vertices P and the degree m . As usual, in any computer graphic system, when we want its plotting, we tabulate S for a certain number¹ of values of t and then we draw the polygonal chain that connects them.

¹ Enough for having a smooth look.

4.2 BASIC OBSTACLE REPRESENTATION

Besides the curve, in the scene we need to represent the obstacles. We call Obs the set of all obstacles in scene. We choose to represent each obstacle $Ob \in Obs$ as a set of triangular faces called Obstacle Triangular Faces (OTFs), each one containing three vertices. To summarize, we have

$$\begin{aligned} Obs &= \{Ob_0, \dots, Ob_{\#Obs}\} \\ Ob_i &= \{Otf_{i,0}, \dots, Otf_{i,\#Otf_i}\} & i = 0, \dots, \#Obs \\ Otf_{i,j} &= \{p_{i,j,0}, p_{i,j,1}, p_{i,j,2}\} & i = 0, \dots, \#Obs; j = 0, \dots, \#Otf_i \end{aligned}$$

where $\#Obs$ is the number of obstacles in the scene and $\#Otf_i$ is the number of OTFs in obstacle Ob_i .

We choose this specific configuration because this way all the intersections that can occur are between triangle and triangle or triangle and segment and they can be easily calculated. This implies that, if an obstacle is a polyhedron more complex than just a tetrahedron, its faces must to be preliminarily triangulated.

We provide the methods explained in Section 4.3 to abstract the creation of OTFs.

Using this solution, we can potentially insert open polyhedrons² or intersecting shapes in the scene, as we do not have any restriction on the position of the points $p_{i,j,k}$.

4.3 COMPLEX OBSTACLES

In order to simplify the scene construction, we create four methods to easily build obstacles:

- one for tetrahedrons;
- one for parallelepipeds³;
- a more general one for convex hulls;
- a special method for a bucket-shaped obstacle that we use in the tests.

Algorithm 5 takes the four vertices of a tetrahedron and adds to Obs a new obstacle that have all the faces of the unique tetrahedron that can be built with the four points.

² For instance a tetrahedron without one face

³ Aligned with the axis.

Algorithm 5 Abstract construction of tetrahedron

```

1: procedure BUILDTETRAHEDRON(Obs, a, b, c, d)
2:   Obs  $\leftarrow$  Obs  $\cup$  { {a, b, c}, {a, b, d}, {b, c, d}, {c, a, d} }
3: end procedure

```

Algorithm 6 Abstract construction of convex hull polyhedron

```

1: procedure BUILDCONVEXHULLPOLYHEDRON(Obs, p0, ..., pn)
2:   Ob  $\leftarrow$   $\emptyset$ 
3:   facets  $\leftarrow$  convexHull({p0, ..., pn})
4:   for all f  $\in$  facets do
5:     simplices  $\leftarrow$  triangularize(f)
6:     for all {s0, s1, s2}  $\in$  simplices do
7:       Ob  $\leftarrow$  Ob  $\cup$  {s0, s1, s2}
8:     end for
9:   end for
10:  Obs  $\leftarrow$  Obs  $\cup$  Ob
11: end procedure

```

Algorithm 6 is more complex, first we need to build the convex hull of the input points (see [8] and [31] for details on the convex hull algorithm), then we obtain a set of facets that have to be triangulated (see [8] and [31] for details on the triangularization algorithms). Finally we add each triangle as a new OTF of the obstacle.

4.4 BOUNDING BOX

We also give to the user the possibility of adding a bounding box around the scene. It is built as an obstacle, using OTFs, in fact we provide a method that takes two points **a** and **b** and builds the parallelepiped having those points as extremes and with all the faces triangularized like in Fig. 7.

In regards to the intersections, the OTFs of the bounding box are considered exactly like the OTFs of the obstacles throughout the whole project. The only differences are that the bounding box is not visible when the scene is plotted and a point inside the bounding box is not considered to be inside the obstacle.

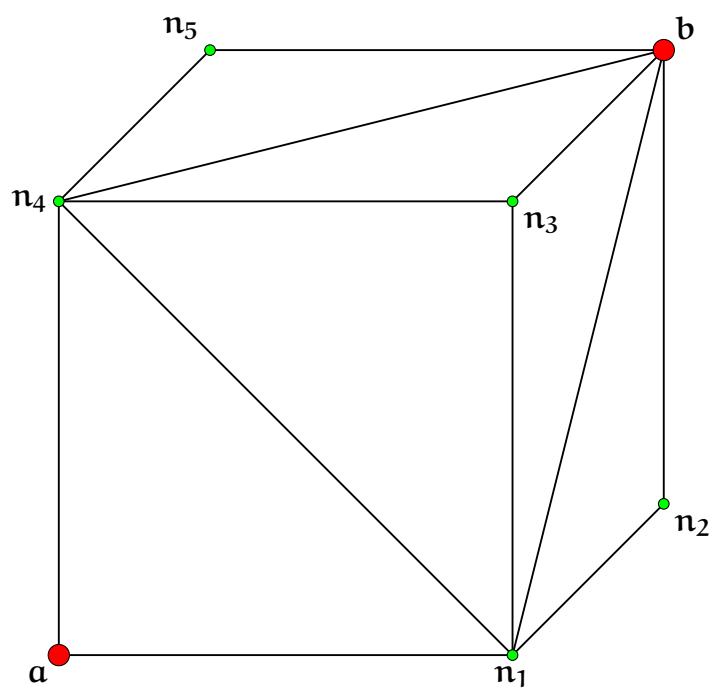


Figure 7.: Bounding box with extremes **a** and **b**.

5

ALGORITHMS

In this chapter we analyze step-by-step the algorithms that implement the different parts of the program. We do this with the help of the test scene in Fig. 8.

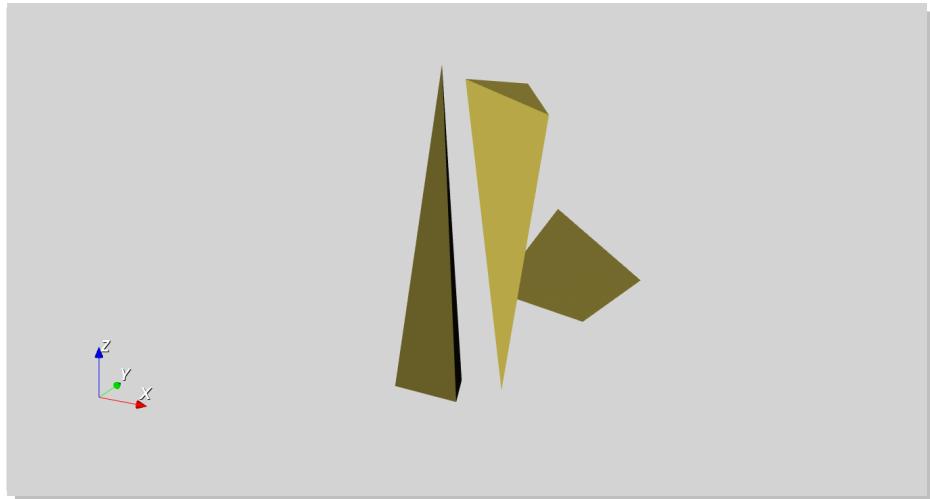


Figure 8.: Initial scene.

The general idea is to use an open B-spline curve of a certain degree interpolating the chosen starting and ending points, whose control polygon is a suitable modification of a polygonal chain extracted from a graph obtained with a VD method. In Section 5.1 we explain in detail how to build such polygonal chain. The chain, before being used as a control polygon for the B-spline, is refined and adjusted - as explained in detail in Section 5.2 and Section 5.3 - in order to ensure that the associated B-spline curve has no obstacle collision. Furthermore, in Section 5.4 we implement a method for an optional adaptive arrangement of the breakpoints of the B-spline. Finally, Section 5.5 is devoted to an optional post-processing of the path.

5.1 POLYGONAL CHAIN

In the first phase, the purpose is to extract a suitable polygonal chain from the scene, such that the extremes coincide with the start point s and the end point e . In particular, we are interested in short length chains. We calculate the shortest path in a graph that is obtained by using an adaptation to three dimensions of a well known bidimensional method [5][18][38] that use VDs as base.

We choose a Voronoi method because it builds a structure roughly equidistant from obstacles, resulting in a low probability of collisions between the curve and the obstacles.

5.1.1 Base Graph

First we start distributing points on the OTFs and on an invisible bounding box, as in Fig. 9. The sites are distributed using a recursive method, for

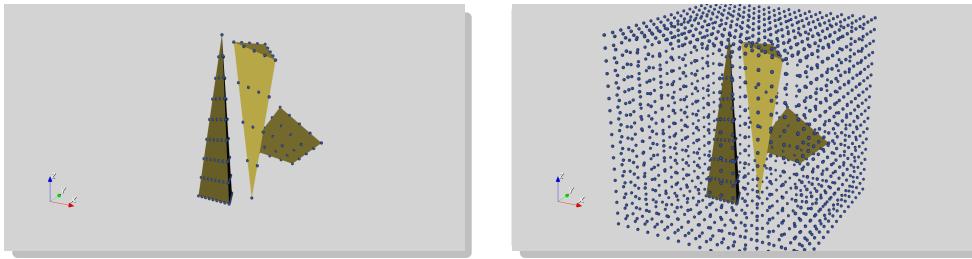


Figure 9.: Scene with Voronoi sites (distributed only on the obstacles surfaces on the left, and on obstacles and bounding box on the right).

each triangle of the scene we add three points - one for each vertex, if not already added before - and then we calculate the area of the triangle. If the area is bigger than a threshold, we decompose the triangle in four triangles adding three more vertices on the midpoints of the edges of the original triangle as in Fig. 10. We repeat the process recursively for each new triangle.

We construct the VD using the Fortune's algorithm [14] on those points as input sites, and we build a graph

$$G = (V, E)$$

using the vertices of the Voronoi cells as graph nodes in V , and the edges of the cells¹ as graph edges in E . Furthermore, we make G denser by

¹ Rejecting potential infinite edges.



Figure 10.: Decomposition of an OTF.

adding all the diagonals as edges for every cell's face, in other words we connect every vertex to every other vertex of a face.

Subsequently, we prune such graph deleting every edge that intersects an OTF using the methods explained in Section 3.5. The edge-pruning process considers a margin around the OTFs during the collision checks.

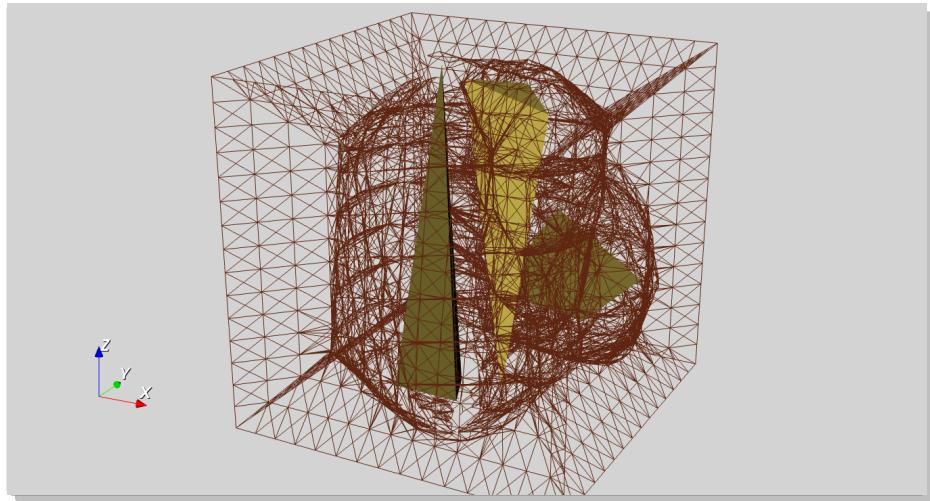


Figure 11.: Scene with pruned graph.

The result, visible in Fig. 11, is a graph that embraces the obstacles like a cobweb where the possible paths are roughly equidistant from the obstacles.

As visible in Fig. 12, in the bidimensional scenario the equivalent method implies distributing the sites (the blue dots) in the edges of the polygonal obstacles and then pruning the graph when an edge of the graph intersects an edge of the obstacle. The result is a sparse graph composed of chains around the obstacles (the green dots).

We decide to extend the method in 3 dimensions distributing points in the whole OTF surface. An alternative to this would be distributing points only along the edges of the obstacles.

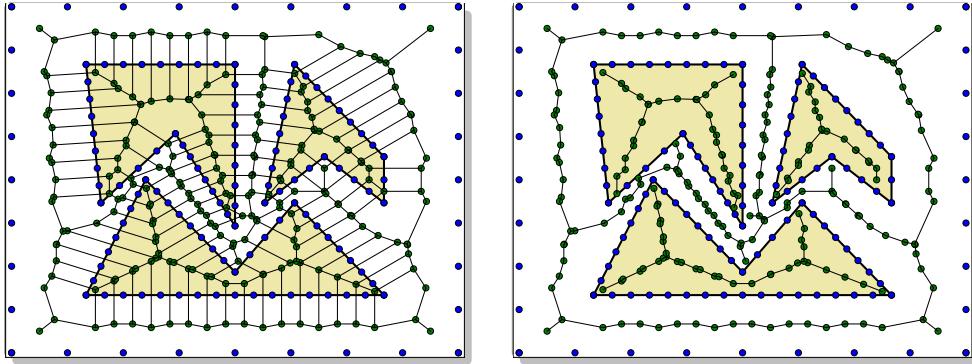


Figure 12.: Voronoi graph in 2D before (left) and after (right) pruning.

We attach the desired start and end points s and e on the obtained graph G and we can obtain a path between the two points using an algorithm like Dijkstra [10][24]. To attach s and e we finds the vertex $v_n \in V_{vis} \subseteq V$ such that $\text{dist}(s, v_n) \leq \text{dist}(s, v_i), \forall v_i \in V_{vis}$, where

$$V_{vis} = \{v \in V : \overline{sv_i} \text{ do not intersects any obstacle}\},$$

then adds s to V and the edge (s, v_n) to E . Similarly for e .

Before using that path as a control polygon, we need to take into account the degree of the B-spline and the position of the obstacles, the details are in Section 5.2 and Section 5.3.

5.1.1.1 Complexity considerations

Fortune's algorithm runs in time $\mathcal{O}(|I| \log |I|)$ [8], where I is the set of input sites. If we impose a maximum area A for the obstacles ² then $|I| = \mathcal{O}(|O|)$ where O is the set of obstacles, because in the worst case we have that $|I| = C \cdot A \cdot |O|$ for some constant C that depends on the chosen density of sites per area.

In conclusion, the time cost for the creation of the graph is

$$\mathcal{O}(|O| \log |O|) \tag{20}$$

and the number of the vertices in the graph is

$$|V| = \mathcal{O}(|I|) = \mathcal{O}(|O|) \tag{21}$$

² Inserting the obstacles in a progressive order, the area of the i -th obstacle cannot be a function $f(i)$ of the number of the obstacles.

because the number of vertices in the resulting graph has the same order of magnitude of the number of input sites.

If we formulate the hypothesis of having maximum degree k in G - i.e. each vertex in V is connected to other k vertices at most - then we have that

$$|E| = \mathcal{O}(k|V|) = \mathcal{O}(k|O|). \quad (22)$$

In the worst case $k = |V|$ and $|E| = \mathcal{O}(|V|^2)$ but for VDs in plane there is a property that if we have n input sites that lay on a circumference, without any other site inside the circumference, then the center of the circumference is a vertex shared by n cells (Section 3.3 for details). The same property holds in the 3D case with respect to spheres. We can make the assumption that no more than three sites can lay on a circumference, hence, no vertex can have more than three neighbours, or the same with four vertices in sphere. This assumption is plausible because we use floating point numbers for the coordinates of the vertices of the obstacles, and it is unlikely that more than four points lay on a sphere. With this assumption k is a constant, and Eq. (22) becomes

$$|E| = \mathcal{O}(|V|) = \mathcal{O}(|O|).$$

To prune the graph of every edge that intersects obstacles, we need to solve a system of three unknowns in three equations for every edge and every OTF³, so we have a cost of

$$\mathcal{O}(|E| \cdot |O|) = \mathcal{O}(k|O|^2) \quad (23)$$

and, if we make the assumption of k constant, it becomes

$$\mathcal{O}(|O|^2).$$

5.1.2 Graph's transformation

Before calculating the shortest path on the chosen graph with Dijkstra [10][24], we transform it in a graph containing all the triples of three adjacent vertices in the original graph. This because we want to filter the triples for collisions as described in Section 5.2.1. We call the transformed graph

$$G_t = (V_t, E_t)$$

³ See Section 3.5.2.

where we have triples of vertices of G in V_t .

The original graph G is not directed and it is weighted with the distance from vertex to vertex, whereas the transformed graph G_t is directed and weighted. If in G the nodes a and b are neighbouring, and b and c are neighbouring, then G_t has the two nodes (a, b, c) and (c, b, a) . In G_t a node (a_1, b_1, c_1) is a predecessor of (a_2, b_2, c_2) if $b_1 = a_2$ and $c_1 = b_2$, and the weight of the arc from (a_1, b_1, c_1) to (a_2, b_2, c_2) in G_t is equal to the weight of the arc from a_1 to $b_1 (= a_2)$ in G .

Algorithm 7 Create triples graph G_t

```

1: function CREATETRIPLESGRAPH( $G$ )
2:    $V_t \leftarrow E_t \leftarrow \emptyset$ 
3:   for all  $(a, b) \in E$  do
4:     leftOut  $\leftarrow$  leftIn  $\leftarrow$  rightOut  $\leftarrow$  rightIn  $\leftarrow \emptyset$ 
5:     for all  $v \in N_G(a) \setminus \{b\}$  do
6:       leftOut  $\leftarrow$  leftOut  $\cup \{(v, a, b)\}$ 
7:       leftIn  $\leftarrow$  leftIn  $\cup \{(b, a, v)\}$ 
8:        $V_t \leftarrow V_t \cup \{(v, a, b), (b, a, v)\}$ 
9:     end for
10:    for all  $v \in N_G(b) \setminus \{a\}$  do
11:      rightOut  $\leftarrow$  rightOut  $\cup \{(v, b, a)\}$ 
12:      rightIn  $\leftarrow$  rightIn  $\cup \{(a, b, v)\}$ 
13:       $V_t \leftarrow V_t \cup \{(v, b, a), (a, b, v)\}$ 
14:    end for
15:    for all  $o \in \text{leftOut}$  do
16:      for all  $i \in \text{rightIn}$  do
17:         $E_t \leftarrow E_t \cup (o, i)$ 
18:      end for
19:    end for
20:    for all  $o \in \text{rightOut}$  do
21:      for all  $i \in \text{leftIn}$  do
22:         $E_t \leftarrow E_t \cup (o, i)$ 
23:      end for
24:    end for
25:  end for
26:   $G_t \leftarrow (V_t, E_t)$ 
27:  return  $G_t$ 
28: end function

```

The steps necessary to create G_t are summarized in Algorithm 7. The input G is the base graph that has vertices V and edges E , $N_G(a)$ is the set of neighbours in G of the vertex a , and the output is G_t .

The transformation of the graph is useful only for the obstacle avoidance algorithm of Section 5.2.1, theoretically it is possible to bypass such transformation for the algorithm described in Section 5.2.2.

5.1.2.1 Complexity considerations

If we suppose a maximum degree k for each vertex in the graph G - i.e. each vertex in V can have k edges insisting on it at most, then the number of vertices in the transformed graph G_t is

$$|V_t| \leq |V| \cdot k \cdot (k-1) = \mathcal{O}(k^2|V|) \quad (24)$$

because for each vertex v in G we need to consider all the neighbours of v and the neighbours of the neighbours of v (excluded v).

For how we define the triples neighbour rule in G_t we have that each triple is a predecessor of $k-1$ other triples at most. For instance, (a, b, c) in V_t is the predecessor of all the triples $(b, c, *)$ where $*$ can be one of the k neighbours of c in V excluded b . Thus, the number of edges in G_t is

$$|E_t| \leq |V_t| \cdot (k-1) = \mathcal{O}(k|V_t|) = \mathcal{O}(k^3|V|). \quad (25)$$

Furthermore, the time cost for the creation of G_t is

$$\mathcal{O}(k^2|E|) = \mathcal{O}(k^3|O|) \quad (26)$$

because Algorithm 7 scans all the edges e on Line 3 for creating the transformed graph and for each iteration the biggest cost is due to the two *for* on Line 15 and Line 20.

5.2 OBSTACLE AVOIDANCE

Before using the polynomial chain extracted as explained in Section 5.1 as a control polygon for the B-spline, we need to discuss a problem: every possible path in the graph G is free from collisions by construction - in fact we prune the graph of every edge that intersects an obstacle - but this does not guarantee that the associated curve will not cross any obstacle. This concept is exemplified in Fig. 13.

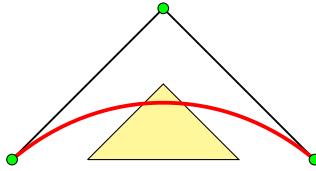


Figure 13.: B-spline that intersects an obstacle in the plane.

In this chapter we formulate the hypothesis of using quadratic B-splines⁴, in Section 5.3 we explain how it is possible to use curves with a higher degree. With this assumption, we can exploit the CHPs explained in Section 3.2 and assert that the resulting curve is contained inside the union of all the triangles of three consecutive control vertices of the control polygon. Using that property we can solve the problem of the collision, maintaining all the triangles associated to the control polygon free from collision with OTFs. Note that the CHP of quadratic B-splines is also valid in space, hence, the convex hull is still composed of triangles, like the faces of the obstacles. This simplifies all the checks for collisions because they are all between triangles in space and we can use the methods described in Section 3.5.

We design two different algorithms to approach the collision problem. The first solution, described in Section 5.2.1, implements a modified version of Dijkstra's algorithm that finds the shortest path from start to end in the graph such that all the triangles formed by three consecutive points in the path are free from collisions. The second solution, described in Section 5.2.2, uses the classical Dijkstra's algorithm to find the shortest path from s to e in the graph G , checking later for collisions in the triangles formed of three consecutive points in such path. When a collision is found we add vertices to the path to manage that.

5.2.1 First solution: Dijkstra's algorithm in G_t

The first solution of the problem exploits the graph G_t obtained as explained in Section 5.1.2. Before applying Dijkstra's algorithm to G_t all the triples are filtered checking if the triangle composed of the vertices of the triple intersects an OTF. If a triple intersects an obstacle then it is removed from the graph so that a path cannot pass from such vertices in that order.

⁴ B-spline curves with degree 2.

Note that if a triple (a, b, c) is removed from V_t - and consequently also the triple (c, b, a) - this does not necessarily exclude the three vertices a, b, c from being part of the final polynomial chain. For instance, in Fig. 14 we have a graph G with vertices a, b, c, d, e, f and an obstacle that intersects triples on the transformed graph⁵ G_t . The triple (a, b, c) and (c, b, a) are removed from G_t because the corresponding triangle intersects the obstacle, and the path $d \rightarrow a \rightarrow b \rightarrow c \rightarrow e$ cannot be admissible. This doesn't preclude the nodes a, b and c to be part of the final admissible path $d \rightarrow a \rightarrow b \rightarrow e \rightarrow c \rightarrow f$.

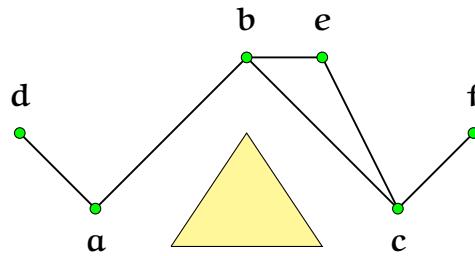


Figure 14.: Example of triples.

On the cleaned transformed graph it is possible to find the shortest path

$$P_t = (a_0, b_0, c_0), (a_1, b_1, c_1), \dots, (a_i, b_i, c_i), \dots, (a_n, b_n, c_n)$$

using an algorithm like Dijkstra. Then the shortest path P in G is constructed by taking the central vertex b_i of every triple (a_i, b_i, c_i) of P_t , plus the extremes a_0 and c_n of the first and last triple, obtaining

$$P = a_0, b_0, b_1, \dots, b_i, \dots, b_{n-1}, b_n, c_n.$$

In Fig. 15 and Fig. 16 the effect of the application of the first solution is shown. The triangle formed by the vertices a_1, b_1, c_1 in the left picture of Fig. 15 is colliding with the obstacle Obs in the back. In the right picture there is the path a_2, b_2, c_2, d_2 obtained applying the solution - in this case no triangles in the path collide with obstacles. In Fig. 16 another point of view of pictures in Fig. 15 is visible.

⁵ In the plane, this graph cannot be obtained using the procedure based on VDs explained in Section 3.3, but a similar situation is plausible considering Voronoi cells in space.

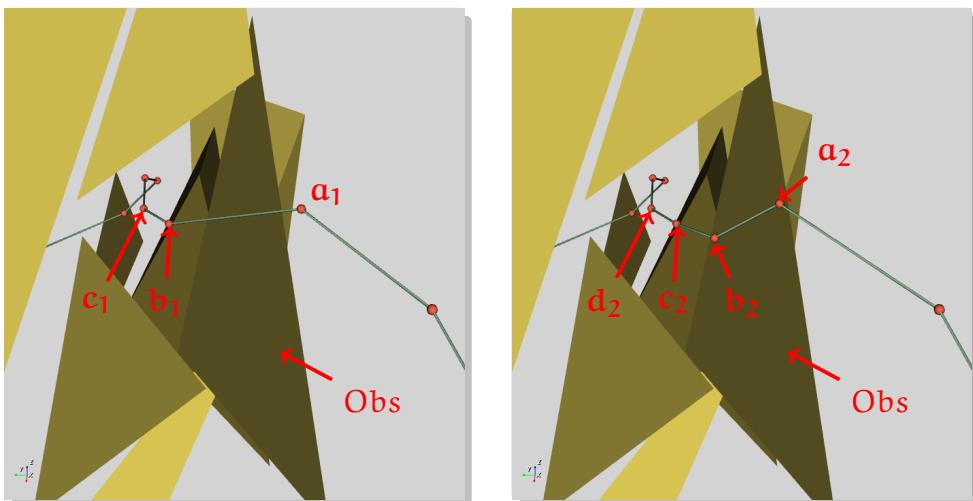


Figure 15.: Effects of application of solution one.

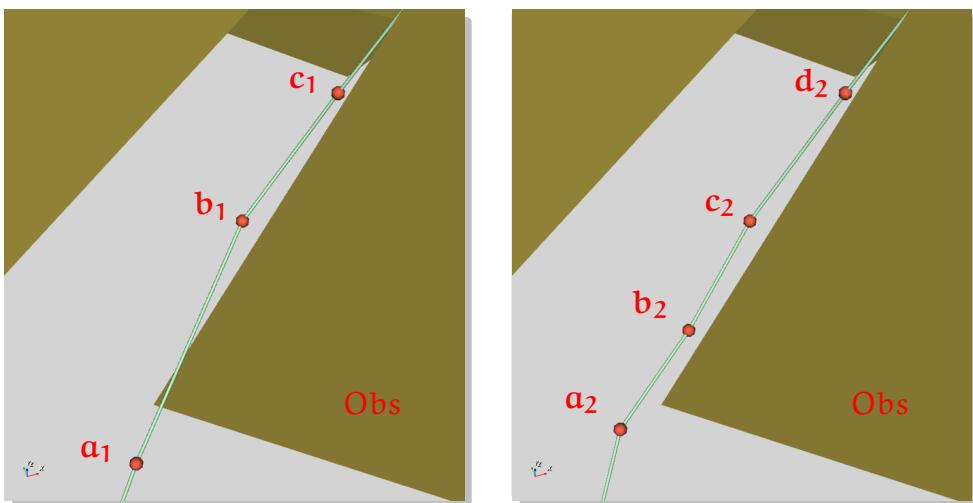


Figure 16.: Effects of application of solution one, other viewpoint.

5.2.1.1 Complexity considerations

For each triple and each OTF we need to solve three 3×3 linear systems for the collision check⁶, hence, in total the cost is

$$\mathcal{O}(|V_t| \cdot |O|)$$

and for Eq. (21) and Eq. (24) this is equal to

$$\mathcal{O}(|O|^2 k^2). \quad (27)$$

The cost of applying Dijkstra's algorithm⁷ in G_t is [1][26]

$$\begin{aligned} \mathcal{O}(|E_t| + |V_t| \log |V_t|) &= \mathcal{O}(k^3 |V| + k^2 |V| \log(k^2 |V|)) \\ &= \mathcal{O}(k^3 |O| + k^2 |O| \log(k^2 |O|)). \end{aligned} \quad (28)$$

Such cost has two special cases:

- if G is a *clique* - i.e. each node in V is connected to every other node [1] - then $k = |V| - 1$ and the cost is

$$\mathcal{O}(|V|^4);$$

- if k is constant - i.e. doesn't grow with $|V|$ - the cost is

$$\mathcal{O}(|V| \log |V|).$$

The latter case is the more plausible if we assume the hypothesis that no more than four input sites in space can be on the same sphere, in fact in that case every Voronoi cell cannot have a vertex with more than four edges connected to it (see Section 3.3 for details).

If we sum all the costs we obtain:

$$\mathcal{O}(k^2 |O|^2 + k^3 |O|) \quad (29)$$

where all the other terms are absorbed in those two. If we have k constant, as we said before, then we have an overall cost of

$$\mathcal{O}(|O|^2) \quad (30)$$

that originates from the collision-check controls.

We can improve this result if we divide the algorithm in two parts:

1. first we can construct the graph with cost $\mathcal{O}(|O|^2)$;

Description	Cost	Reference
Creation of G	$\mathcal{O}(O \log O)$	Eq. (20)
Pruning of G	$\mathcal{O}(k O ^2)$	Eq. (23)
Creation of G_t	$\mathcal{O}(k^3 O)$	Eq. (26)
Pruning of G_t	$\mathcal{O}(O ^2 k^2)$	Eq. (27)
Routing in G_t	$\mathcal{O}(k^3 O + k^2 O \log(k^2 O))$	Eq. (28)
Total	$\mathcal{O}(k^2 O ^2 + k^3 O)$	Eq. (29)
Total (k constant)	$\mathcal{O}(O ^2)$	Eq. (30)

Table 2.: Summary of the costs for solution one

2. then we can use the same graph in different situations⁸ with cost $\mathcal{O}(|O| \log |O|)$, only for the routing.

On Table 2 we summarize all the terms that contributes to the total costs, and the total cost itself.

5.2.2 Second solution: Dijkstra's algorithm in G

The First solution is interesting from an algorithmic point of view, but it is not very practical. It ignores all the triples that intersect an obstacle, thus possible paths in G are lost.

We develop a solution that uses another approach: obtain the shortest path from the Voronoi's graph G directly using Dijkstra's algorithm, without removing any triple. On this path - that we call P - we check every triple of consecutive vertices, and if it collides with an OTF then we take countermeasures (see Section 3.5.3 for the procedure implemented to identify collisions between two triangles). For instance, if the path is composed from the vertices

$$P = (v_0, v_1, \dots, v_n)$$

6 See Section 3.5.3.

7 In the worst case where no triples are removed in the cleaning phase.

8 With specific starting and ending points.

then we check every one of the triangles

$$\begin{aligned}
 T_0 &= \Delta v_0 v_1 v_2 \\
 T_1 &= \Delta v_1 v_2 v_3 \\
 &\dots \\
 T_i &= \Delta v_i v_{i+1} v_{i+2} \\
 &\dots \\
 T_{n-3} &= \Delta v_{n-3} v_{n-2} v_{n-1} \\
 T_{n-2} &= \Delta v_{n-2} v_{n-1} v_n
 \end{aligned}$$

for intersections with OTFs. $\Delta v_i v_j v_k$ denotes the triangle having points v_i , v_j and v_k as vertices.

Consider that G is pruned from all the edges that intersect any obstacle, thus none of the edges of the triangles T_i can intersect an OTF. The only possibility is that edges⁹ of OTF intersect a triangle T_i . Hence for each T_i we have a (possibly empty) set of points of intersection between it and the edges of each OTF - we call that set O.

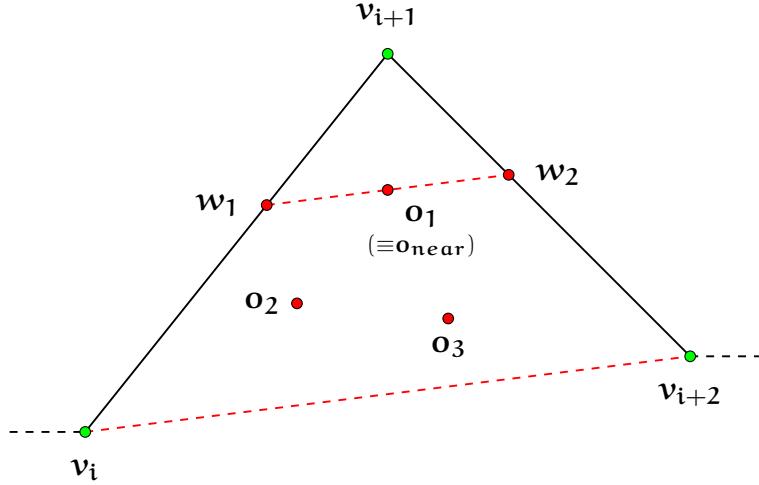


Figure 17.: $T_i (= \Delta v_i v_{i+1} v_{i+2})$ and the points o_1, o_2, o_3 of intersection between it and the edges of some OTFs.

In Fig. 17 we have an example of the triangle

$$T_i = \Delta v_i v_{i+1} v_{i+2}$$

⁹ If we ignore special cases, two edges for each OTF at most.

that is intersected by obstacles in the points

$$O = \{o_1, o_2, o_3\}.$$

Each one of the points in O is expressed in barycentric coordinates of the vertices v_i, v_{i+1} and v_{i+2} of the triangle:

$$\begin{aligned} o_1 &= \alpha_1 v_i + \beta_1 v_{i+1} + \gamma_1 v_{i+2} \\ o_2 &= \alpha_2 v_i + \beta_2 v_{i+1} + \gamma_2 v_{i+2} \\ o_3 &= \alpha_3 v_i + \beta_3 v_{i+1} + \gamma_3 v_{i+2} \end{aligned}$$

where $\alpha_i + \beta_i + \gamma_i = 1$ for $i = 1, 2, 3$.

We want to avoid collisions adding vertices in the control polygon, such that consecutive triangles are free from obstacles. We obtain this by adding two new control vertices:

- w_1 between v_i and v_{i+1} ;
- w_2 between v_{i+1} and v_{i+2} .

We add those points in a way that makes the segment $\overline{w_1 w_2}$ parallel to the segment $\overline{v_i v_{i+2}}$ and $\overline{w_1 w_2}$ passing just above the obstacle point o_{near} that is the nearest to v_{i+1} (o_1 in Fig. 17). The degenerate triangles $\triangle v_i w_1 v_{i+1}$ and $\triangle v_{i+1} w_2 v_{i+2}$, and the not degenerate triangle $\triangle w_1 v_{i+1} w_2$ replace the original triangle T_i . They are built in a way that do not make them collide with obstacles.

When we check for collisions between a segment and a triangle, we resolve a system of three unknowns in three equations and we extract the barycentric coordinates of the point of collision from the solutions. When we have all the coordinates of the points in O , we can obtain o_{near} by picking the one with the biggest β and then, using the corresponding β_{near} , we can obtain

$$\begin{aligned} W_1 &= \beta_{near} v_{i+1} + (1 - \beta_{near}) v_i \\ W_2 &= \beta_{near} v_{i+2} + (1 - \beta_{near}) v_{i+1}. \end{aligned}$$

In Fig. 18 and Fig. 19 we can see the effects of the application of this solution to a piece of the curve. The original pieces of control polygon are on the left pictures; the triangle composed of those vertices collide with the obstacle on the back. The two new vertices w_1 and w_2 are added to avoid the collision.

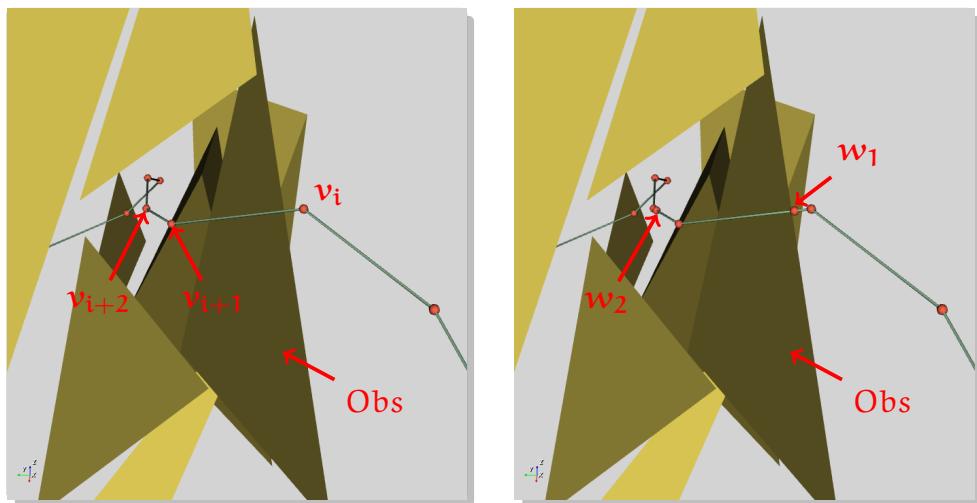


Figure 18.: Effects of application of solution two.

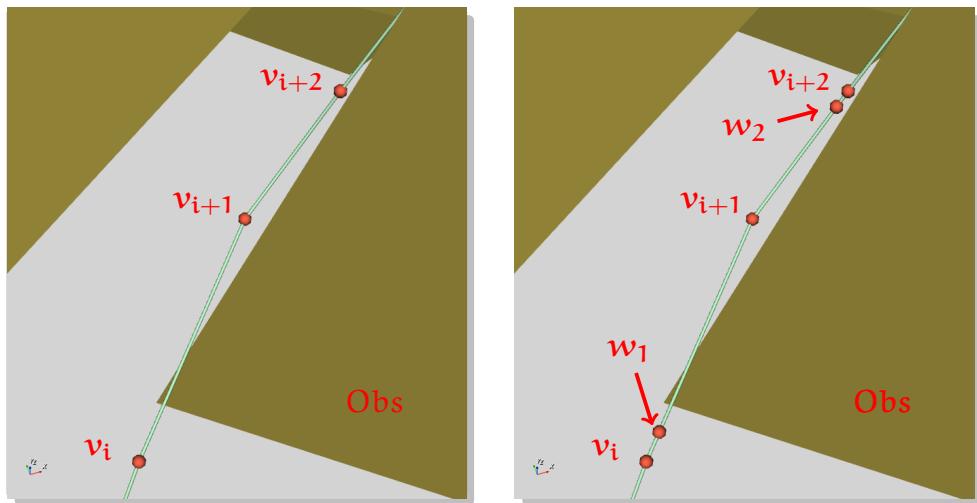


Figure 19.: Effects of application of solution two, other viewpoint.

5.2.2.1 Complexity considerations

For this solution we still have the costs of Eq. (20) and Eq. (23) for the creation and pruning of the graph G . In addition, we need to apply Dijkstra's algorithm in G to obtain P with a cost [1][26]

$$\mathcal{O}(|E| + |V| \log |V|).$$

For Eq. (21) and Eq. (22) this cost is equal to

$$\mathcal{O}(k|O| + |O| \log |O|) \quad (31)$$

and if we make the assumption of k constant we have a cost

$$\mathcal{O}(|O| \log |O|).$$

We need to consider every face of obstacles in O for every triangle in P to check and remove the collisions in the path. The cost to do this is¹⁰ $\mathcal{O}(|P| \cdot |O|)$ where $|P|$ means the number of vertices in P . In the worst case $|P| = \mathcal{O}(|V|) = \mathcal{O}(|O|)$, hence we have a cost

$$\mathcal{O}(|P| \cdot |O|) = \mathcal{O}(|O|^2). \quad (32)$$

Summing up all the costs, we have

$$\mathcal{O}(k|O|^2) \quad (33)$$

and, if we consider k constant,

$$\mathcal{O}(|O|^2). \quad (34)$$

On Table 3 we summarize all the terms that contribute to the total cost, and the total cost itself.

The cost is comparable with the one of the first solution. Furthermore, in this case we can divide the algorithm in two parts:

1. first we can construct G with cost $\mathcal{O}(|O|^2)$;
2. then we can use it for different situations with cost $\mathcal{O}(|O| \log |O| + |P| \cdot |O|)$.

¹⁰ If #OTFs = $\mathcal{O}(|O|)$ - i.e. the number of OTFs does not grow faster than the number of obstacles.

Description	Cost	Reference
Creation of G	$\mathcal{O}(O \log O)$	Eq. (20)
Pruning of G	$\mathcal{O}(k O ^2)$	Eq. (23)
Routing in G	$\mathcal{O}(k O + O \log O)$	Eq. (31)
Clean path	$\mathcal{O}(P \cdot O) = \mathcal{O}(O ^2)$	Eq. (32)
Total	$\mathcal{O}(k O ^2)$	Eq. (33)
Total (k constant)	$\mathcal{O}(O ^2)$	Eq. (34)

Table 3.: Summary of the costs for solution two.

5.3 DEGREE INCREASE

We have hitherto assumed we are dealing only with quadratic B-splines - i.e. of degree 2 - because, for the CHP (Section 3.2.1), we need to check intersections only between two triangles (one belonging to P and the other to OTFs). If we want to use higher degree curves, we can modify the previous algorithms to deal with polyhedral convex hulls, but this implies an increase in complexity.

We are interested in increasing the degree to achieve smooth curves with continuous curvature and torsion. We adopt a compromise: we adapt the path obtained from the previous algorithms adding vertices and forcing the curve to remain in the same convex hull. However, this approach has the disadvantage that we cannot achieve a good torsion¹¹ because the curve changes plane in an inflection point of the curvature.

We modify

$$P = (v_0, \dots, v_n)$$

adding a certain number of aligned new vertices (w_0, w_1, \dots) between each pair (v_i, v_{i+1}) of vertices in P for $i = 0, \dots, n - 1$. The number of w_j between each pair (v_i, v_{i+1}) depends on the desired grade of the curve. In fact we need $m - 2$ new vertices between each (v_i, v_{i+1}) for B-spline curves of degree m . Thus the final modified path for a B-spline curve of degree $m \geq 3$ is

$$\tilde{P} = (v_0, w_0, \dots, w_{m-3}, v_1, \dots, v_i, w_{i(m-2)}, \dots, w_{(i+1)(m-2)-1}, v_{i+1}, \dots, v_n).$$

This strategy is used in this project only to lift the degree from 2 to 3 or 4.

¹¹ We can improve this with the post process.

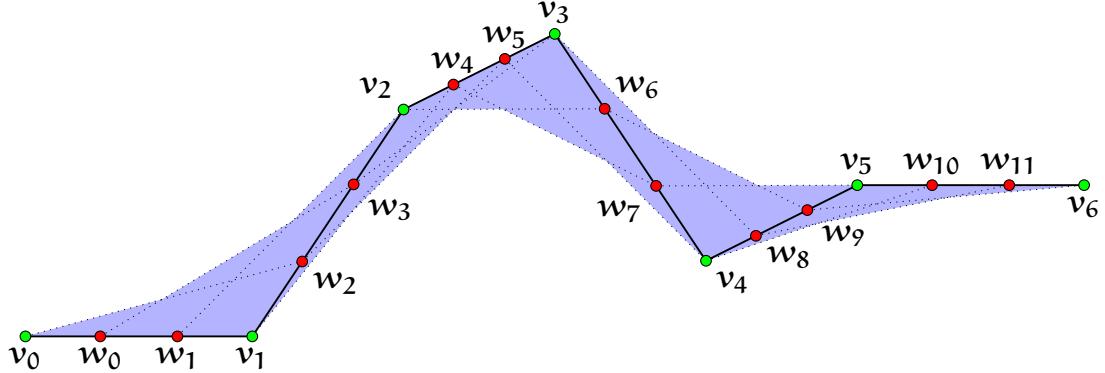


Figure 20.: Increase the degree m from 2 to 4.

An example of path

$$P = (v_0, v_1, v_2, v_3, v_4, v_5, v_6)$$

is visible in Fig. 20. We have the vertices of P in green, the added vertices in red and the cyan area is the convex hull of the final curve.

We want to adapt P to quartic B-spline curves, hence we need to add two new vertices between each pair of vertices (v_i, v_{i+1}) for $i = 0, \dots, 6$. Those new vertices are

$$(w_0, w_1, w_2, w_3, w_4, w_5, w_6, w_7, w_8, w_9, w_{10}, w_{11}).$$

Note that, with this algorithm, when we increase the degree from 2 to $m \geq 3$ we have that the convex hull containing a B-spline curve of degree m in \tilde{P} is a subset of the convex hull containing a B-spline curve of degree 2 in P . This happens because the polyhedrons of consecutive $m+1$ vertices in \tilde{P} collapse in triangles contained inside the triangles of consecutive vertices in P . For instance, in Fig. 20 the convex hull of the first 5 vertices v_0, w_0, w_1, v_1, w_2 of \tilde{P} coincides with the triangle $\Delta v_0 v_1 w_2$ that is contained inside the triangle $\Delta v_0 v_1 v_2$ of the first 3 vertices of P .

One effect of the application of this method is that a curve of degree m in \tilde{P} touches every segment of the original control polygon P . This is because adding $m-2$ aligned vertices between each pair (v_i, v_{i+1}) will result in m aligned vertices on each original segment (Section 3.2.2).

5.4 KNOTS SELECTION

In the previous sections we never discuss the criterion adopted to determine the extended knot vector T

$$T = \{t_0, \dots, t_{m-1}, t_m, \dots, t_{n+1}, t_{n+2}, \dots, t_{n+m+1}\}$$

associated to the B-spline curve.

In this section we discuss two methods implemented to establish T .

First of all, we want the curve to interpolate the chosen start and end points that correspond to the extremes v_0 and v_n of the extracted path P . We see in Section 3.2.4 that we can achieve such interpolation if we impose

$$\begin{aligned} t_0 &= t_1 = \dots = t_m = a \\ t_{n+1} &= t_{n+2} = \dots = t_{n+m+1} = b \end{aligned} \tag{35}$$

where a and b are the extremes of the parametric domain of the curve.

The constraint of Eq. (35) is a mandatory choice, thus we cannot change it. Regarding the parametric domain, we choose it to be $[0, 1]$ because changing the extremes do not change the behavior of the curve, only changing the ratios of the distances between the knots is effective [12]. We still need to chose how to select the inner $n - m$ knots t_{m+1}, \dots, t_n , and we develop two different ways to do this:

method 1 Use a uniform partition where $t_i - t_{i-1} = c$ for $i = m + 1, \dots, n + 1$ for c constant;

method 2 Use an adaptive partition, where we try to create dense knots in correspondence of points on the curve where we have dense control vertices.

method 1 is the easiest way to choose a knot vector and it is a common first choice in textbooks [12][11], but it has the disadvantage of ignoring the geometry of the curve [12]. The steps to accomplish **method 1** are quite straightforward: we need to pick the nodes

$$\frac{i}{n - m + 1}$$

for $i = 1, \dots, n - m$. Thus, we concentrate on **method 2**.

We start from the idea that if we have a control polygon with uniformly-spaced vertices - i.e. $\|v_1 - v_0\|_2 = \|v_2 - v_1\|_2 = \dots = \|v_n - v_{n-1}\|_2$ - then

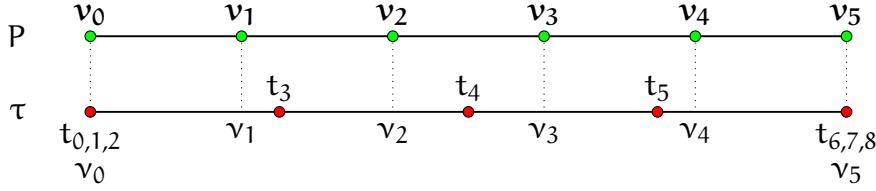


Figure 21.: Optimal case for a quadratic curve (we want uniform partition).

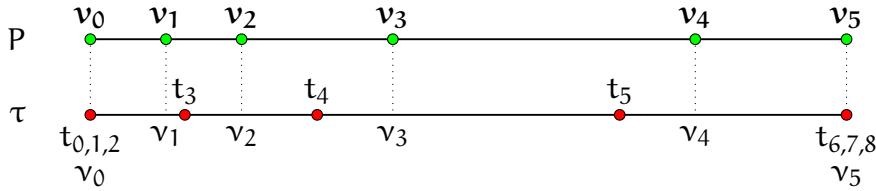


Figure 22.: General case for a quadratic (same distances between t_i and enclosing v_j, v_{j+1} as Fig. 21).

we agree on a uniform partition of the knots ($t_{m+1} - t_m = t_{m+2} - t_{m+1} = \dots = t_{n+1} - t_n$). In Fig. 21 there is an example of a quadratic B-spline curve with uniformly-spaced control polygon. The above segment is a *rectified* visualization of the control polygon with six control vertices v_0, \dots, v_5 . The segment below represents the partition of the domain from a (on the left) to b (on the right), with the projections v_0, \dots, v_5 of the control vertices, scaled in length to the parametric domain axis¹², and the knots t_0, \dots, t_8 on it.

Starting from this situation, if we have a generic control polygon with segments of different length, as in Fig. 22, then we want each t_i to keep the same distance, in ratio, between the surrounding v_j and v_{j+1} , respect to the optimal case. For instance, in Fig. 21 $\frac{t_3 - v_1}{v_2 - v_1} = \frac{1}{4}$ and $\frac{v_2 - t_3}{v_2 - v_1} = \frac{3}{4}$, this means that in Fig. 22 the same values must be preserved.

The problem now is how to calculate the values of t_i in the general case. We consider only the inner part τ of the partition vector, included the extremes

$$\tau_i = t_{i+m} \quad i = 0, \dots, n-m+1$$

where $\tau_0 = a = 0$ and $\tau_{n-m+1} = b = 1$. In Fig. 21 and Fig. 22 $\tau = (t_2, t_3, t_4, t_5, t_6)$. Now we calculate the positions of all τ_i respect to the

¹² v_0 is projected to a , v_5 is projected to b , and the ratios between the distances between vertices are preserved.

v_j in the optimal case. We can achieve that using as unit the uniform distance $v_j - v_{j-1}$ to calculate the positions of τ_i . We specifically calculate

$$\tau_i^v = \frac{n}{n-m+1} \cdot i \quad i = 0, \dots, n-m+1 \quad (36)$$

obtaining the numbers τ_i^v whose integer part $\lfloor \tau_i^v \rfloor$ represents the index j of the v_j that is to the left of τ_i , and the decimal part $(\tau_i^v - \lfloor \tau_i^v \rfloor)$ represents the distance from it: $\frac{\tau_i^v - \lfloor \tau_i^v \rfloor}{v_{j+1} - v_j}$.

Now we calculate the projections v_i in the *generic* case. We start calculating the incremental distances between the vertices

$$\begin{cases} d_0 = 0 \\ d_i = d_{i-1} + \|v_i - v_{i-1}\|_2 \end{cases} \quad i = 1, \dots, n$$

and, remembering that the parametric domain is $[0, 1]$, we have

$$v_i = \frac{d_i}{d_n} \quad i = 0, \dots, n. \quad (37)$$

Using the positions in Eq. (36) on the projection in Eq. (37), we obtain the values

$$\tau_i = v_{\lfloor \tau_i^v \rfloor} + (\tau_i^v - \lfloor \tau_i^v \rfloor)(v_{\lfloor \tau_i^v \rfloor + 1} - v_{\lfloor \tau_i^v \rfloor}) \quad i = 0, \dots, n-m+1.$$

Finally, adding the duplicated knots, we obtain

$$t_i = \tau_{\min(n-m+1, \max(0, i-m))} \quad i = 0, \dots, n+m+1.$$

5.5 POST PROCESSING

The purpose of the post processing phase is to try to simplify the path $P = (v_0, \dots, v_n)$ obtained in the previous phase removing useless vertices, in order to achieve a smoother path.

To obtain this, we realize Algorithm 8 that iterates through all the vertices, except the extremes, and checks if each v_i can be removed without consequences. With consequences we mean that removing v_i would cause a triangle in P to intersect one of the OTFs.

To clarify the concept, consider the simplification in 2-dimensional space in Fig. 23. The path to process is


$$P = (\dots, v_{i-2}, v_{i-1}, v_i, v_{i+1}, v_{i+2}, \dots)$$

Algorithm 8 Post processing algorithm on path P.

```

1: procedure POSTPROCESS(P)
2:   for  $i \leftarrow 1, n - 1$  do
3:     if  $i = 1$  or not intersectOTF( $\triangle v_{i-2}v_{i-1}v_{i+1}$ ) then
4:       if  $i = n - 1$  or not intersectOTF( $\triangle v_{i-1}v_{i+1}v_{i+2}$ ) then
5:          $P \leftarrow P \setminus \{v_i\}$ 
6:       end if
7:     end if
8:   end for
9: end procedure

```

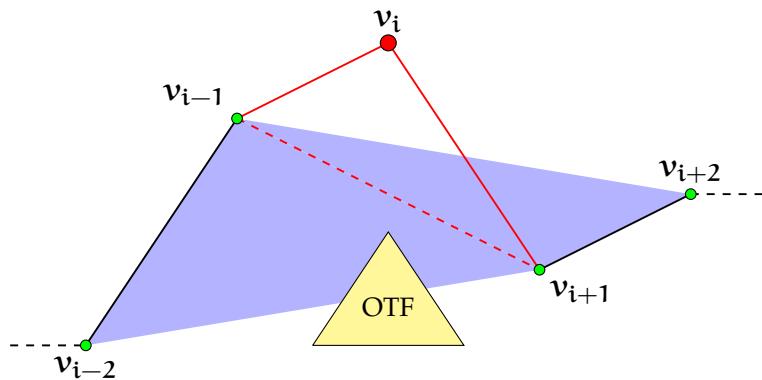Figure 23.: Example of post process check that removes v_i .

and we are considering removing v_i obtaining a modified path

$$\tilde{P} = (\dots, v_{i-2}, v_{i-1}, v_{i+1}, v_{i+2}, \dots).$$

Before doing this we need to check if any triangle in \tilde{P} intersects any OTF. In detail, we need to check only the two triangles $\triangle v_{i-2}v_{i-1}v_{i+1}$ and $\triangle v_{i-1}v_{i+1}v_{i+2}$ because the other triangles in \tilde{P} are already present in P . For instance the obstacle in the figure do not intersects any of the triangles in P , but it intersects $\triangle v_{i-2}v_{i-1}v_{i+1}$ in \tilde{P} .

5.5.1 Complexity considerations

We need to check if two triangles intersect with an OTF for every vertex of P , hence we have a complexity of

$$\mathcal{O}(|P| \cdot |O|) = \mathcal{O}(|O|^2)$$

where O is the set of obstacles and $|P|$ is the number of vertices in P .

5.6 THIRD SOLUTION: SIMULATED ANNEALING

The solutions in Section 5.2.1 and Section 5.2.2 have two problems in common:

- both reject configurations in a prudent way considering only the control polygon;
- and both do not optimize neither length nor other quantities.

These solutions have also the following benefits:

- they produce paths that are obstacle-free from construction;
- the application of the post-processing often produces a reduction in the curve length.

In this section, we describe a third approach based on probabilistic computation.

We can consider the problem of finding the shortest path as a constrained optimization problem, in which a certain configuration of the control vertices (and consequently the B-spline) is the state of the system, and we aim to minimize both the length of the control polygon (and

therefore the B-spline¹³⁾ and the peak in curvature and torsion of the B-spline, under the constraint that the B-spline must not intersect the obstacles. We are interested in optimizing the length of the curve and the maximum peaks of both curvature and torsion, because we want a path that is short but also fair.

5.6.1 Lagrangian Relaxation (LR) applied to the project

We can apply the concept explained in Section 3.4.4 to the project.

The variable space X is composed of all the possible configurations of the path, or, in other words, it is defined by all the possible values of the vector $P = (v_1, \dots, v_n)$ of all n ordered vertices $v_i = (x_i, y_i, z_i)$ of the path. The Problem 13 can be formulated as follows:

$$\begin{aligned} & \underset{P}{\text{minimize}} \quad \alpha \cdot \text{maxCurv}(P) + \beta \cdot \text{maxTors}(P) + \gamma \cdot \text{normLen}(P) \\ & \text{subject to} \quad \left| \text{bspline}(P) \cap \bigcup_{i \in I} \text{obstacle}_i \right| = 0, \end{aligned}$$

where $\text{maxCurv}(P)$ is the curvature peak of the B-spline constructed using P as control polygon, $\text{maxTors}(P)$ is the absolute value of the torsion peak and $\text{normLen}(P)$ is the length of the control polygon P normalized as a percentage of the length of the initial status¹⁴. α , β and γ are fixed coefficients used to give different weights to the curvature peak, torsion peak and length during the optimization process. The normalization of length is necessary to decouple the weight of the length from the length of the path.

Curvature and torsion are obtained in a discrete form. The B-spline curve is tabulated in a number of points that depends on the length of P by a multiplied constant, then for each point the curvature and torsion values are calculated.

Regarding the constraint, $\text{bspline}(P)$ is the set of points of the *B-spline*, using P as control polygon, and obstacle_i is the area of the i^{th} of m obstacles, and $I = \{1, \dots, m\}$.

¹³ We give to the users also the possibility of selecting the arc length as the quantity to minimize.

¹⁴ If the user chooses to minimize the arc length, then $\text{normLen}(P)$ becomes the length of the B-spline curve.

Thus, we need to build the Lagrangian function corresponding to Eq. (14). The constraint function is not negative and is calculated as the ratio

$$\text{constraint}(P) = \frac{|\{p \in \text{spline}(P) : \exists i \text{ s.t. } p \in \text{obstacle}_i\}|}{|\{\mathbf{p} \in \text{spline}(P)\}|}. \quad (38)$$

The points \mathbf{p} of the spline are calculated in a discrete form, like curvature and torsion. Thus, the constraint depends on the tabulation of the curve and it is also possible to have borderline cases where the constraint does not reflect the real situation¹⁵.

The function in Eq. (38) is not negative, thus the Lagrangian function, corresponding to Eq. (14), is

$$L_d(P, \lambda) = \text{gain}(P) + \lambda \cdot \text{constraint}(P) \quad (39)$$

where, for convenience,

$$\text{gain}(P) = \alpha \cdot \text{maxCurv}(P) + \beta \cdot \text{maxTors}(P) + \gamma \cdot \text{normLen}(P). \quad (40)$$

5.6.2 Annealing phase

The purpose of the simulated annealing phase is to find the minimum saddle point in the curve represented by the Eq. (39).

The Algorithm 9 is the annealing process, and its input is the initial status of the system x - i.e. the initial configuration of the control polygon. It operates this way:

1. λ and the temperature are initialized on Line 2 and Line 3 respectively;
2. the *while* on Line 4 is the main loop and the terminating condition is given by a minimum temperature or a minimum variation of energy between two iterations;
3. the *for* at Line 5 repeats the annealing move for a certain number of trials, on each iteration the algorithm probabilistically tries to make a move of the state of the system;
 - first, on Line 6, it chooses between moving in the Lagrangian space or in the space of the path;

¹⁵ For instance, if we have very thin obstacles, a curve can pass through them having only few points (or even none) inside.

Algorithm 9 Annealing

```

1: procedure ANNEALING( $x$ )
2:    $\lambda \leftarrow \text{initialLambda}$ 
3:    $T \leftarrow \text{initialTemperature}$ 
4:   while not terminationCondition() do
5:     for all number of trials do
6:       changeLambda  $\leftarrow$  True with changeLambdaProb
7:       if changeLambda then
8:          $\lambda' \leftarrow \text{neighbour}(\lambda)$ 
9:          $\lambda \leftarrow \lambda'$  with probability  $e^{-(|\text{energy}(x,\lambda) - \text{energy}(x,\lambda')|)/T}$ 
10:      else
11:         $x' \leftarrow \text{neighbour}(x)$ 
12:         $x \leftarrow x'$  with probability  $e^{-(|\text{energy}(x',\lambda) - \text{energy}(x,\lambda)|)/T}$ 
13:      end if
14:    end for
15:     $T \leftarrow T \cdot \text{warmingRatio}$ 
16:  end while
17: end procedure

```

- after that, based on the previous choice, the algorithm probabilistically tries to move the system in a neighbouring state: in the Lagrangian space at Line 8 or in the path space at Line 11;
4. finally, at the end of every trial set, at Line 15, the temperature T is cooled by a certain factor.

The termination condition in Line 4 is triggered by a minimum variation of energy Δenergy between two consecutive iterations of the cycle. The termination is also triggered when a minimum temperature is reached, this happens to impose a limit on the number of cycles.

The choice of the neighbour is probabilistic. If the energy increases in the Lagrangian space or decreases in the path space, then the probability of choosing the new state is 1. If the energy decreases in the Lagrangian space or increases in the path space, then the new state is accepted with a probability that is:

$$\exp\left(-\frac{\Delta\text{energy}}{T}\right).$$

The neighbour function depends on the input:

- a neighbour of λ is a value that is equal to λ plus a uniform perturbation in range $[-\text{maxLambdaPert}, \text{maxLambdaPert}]$;

- a neighbour of the path is obtained by randomly picking one of the vertices v_i (except the extremes v_0 and v_n), then uniformly choosing a direction and a distance in a specific range and, finally, moving v_i by the chosen values.

The energy function is equivalent to L_d in the Eq. (39):

$$\text{energy}(x, \lambda) = \text{gain}(P) + \lambda \cdot \text{constraint}(P). \quad (41)$$

The annealing process finds a saddle point by probabilistically increasing the energy when λ is moved, and decreasing the energy when the points are moved.

5.6.2.1 Complexity considerations

For this solution, we still have the costs of Eq. (20) and Eq. (23) for the creation and pruning of the graph G . In addition, we need to apply Dijkstra's algorithm in G to obtain the initial path P with the cost of Eq. (31).

Regarding the annealing phase, for each *step* (an iteration of Line 4 in Algorithm 9) we have a fixed number of *trials* (the iterations of Line 5). For each trial, we need to calculate the value of the energy of Eq. (41) that is the sum of the gain and the constraint.

For the gain of Eq. (40) we need to calculate the values of curvature and torsion for every tabulated point. Furthermore, there is also a cost¹⁶ of $\mathcal{O}(|P|)$ to calculate the length of the control polygon. Thus, the cost for calculating the gain is

$$\mathcal{O}(|Sp| + |P|)$$

where Sp is the set of the tabulated points of the curve. The number of points in Sp depends on the length of the control polygon $\text{len}(P)$. Thus, we have a cost of $\mathcal{O}(\text{len}(P) + |P|)$, but in the worst case $|P| = \mathcal{O}(|V|) = \mathcal{O}(|O|)$, thus the cost is

$$\mathcal{O}(\text{len}(P) + |P|) = \mathcal{O}(\text{len}(P) + |O|). \quad (42)$$

In regards to the constraint of Eq. (38), we need to calculate if every point of the curve is inside an obstacle. This means a cost of

$$\mathcal{O}(\text{len}(P)|O|). \quad (43)$$

¹⁶ Only if the users do not choose to minimize the arc length.

Hence, the total cost for the calculation of the annealing phase is

$$\mathcal{O}(\#steps \cdot \#trials \cdot (\text{len}(P)|O|)),$$

but the number of steps and trials are bounded by constants¹⁷. Thus, the cost becomes

$$\mathcal{O}(\text{len}(P)|O|). \quad (44)$$

The total cost for the solution is

$$\mathcal{O}(k|O|^2 + \text{len}(P)|O|). \quad (45)$$

Similarly to the previous solutions, if we have that k is a constant then the total cost becomes

$$\mathcal{O}(|O|^2 + \text{len}(P)|O|). \quad (46)$$

Description	Cost	Reference
Creation of G	$\mathcal{O}(O \log O)$	Eq. (20)
Pruning of G	$\mathcal{O}(k O ^2)$	Eq. (23)
Routing in G	$\mathcal{O}(k O + O \log O)$	Eq. (31)
Gain	$\mathcal{O}(\text{len}(P) + P) = \mathcal{O}(\text{len}(P) + O)$	Eq. (42)
Constraint	$\mathcal{O}(\text{len}(P) O)$	Eq. (43)
Annealing	$\mathcal{O}(\text{len}(P) O)$	Eq. (44)
Total	$\mathcal{O}(k O ^2 + \text{len}(P) O)$	Eq. (45)
Total (k constant)	$\mathcal{O}(O ^2 + \text{len}(P) O)$	Eq. (46)

Table 4.: Summary of the costs for solution three

In Table 4 we summarize all the costs. It is difficult to quantitatively compare the cost of this solution with the previous ones. This is due to the presence of the factor $\text{len}(P)$ that depends on the geometry of the scene. however, we can affirm that this solution is more complex than the previous two by a term $\mathcal{O}(\text{len}(P)|O|)$.

Furthermore, in this solution we can divide the algorithm in two parts:

1. first we can construct G with cost $\mathcal{O}(|O|^2)$;
2. then we can use it for different scenarios with cost $|O| \log |O| + \text{len}(P)|O|$.

¹⁷ Although such constants can be very high.

Part III

EVALUATION

6

CODE STRUCTURE

We designed the code with an Object Oriented Programming (OOP) methodology in Python 3 (<https://www.python.org/>). A versatile language with a strong appeal on scientific community, easy to learn and with an increasing active community of developers behind. We relied on SciPy (<https://www.scipy.org/>) and NumPy (<http://www.numpy.org/>) libraries for taking care of different numerical methods. Furthermore we used NetworkX library (<http://networkx.github.io/>) to represent graphs and to route in them. Regarding the graphic output we used VTK (<http://www.vtk.org/>) bindings in Python.

The main class is `Voronizerator`, it maintains the status of the scene and provides all the methods for the interface with users.

- `addBoundingBox` is used for adding a bounding box at specified coordinates to the scene.
- `addPolyhedron` is used for adding a new obstacle to the scene, it required a `Polyhedron` object as argument.
- `setPolyhedronsSites` add the sites for the VD to the scene.
- The method `makeVoroGraph` is used for creating the graphs G and G_t using the algorithms described in Section 5.1.1 and Section 5.1.2.
- `setAdaptivePartition` and `setBsplineDegree` are used for selecting between uniform or adaptive knot partition, and for choosing the desired degree of the curve.
- `extractXmlTree` and `importXmlTree` are used for saving and restoring the scene in XML format.
- All the other methods `plot*` are used for drawing the different elements of the scene. They require a plotter as argument.

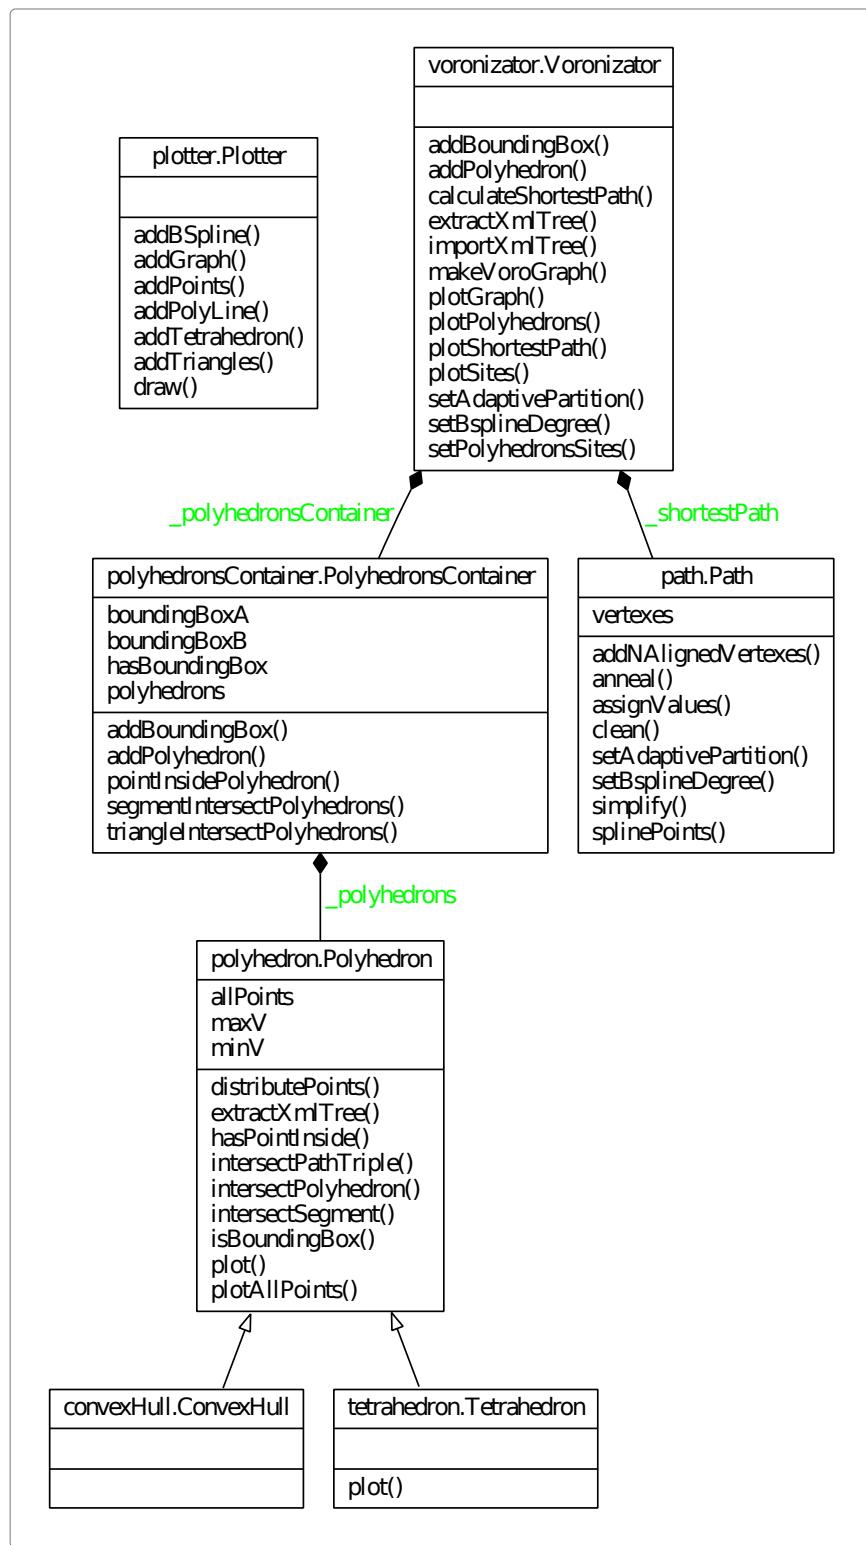


Figure 24.: Excerpt UML of the project

The class `Plotter` provides the interface for drawing all the necessary elements using VTK.

The class `Polyhedron` represents a single obstacle (that can also be one of the two subclasses `ConvexHull` and `Tetrahedron`). it provides all the necessary methods for performing geometry checks of point inclusion and intersection with segments, triangles, and other obstacles.

The class `Path` represents the control polygon of the curve. It provides the methods `addNAlignedVertexes` and `simplify` that perform respectively the degree increase (Section 5.3) and the post processing (Section 5.5). The method `clean` is necessary for the second solution described in Section 5.2.2. Furthermore this class provides also the functionality for optimizing the curve using the SA (Section 5.6) with the method `anneal`.

Furthermore we provide scripts for the creation of random scenes and for the execution of the different methods.

7

TESTING

We execute the tests summarized in Tables 7, 8, 9 and 10 for evaluating the algorithms of the project. The focus of the testing phase is to assess the validity of the different algorithm, thus we present a detailed series of tests trying to cover all the functionalities.

Each table presents the following fields.

- *Scene* specifies the considered scene among those listed in Tables 7, 8, 9 and 10;
- $s \rightarrow e$ indicates the starting and ending points
- *Deg.* is the degree of the B-spline curve;
- *Met.* is the method used, where
 - Method A is Dijkstra in G' ;
 - Method B is Dijkstra in G ;
 - Method C is Simulated Annealing;
- *P. p.* indicates if the post processing is used (\checkmark) or not (\times);
- *Part.* indicates if the uniform knot partition (**U**) or the adaptive one (**A**) is used;
- *Config.* is used only for method C and indicates the used annealing configuration among those listed in Table 6.

Table 5 gives some details about the scenes. The fields are the followings.

- *Scene* specifies the name of the scene
- *B.b. A* and *B.b. B* are the extremes of the bounding box.

- *Obs. shapes* indicates the shape of the obstacles in the scene¹;
- *# obs.* is the number of obstacles in the scene.
- *Max. empty area* is the maximum empty area for the distribution of the Voronoi sites on the OTFs of the obstacles (see Section 5.1.1);
- *Figure* is the reference to the figure of the scene that contemplates also the graph G.

Table 6 indicates the configurations for the SA phase. The fields are the followings:

- *Config.* specifies the name of the configuration set;
- T_0 is the initial *temperature*;
- *Trials* is the number of trials for each annealing cycle;
- *warm.* is the warming ratio of temperature between two consecutive cycles;
- *min T* is the minimum temperature at which the process terminates;
- *min ΔE* is the minimum difference of energy between two consecutive cycles at which the process terminates;
- λ *pert* is the maximum perturbation of λ in every move;
- V *pert fact* is the maximum perturbation of a path vertex in every move, expressed in fraction of the control polygon length;
- λ_0 is the initial value of λ ;
- λP is the probability of changing λ instead the path in each move;
- *Len type* indicates if it is considered the control polygon (poly) or the arc (arc) length as optimizing quantity;
- *Ratios* is a triple of *weights* that indicates the importance, during the optimization, of curvature, torsion and length respectively;

All the results of the tests are visible in the figures presented in Appendix A. The used visualization for the tests with scene 2 is different from the others to enhance the visualization of the curve. Only the edges of the obstacles are drawn.

¹ Scene 3 has only one bucket-shaped obstacle with center in [0.5, 0.5, 0.5], with width 0.2, height 0.4 and thickness 0.02.

Scene	B.b. A	B.b. B	Obs. shape	# obs.	Max. empty area	Figure
1	[-0.1, -0.1, -0.1]	[1.1, 1.1, 1.1]	Tetrahedrons	10	0.1	Fig. 25
1b	[-0.1, -0.1, -0.1]	[1.1, 1.1, 1.1]	Tetrahedrons	10	0.01	Fig. 26
2	[-0.1, -0.1, -0.1]	[1.1, 1.1, 1.1]	Tetrahedrons	100	0.1	Fig. 27
3	[0, 0, 0]	[1, 1, 1]	Polyhedron	1	0.1	Fig. 28

Table 5.: Testing scenes.

Config.	T_0	Trials	warm.	min T	min ΔE	λ_{pert}	V pert fact	λ_0	λ_P	Len type	Ratios
1	10	10	0.7	1e-7	1e-6	1000	10	0	5e-2	arc	[0.1, 0.1, 0.8]
2	10	10	0.7	1e-7	1e-6	1000	10	0	5e-2	poly	[0.1, 0.1, 0.8]
2b	10	100	0.7	1e-7	1e-6	1000	100	0	5e-2	poly	[0.1, 0.1, 0.8]
3	10	10	0.7	1e-7	1e-6	1000	10	0	5e-2	arc	[0.3, 0.3, 0.4]
3b	10	10	0.9	1e-5	1e-6	1000	100	0	5e-2	arc	[0.3, 0.3, 0.4]

Table 6.: Annealing configurations.

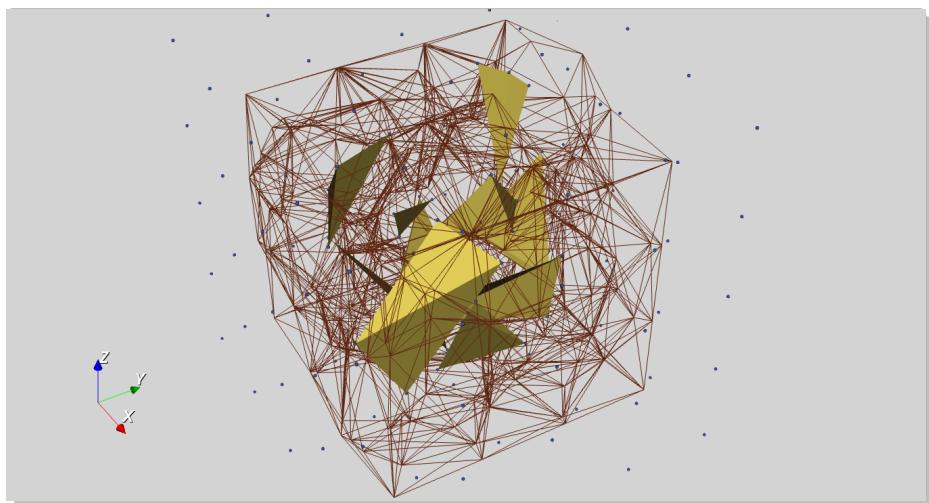


Figure 25.: Scene 1.

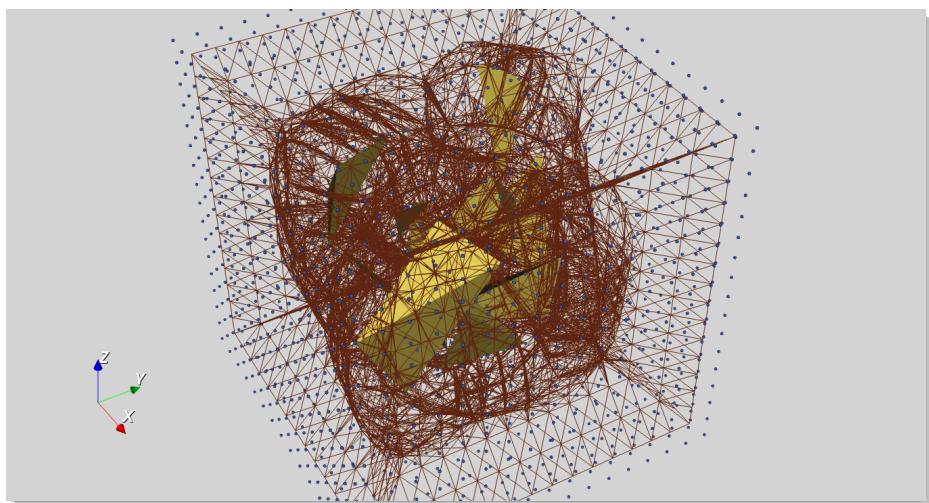


Figure 26.: Scene 1b.

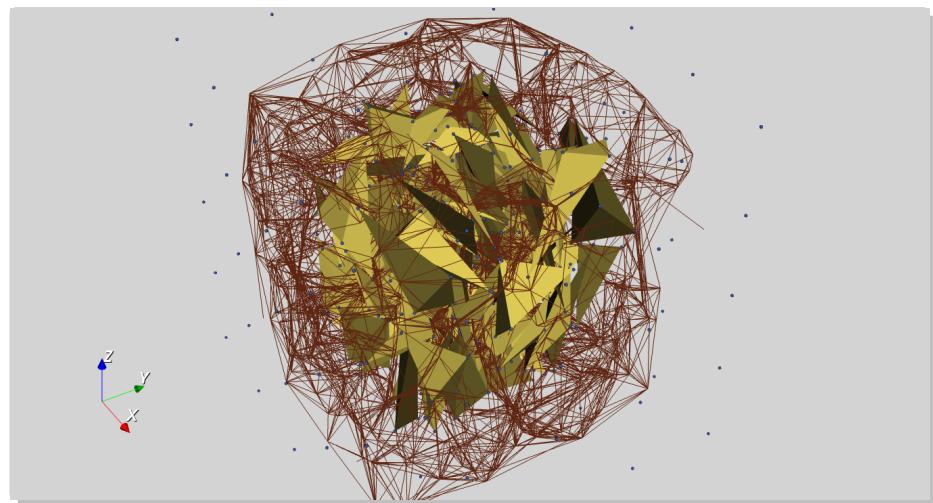


Figure 27.: Scene 2.

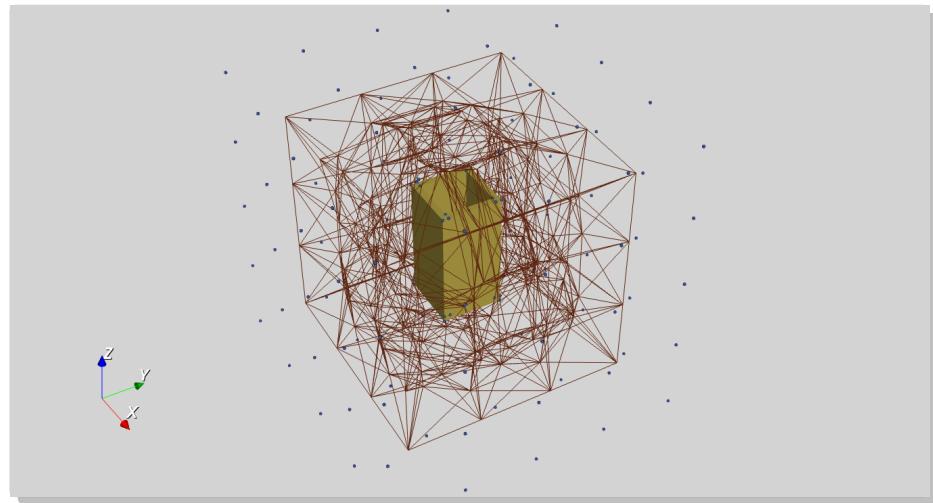


Figure 28.: Scene 3.

#	Scene	$s \rightarrow e$	Deg.	Met.	P. p.	Part.	Config.	figure
1	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	A	✗	U	-	Fig. 29
2	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	A	✓	U	-	Fig. 30
3	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	A	✗	A	-	Fig. 31
4	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	A	✓	A	-	Fig. 32
5	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	A	✗	U	-	Fig. 33
6	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	A	✓	U	-	Fig. 34
7	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	A	✗	A	-	Fig. 35
8	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	A	✓	A	-	Fig. 36
9	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	A	✗	U	-	Fig. 37
10	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	A	✓	U	-	Fig. 38
11	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	A	✗	A	-	Fig. 39
12	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	A	✓	A	-	Fig. 40
13	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	B	✗	U	-	Fig. 41
14	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	B	✓	U	-	Fig. 42
15	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	B	✗	A	-	Fig. 43
16	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	B	✓	A	-	Fig. 44
17	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	B	✗	U	-	Fig. 45
18	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	B	✓	U	-	Fig. 46
19	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	B	✗	A	-	Fig. 47
20	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	B	✓	A	-	Fig. 48
21	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	B	✗	U	-	Fig. 49
22	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	B	✓	U	-	Fig. 50
23	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	B	✗	A	-	Fig. 51
24	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	B	✓	A	-	Fig. 52

Table 7.: Summary of the tests.

#	Scene	$s \rightarrow e$	Deg.	Met.	P. p.	Part.	Config.	figure
25	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	B	✗	U	-	Fig. 53
26	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	B	✓	U	-	Fig. 54
27	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	B	✗	A	-	Fig. 55
28	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	B	✓	A	-	Fig. 56
29	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	B	✗	U	-	Fig. 57
30	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	B	✓	U	-	Fig. 58
31	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	B	✗	A	-	Fig. 59
32	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	B	✓	A	-	Fig. 60
33	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	B	✗	U	-	Fig. 61
34	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	B	✓	U	-	Fig. 62
35	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	B	✗	A	-	Fig. 63
36	1b	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	B	✓	A	-	Fig. 64
37	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	2	B	✗	U	-	Fig. 65
38	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	2	B	✓	U	-	Fig. 66
39	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	2	B	✗	A	-	Fig. 67
40	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	2	B	✓	A	-	Fig. 68
41	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	3	B	✗	U	-	Fig. 69
42	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	3	B	✓	U	-	Fig. 70
43	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	3	B	✗	A	-	Fig. 71
44	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	3	B	✓	A	-	Fig. 72
45	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	4	B	✗	U	-	Fig. 73
46	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	4	B	✓	U	-	Fig. 74
47	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	4	B	✗	A	-	Fig. 75
48	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	4	B	✓	A	-	Fig. 76

Table 8.: Summary of the tests (continue).

#	Scene	$s \rightarrow e$	Deg.	Met.	P. p.	Part.	Config.	figure
49	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	A	✗	U	-	Fig. 77
50	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	A	✓	U	-	Fig. 78
51	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	A	✗	A	-	Fig. 79
52	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	A	✓	A	-	Fig. 80
53	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	A	✗	U	-	Fig. 81
54	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	A	✓	U	-	Fig. 82
55	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	A	✗	A	-	Fig. 83
56	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	A	✓	A	-	Fig. 84
57	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	A	✗	U	-	Fig. 85
58	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	A	✓	U	-	Fig. 86
59	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	A	✗	A	-	Fig. 87
60	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	A	✓	A	-	Fig. 88
61	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	B	✗	U	-	Fig. 89
62	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	B	✓	U	-	Fig. 90
63	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	B	✗	A	-	Fig. 91
64	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	B	✓	A	-	Fig. 92
65	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	B	✗	U	-	Fig. 93
66	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	B	✓	U	-	Fig. 94
67	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	B	✗	A	-	Fig. 95
68	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	B	✓	A	-	Fig. 96
69	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	B	✗	U	-	Fig. 97
70	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	B	✓	U	-	Fig. 98
71	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	B	✗	A	-	Fig. 99
72	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	B	✓	A	-	Fig. 100

Table 9.: Summary of the tests (continue).

#	Scene	$s \rightarrow e$	Deg.	Met.	P. p.	Part.	Config.	figure
73	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	C	-	U	1	Fig. 101
74	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	C	-	U	1	Fig. 102
75	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	C	-	U	1	Fig. 103
76	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	C	-	U	2	Fig. 104
77	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	C	-	U	2	Fig. 105
78	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	C	-	U	2	Fig. 106
79	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	2	C	-	U	3	Fig. 107
80	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	3	C	-	U	3	Fig. 108
81	1	[0.2,0.2,0.2]→[0.9,0.9,0.9]	4	C	-	U	3	Fig. 109
82	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	2	C	-	U	1	Fig. 110
83	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	3	C	-	U	1	Fig. 111
84	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	4	C	-	U	1	Fig. 112
85	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	2	C	-	U	2	Fig. 113
86	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	3	C	-	U	2	Fig. 114
87	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	4	C	-	U	2	Fig. 115
88	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	2	C	-	U	3	Fig. 116
89	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	3	C	-	U	3	Fig. 117
90	2	[0.5,0.5,0.5]→[0.5,0.5,0.95]	4	C	-	U	3	Fig. 118
91	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	C	-	U	1	Fig. 119
92	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	C	-	U	1	Fig. 120
93	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	C	-	U	1	Fig. 121
94	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	C	-	U	2b	Fig. 122
95	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	C	-	U	2b	Fig. 123
96	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	C	-	U	2b	Fig. 124
97	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	2	C	-	U	3b	Fig. 125
98	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	3	C	-	U	3b	Fig. 126
99	3	[0.5,0.5,0.4]→[0.5,0.5,0.2]	4	C	-	U	3b	Fig. 127

Table 10.: Summary of the tests (continue).

8

CONCLUSIONS

In this chapter we describe the evidence that emerges from the tests. Furthermore, we discuss possible future improvements of the project.

8.1 TESTS ANALYSIS

We present three scenes to do the tests. Scene 1 consists in 10 obstacles randomly disposed, scene 1b is the same scene with a more dense graph, scene 2 has 100 obstacles and scene 3 has only one bucket-shaped obstacle.

We set the starting and ending points to be at the extremes of the bounding box for scene 1 and scene 1b- i.e. the purpose of the tests in these scenes is to cross the area with the obstacles. For scene 2, we set the starting point in the centre of the crowded area and the aim is to manage to exit from the area. For scene 3, we set the starting point inside the bucket and we want to arrive under it.

Starting with the test for methods A and B, we manage to test all the possible configurations of scenes, degree, method, post-processing and knot partition. For method C, we tested 5 different parameter sets for the Simulated Annealing (SA).

Regarding the performances, the fastest method is B- to have an idea of the temporal scales, consider that, on a quad core Intel i5-2430M CPU at 2.40GHz with 8 Gb of RAM, an execution in scene 1 with post processing and adaptive knot partitions takes:

- 76 seconds for method A;
- 11 seconds for method B.

Method B is faster than method A, but we have to take into consideration that method B is more refined than method A because the latter needs to rebuild G_t when connecting the start and ending points.

It is difficult to compare method C to the previous two because of the different parameter sets, however, an execution of it in scene 1 with configuration 1 takes 168 seconds.

First of all, we notice that the application of the adaptive partition results in a deterioration of the curvature plots - i.e. an increase in magnitude of the curvature peaks - for the experiments with scenes 1, 1b and 2. However the experiments with scene 3 result in an improvement. Thus, this method is not always reliable in terms of the curve fairing.

We notice that the curvature presents peaks near the start and/or the end on some tests. See for instance tests 1, 3, 5. The cause of this is the attachment method of start and ending points. In fact they are attached to the nearest vertex of G , but it can be also too close and in a bad direction, adding a deleterious hook to the control polygon.

The post-processing fulfills the purpose of simplifying the path. Consider, for instance, test 33 (Fig. 61) where the curvature plot has different peaks. After the application of post-processing, we obtain test 34 (Fig. 62) where the curvature peaks are mitigated.

The degree increase algorithm is improving the curvature: the plots are continuous for degree 3 and continuous and smooth for degree 4. Unfortunately, it is not reliable for the torsion (not shown in the tests) because, by adding aligned vertices, we force plane changes on zero-curvature points, where the torsion is not defined.

Method C produces high quality curves (see tests from 74 to 99) with low peaks of curvature and torsion. Moreover, this solution is not conditioned by the problem in degree increase mentioned before, the plots of the torsion are good.

An disadvantage of this solution is the discretization of collision check. Thus, depending on the parameters, it is possible that the path intersects an obstacle without noticing it. Other disadvantages are the slower execution time and the difficulty in finding the right values of the annealing parameters. In fact, wrong values of warming, or an insufficient number of trials can *freeze* the system in a not optimal status. Furthermore, it is necessary to adapt the parameters to different problems. For instance, the configuration 2 and 3 are not fitted for tests from 94 to 99: using those settings is not enough to let the system converge in an admissible state.

Regarding the complexity, we have that the highest cost which is $\mathcal{O}(|O| \log |O|)$ in the number of obstacles $|O|$, comes from the creation of the scene. A run on the scene have complexity

- $\mathcal{O}(|O| \log |O|)$ for method A;

- $\mathcal{O}(|O| \log |O| + |P||O|)$ for method B, where $|P|$ is the number of vertices in the control polygon;
- $\mathcal{O}(|O| \log |O| + \text{len}(P)|O|)$ for method C, where $\text{len}(P)$ is the length of the control polygon.

8.2 FUTURE IMPROVEMENTS

The present work contemplates many possible improvements. One of them is to provide a better method to attach the start and ending points. For instance one possibility is to connect them to all the visible vertices of G .

Another possible improvement is to design another algorithm for the adaptive knot partition. The current one does not improve enough the fairness of the curve.

Considering the different benefits and drawbacks of the implemented solutions, would be interesting to further elaborate the idea of a mixed approach to the problem: analytical and stochastic.

An new interesting solution might be implementing a stochastic optimization on the path obtained from solution 1 or solution 2, that is obstacle-free guaranteed. This hypothetical stochastic optimization must avoid states that violates the Convex Hull Property (CHP), and it can work directly on the state space without the Lagrangian relaxation. In fact, in that scenario the initial status is already obstacle-free. Furthermore, we believe that the optimization process do not need to explore too much the state space trespassing obstacle zones.

We believe that the described process can be very effective in improving curvature, torsion and length of the path. It can obtain curves with the quality of the implemented third solution and without the disadvantages of it: the slow computation and the possible collision errors caused by the discretization of the inclusion checks.

Another improvement could be studying different basic structures besides the graph extract from Voronoi Diagram (VD). For instance, Rapidly-expanding Random Tree (RRT).



Part IV
APPENDICES

A

TESTS RESULTS

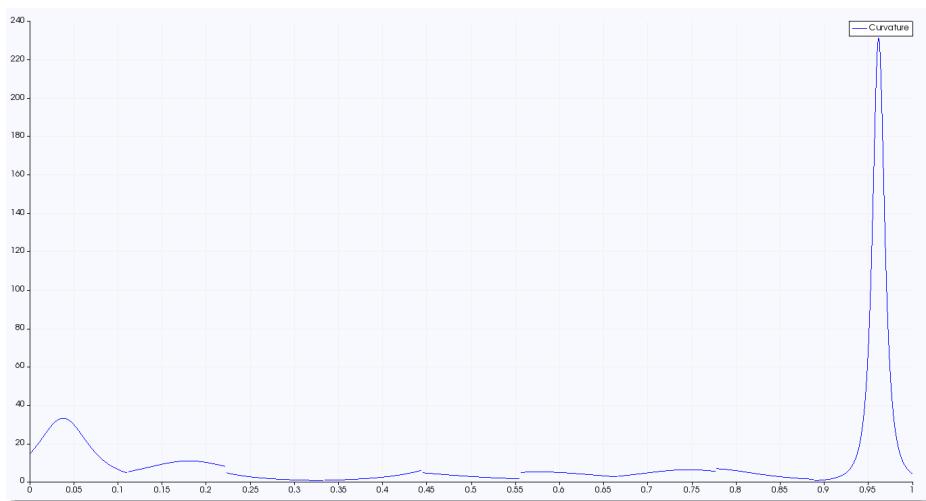
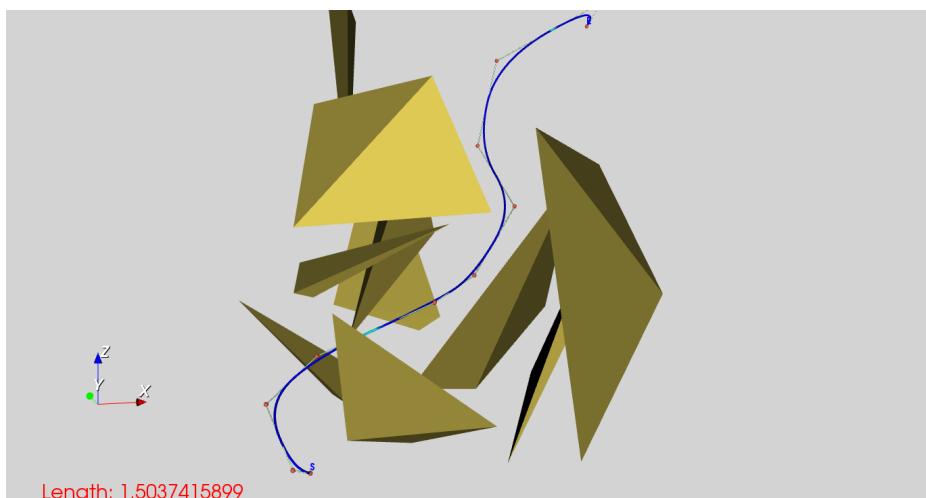
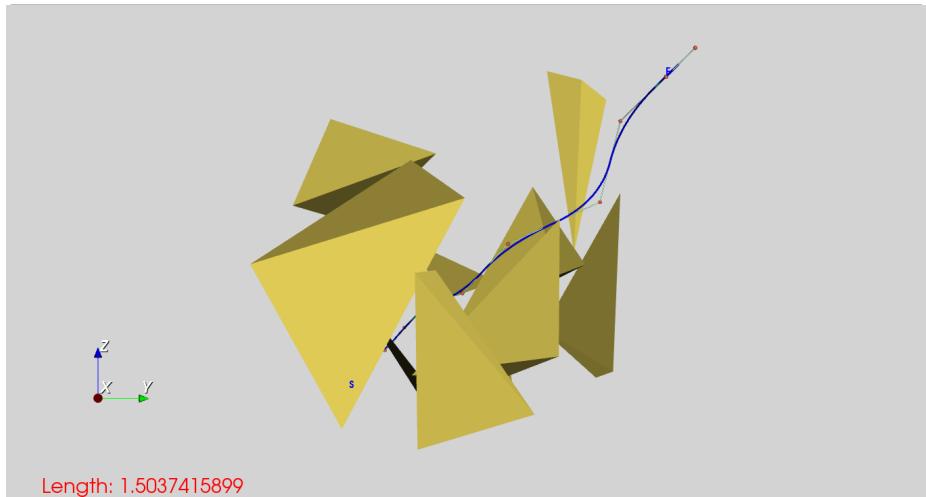


Figure 29.: Test 1; Scene 1; $s \rightarrow e$ $[0.2,0.2,0.2] \rightarrow [0.9,0.9,0.9]$; Deg. 2; Meth. A; Post proc. X; Part. U.

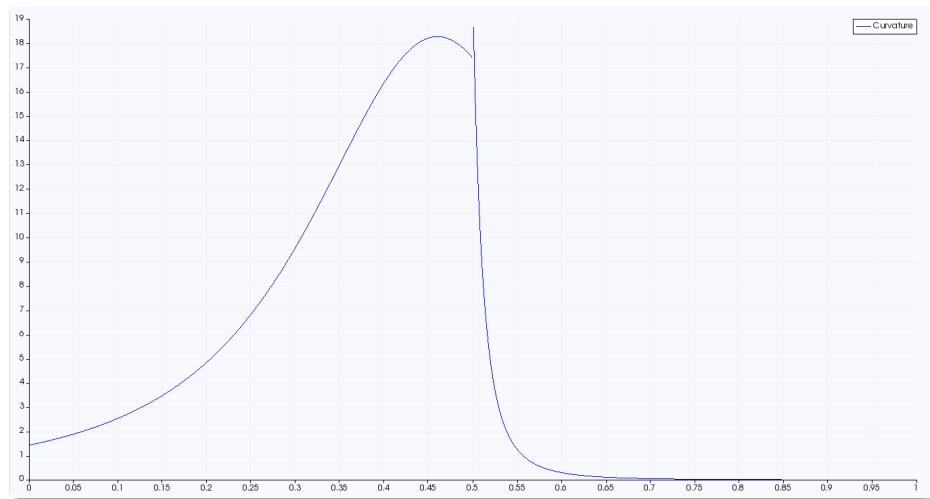
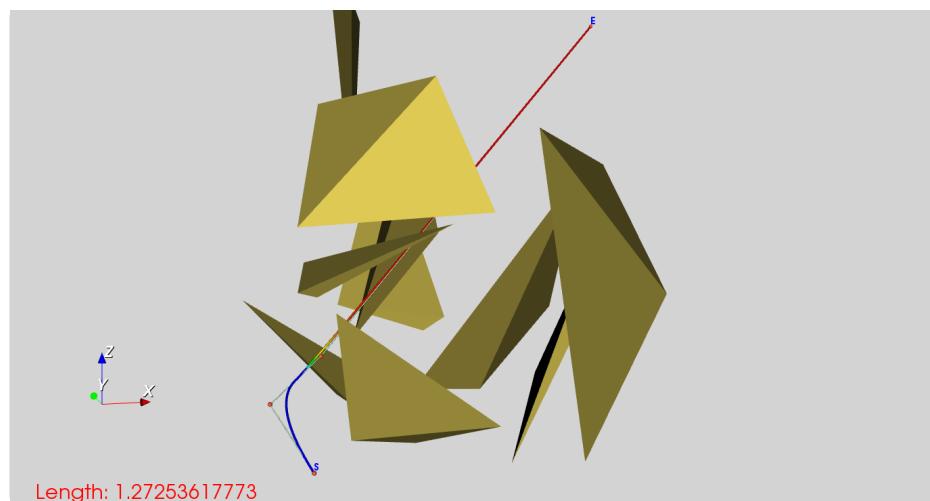
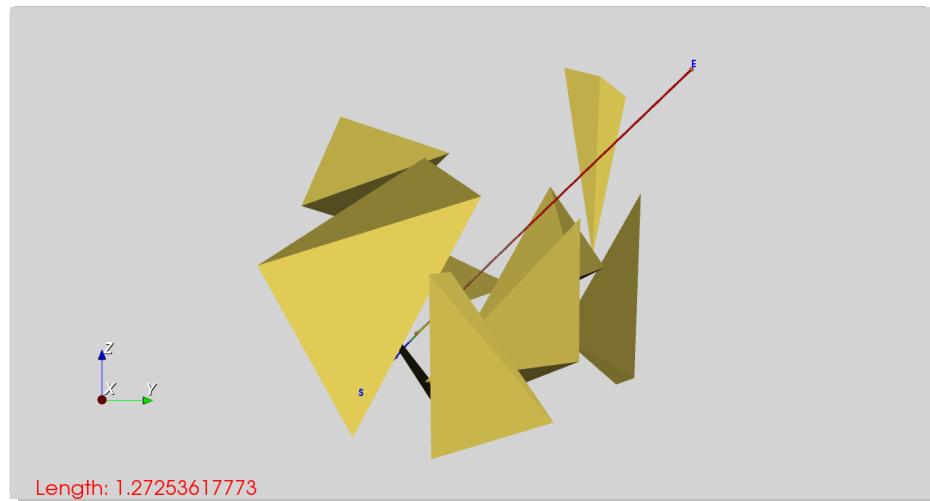


Figure 30.: Test 2; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. A; Post proc. ✓; Part. U.

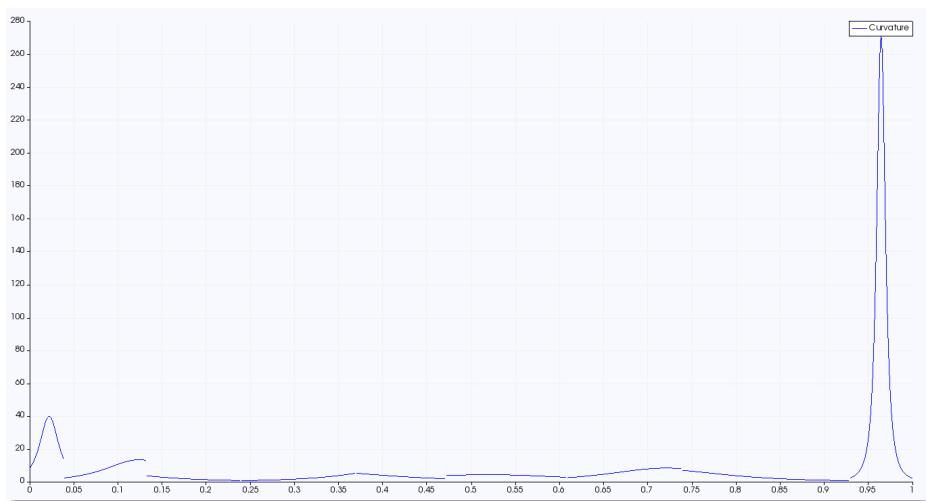
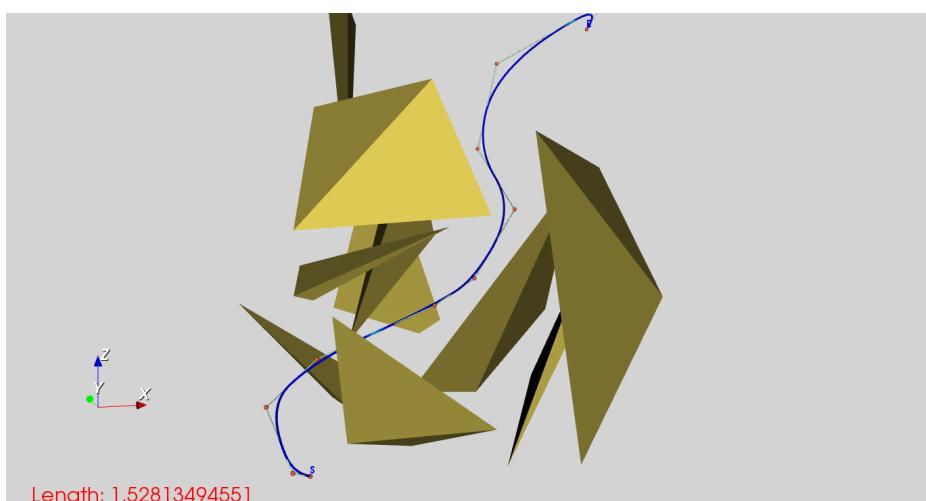
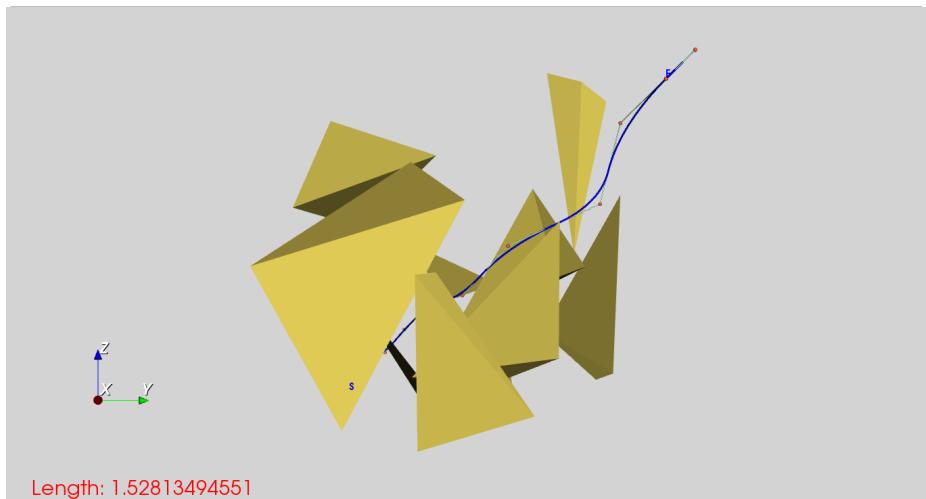


Figure 31.: Test 3; Scene 1; $s \rightarrow e$ $[0.2,0.2,0.2] \rightarrow [0.9,0.9,0.9]$; Deg. 2; Meth. A; Post proc. X; Part. A.

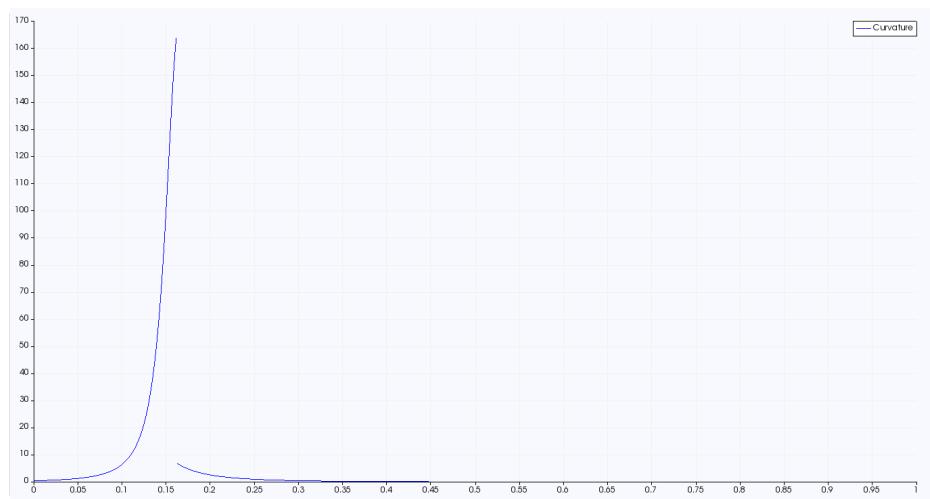
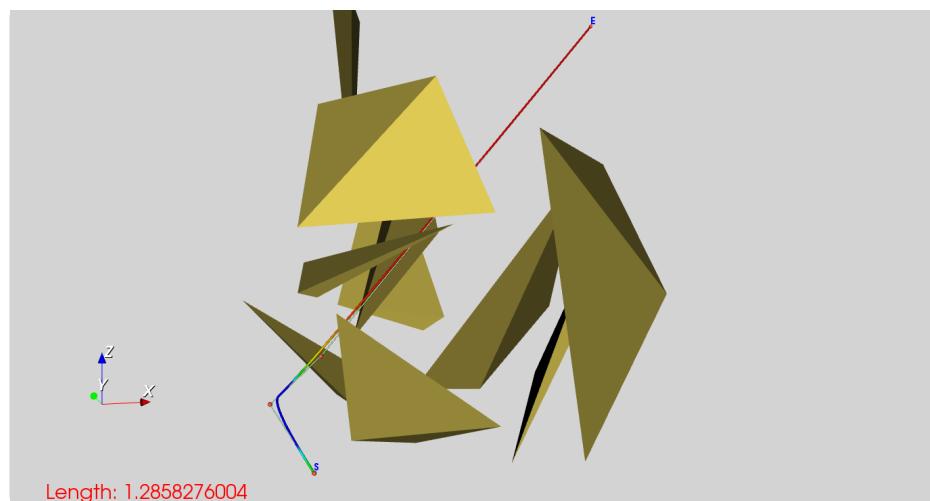
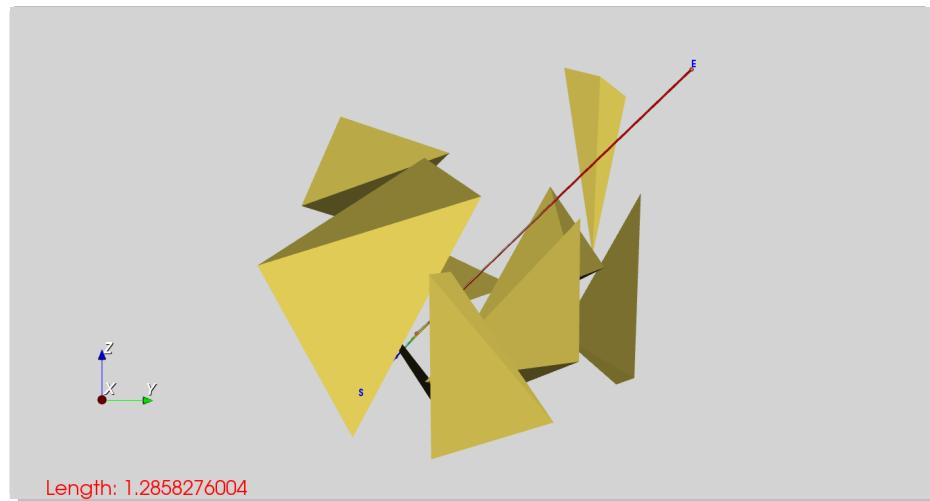


Figure 32.: Test 4; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. A; Post proc. ✓; Part. A.

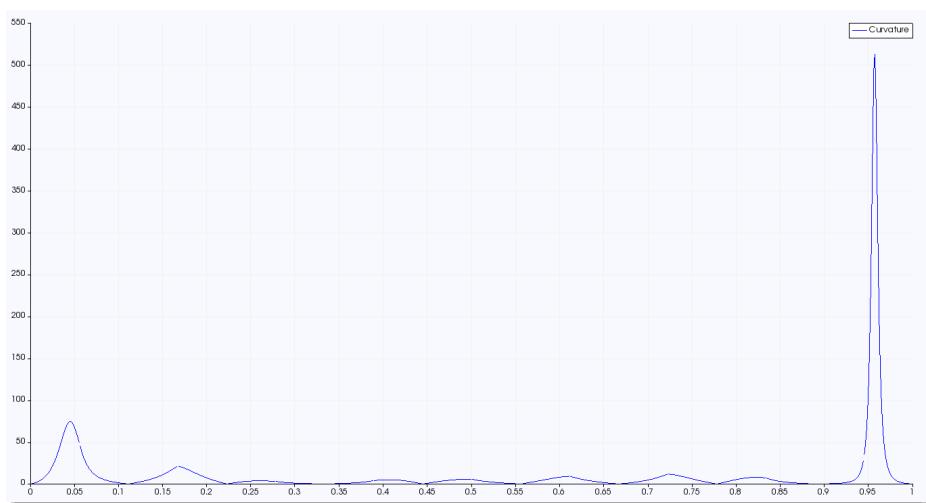
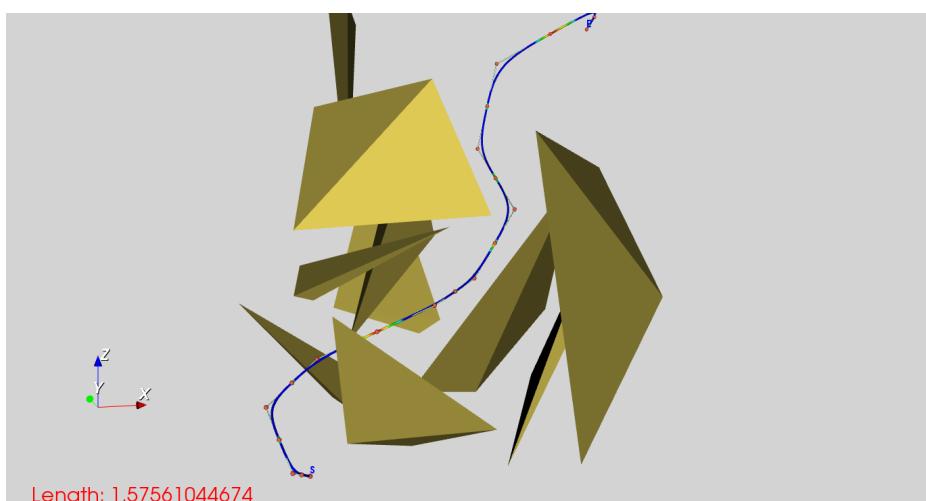
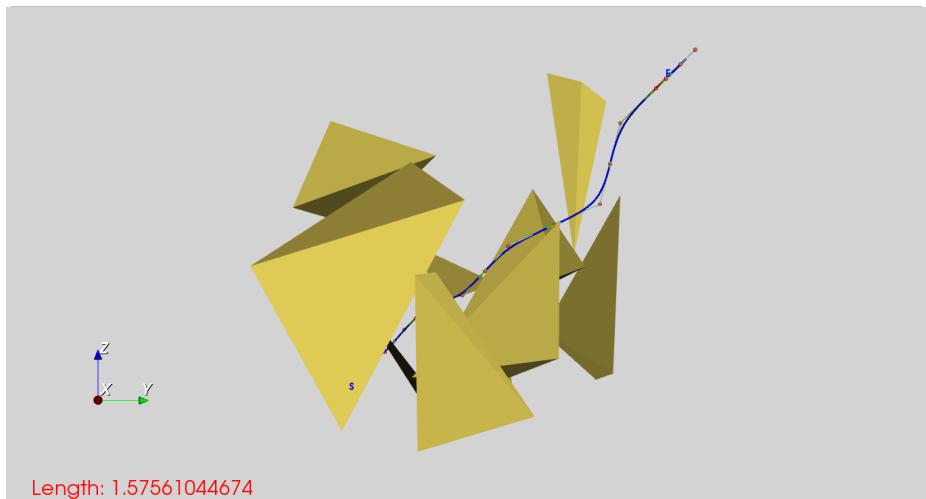


Figure 33.: Test 5; Scene 1; $s \rightarrow e$ $[0.2,0.2,0.2] \rightarrow [0.9,0.9,0.9]$; Deg. 3; Meth. A; Post proc. X; Part. U.

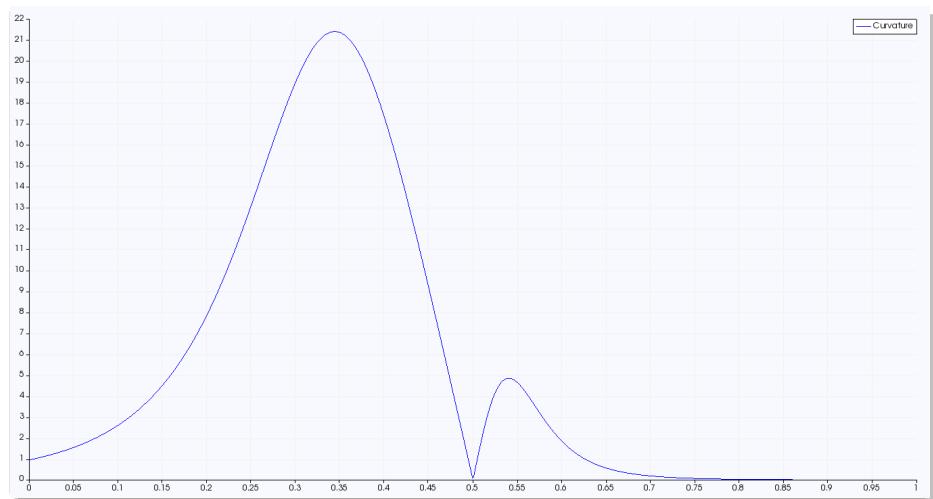
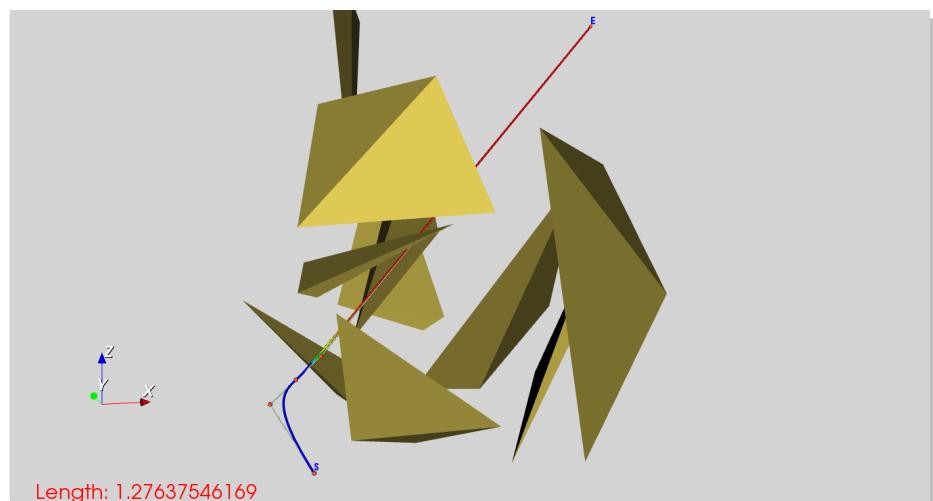
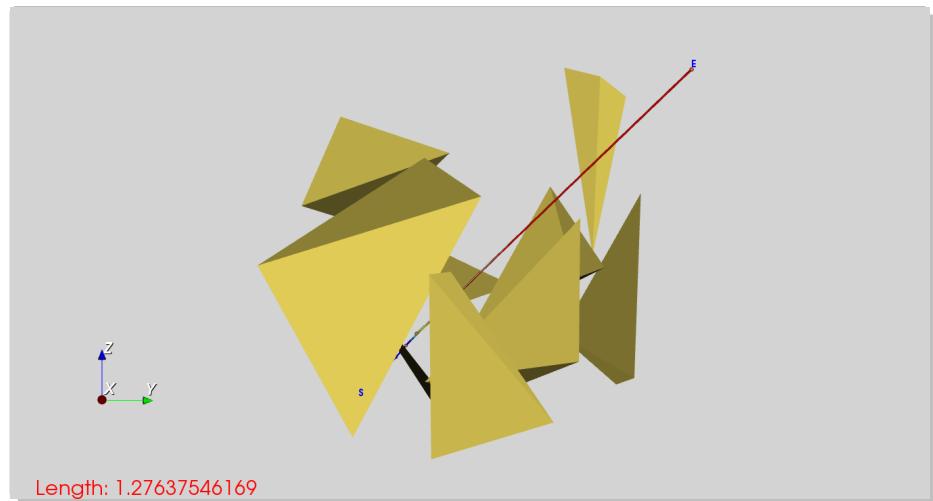


Figure 34.: Test 6; Scene 1; $s \rightarrow e$ $[0.2,0.2,0.2] \rightarrow [0.9,0.9,0.9]$; Deg. 3; Meth. A; Post proc. ✓; Part. U.

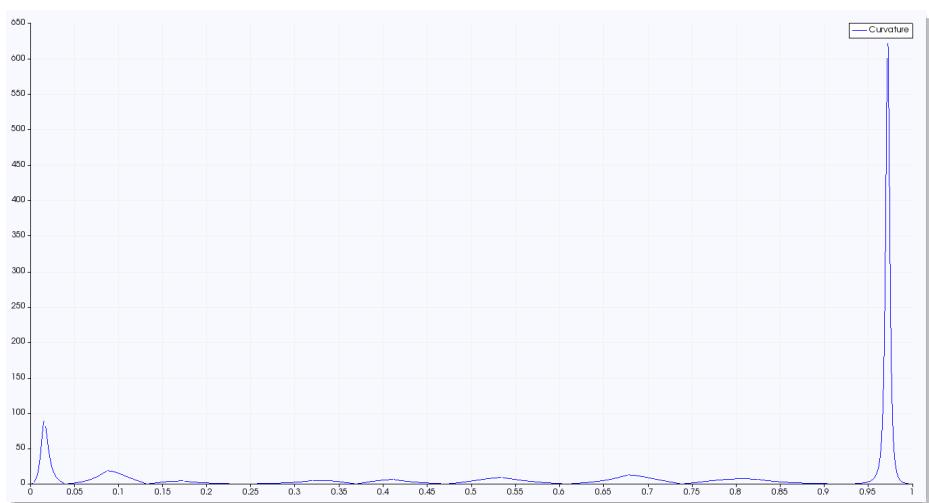
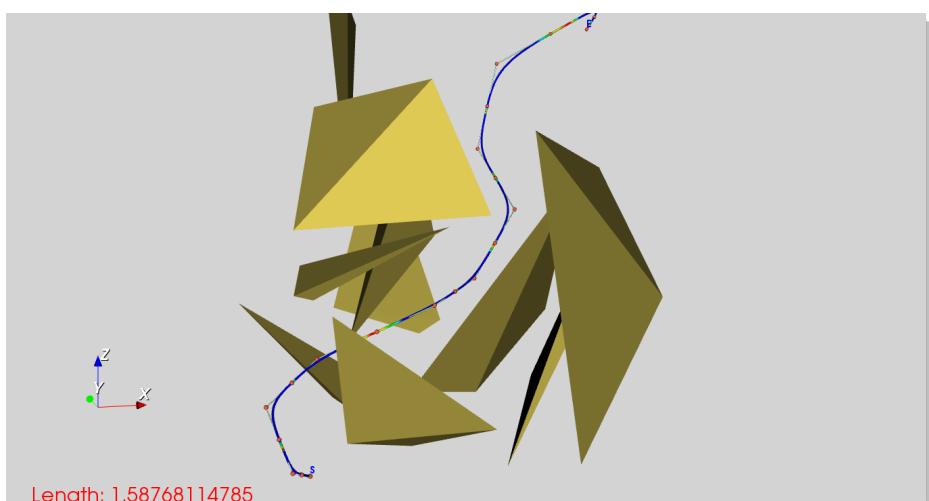
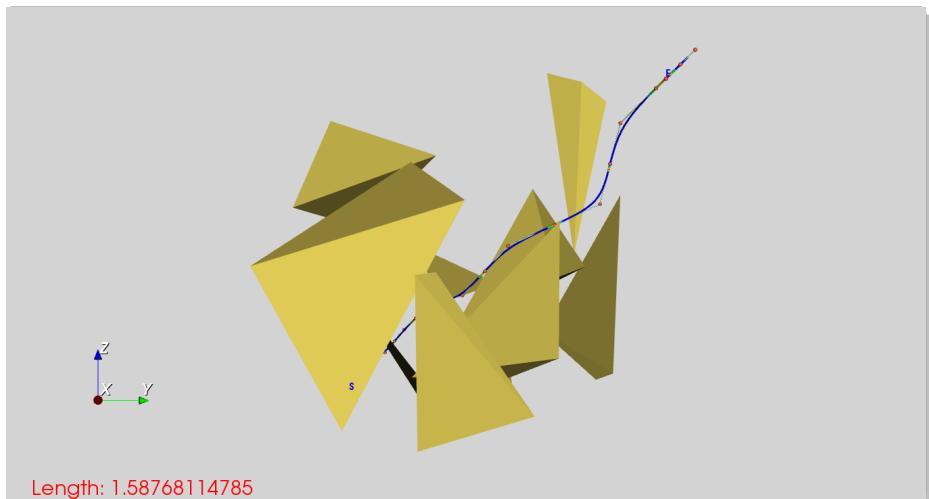


Figure 35.: Test 7; Scene 1; $s \rightarrow e$ $[0.2,0.2,0.2] \rightarrow [0.9,0.9,0.9]$; Deg. 3; Meth. A; Post proc. X; Part. A.

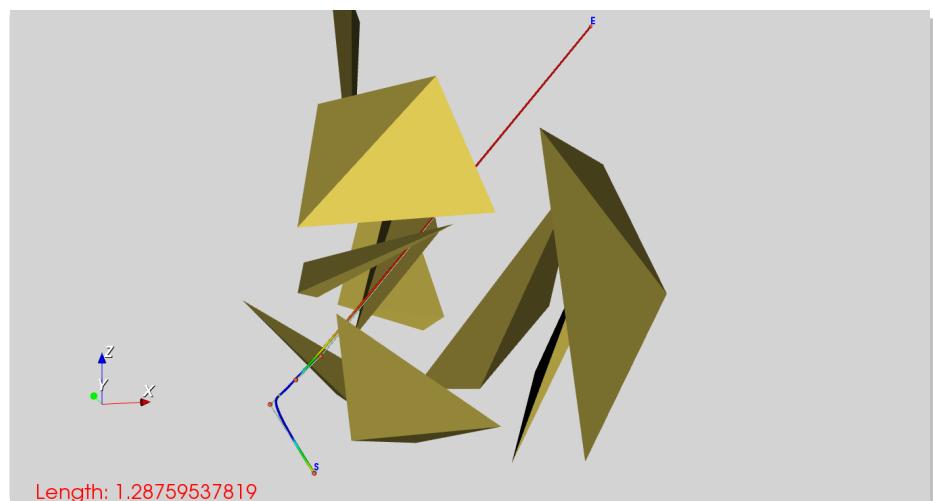
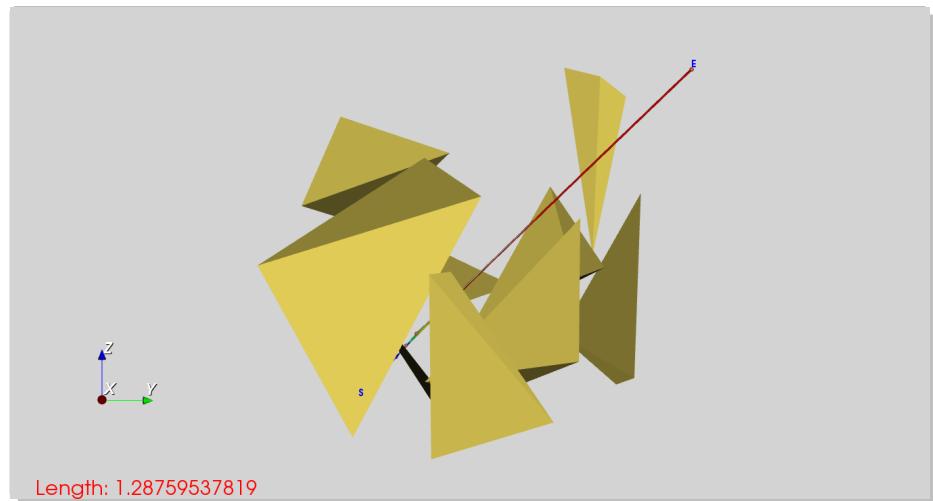


Figure 36.: Test 8; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. A; Post proc. ✓; Part. A.

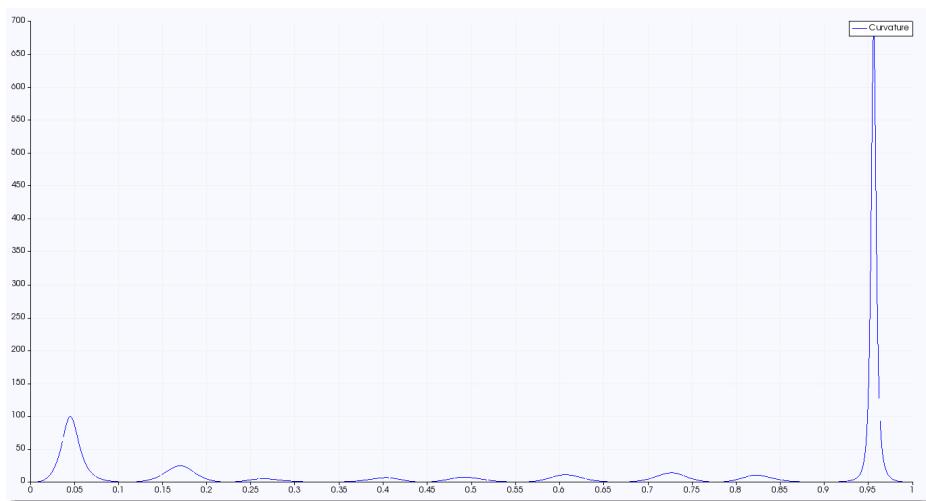
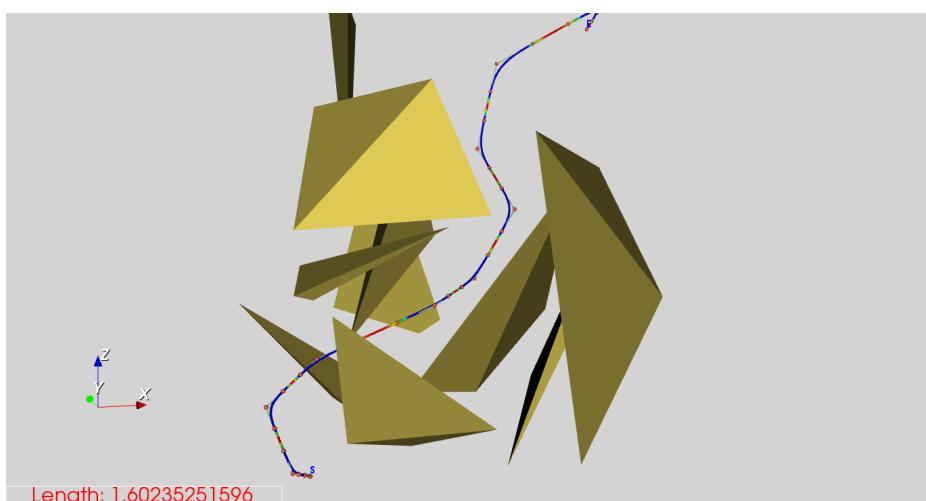
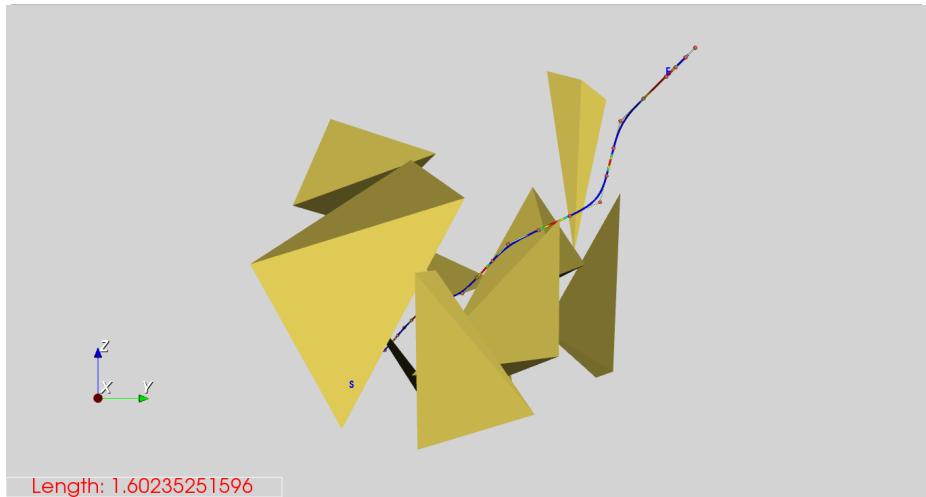


Figure 37.: Test 9; Scene 1; $s \rightarrow e$ $[0.2,0.2,0.2] \rightarrow [0.9,0.9,0.9]$; Deg. 4; Meth. A; Post proc. X; Part. U.

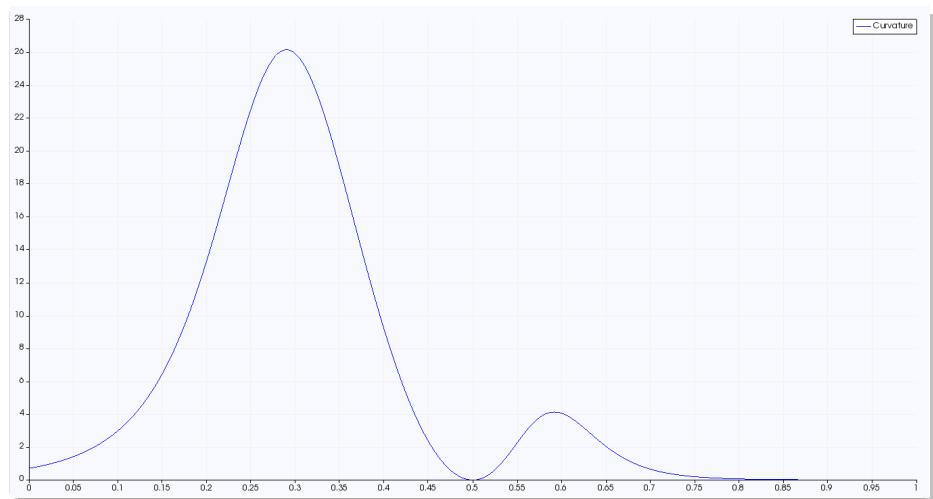
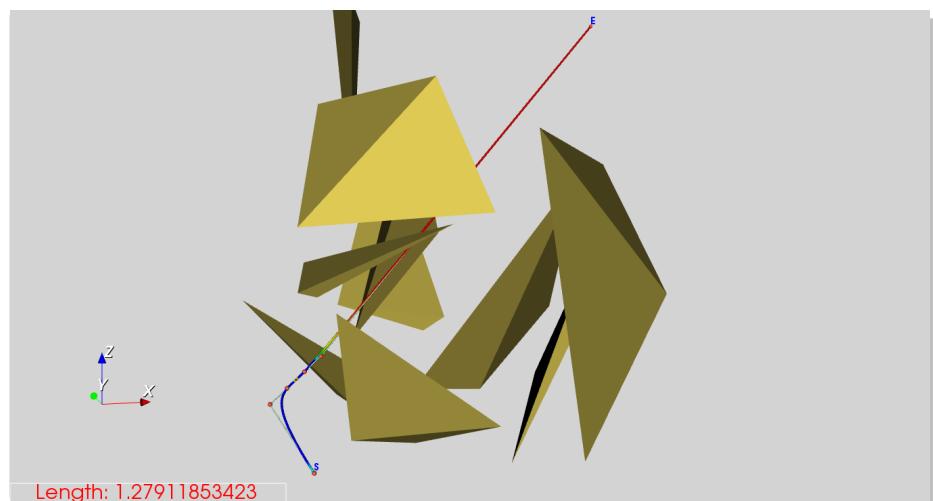
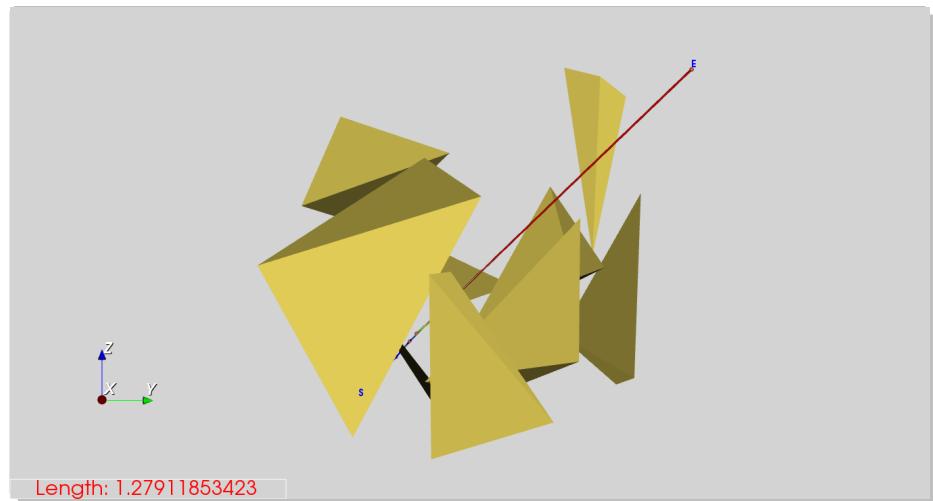


Figure 38.: Test 10; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. A; Post proc. ✓; Part. U.

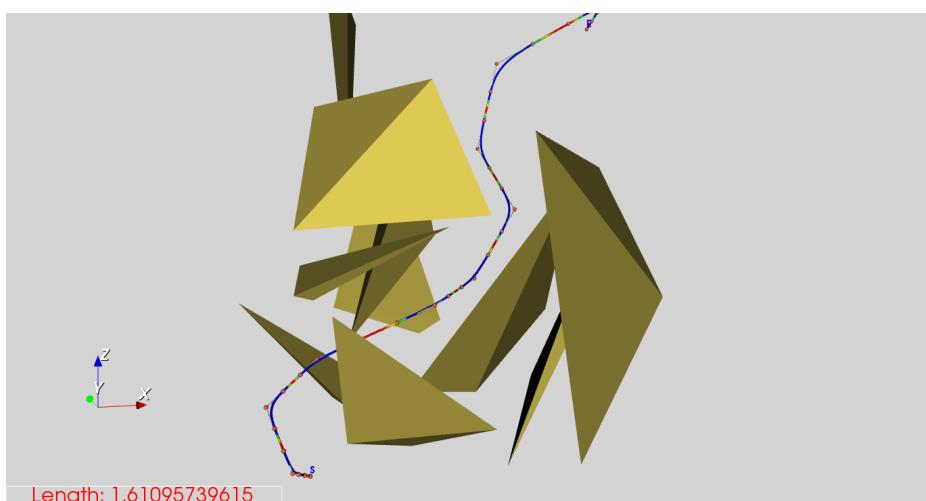
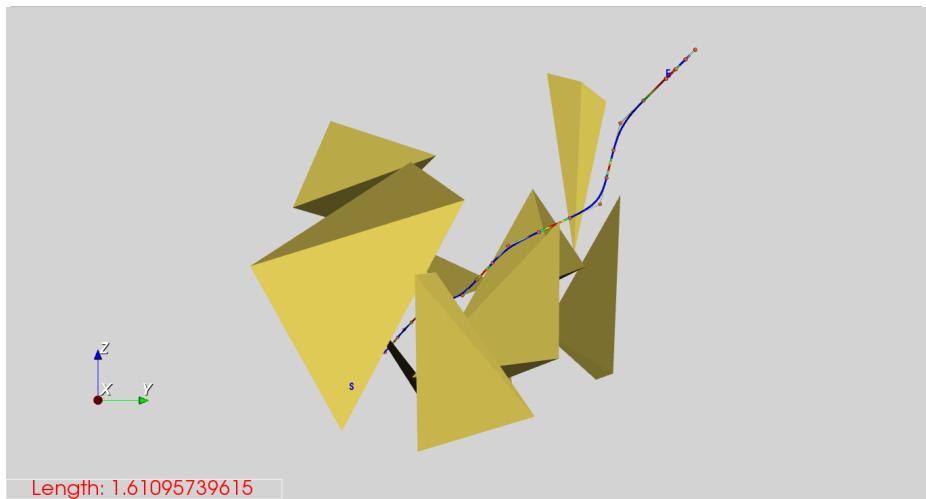


Figure 39.: Test 11; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. A; Post proc. X; Part. A.

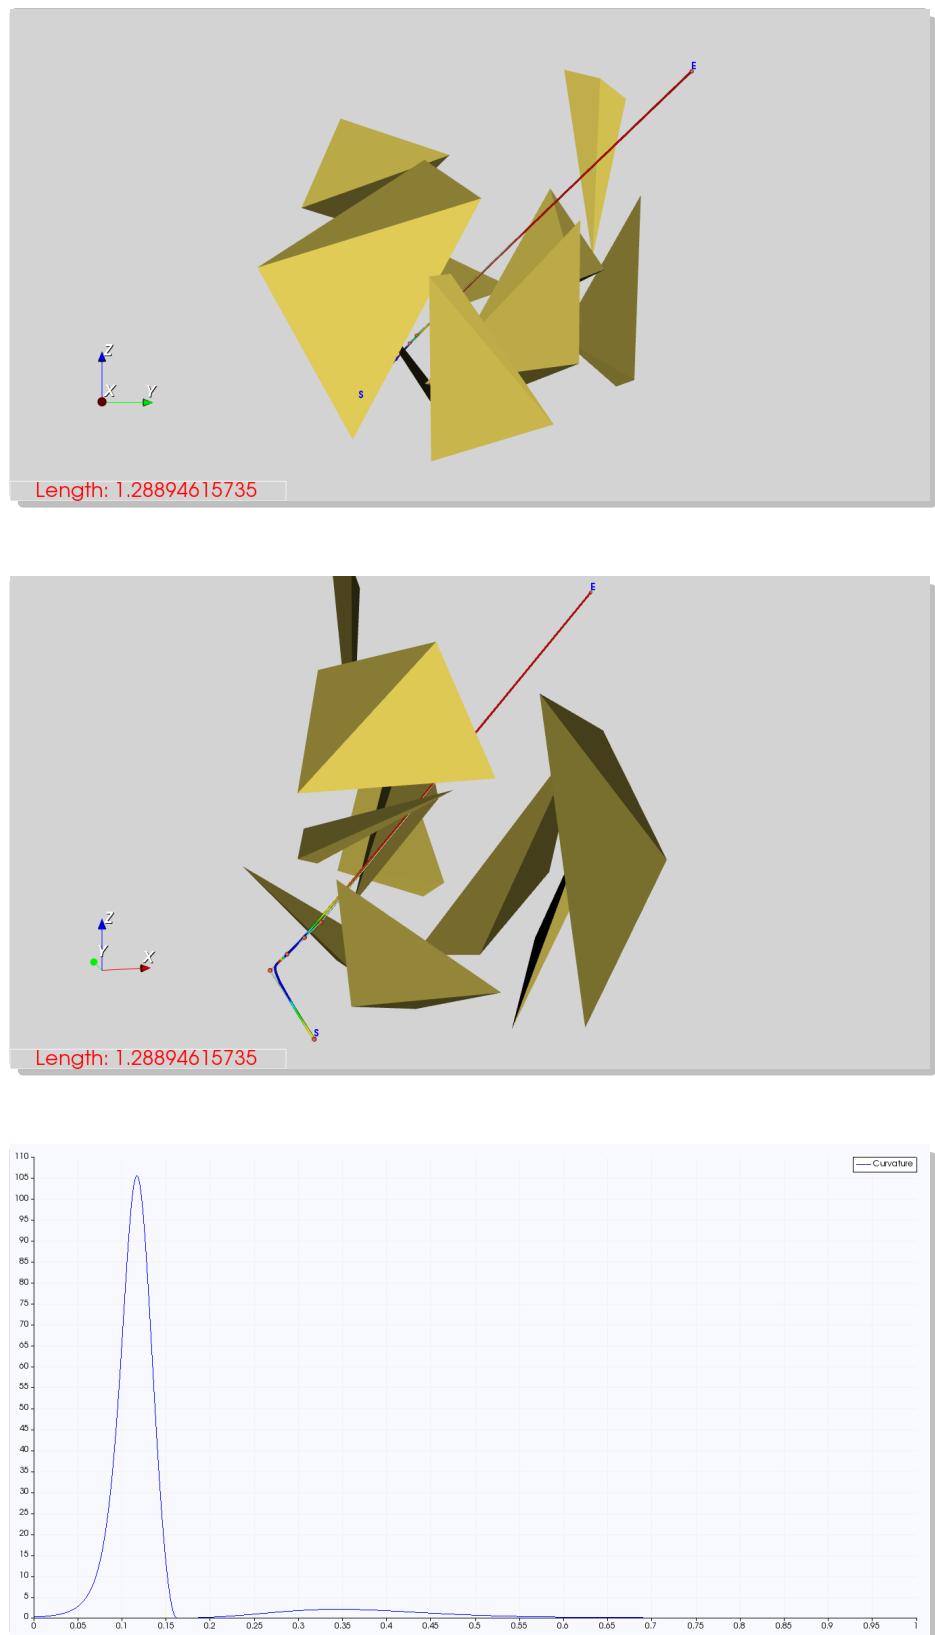


Figure 40.: Test 12; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. A; Post proc. ✓; Part. A.

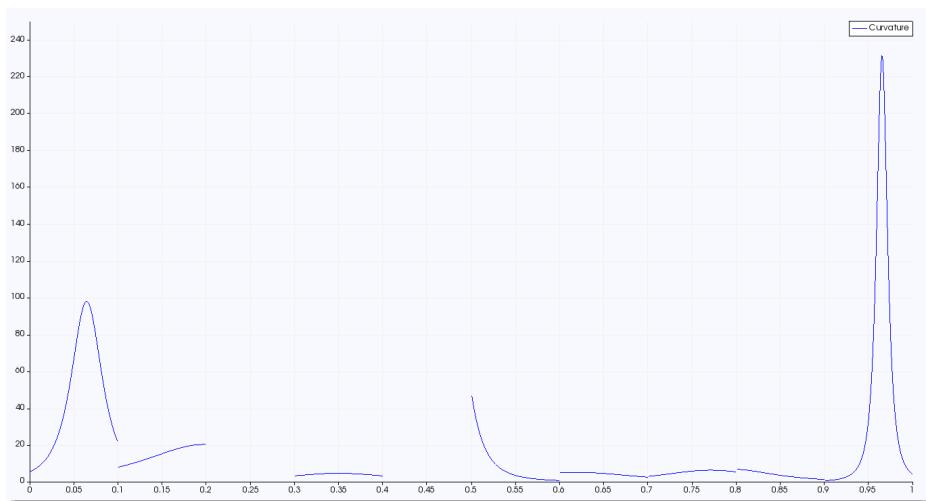
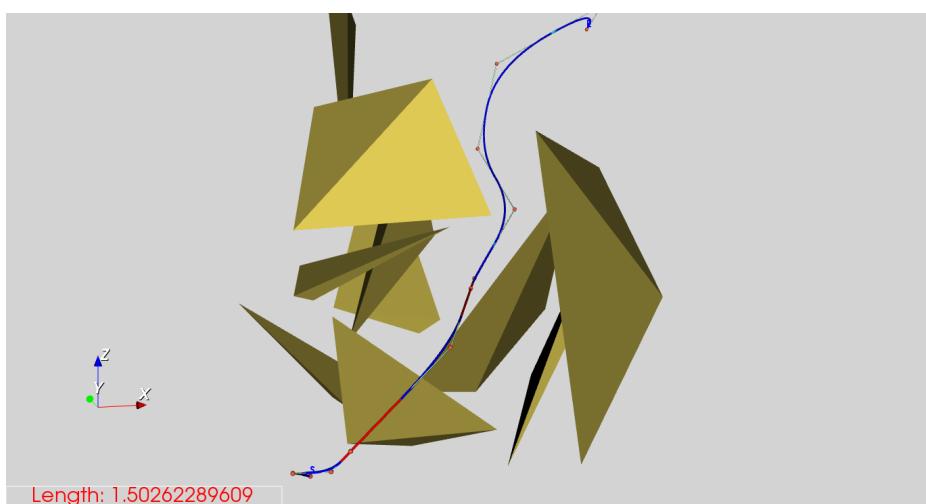
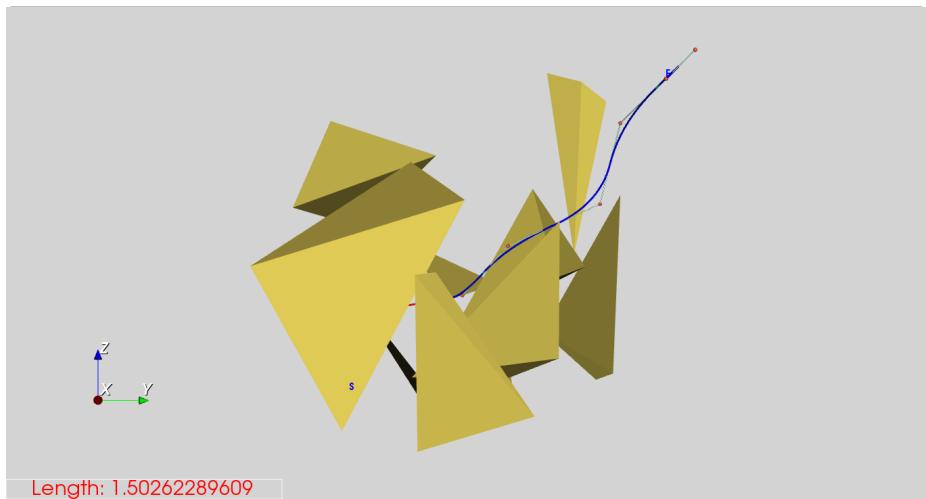


Figure 41.: Test 13; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. B; Post proc. X; Part. U.

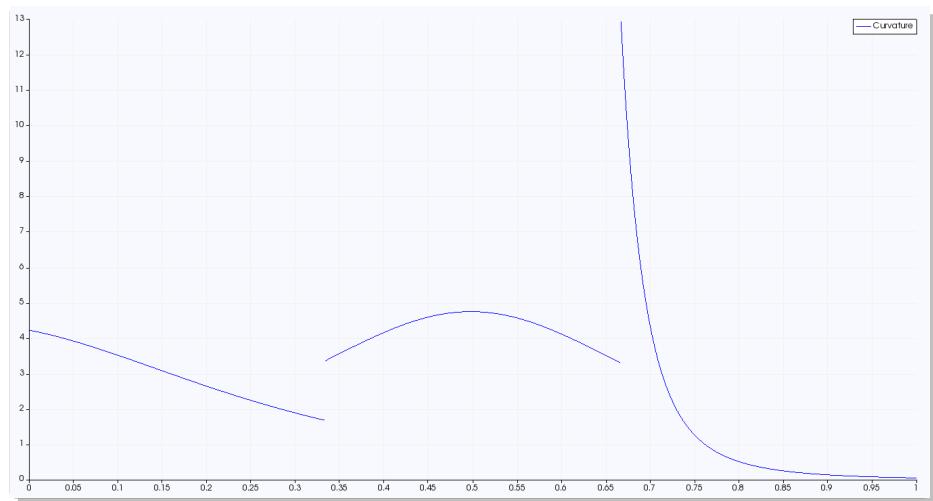
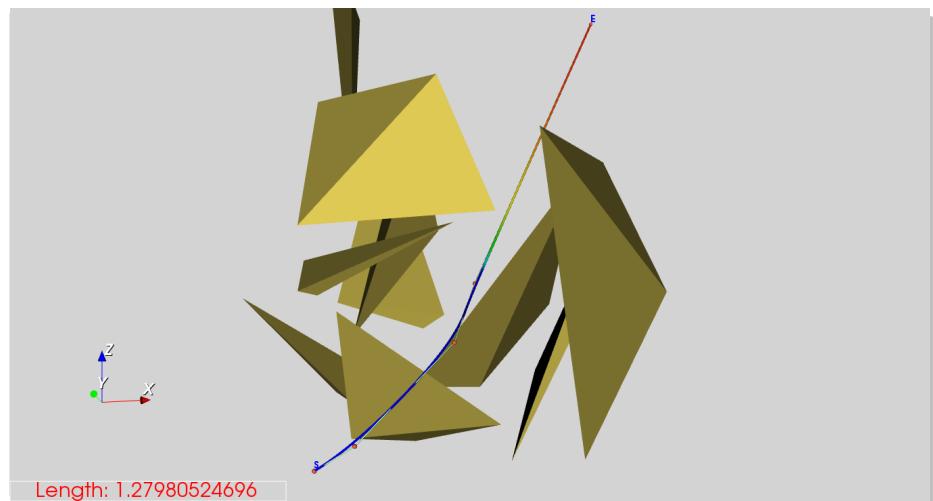
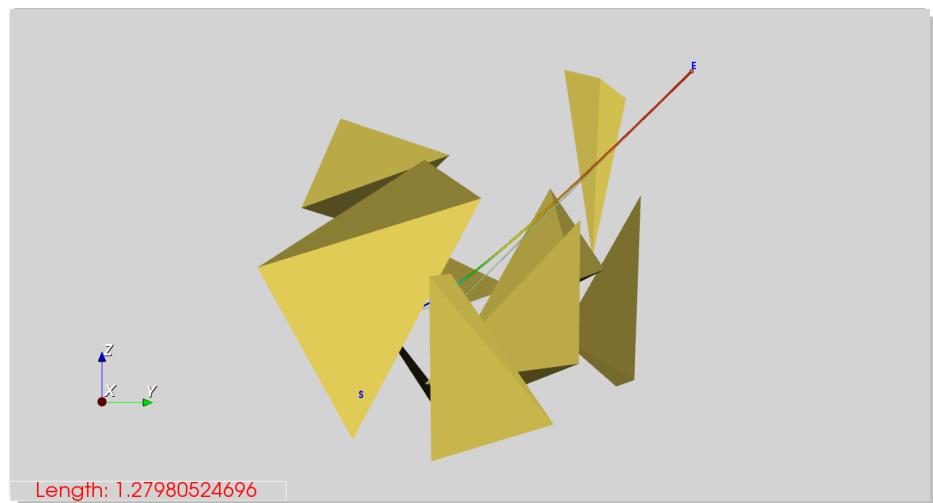


Figure 42.: Test 14; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. B; Post proc. ✓; Part. U.

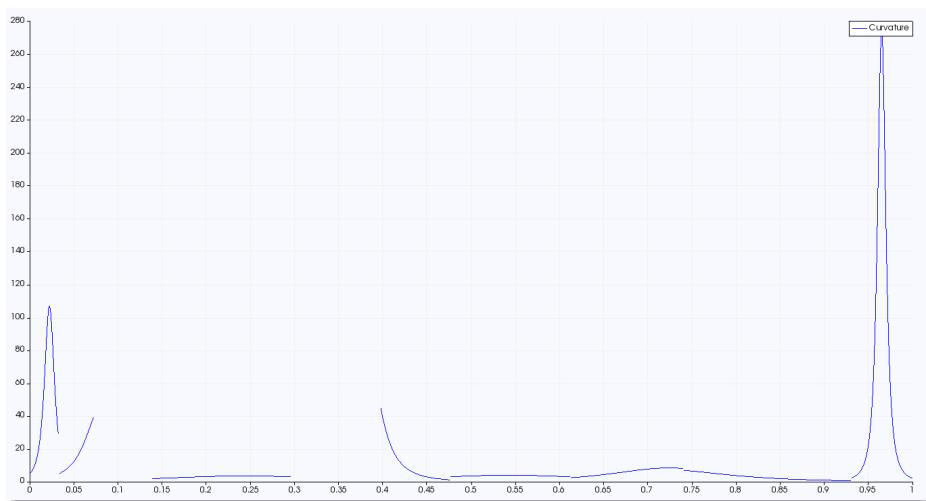
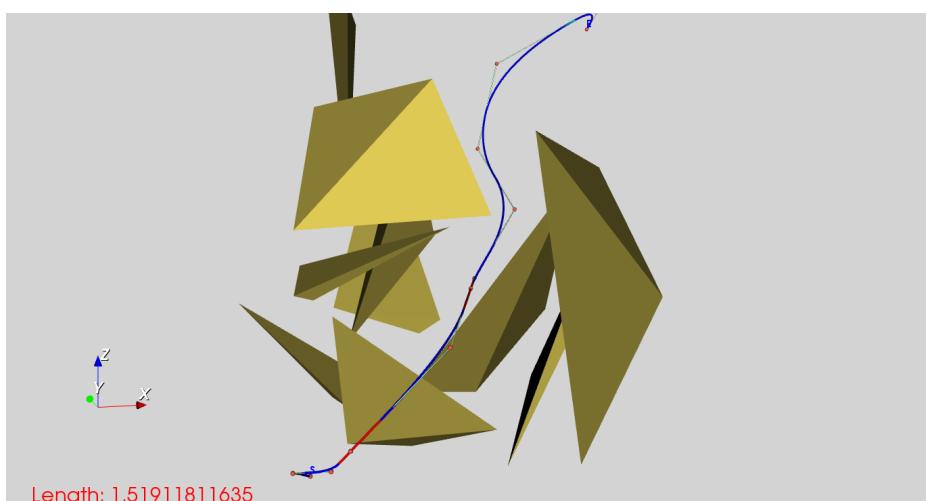
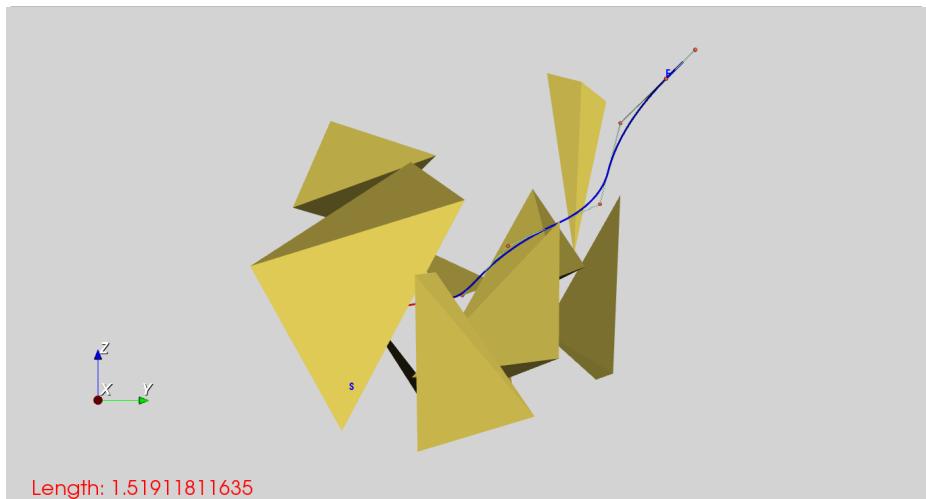


Figure 43.: Test 15; Scene 1; $\mathbf{s} \rightarrow \mathbf{e}$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. B; Post proc. X; Part. A.

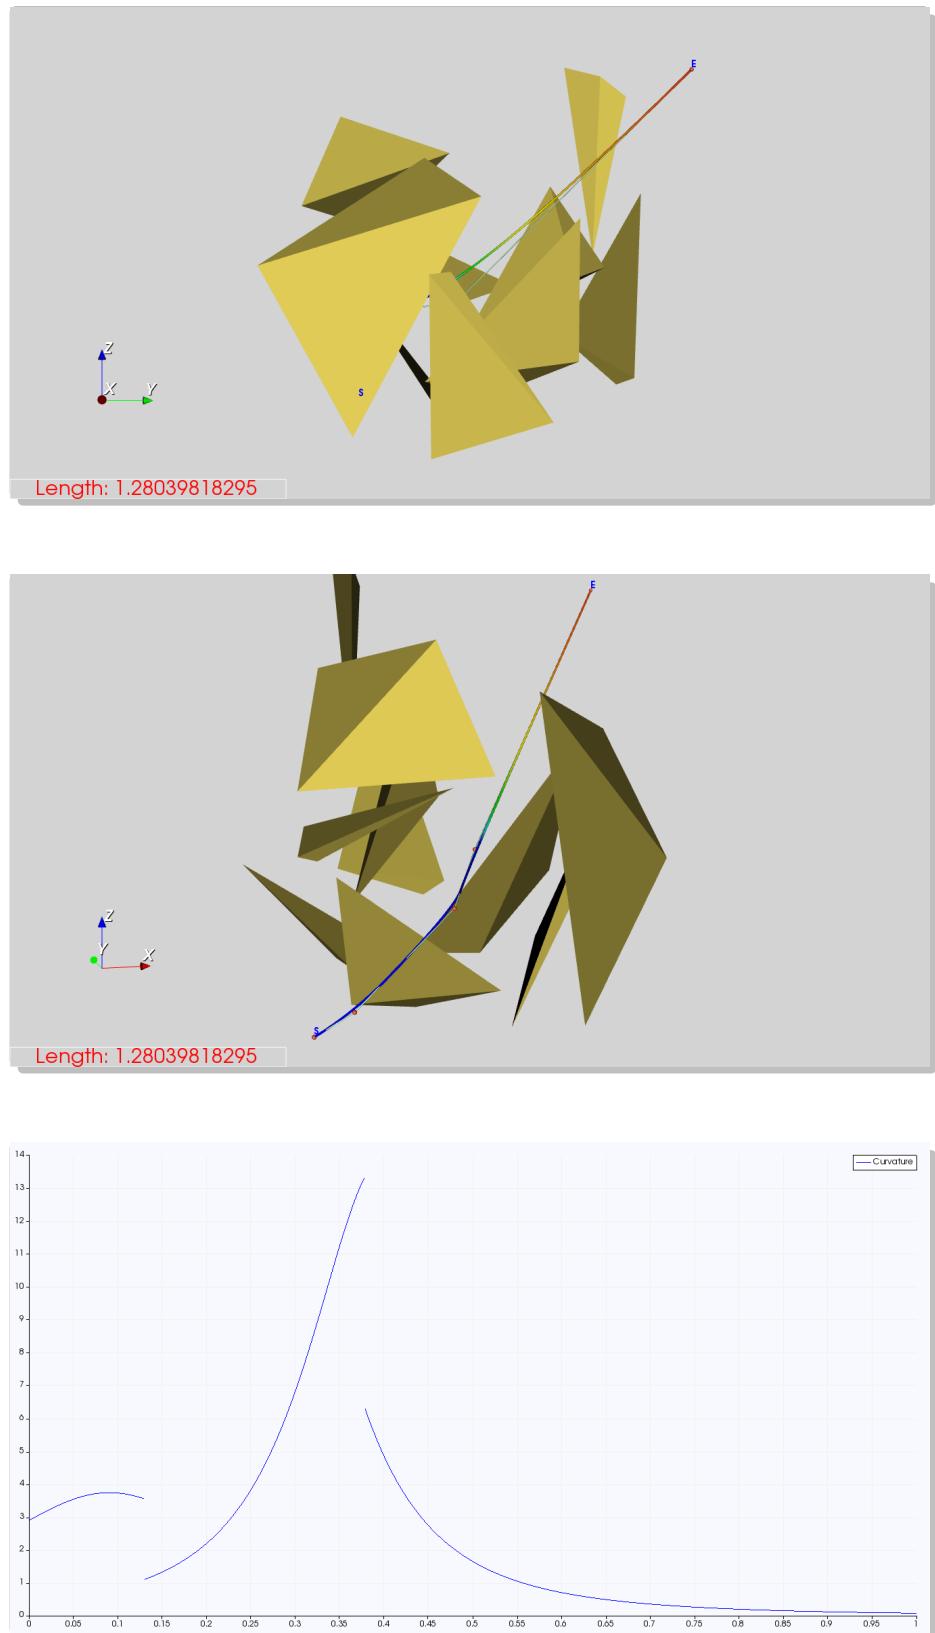


Figure 44.: Test 16; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. B; Post proc. ✓; Part. A.

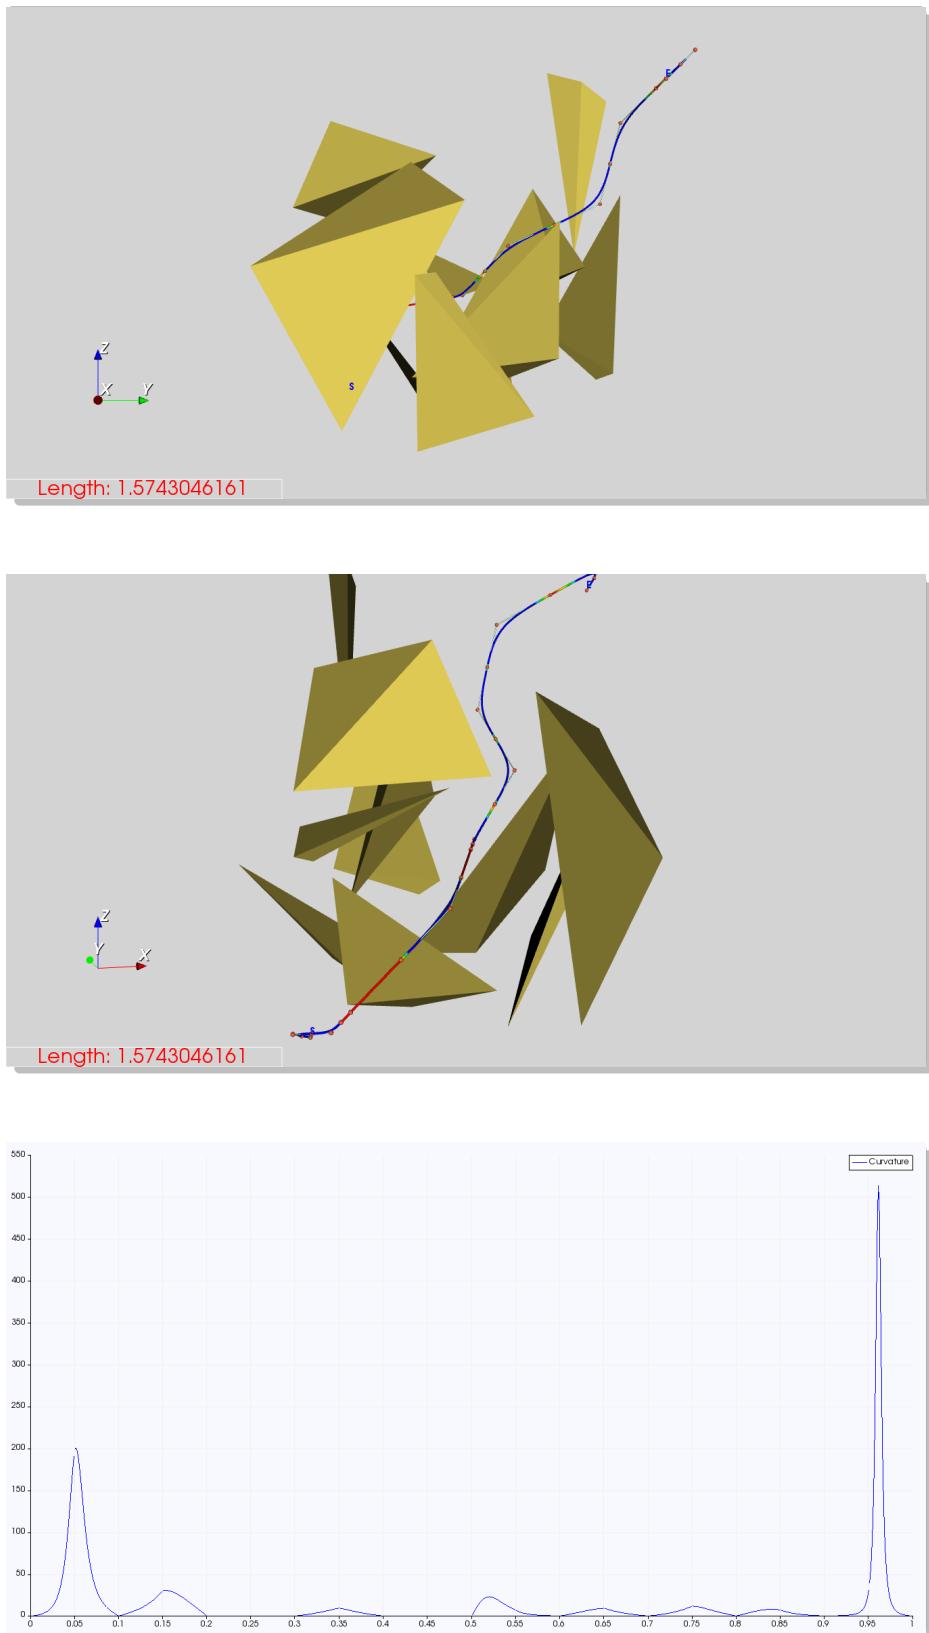


Figure 45.: Test 17; Scene 1; $s \rightarrow e [0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. B; Post proc. X; Part. U.

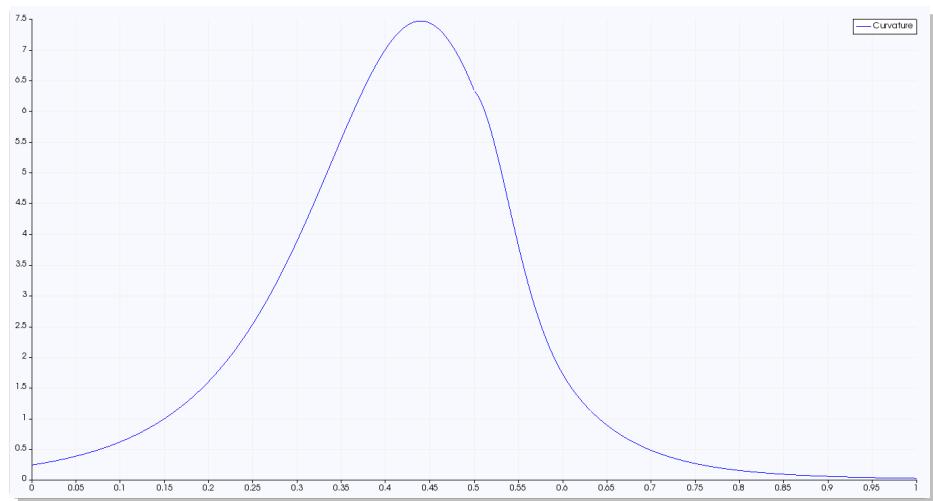
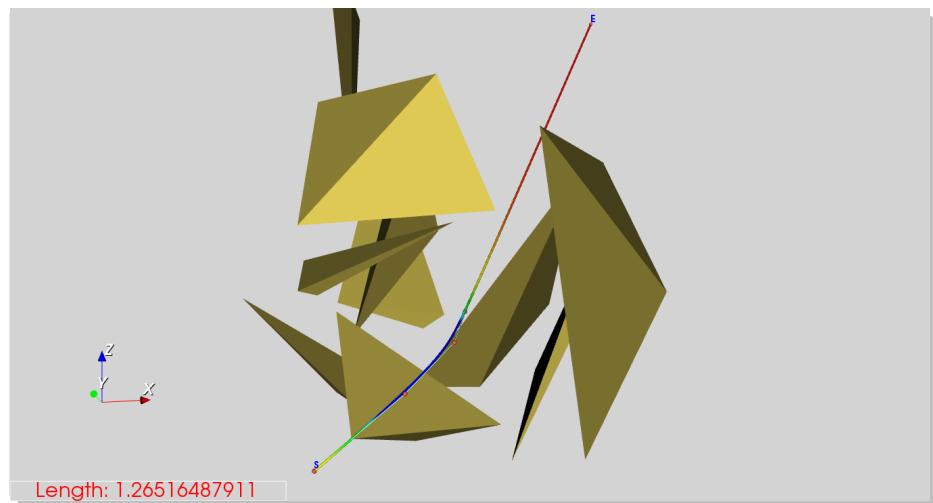
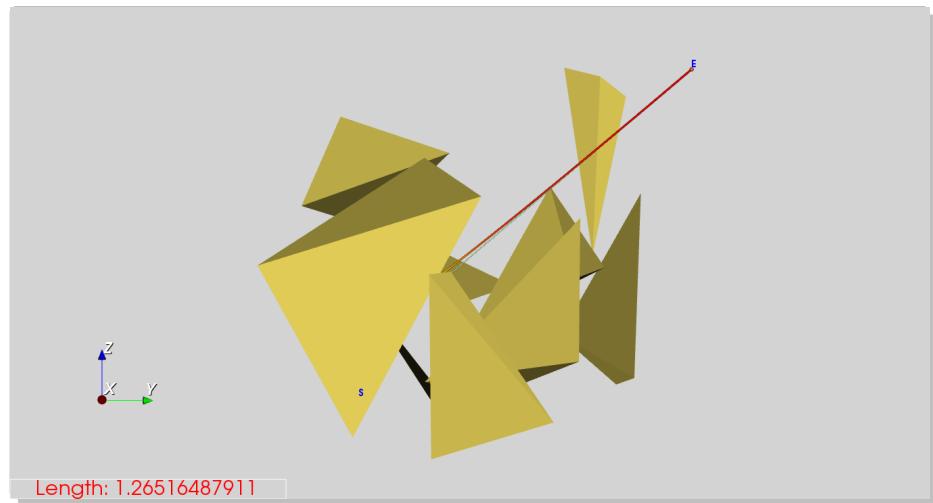


Figure 46.: Test 18; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. B; Post proc. ✓; Part. U.

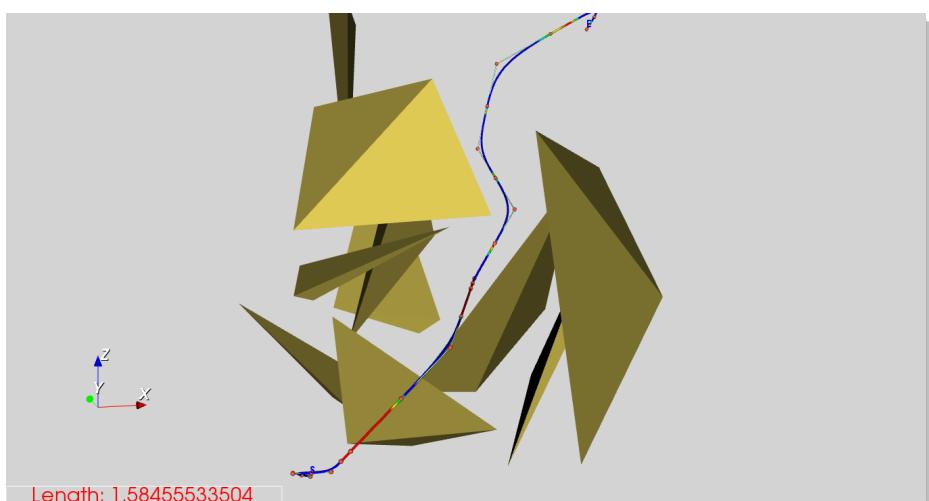
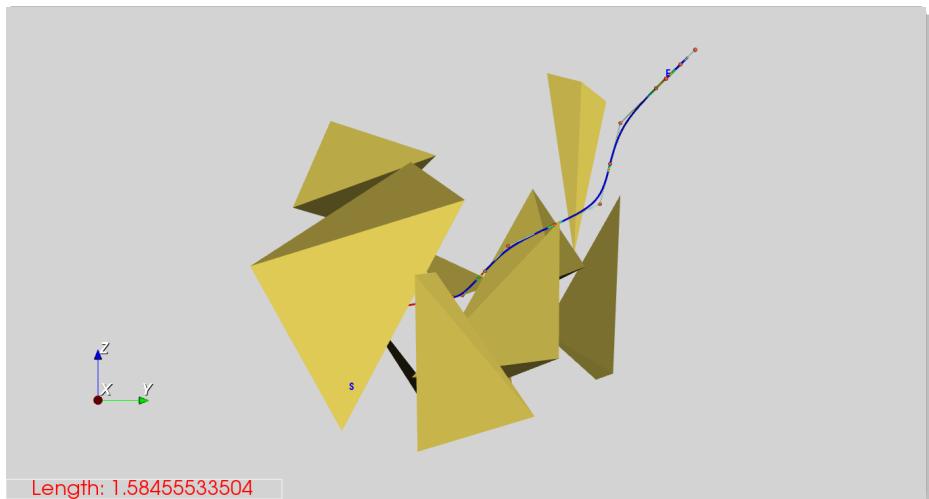


Figure 47.: Test 19; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. B; Post proc. X; Part. A.

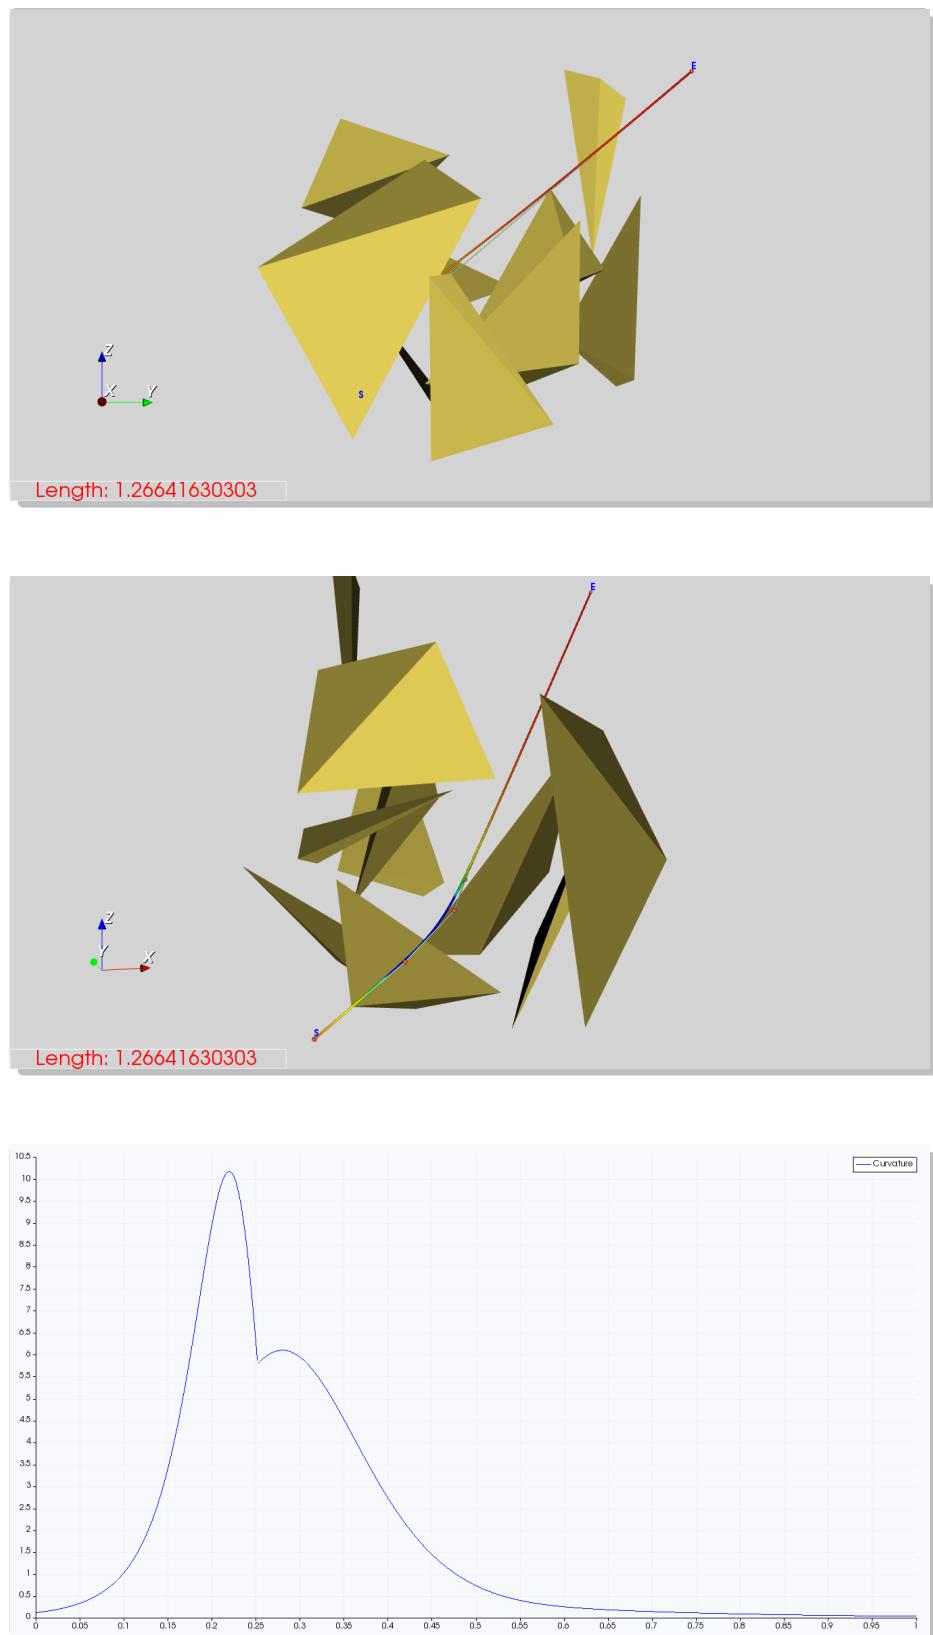


Figure 48.: Test 20; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. B; Post proc. ✓; Part. A.

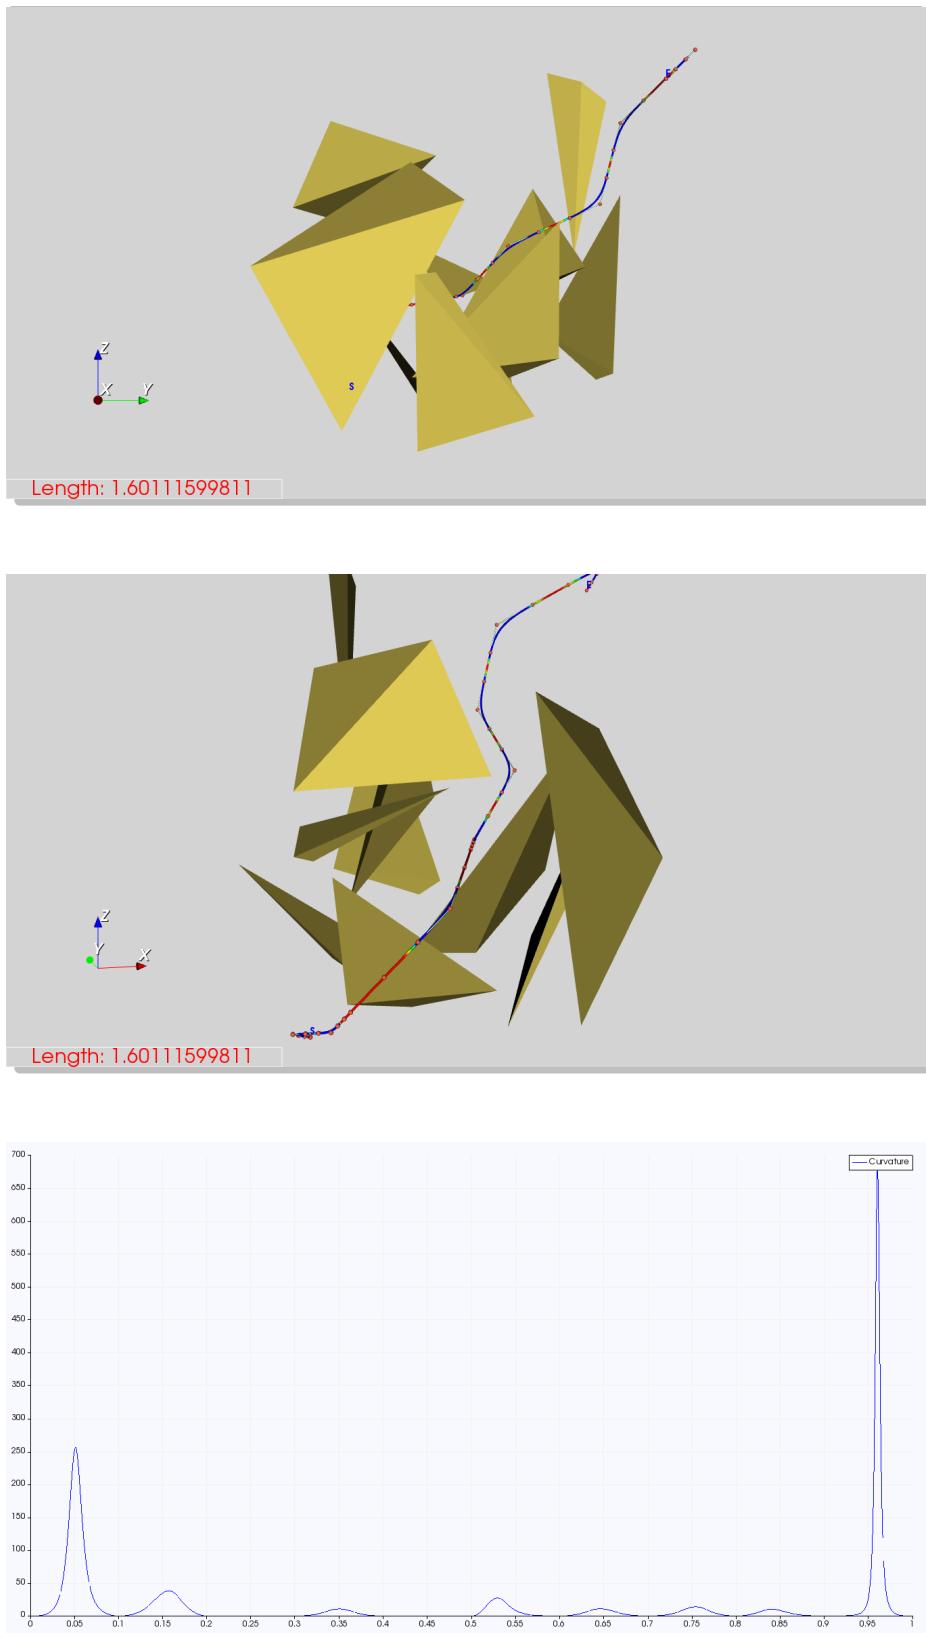


Figure 49.: Test 21; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. B; Post proc. X; Part. U.

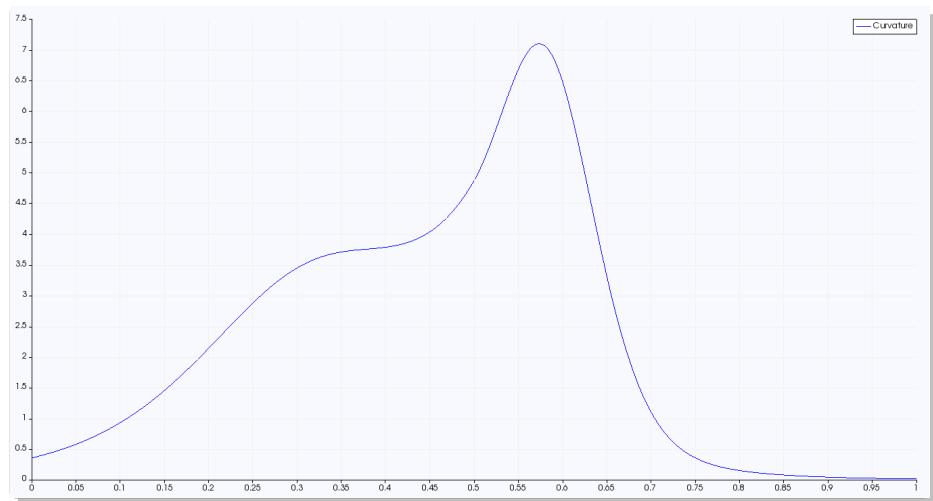
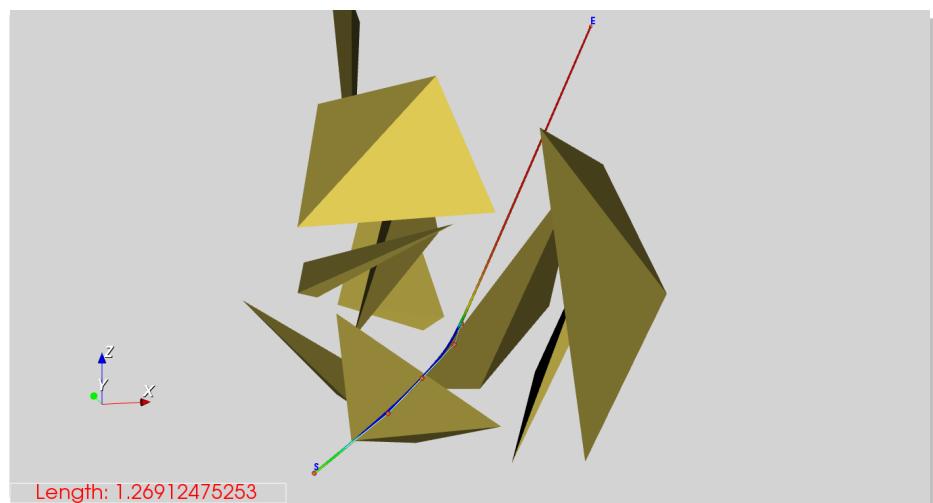
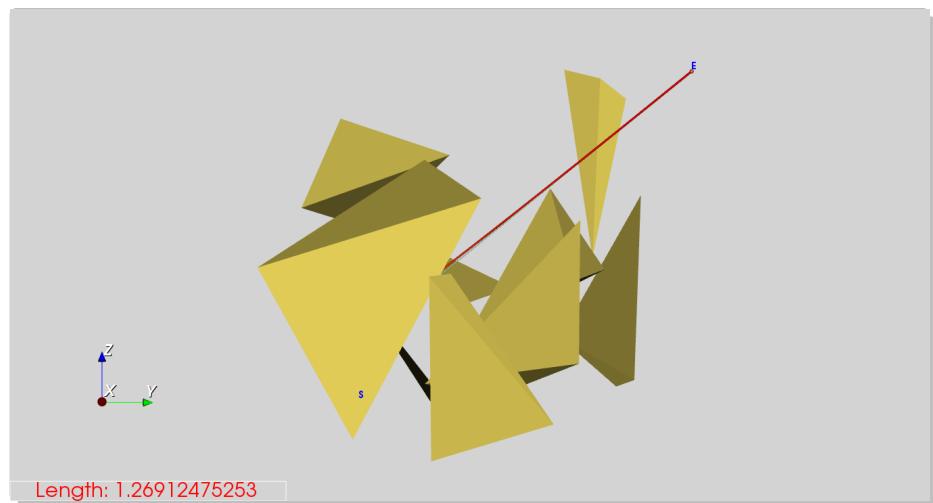


Figure 50.: Test 22; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. B; Post proc. ✓; Part. U.

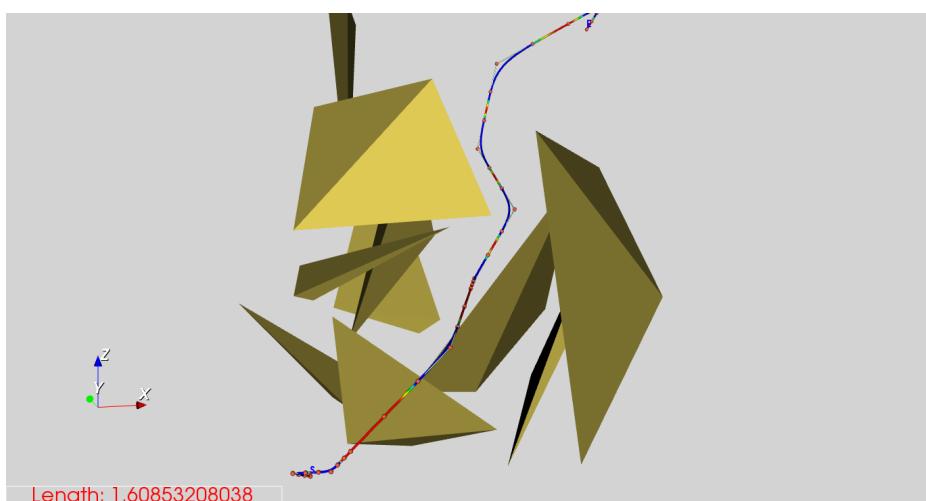
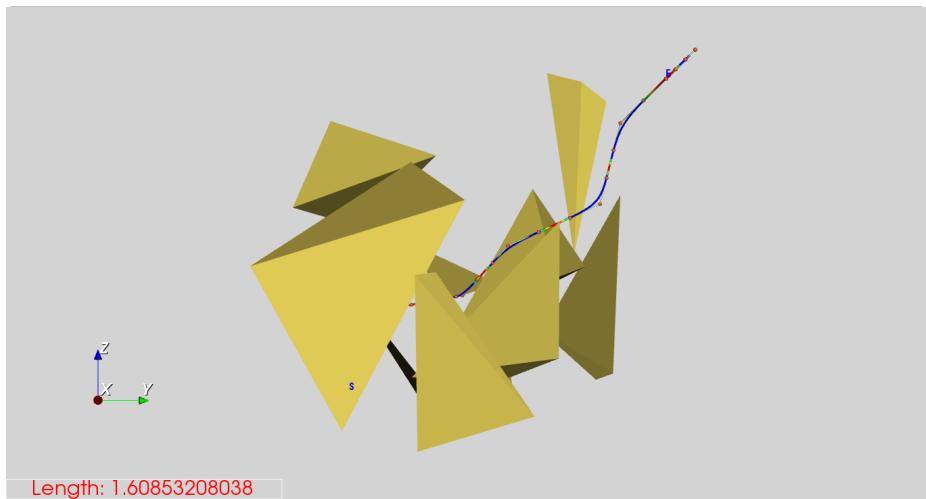


Figure 51.: Test 23; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. B; Post proc. X; Part. A.

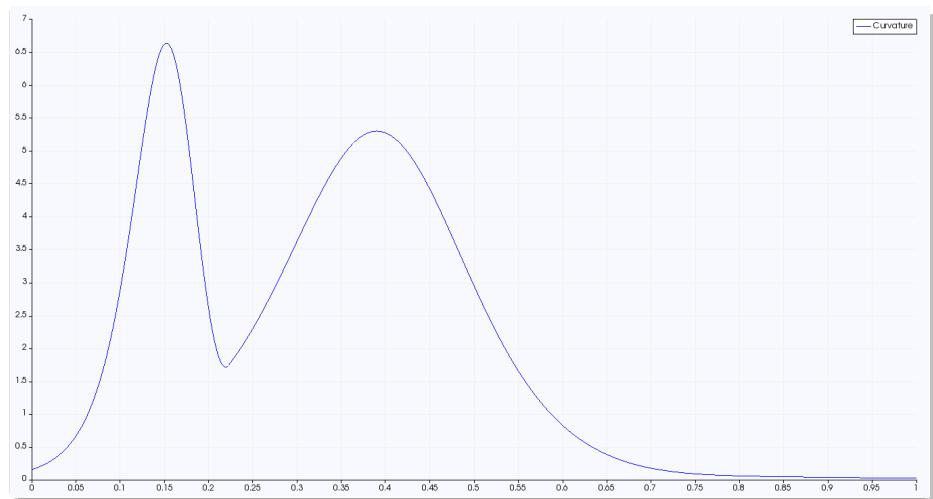
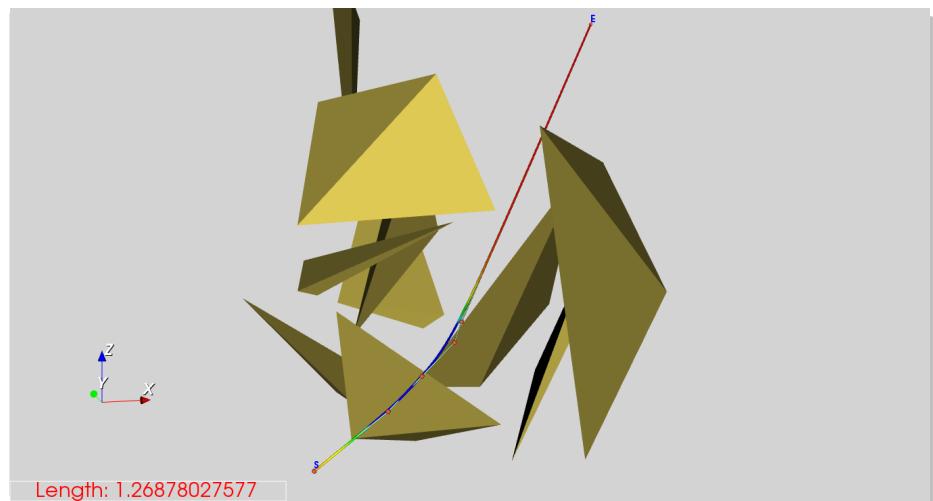
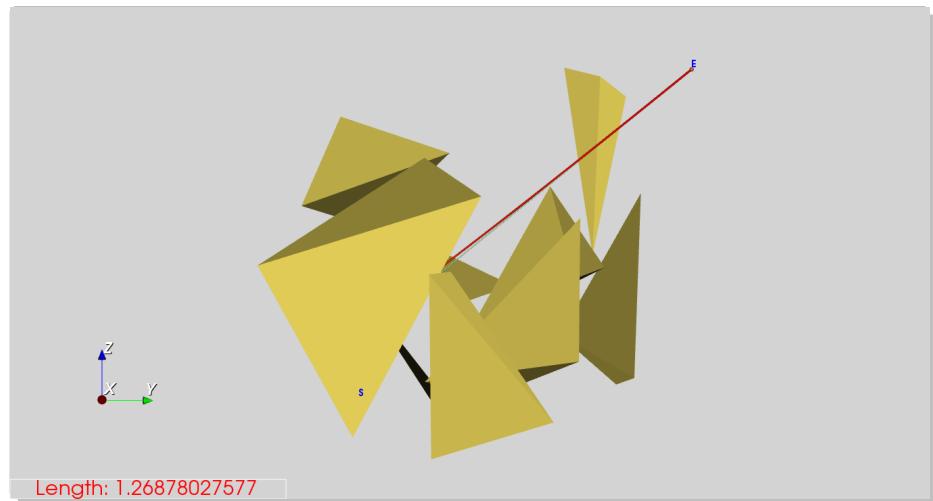


Figure 52.: Test 24; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. B; Post proc. ✓; Part. A.

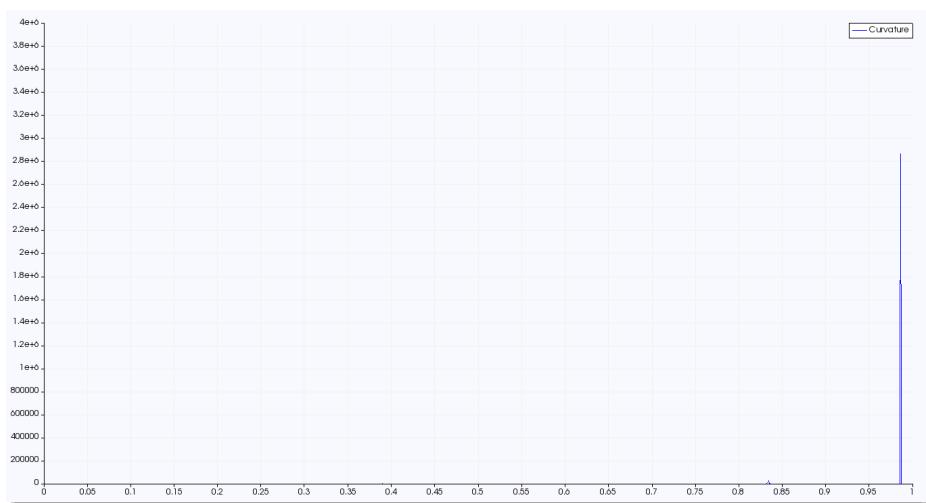
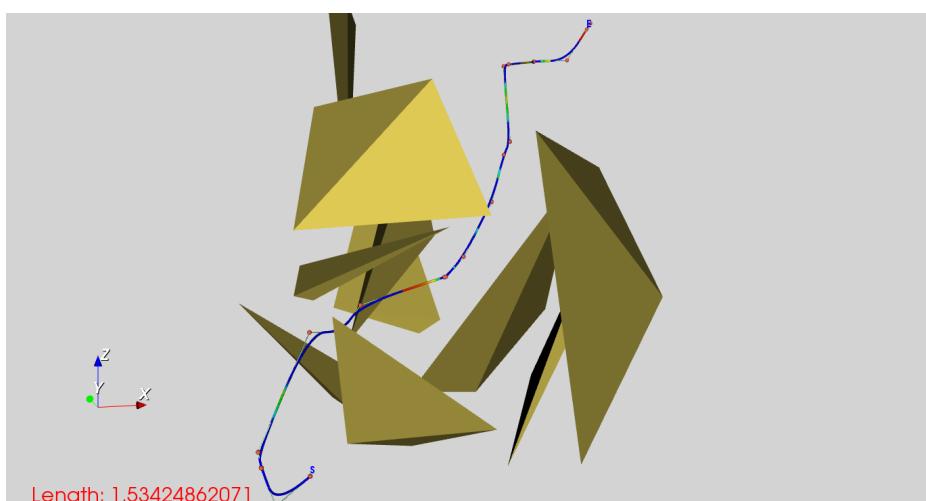
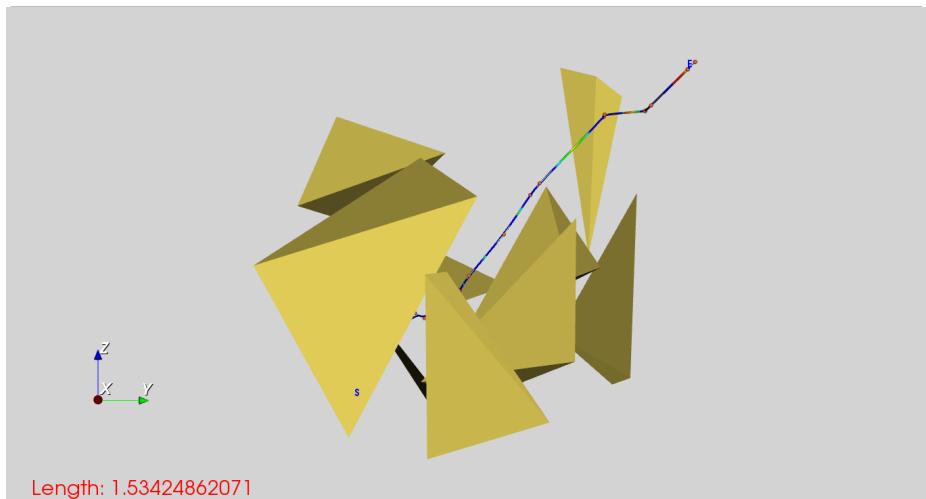


Figure 53.: Test 25; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. B; Post proc. X; Part. U.

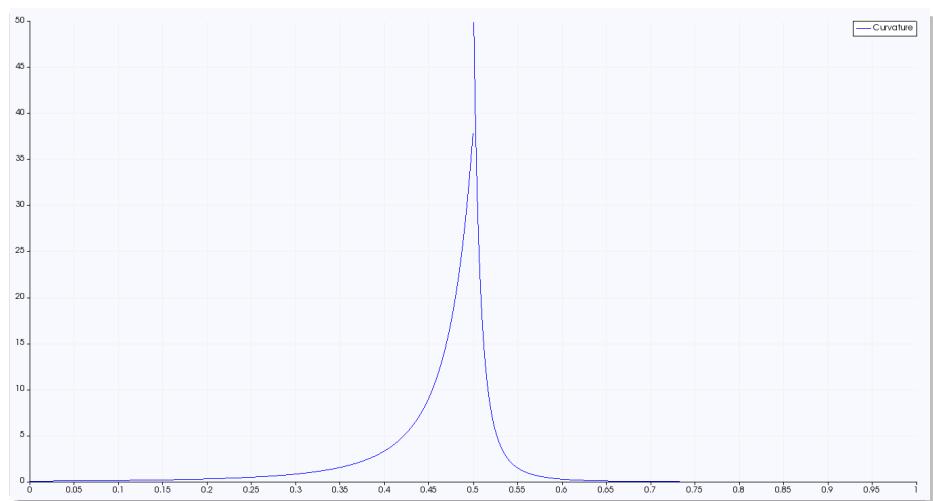
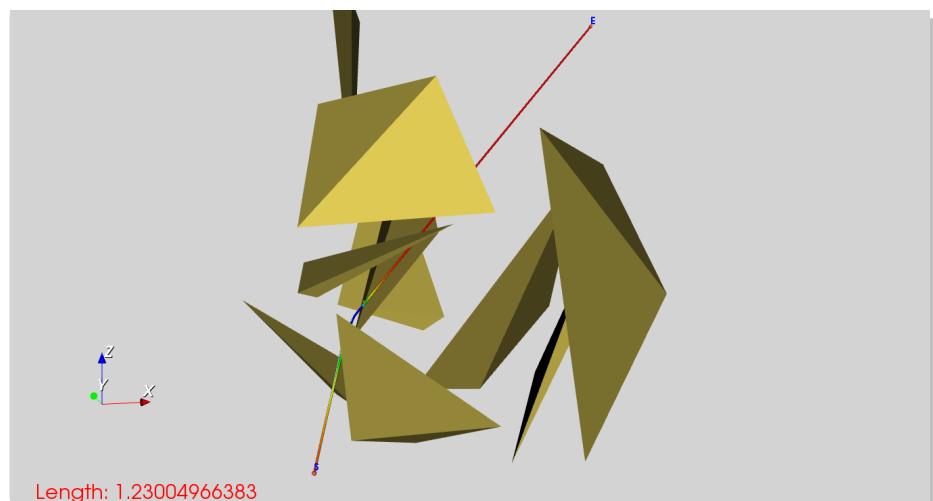
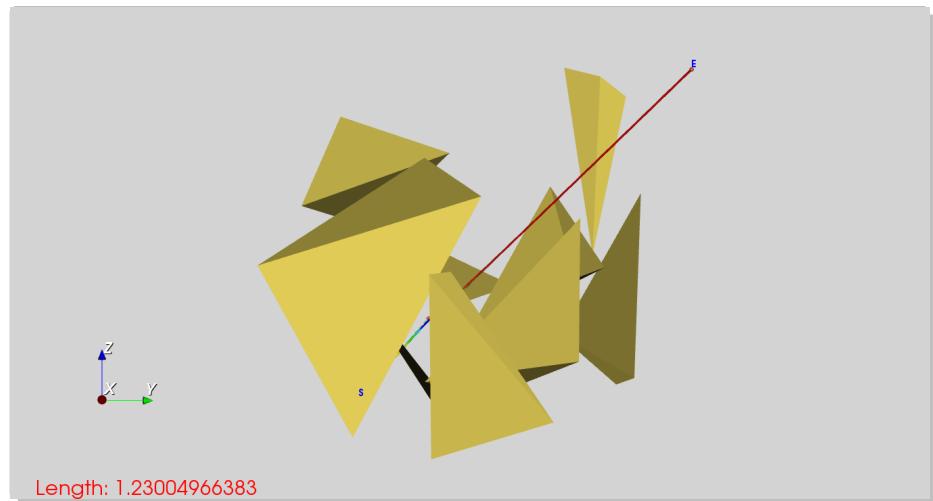


Figure 54.: Test 26; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. B; Post proc. ✓; Part. U.

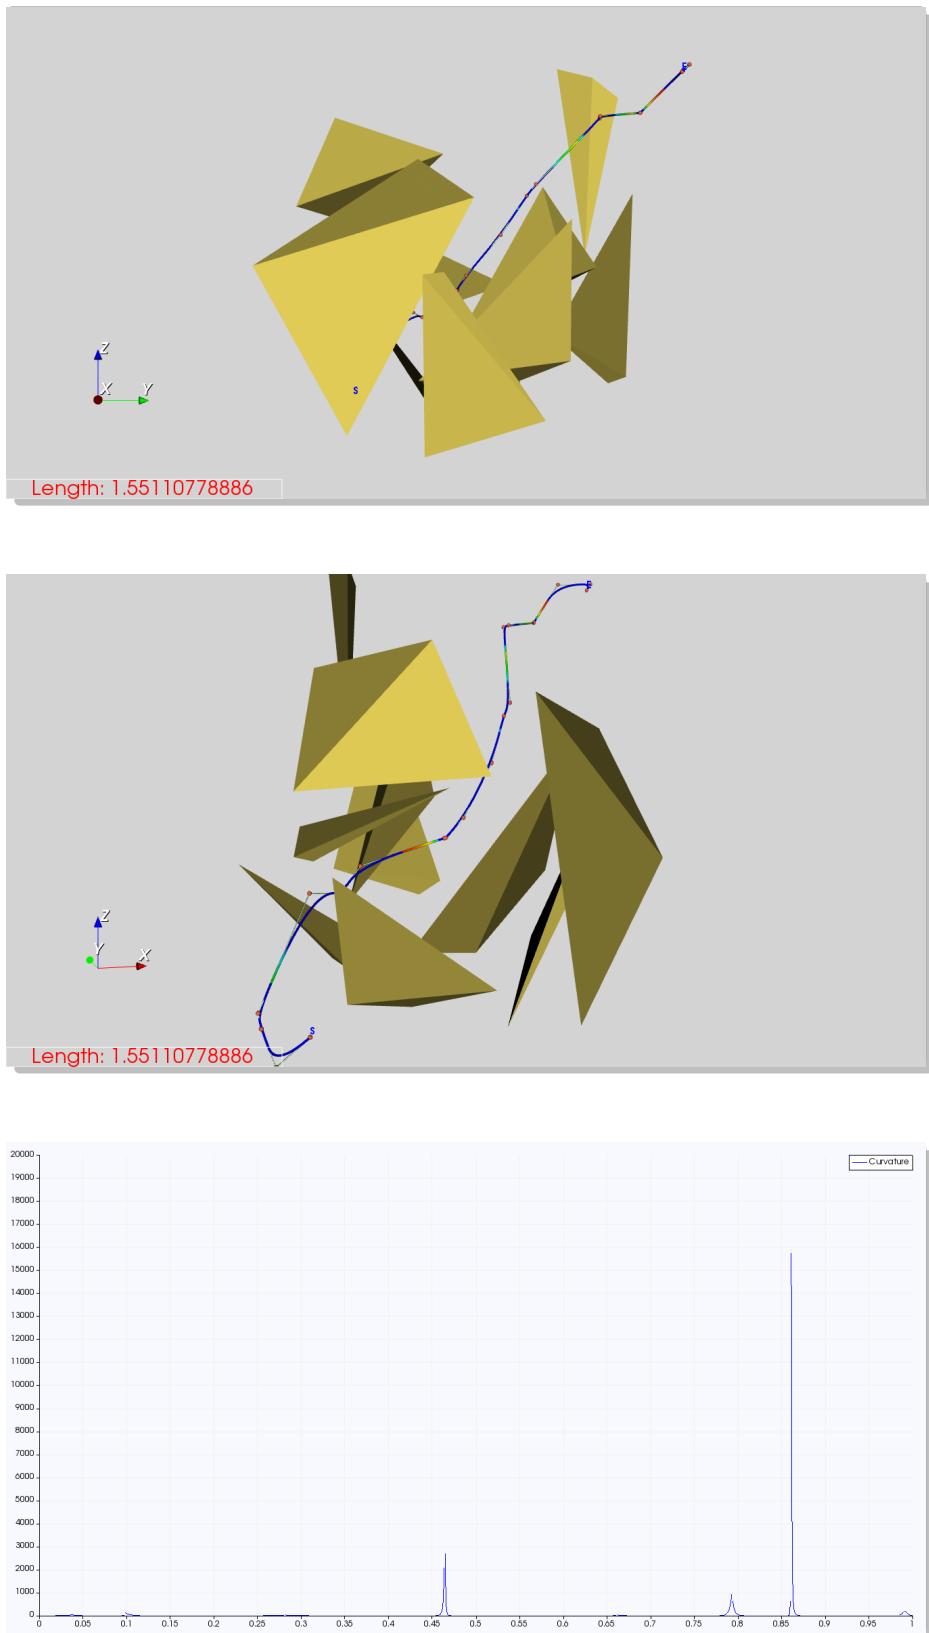


Figure 55.: Test 27; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. B; Post proc. X; Part. A.

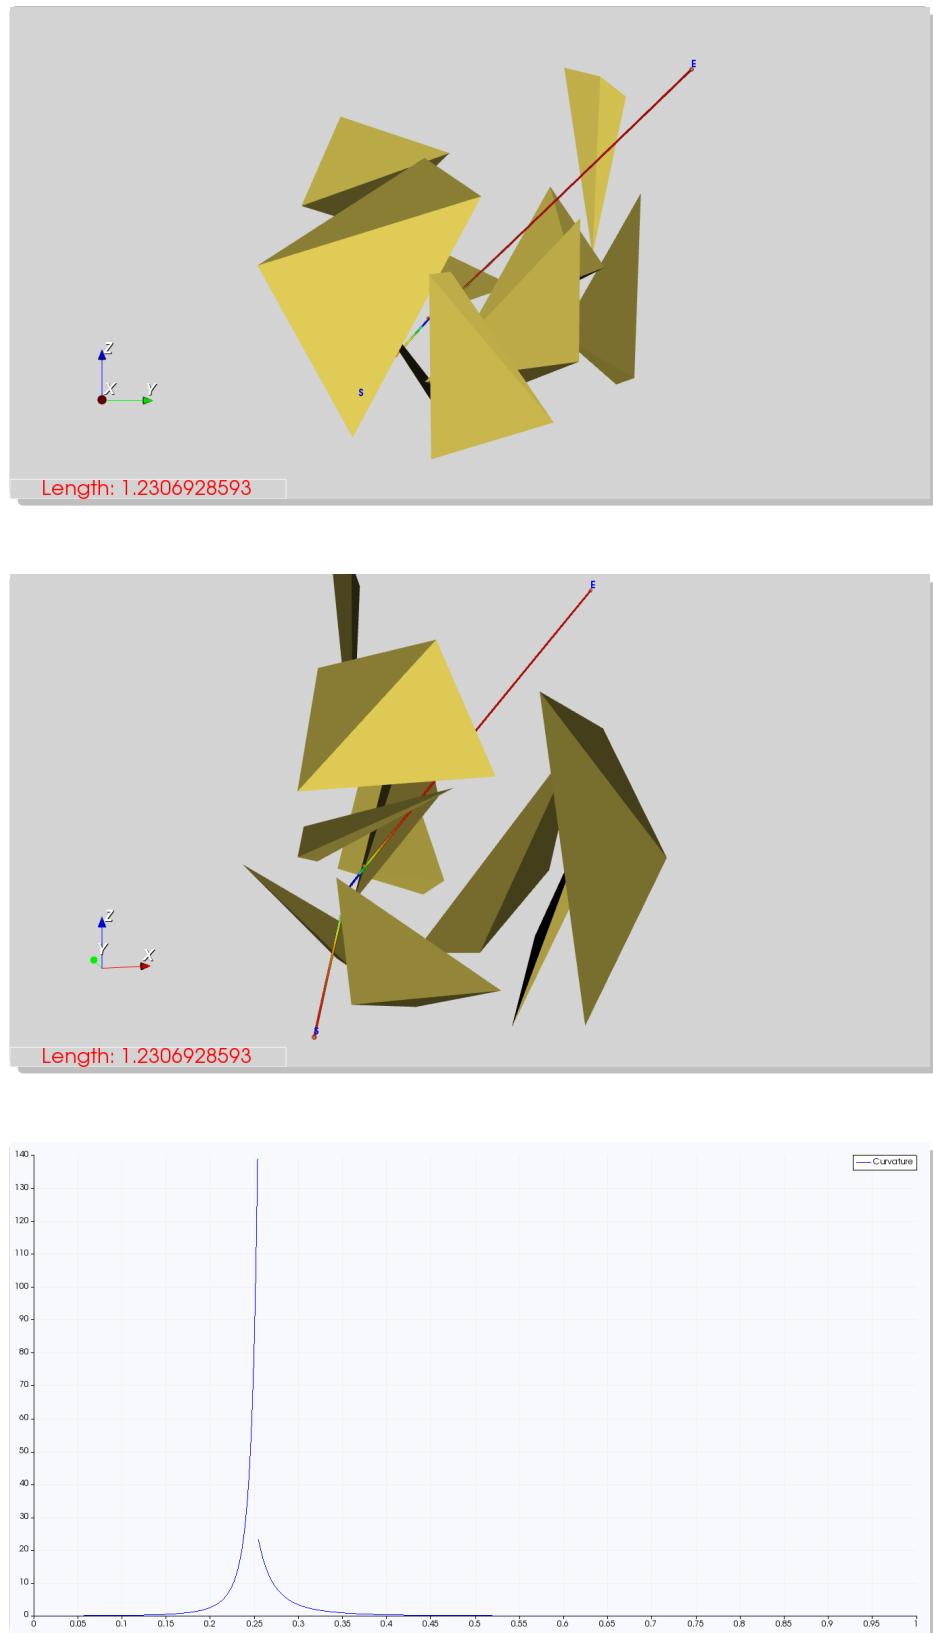


Figure 56.: Test 28; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. B; Post proc. ✓; Part. A.

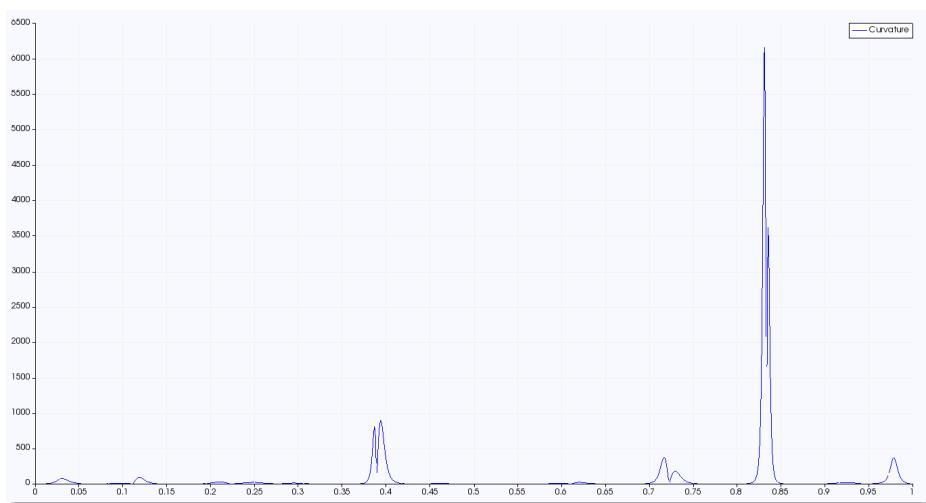
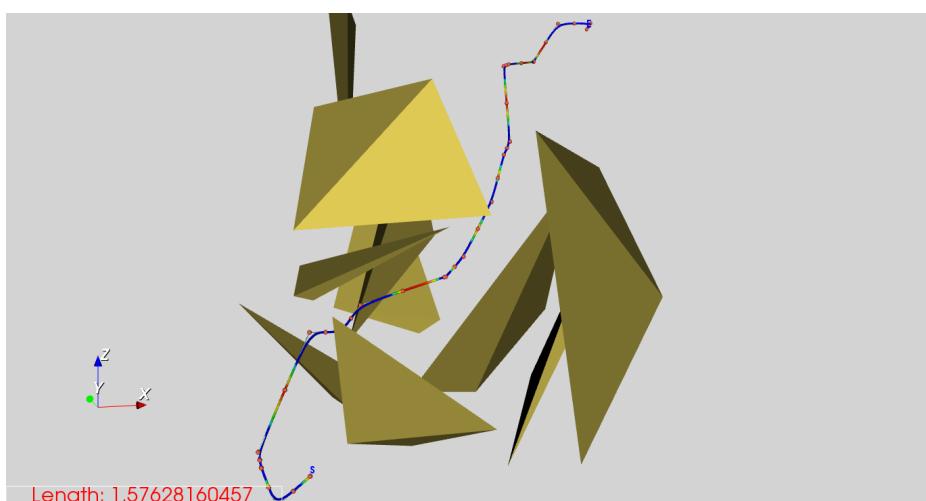
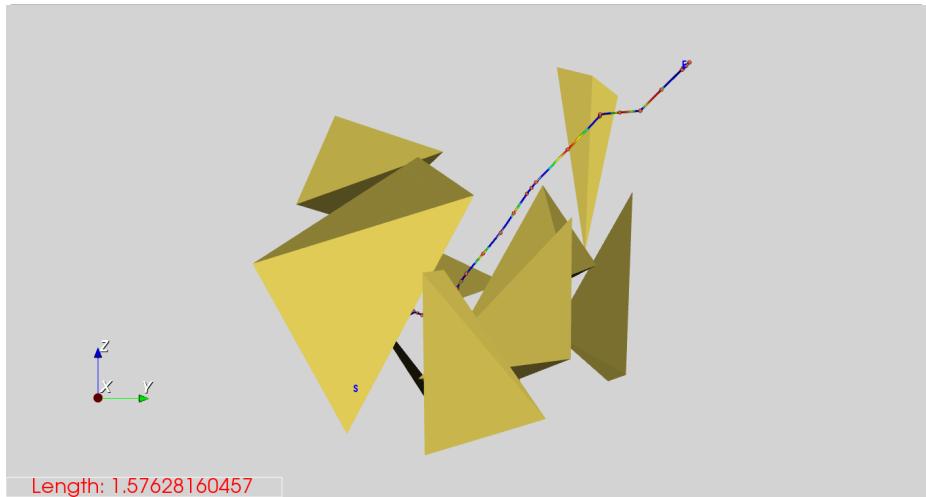


Figure 57.: Test 29; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. B; Post proc. X; Part. U.

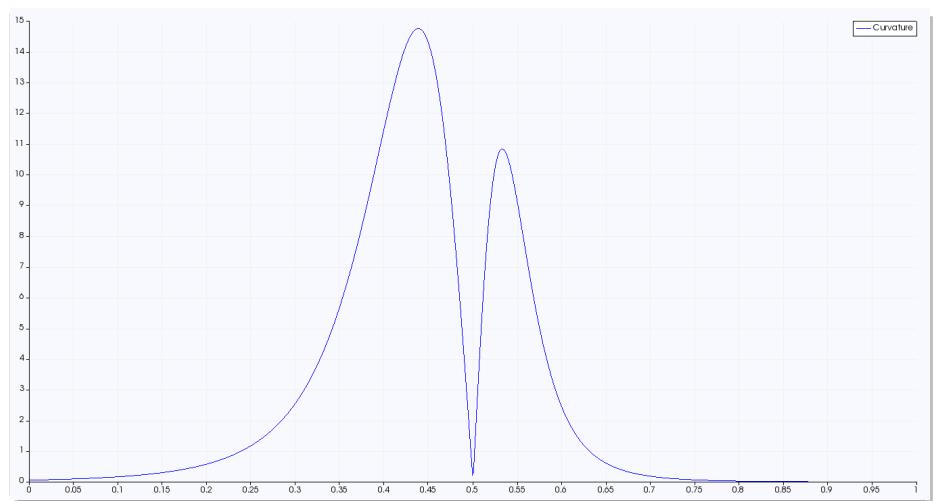
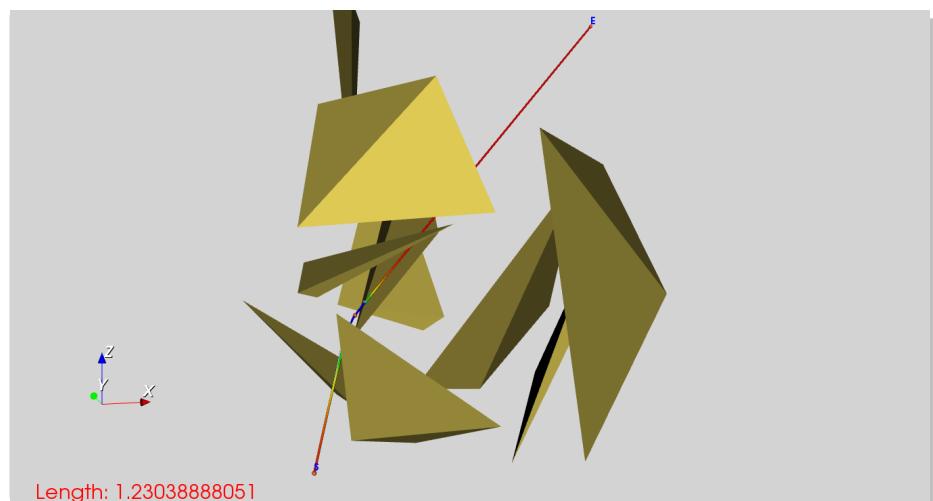
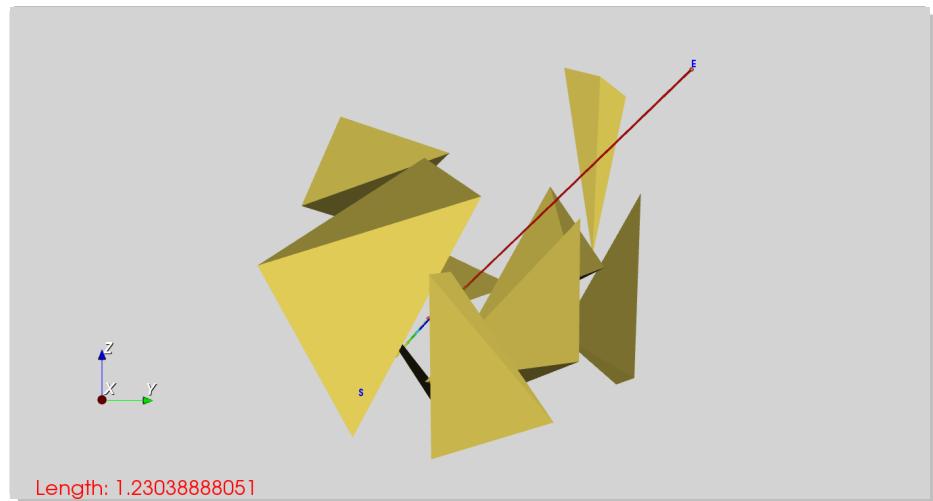


Figure 58.: Test 30; Scene 1b; $s \rightarrow e$ $[0.2,0.2,0.2] \rightarrow [0.9,0.9,0.9]$; Deg. 3; Meth. B; Post proc. ✓; Part. U.

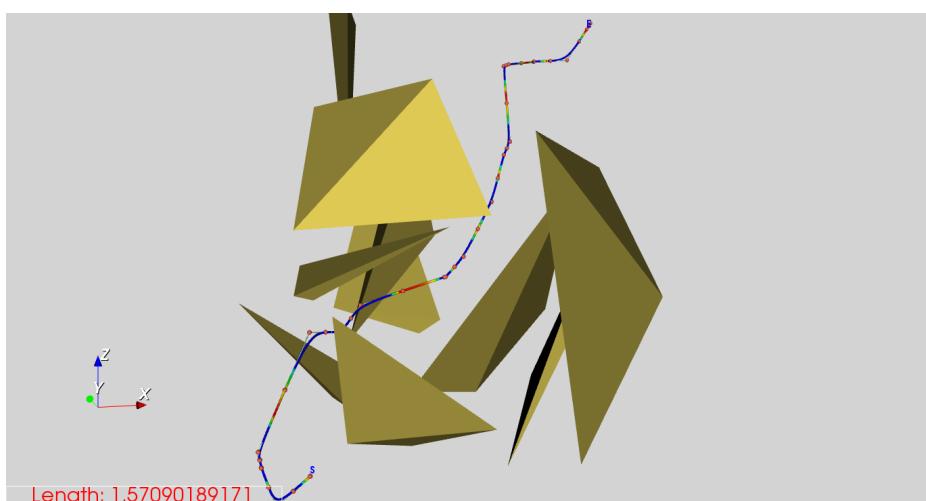
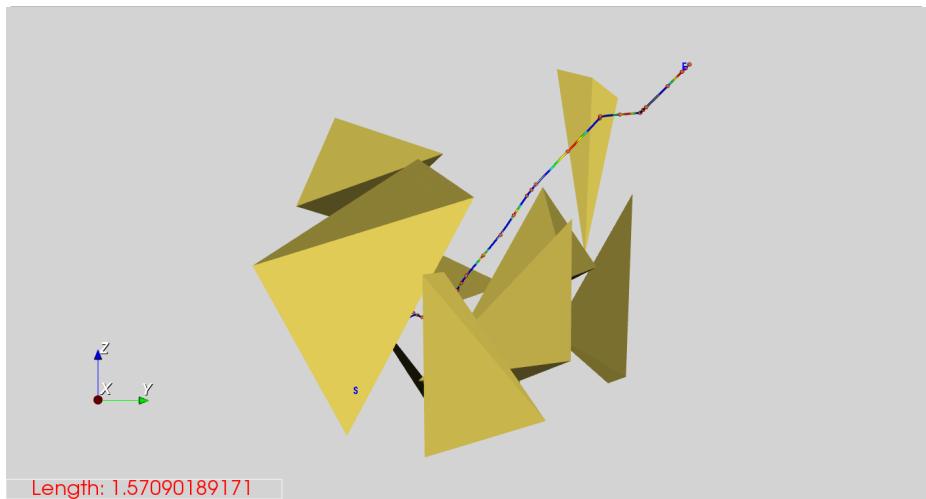


Figure 59.: Test 31; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. B; Post proc. X; Part. A.

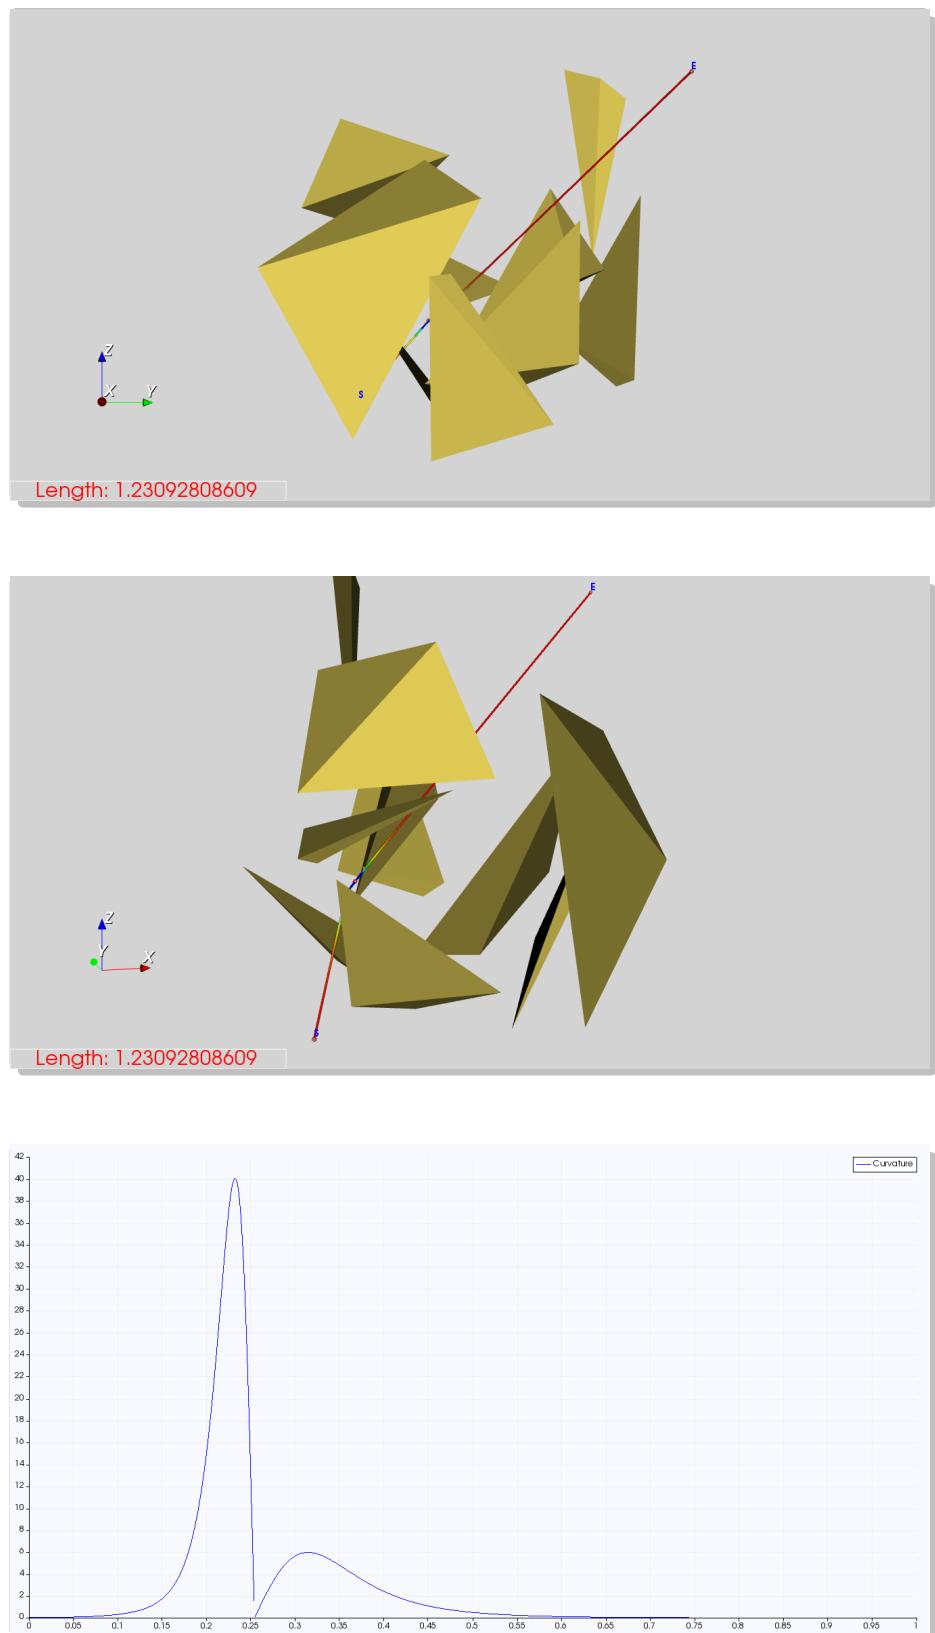


Figure 6o.: Test 32; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. B; Post proc. ✓; Part. A.

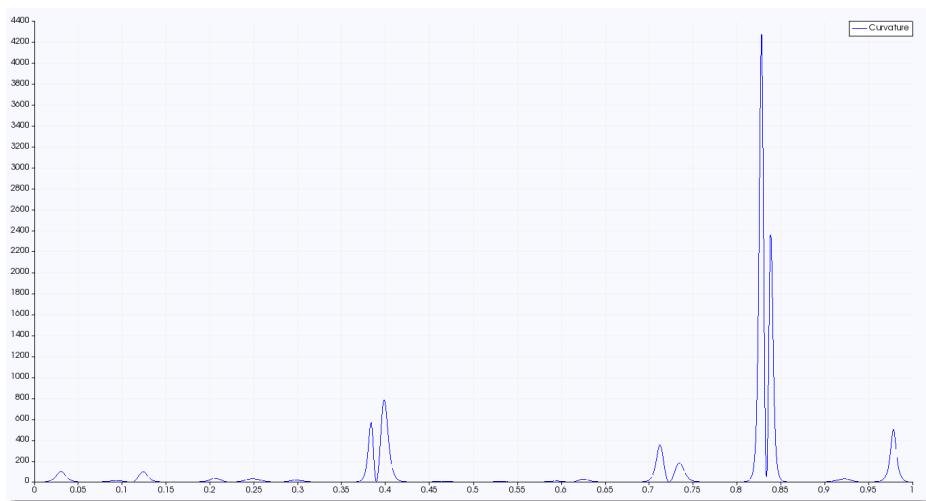
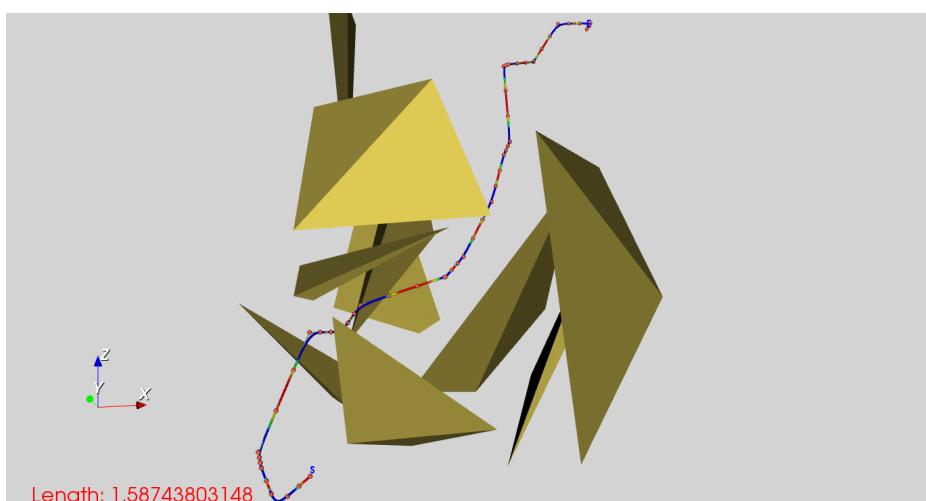
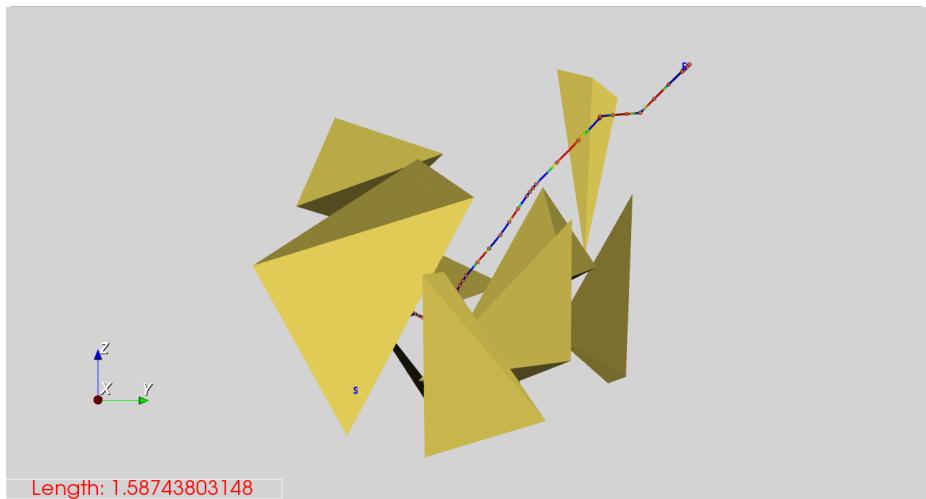


Figure 61.: Test 33; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. B; Post proc. χ ; Part. U.

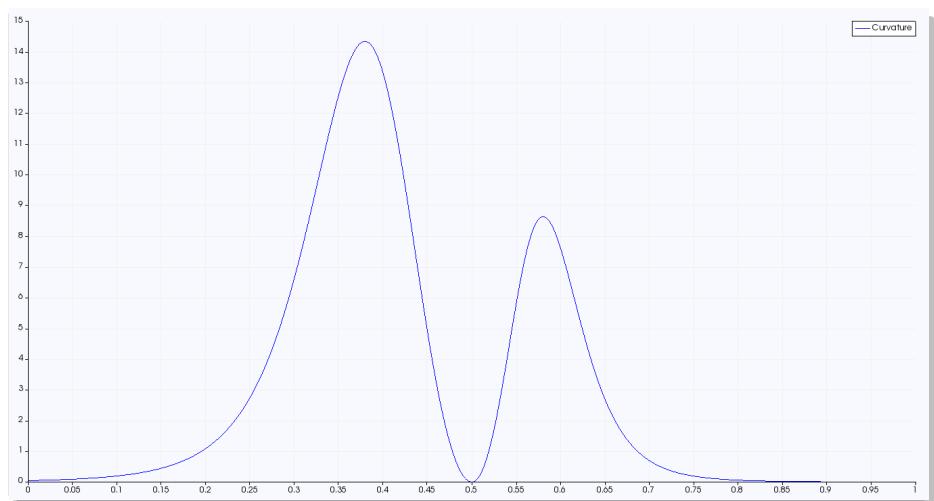
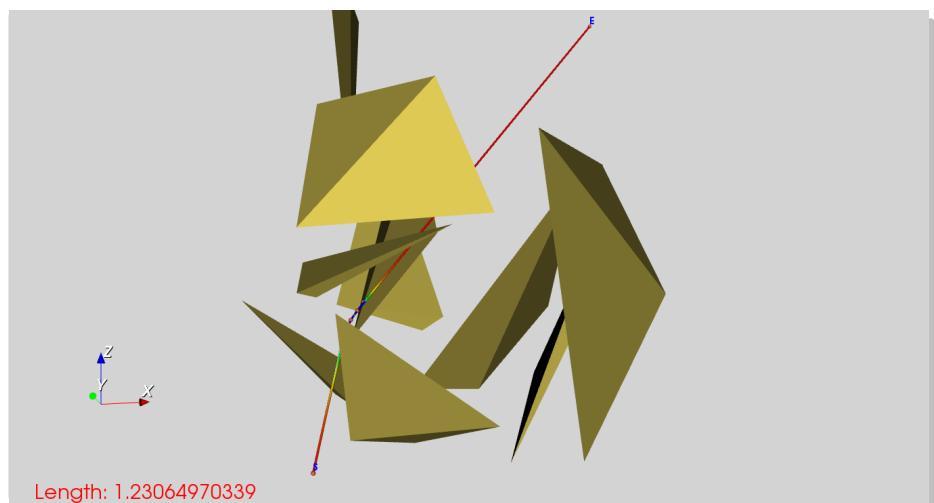
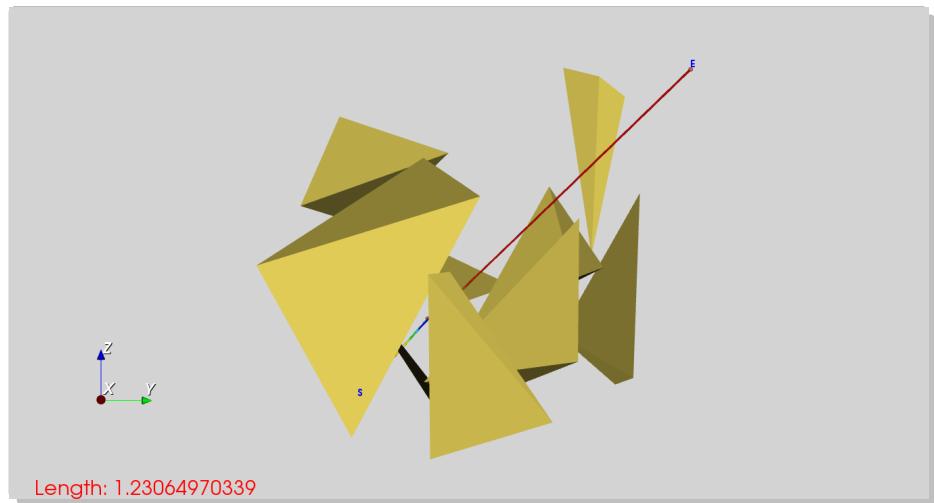


Figure 62.: Test 34; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. B; Post proc. ✓; Part. U.

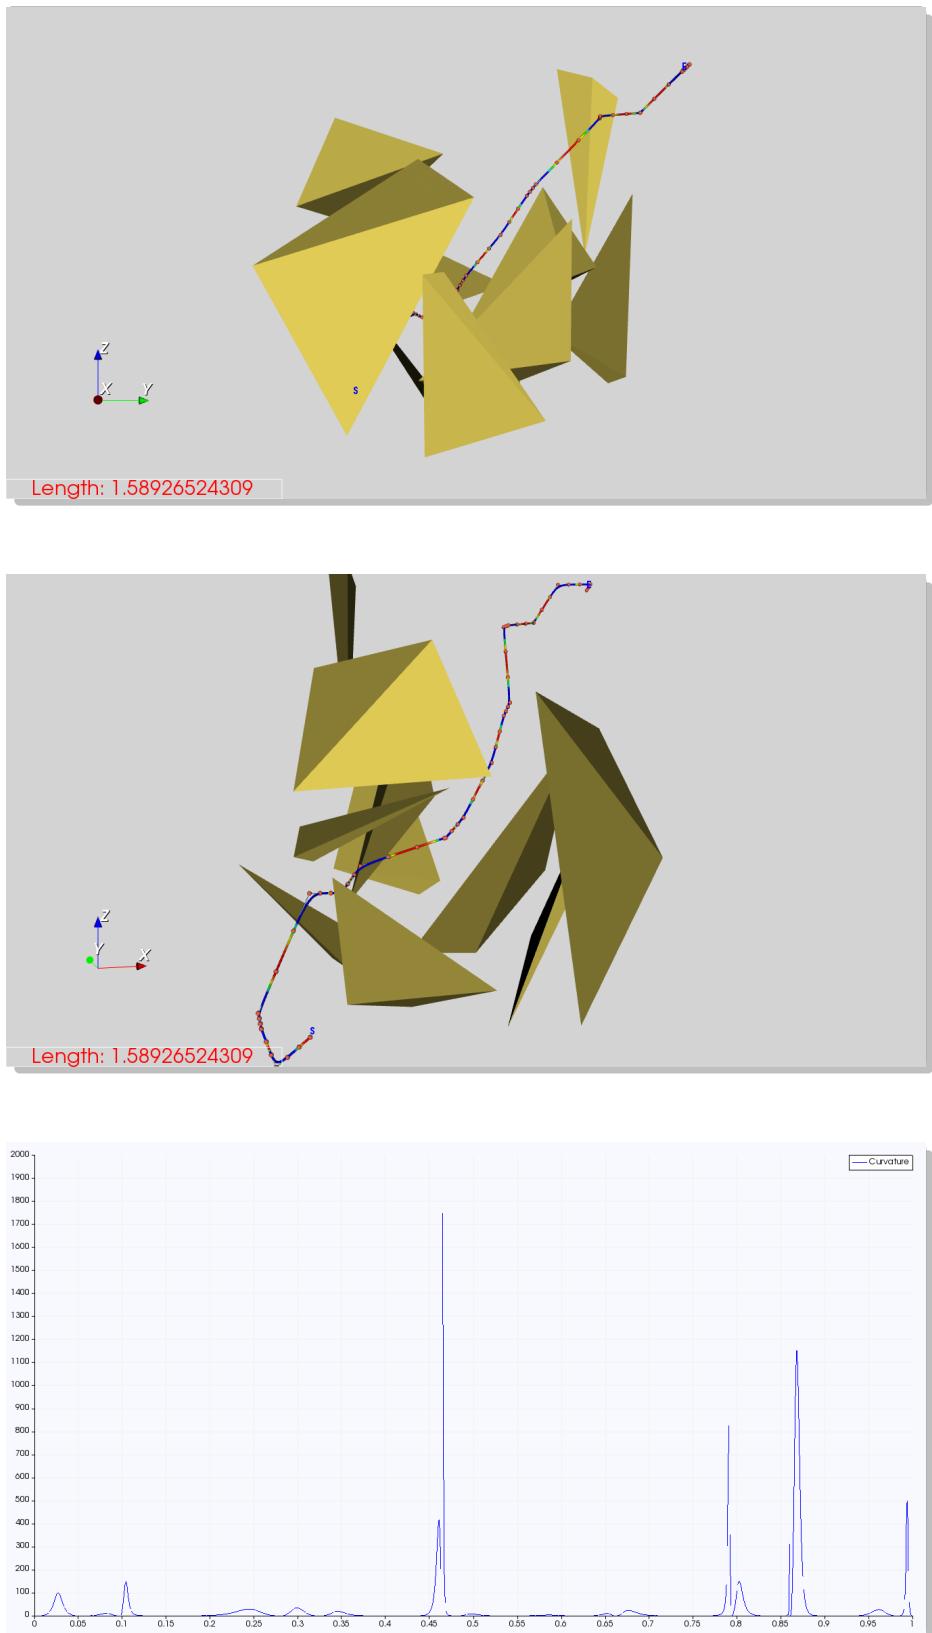


Figure 63.: Test 35; Scene 1b; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. B; Post proc. X; Part. A.

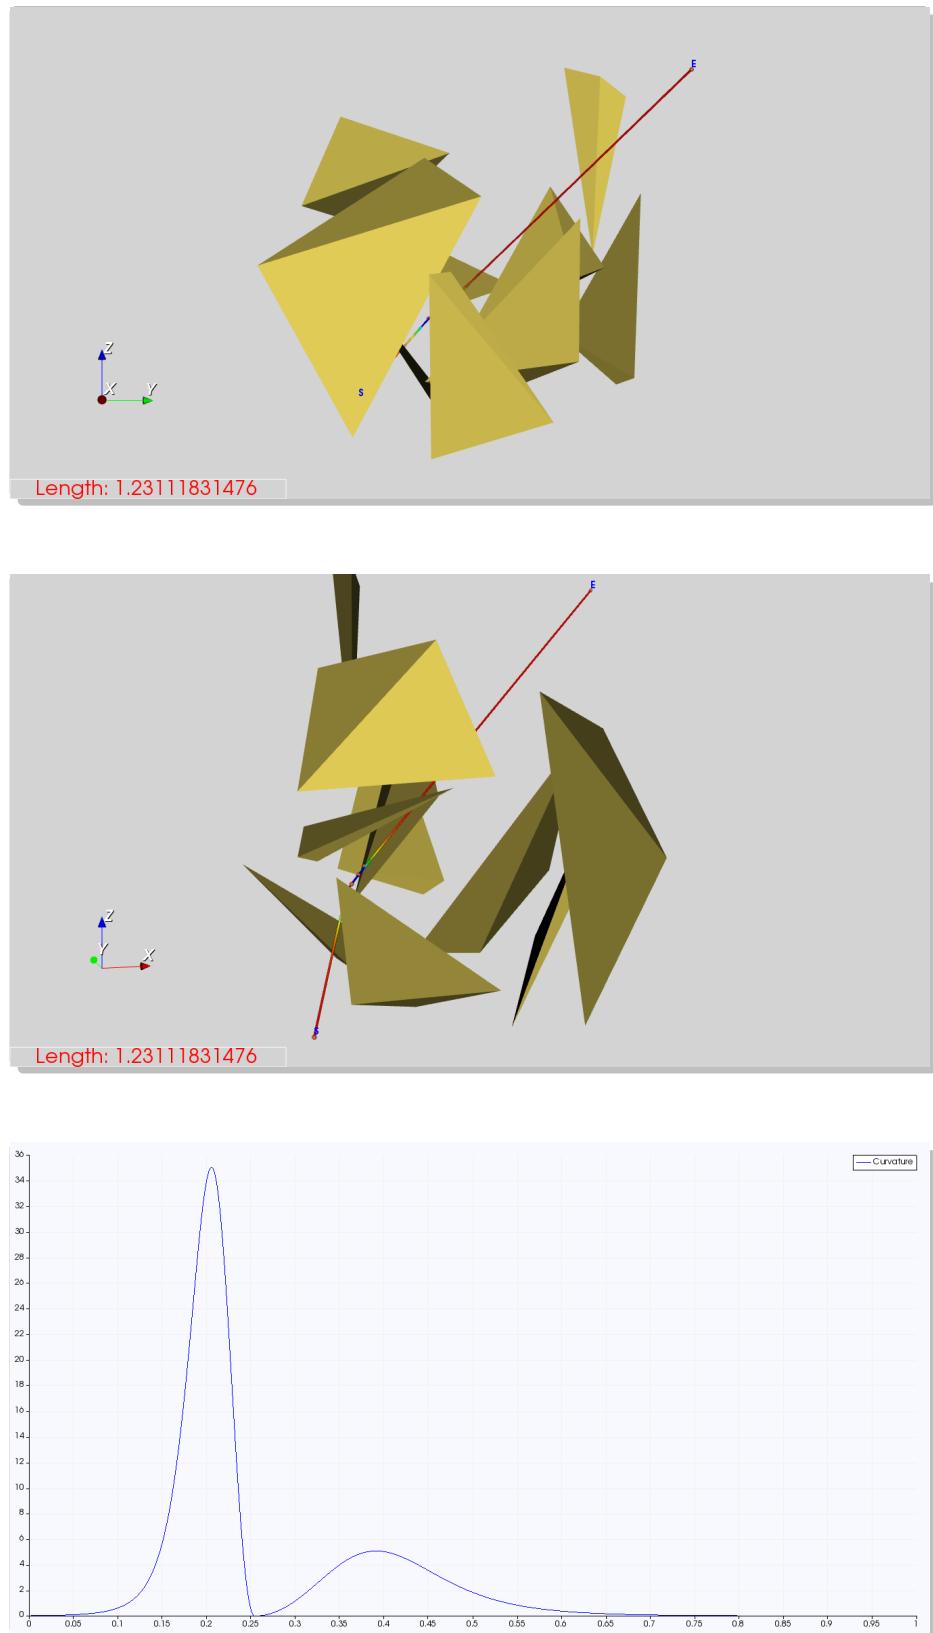


Figure 64.: Test 36; Scene 1b; $s \rightarrow e$ $[0.2,0.2,0.2] \rightarrow [0.9,0.9,0.9]$; Deg. 4; Meth. B; Post proc. ✓; Part. A.

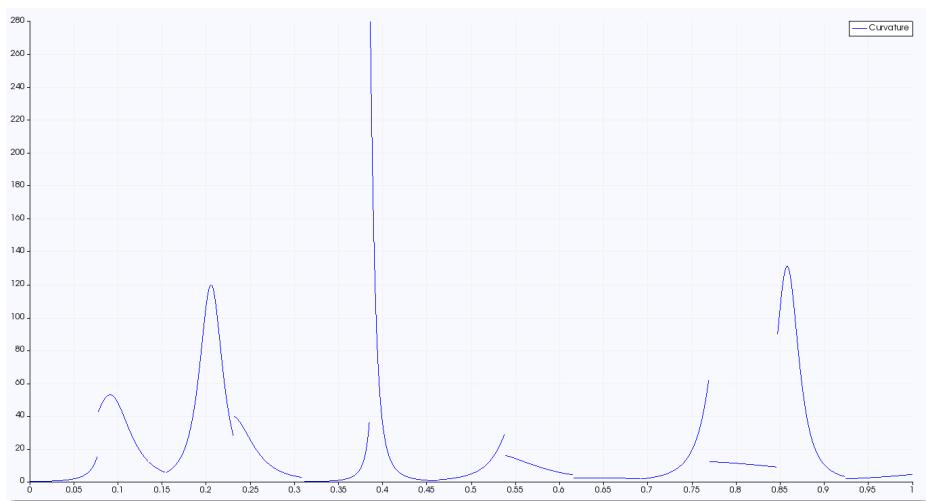
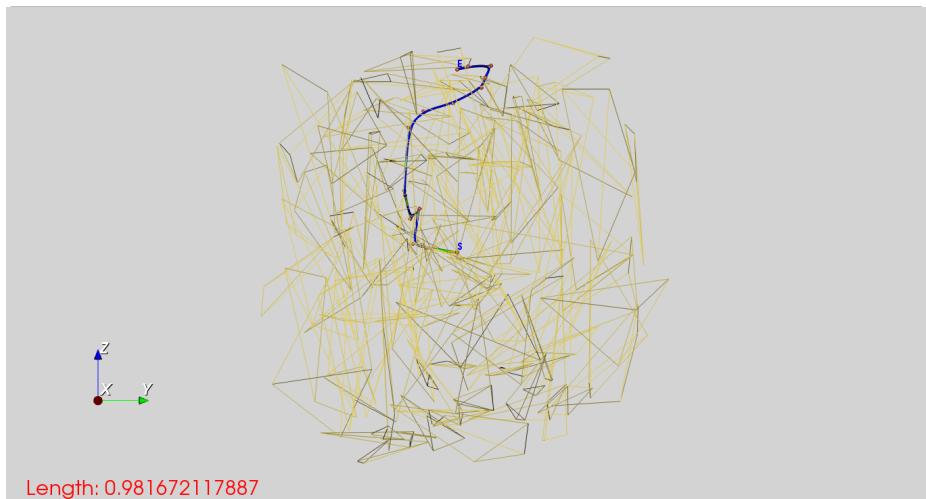


Figure 65.: Test 37; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 2; Meth. B; Post proc. X; Part. U.

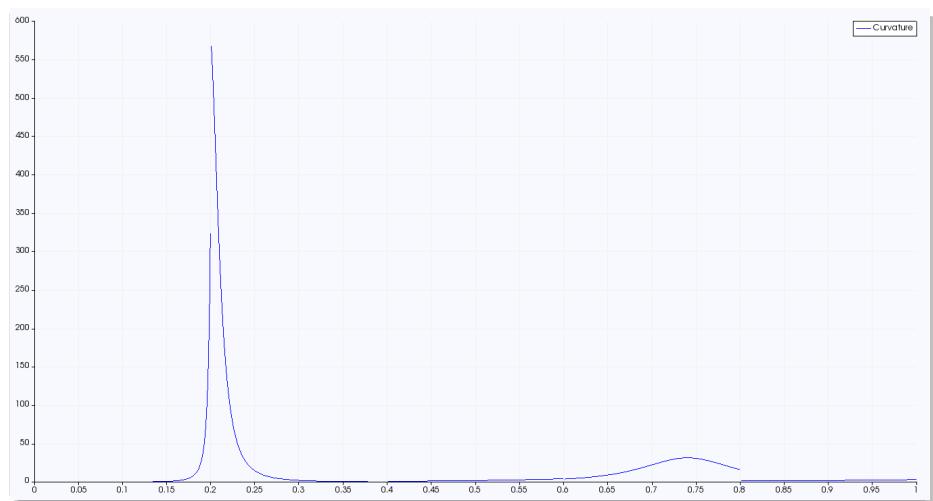
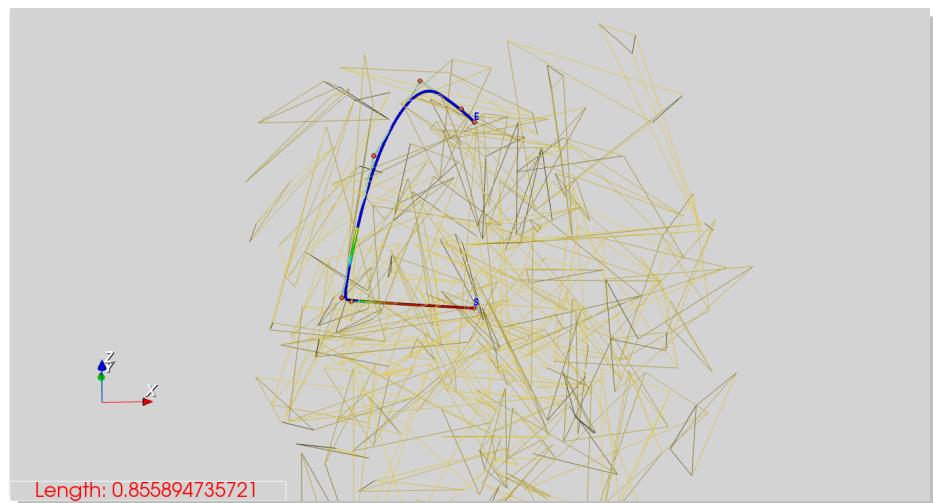
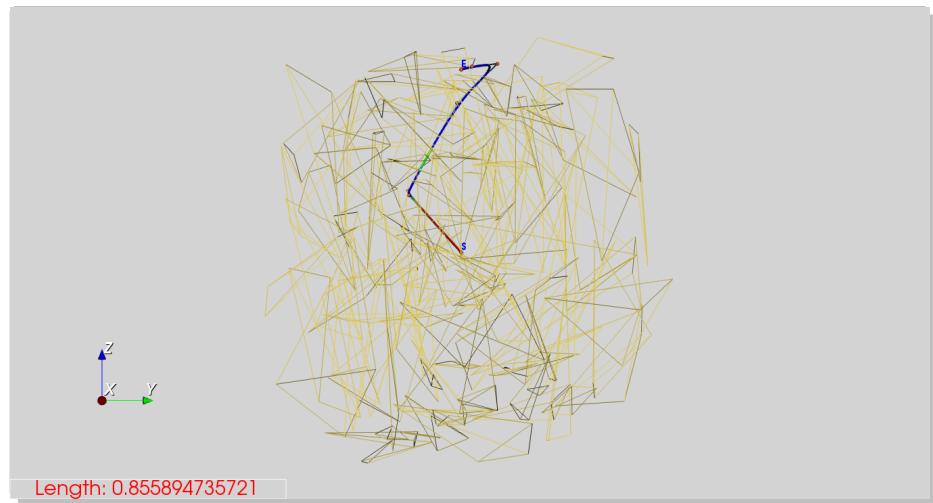


Figure 66.: Test 38; Scene 2; $s \rightarrow e$ $[0.5,0.5,0.5] \rightarrow [0.5,0.5,0.95]$; Deg. 2; Meth. B; Post proc. ✓; Part. U.

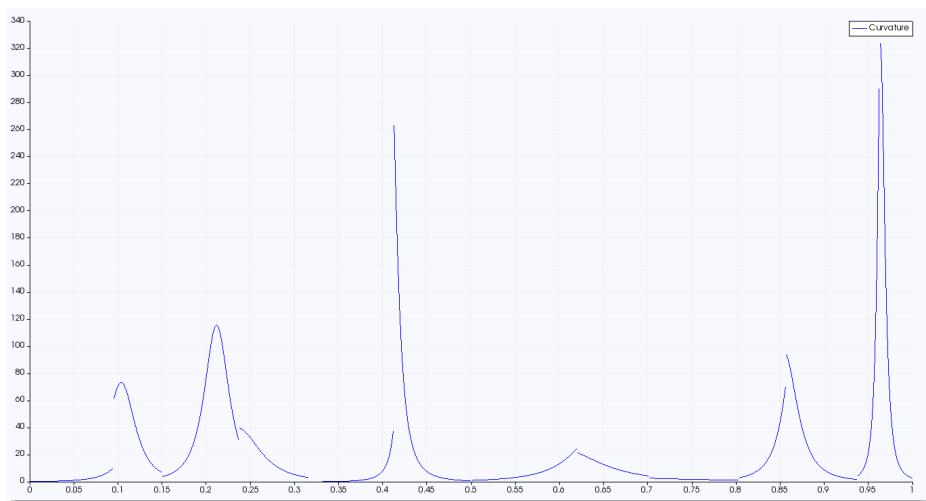
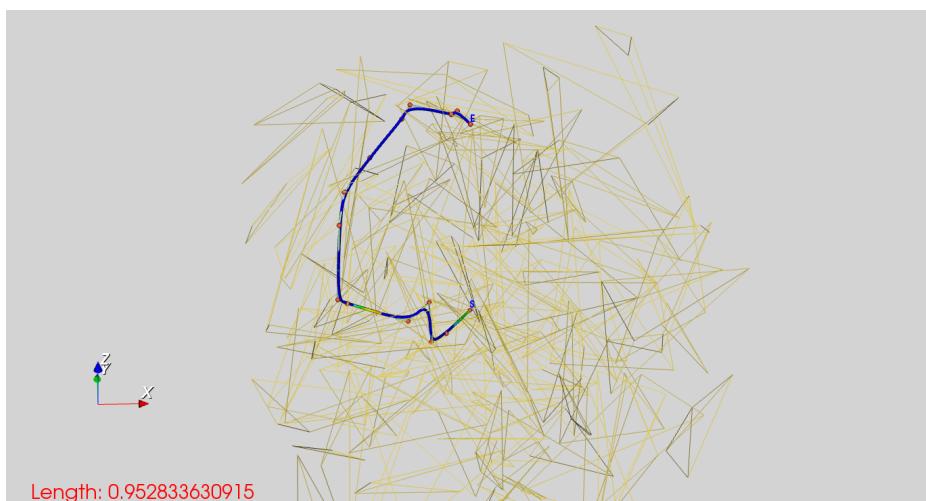
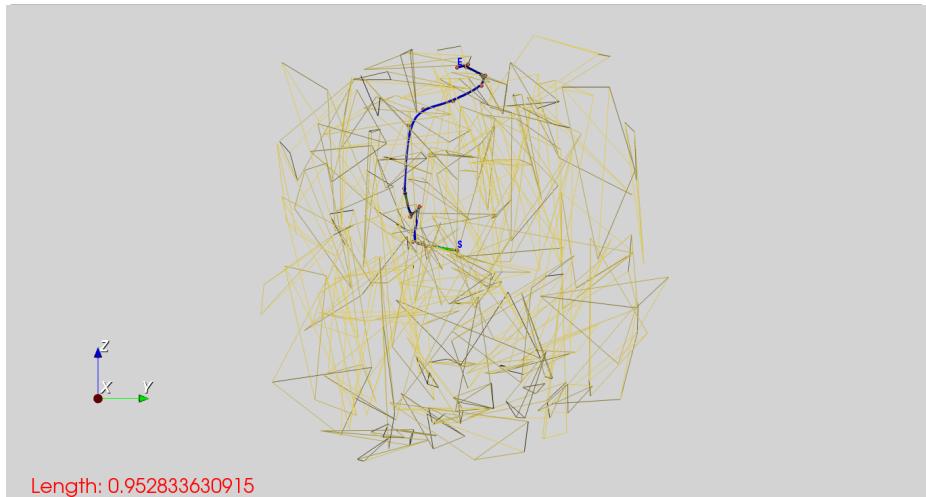


Figure 67.: Test 39; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 2; Meth. B; Post proc. X; Part. A.

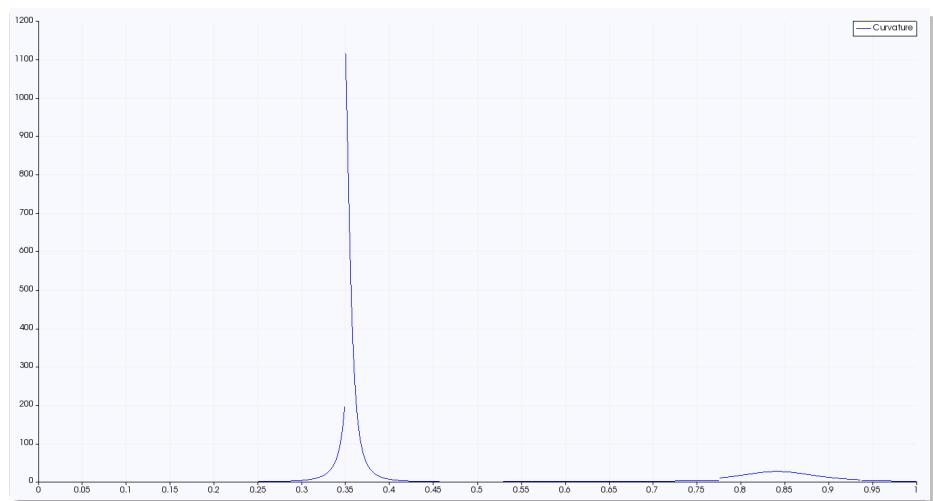
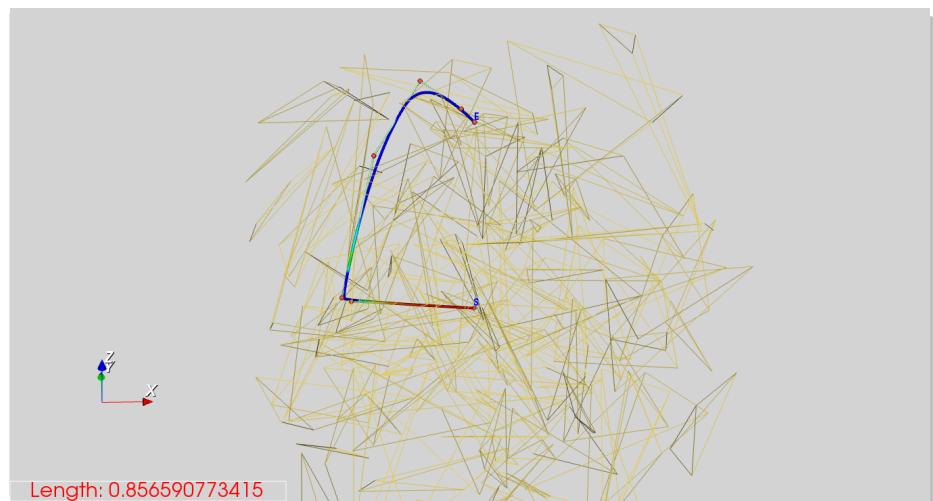
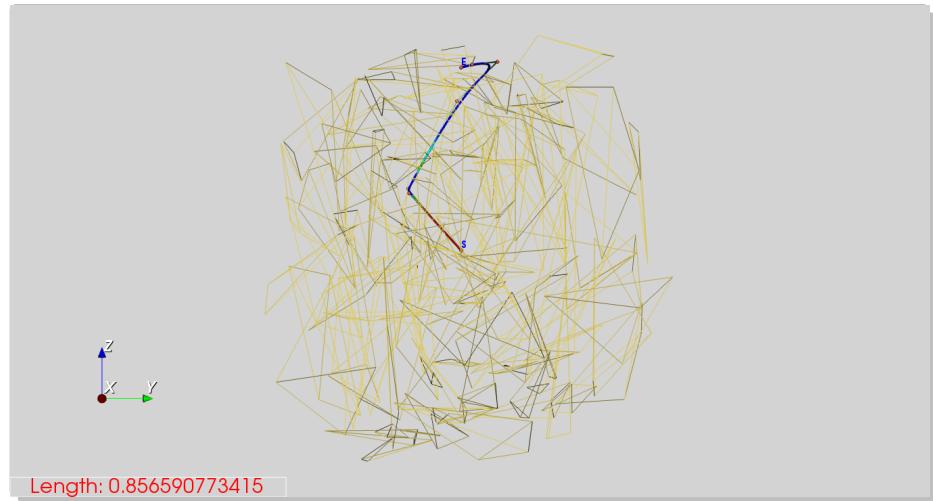


Figure 68.: Test 4o; Scene 2; $s \rightarrow e$ $[0.5,0.5,0.5] \rightarrow [0.5,0.5,0.95]$; Deg. 2; Meth. B; Post proc. ✓; Part. A.

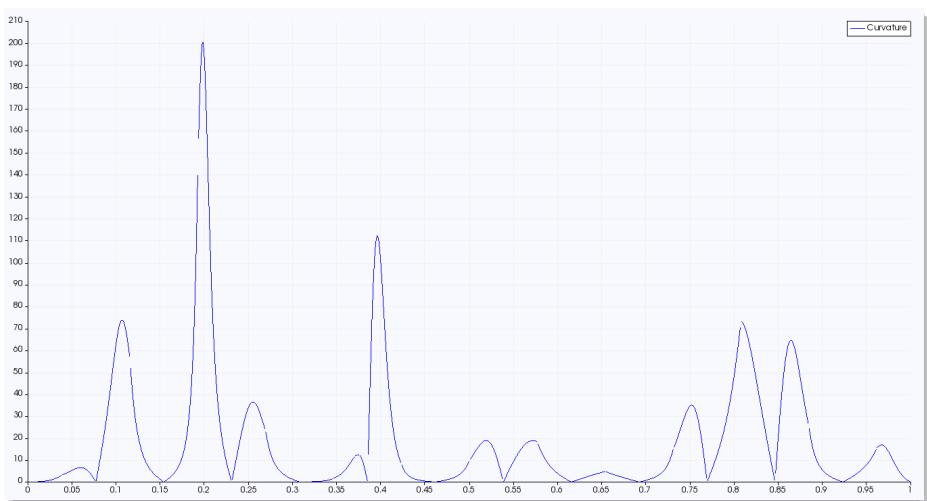
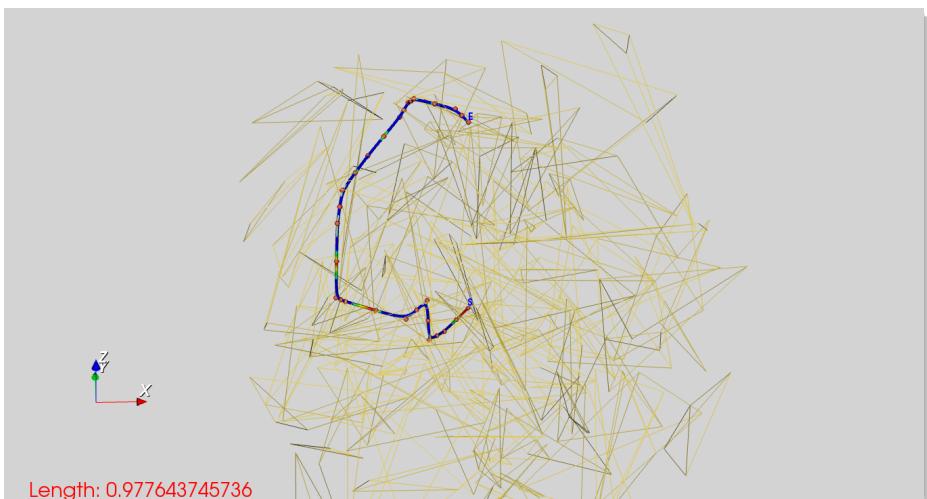


Figure 69.: Test 41; Scene 2; $s \rightarrow e$ $[0.5,0.5,0.5] \rightarrow [0.5,0.5,0.95]$; Deg. 3; Meth. B; Post proc. X; Part. U.

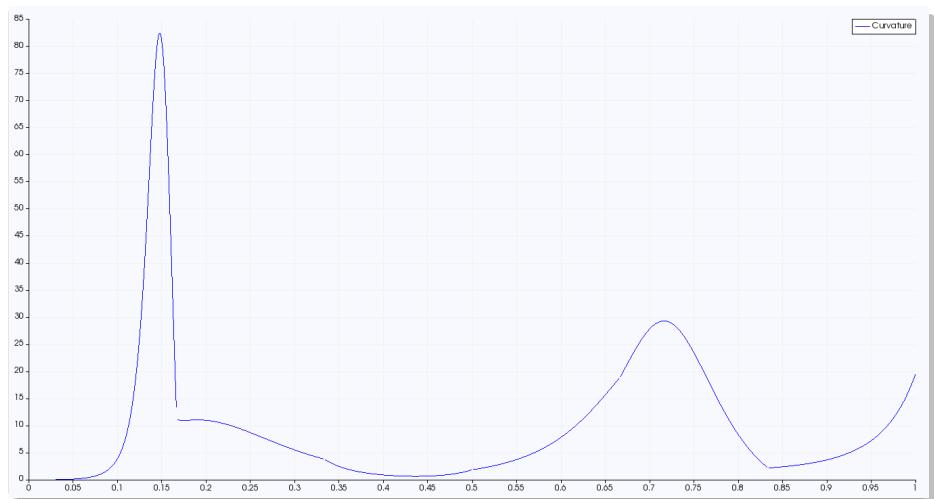
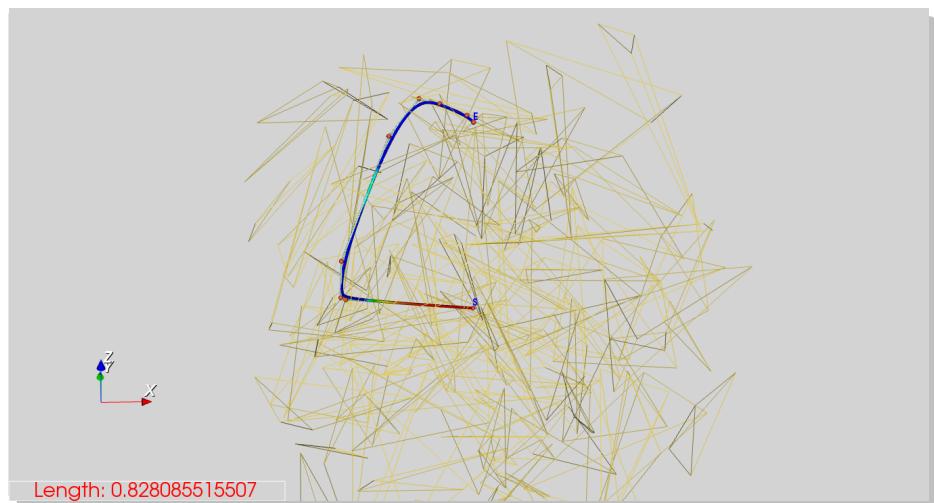


Figure 70.: Test 42; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 3; Meth. B; Post proc. ✓; Part. U.

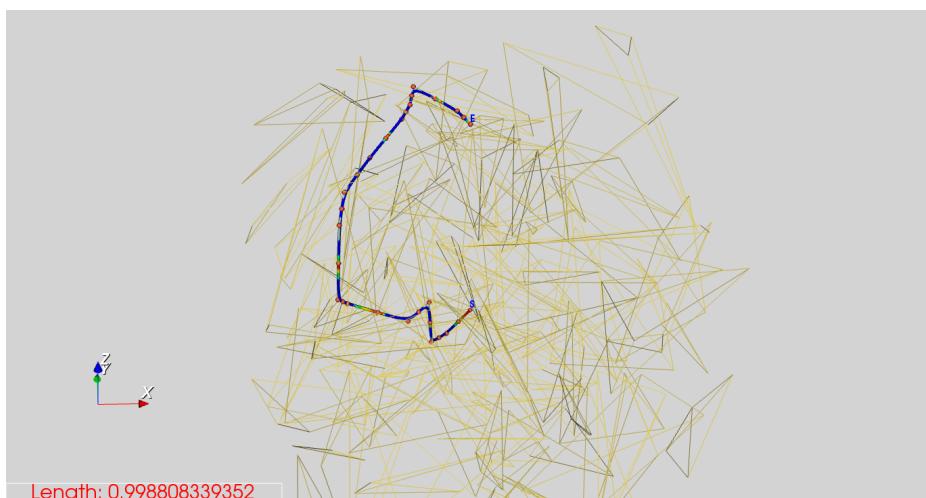
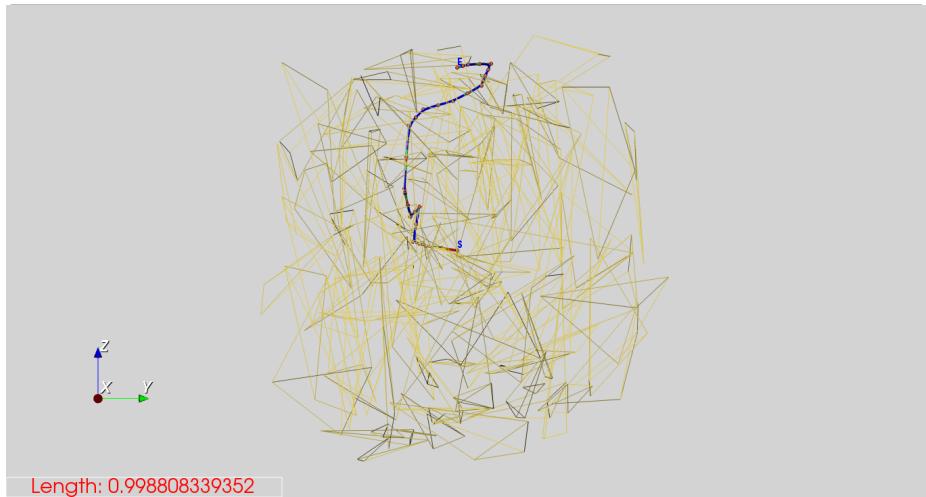


Figure 71.: Test 43; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 3; Meth. B; Post proc. X; Part. A.

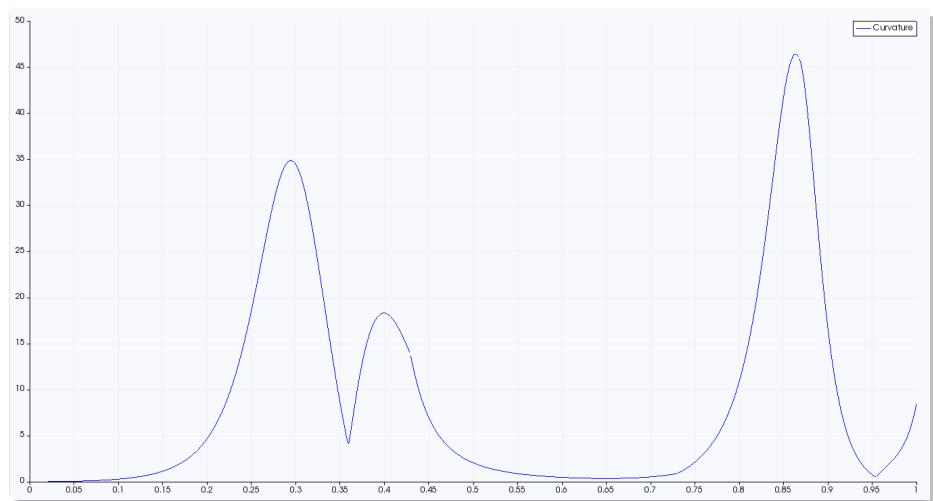
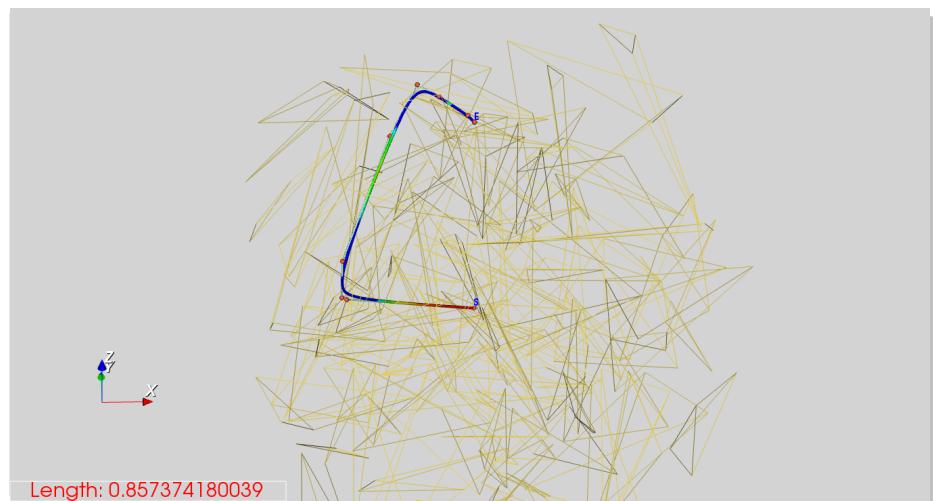
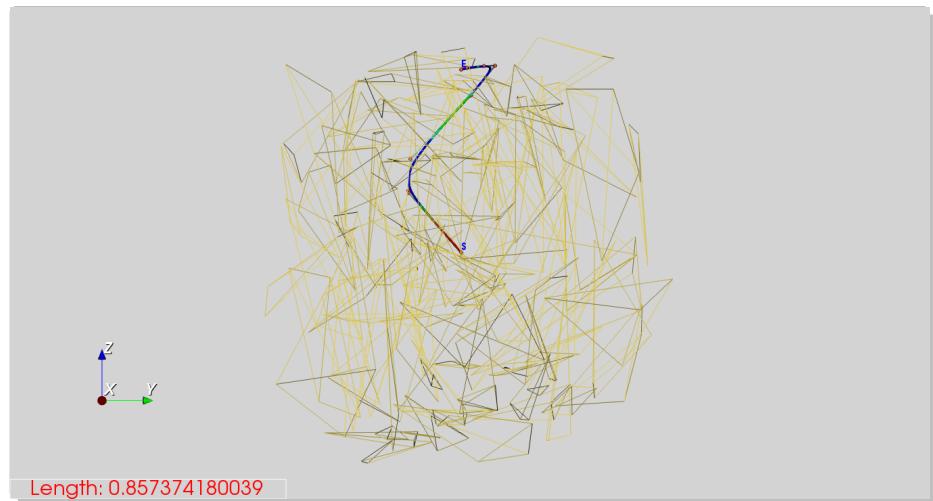


Figure 72.: Test 44; Scene 2; $s \rightarrow e$ $[0.5,0.5,0.5] \rightarrow [0.5,0.5,0.95]$; Deg. 3; Meth. B; Post proc. ✓; Part. A.

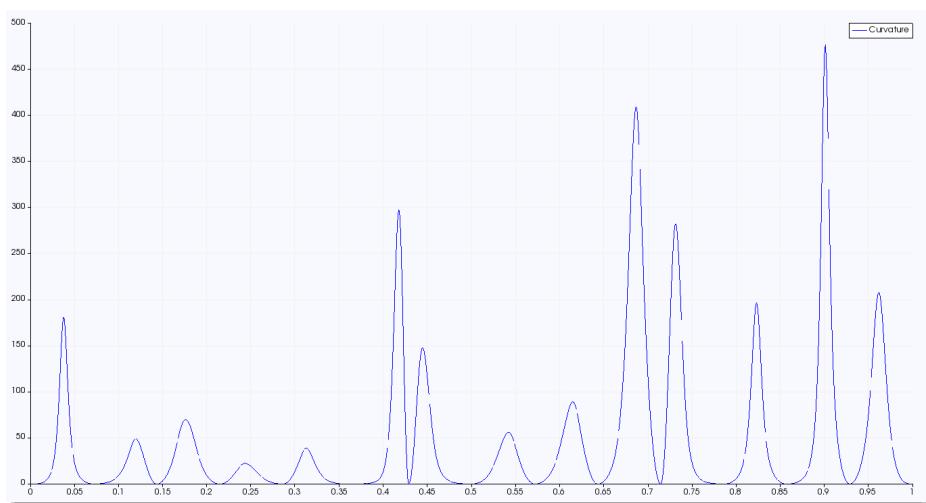
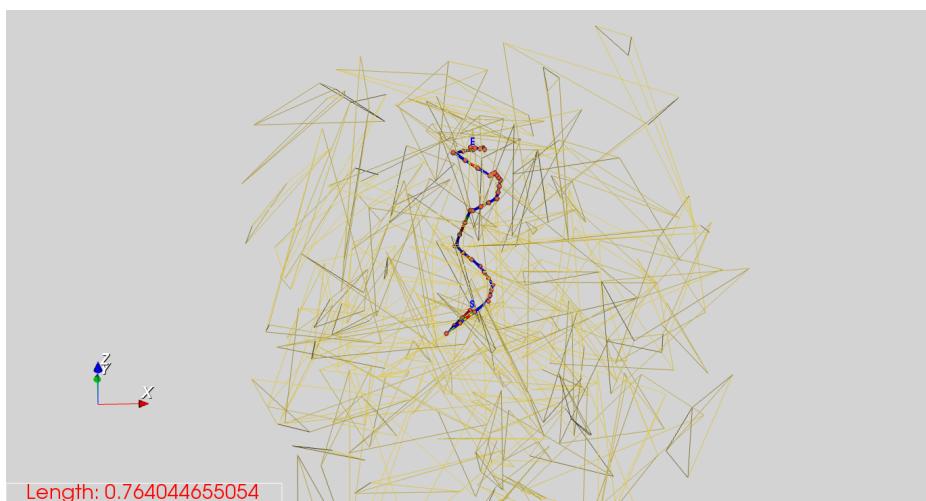
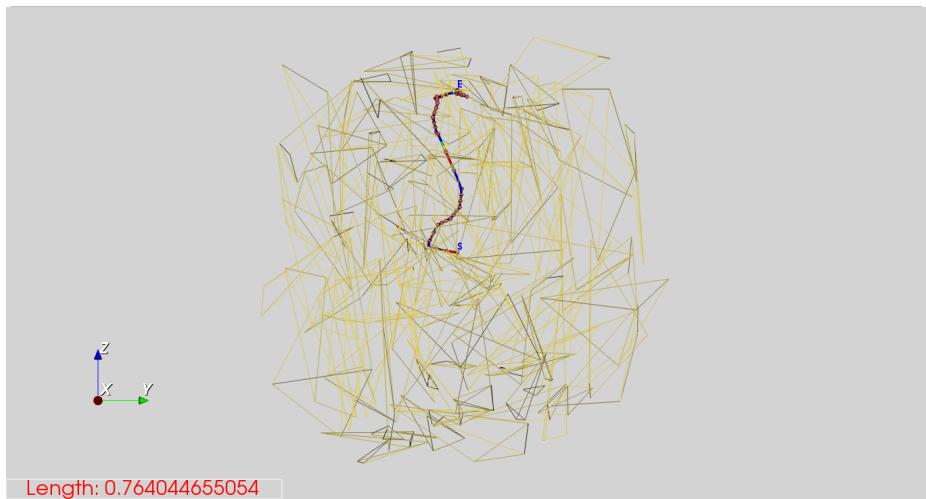


Figure 73.: Test 45; Scene 2; $s \rightarrow e$ $[0.5,0.5,0.5] \rightarrow [0.5,0.5,0.95]$; Deg. 4; Meth. B; Post proc. X; Part. U.

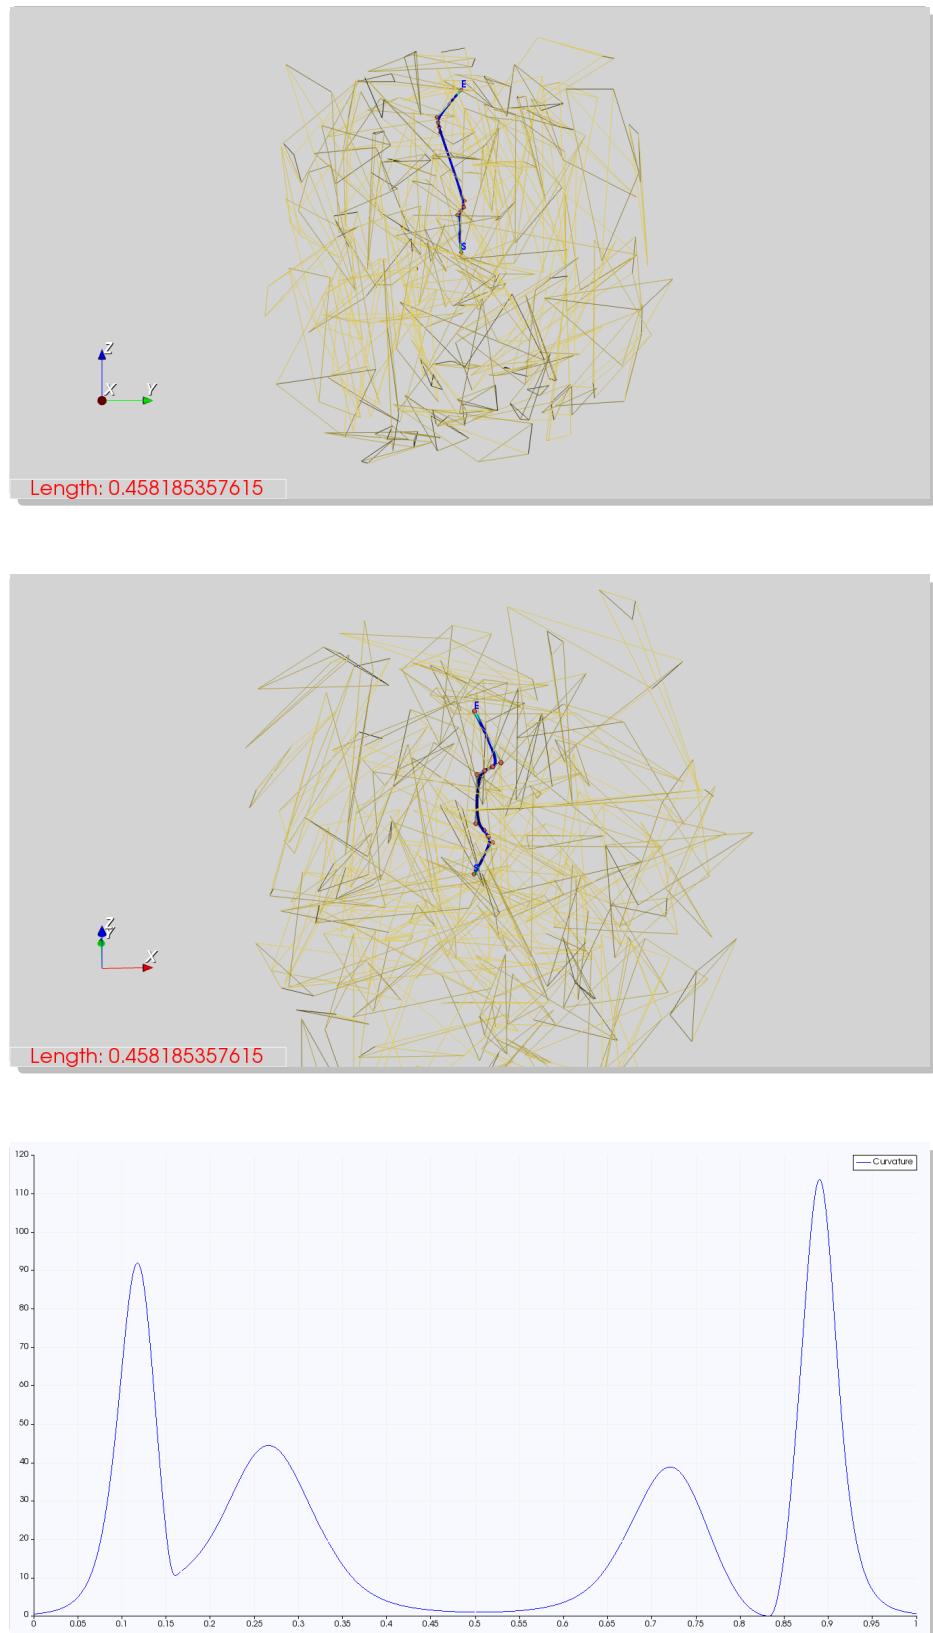


Figure 74.: Test 46; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 4; Meth. B; Post proc. ✓; Part. U.

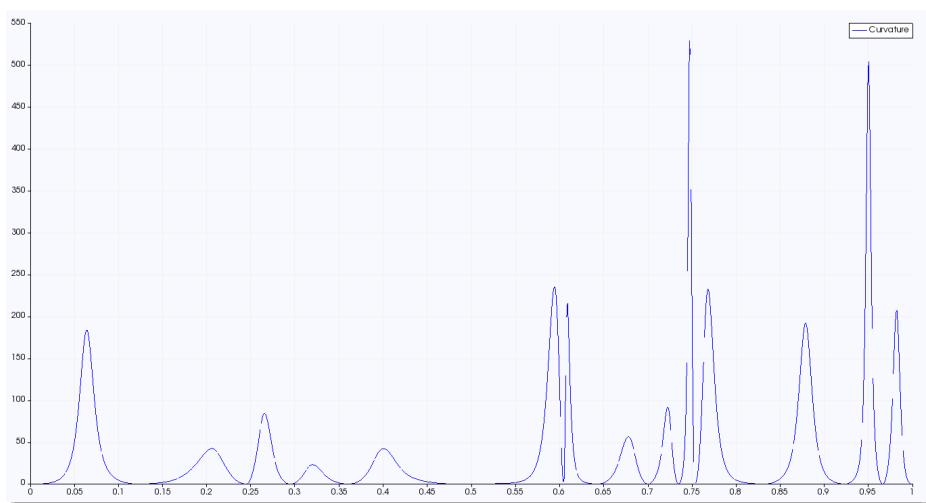
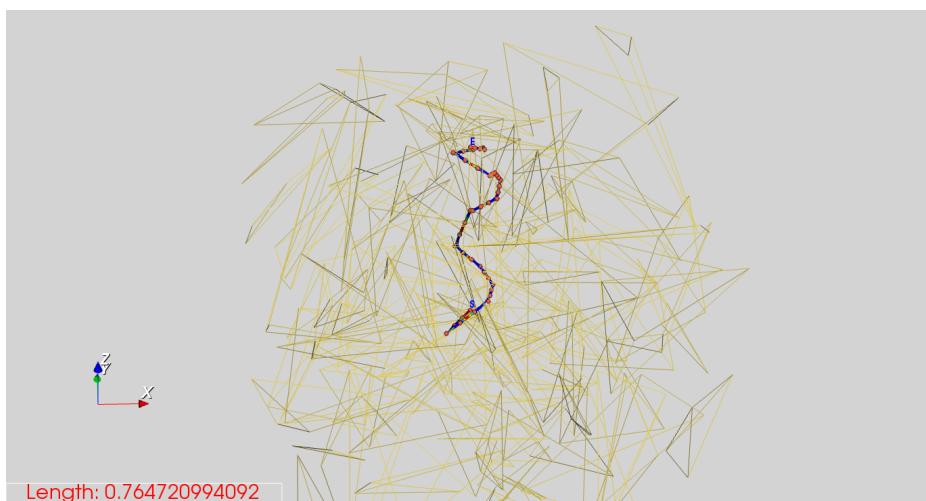
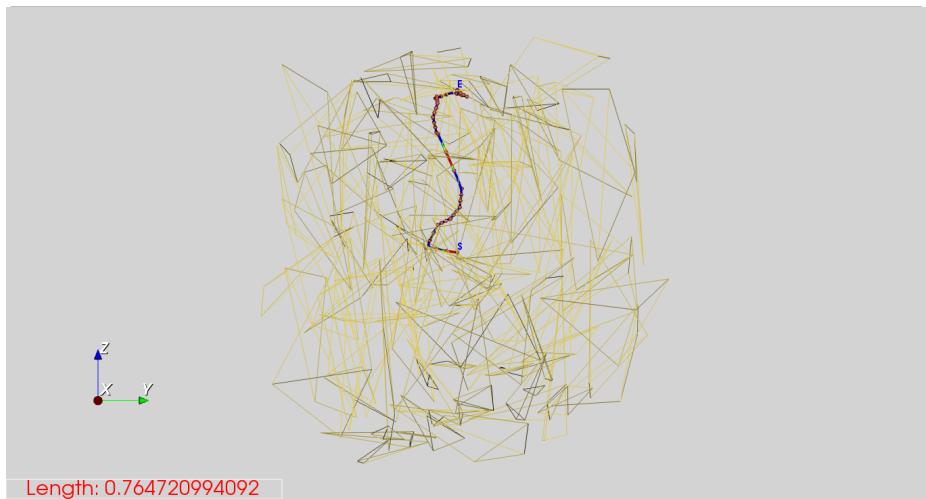


Figure 75.: Test 47; Scene 2; $s \rightarrow e$ $[0.5,0.5,0.5] \rightarrow [0.5,0.5,0.95]$; Deg. 4; Meth. B; Post proc. X; Part. A.

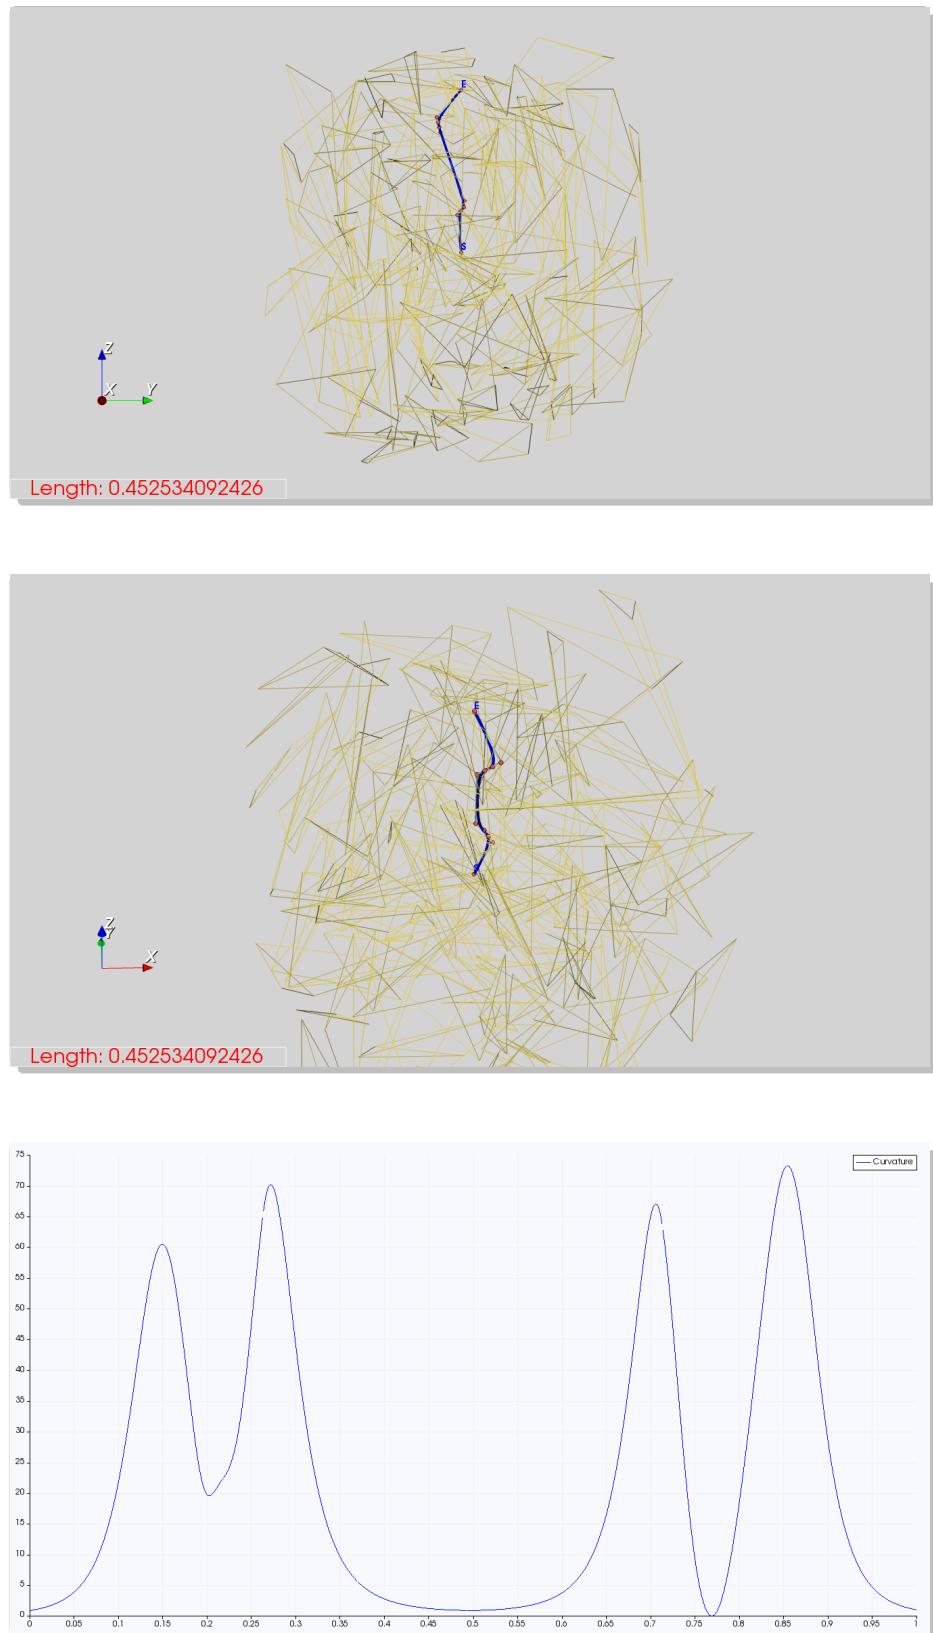


Figure 76.: Test 48; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 4; Meth. B; Post proc. ✓; Part. A.

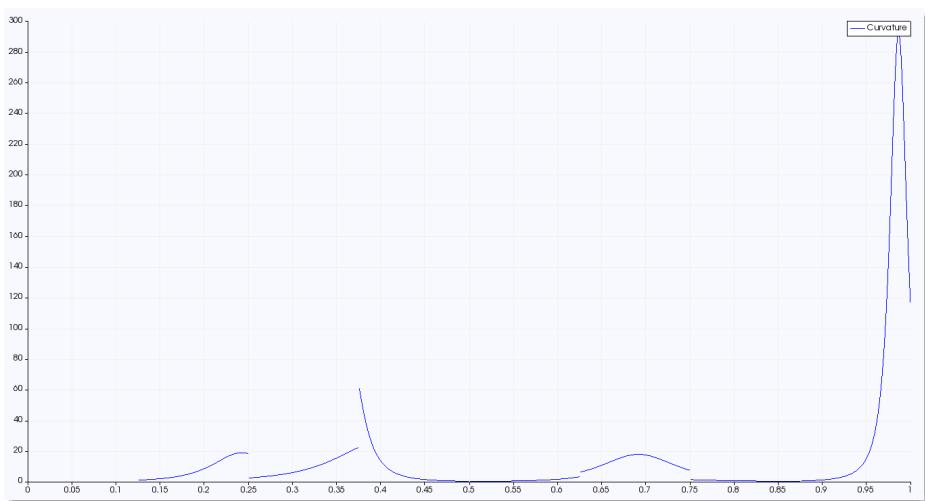
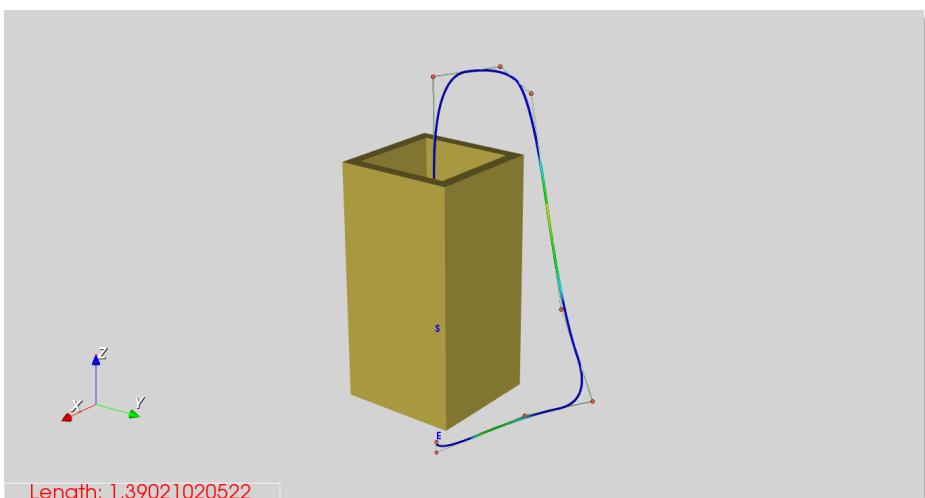
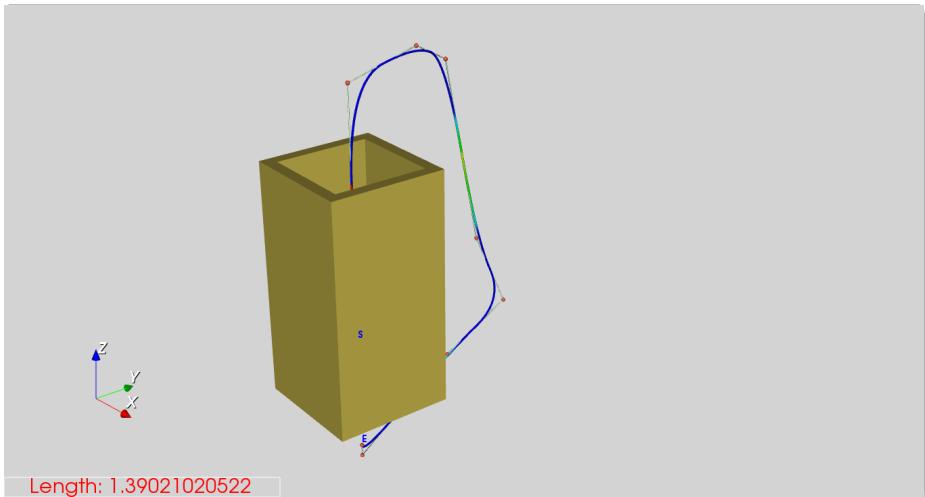


Figure 77.: Test 49; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. A; Post proc. X; Part. U.

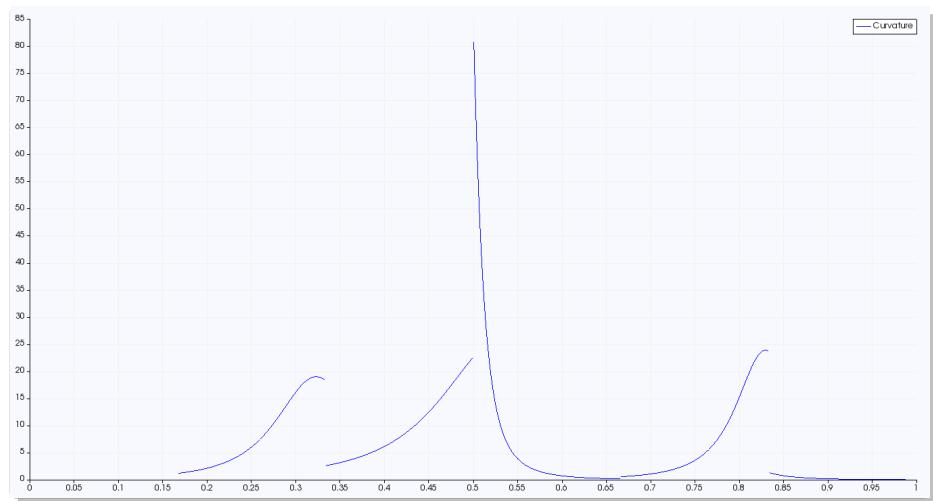
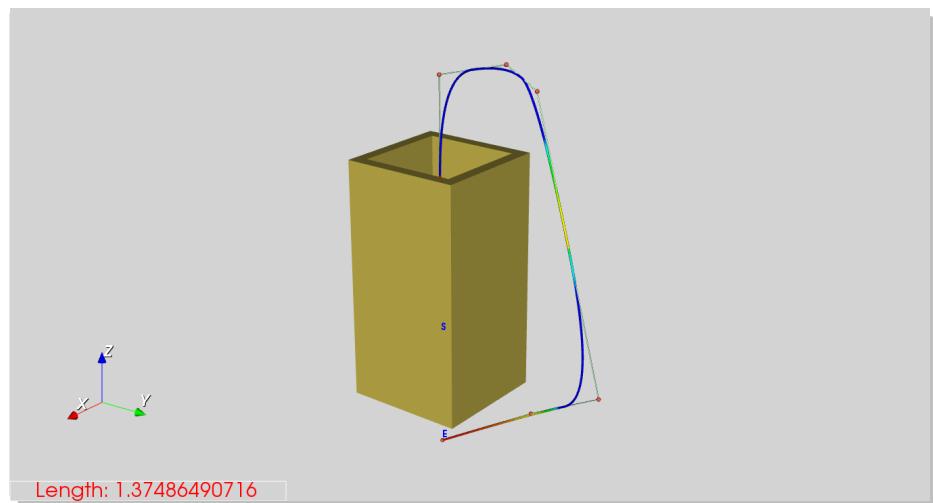
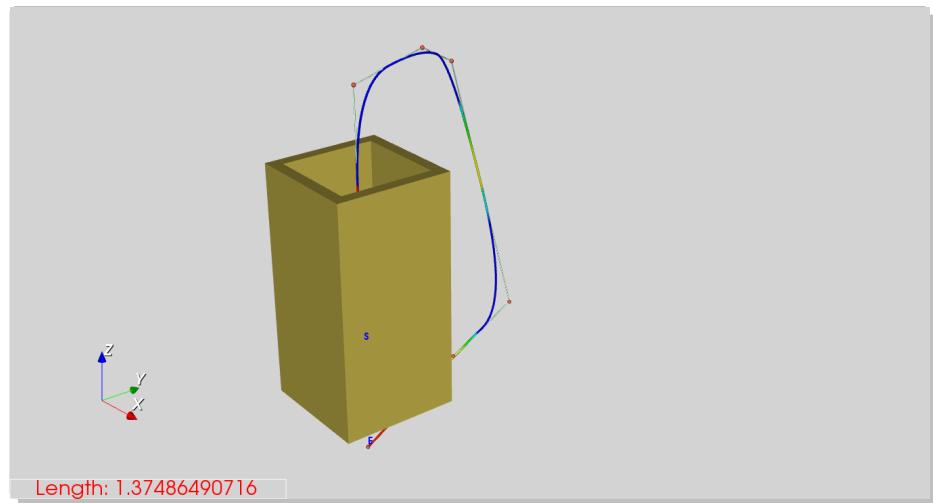


Figure 78.: Test 50; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. A; Post proc. ✓; Part. U.

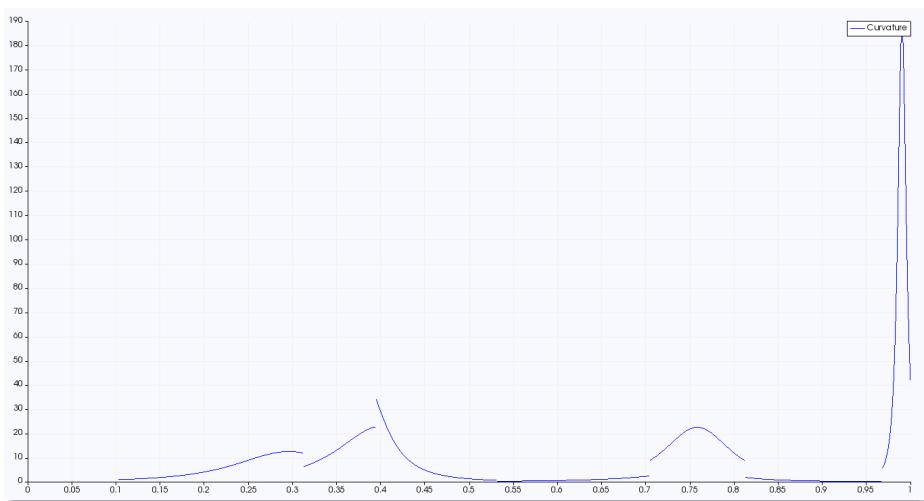
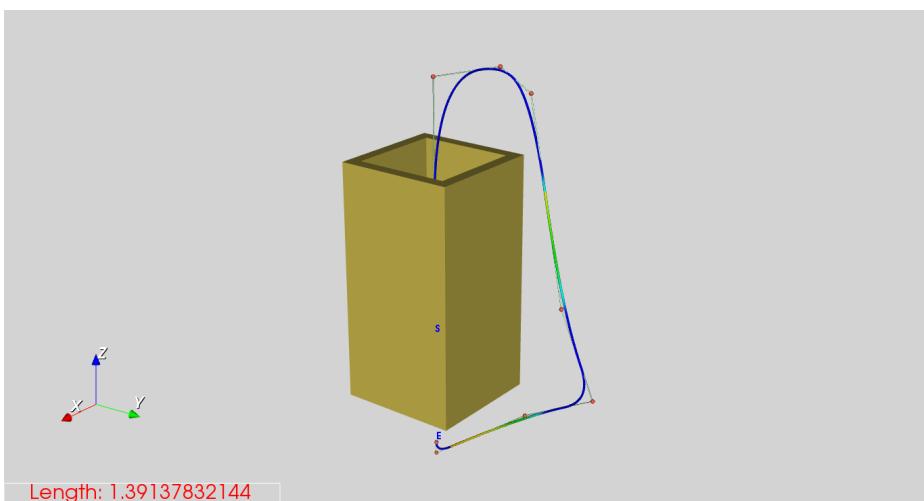
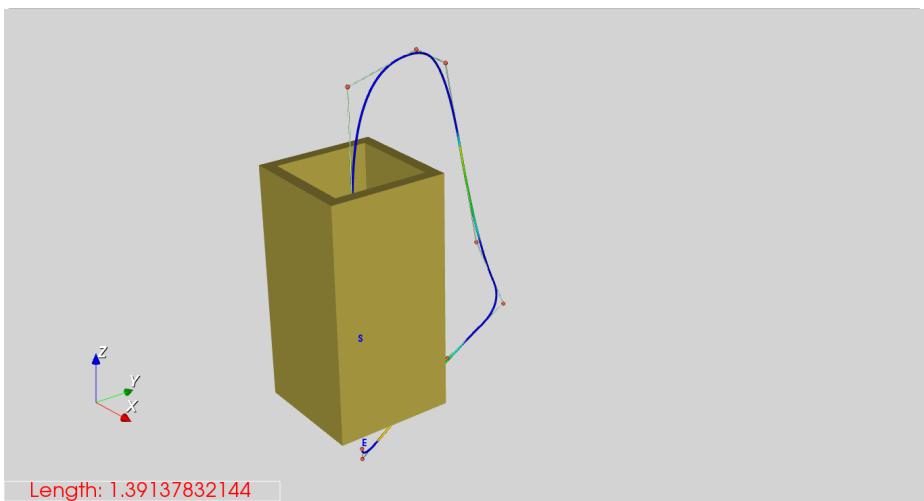


Figure 79.: Test 51; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. A; Post proc. X; Part. A.

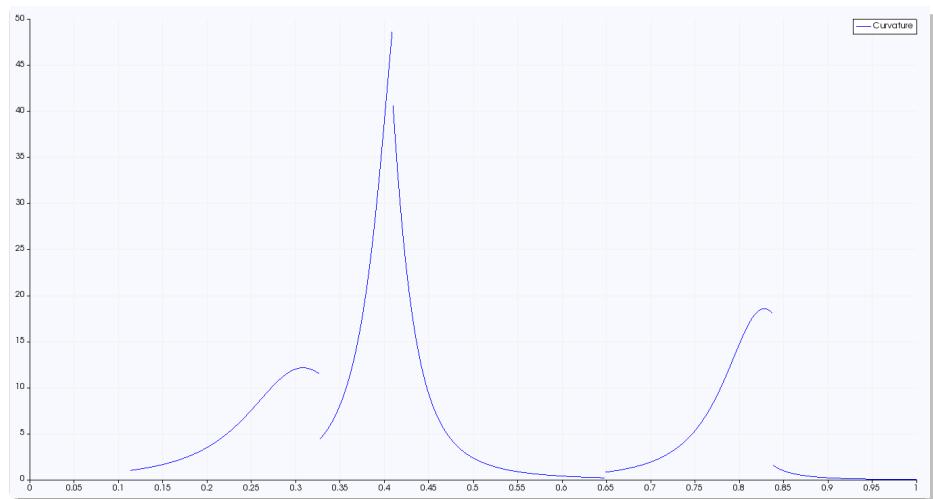
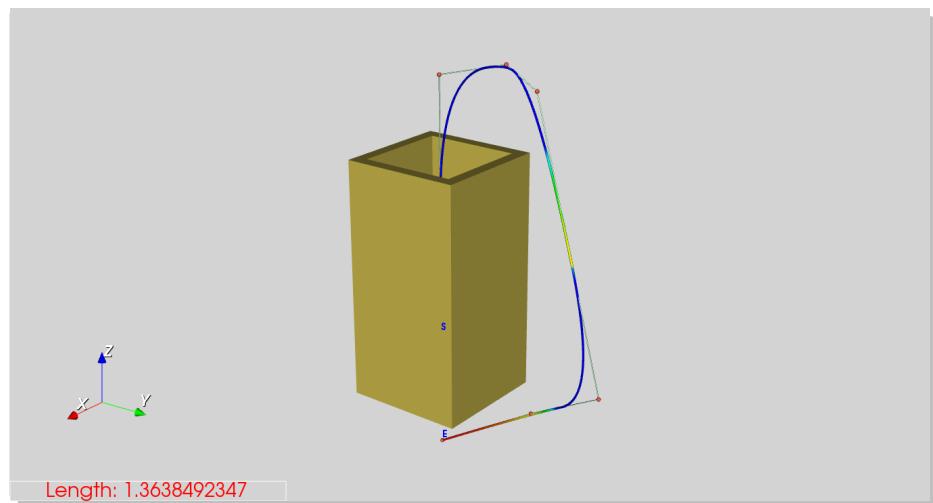
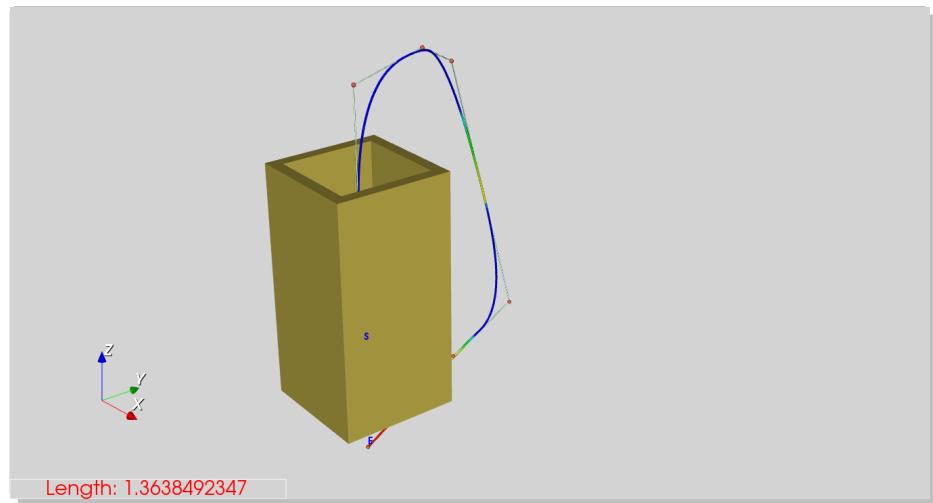


Figure 8o.: Test 52; Scene 3; $s \rightarrow e [0.5,0.5,0.4] \rightarrow [0.5,0.5,0.2]$; Deg. 2; Meth. A; Post proc. ✓; Part. A.

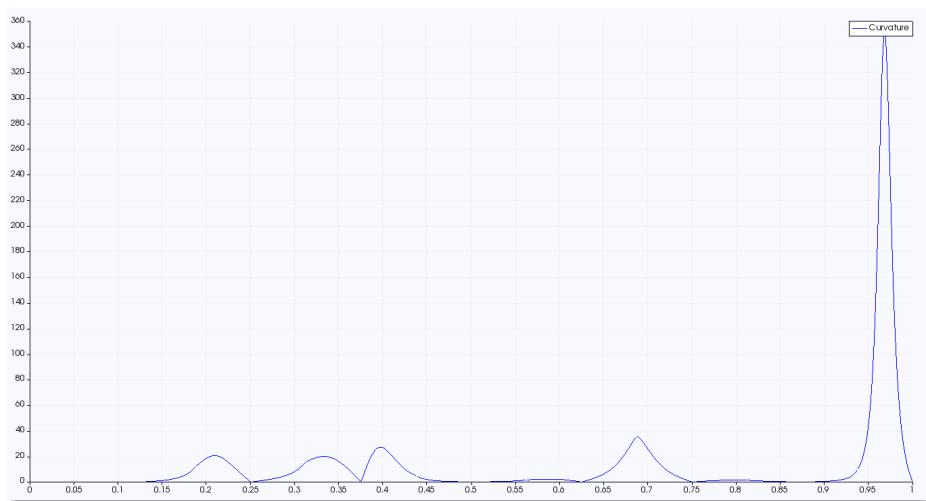
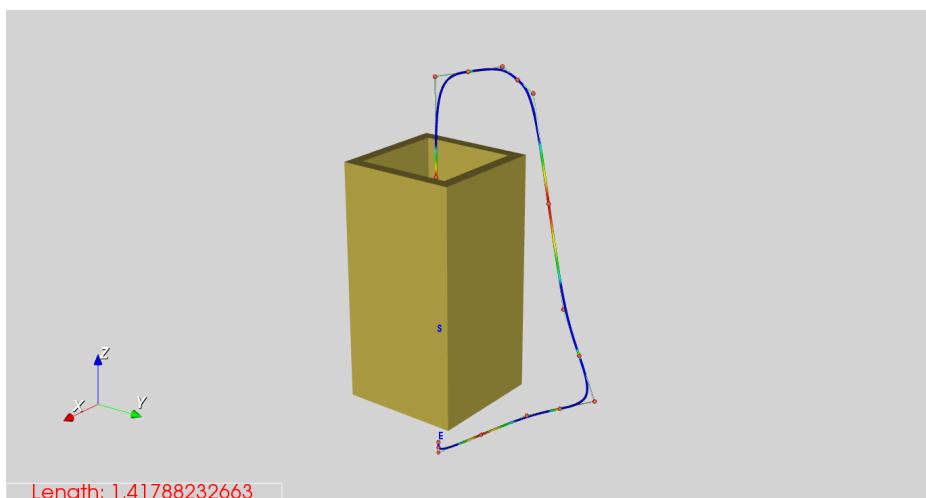
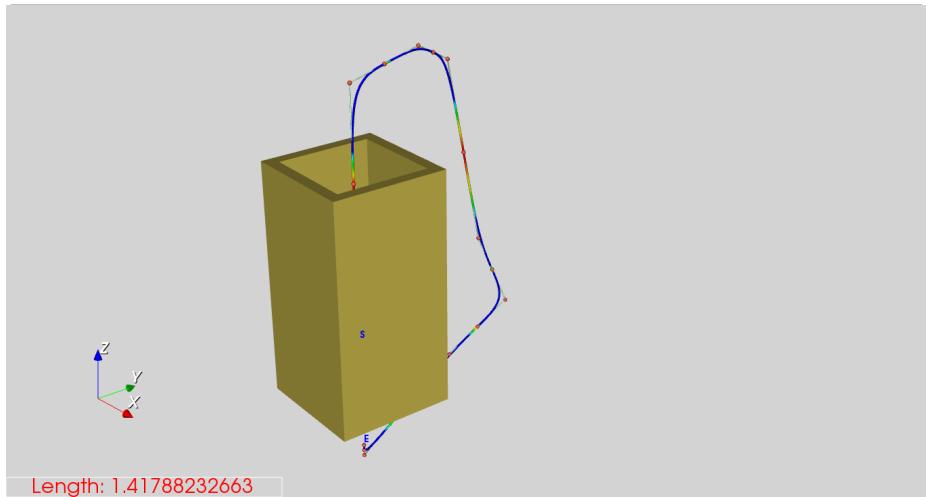


Figure 81.: Test 53; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 3; Meth. A; Post proc. X; Part. U.

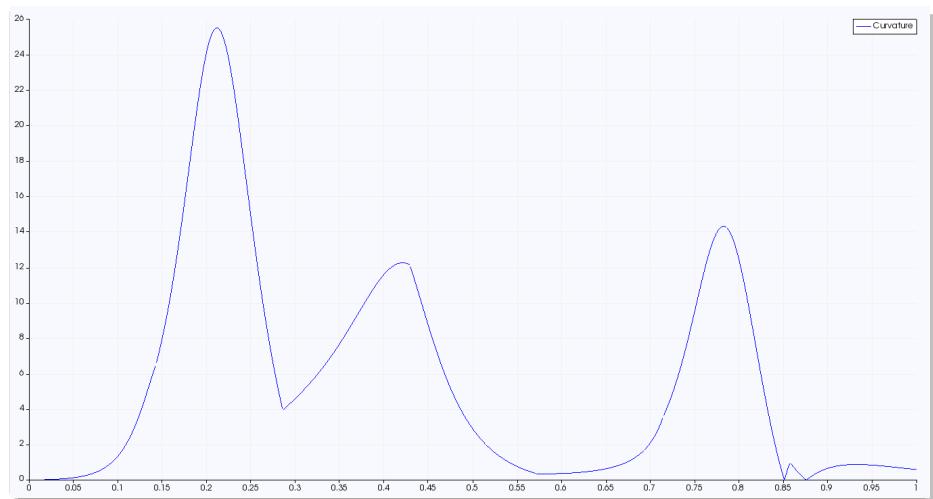
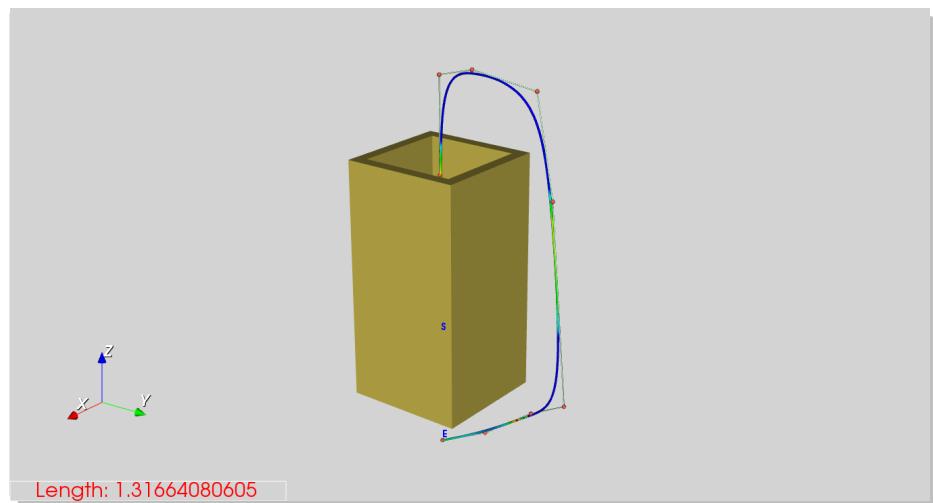
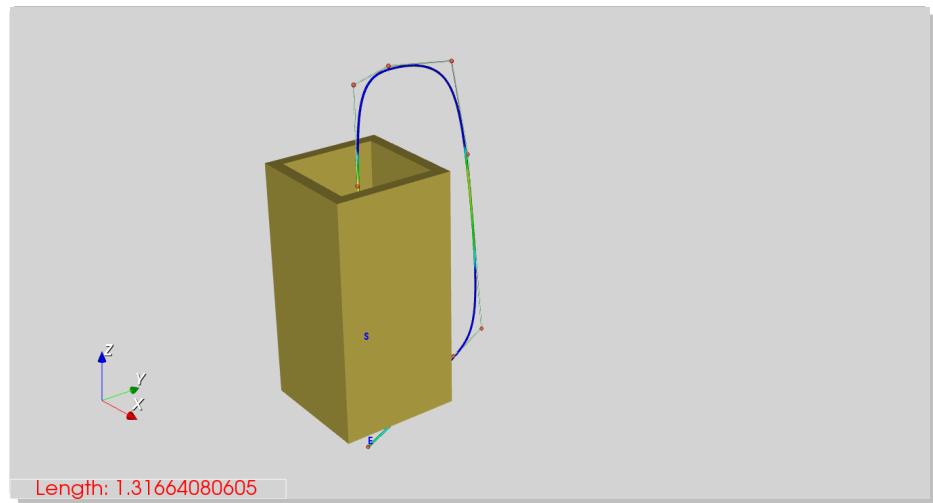


Figure 82.: Test 54; Scene 3; $s \rightarrow e [0.5,0.5,0.4] \rightarrow [0.5,0.5,0.2]$; Deg. 3; Meth. A; Post proc. ✓; Part. U.

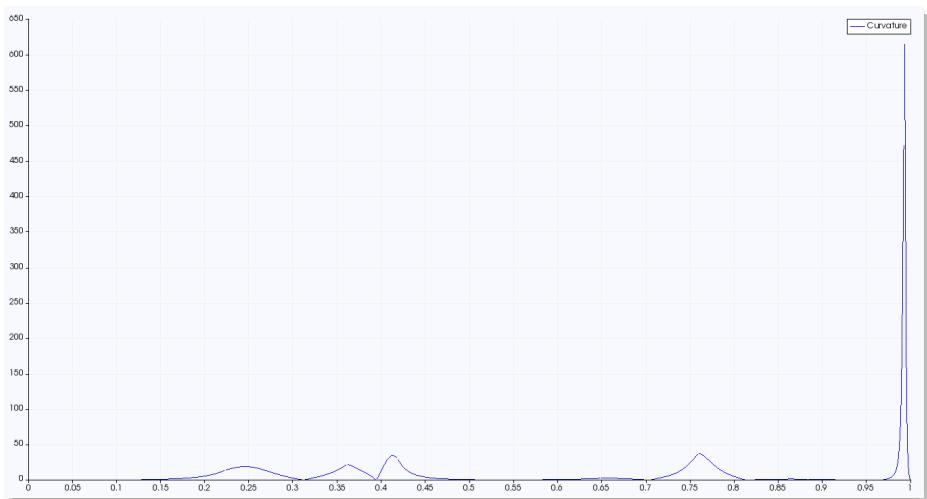
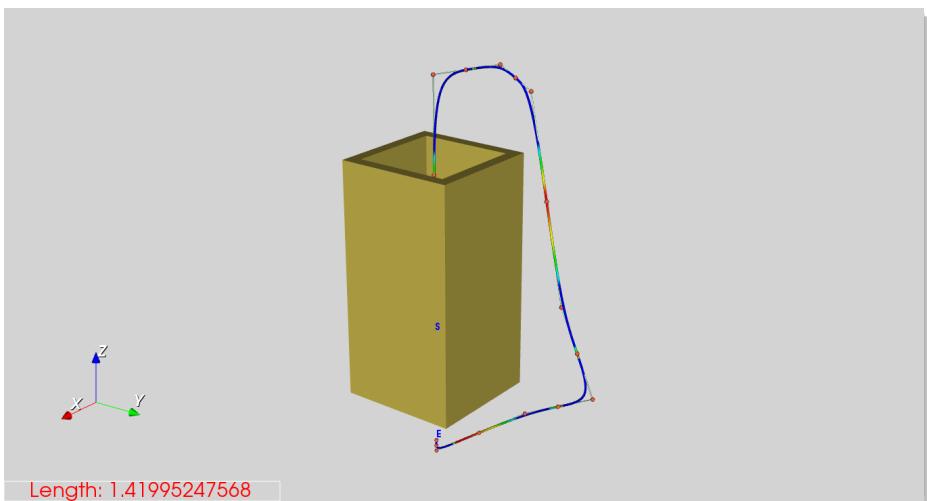
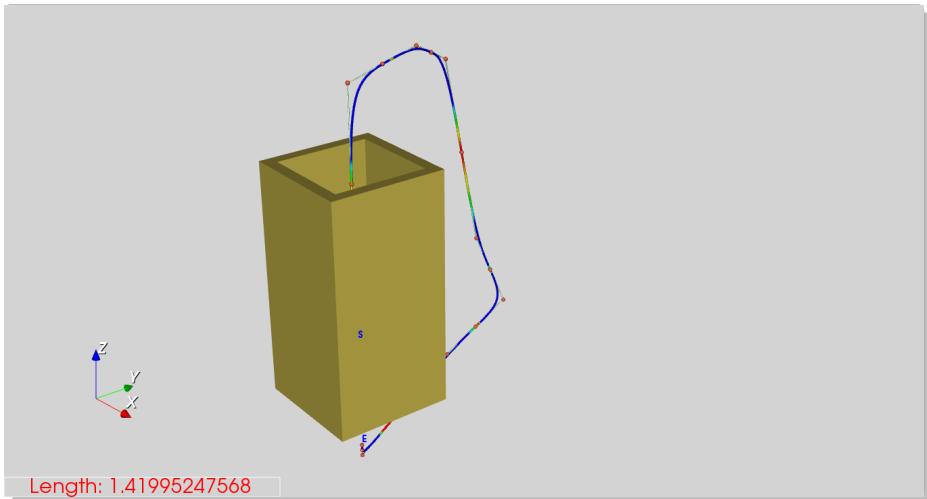


Figure 83.: Test 55; Scene 3; $s \rightarrow e$ $[0.5,0.5,0.4] \rightarrow [0.5,0.5,0.2]$; Deg. 3; Meth. A; Post proc. X; Part. A.

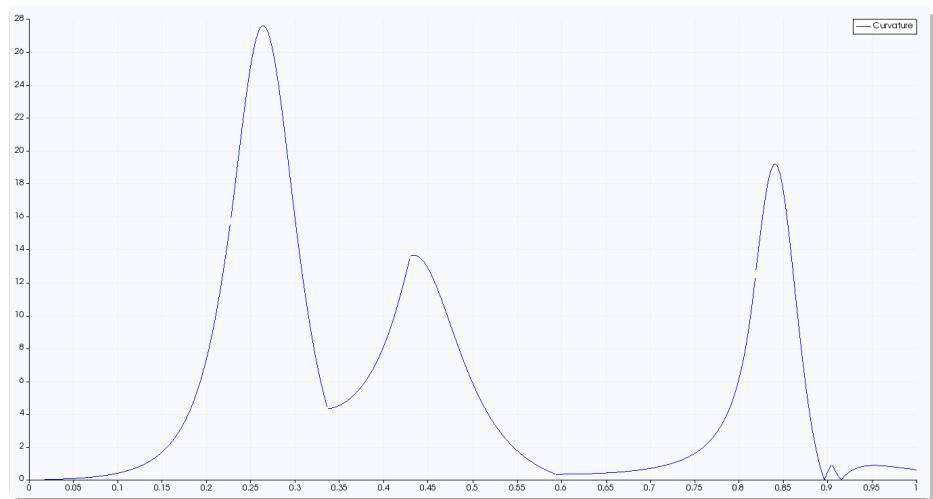
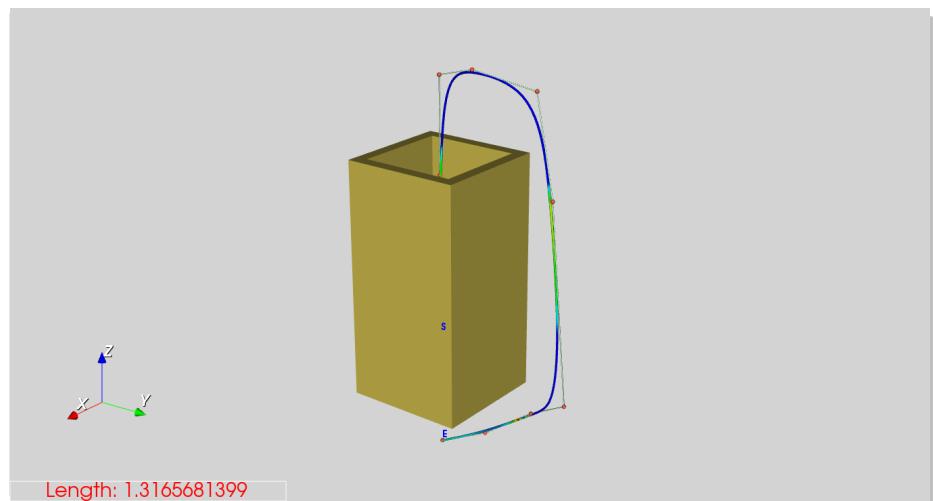
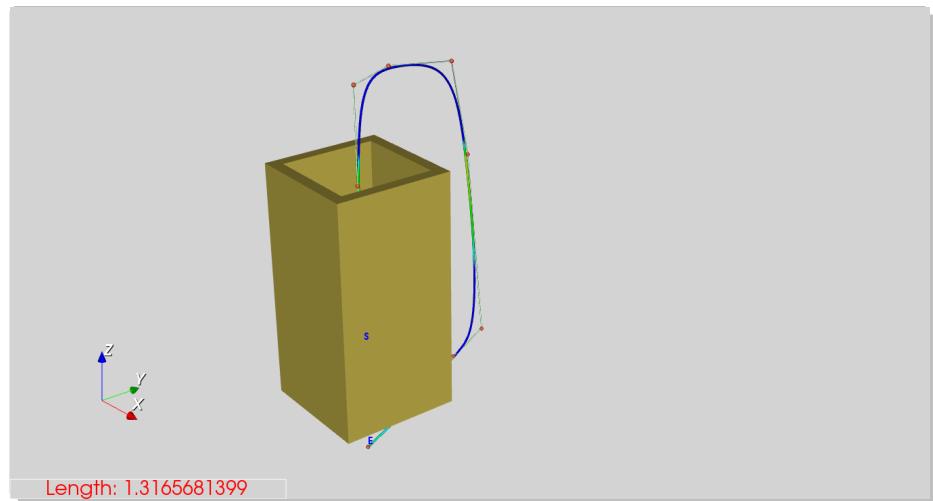


Figure 84.: Test 56; Scene 3; $s \rightarrow e [0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 3; Meth. A; Post proc. ✓; Part. A.

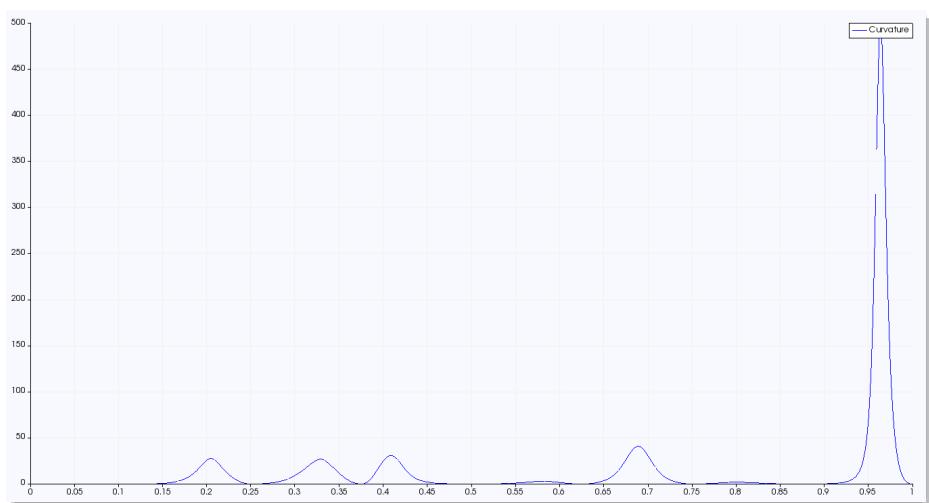
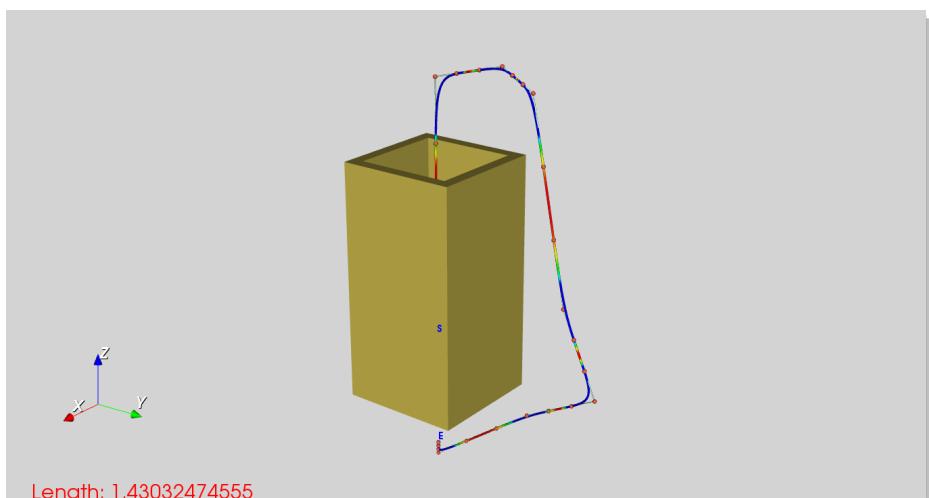
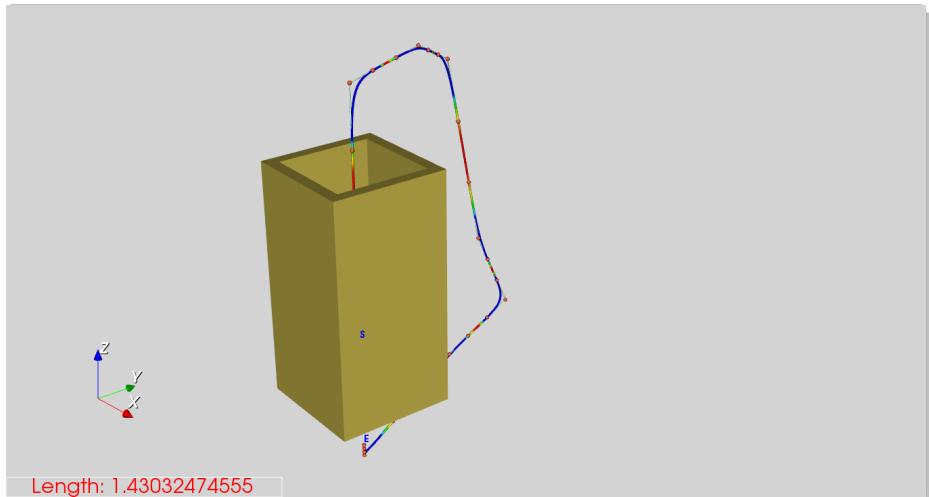


Figure 85.: Test 57; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. A; Post proc. X; Part. U.

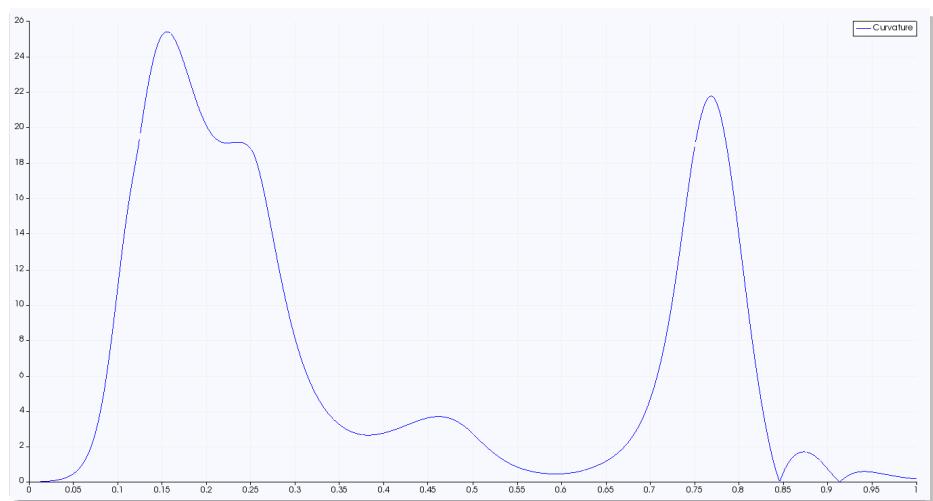
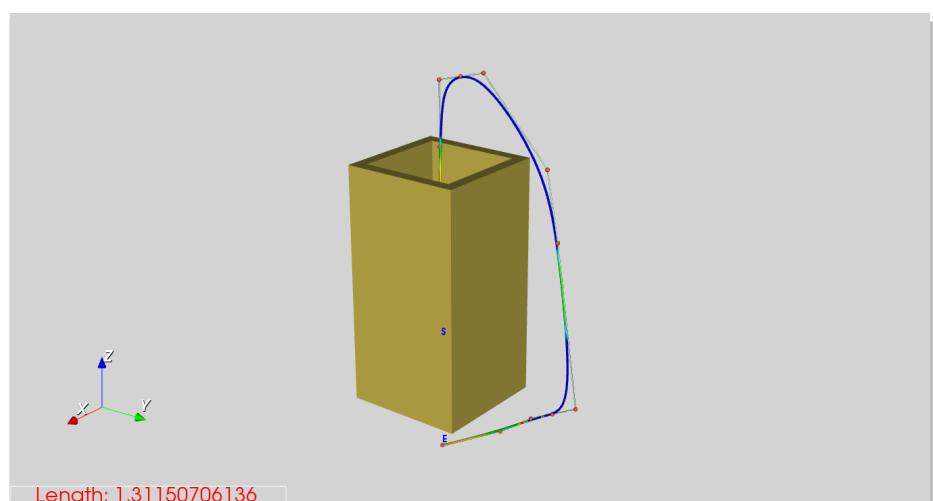
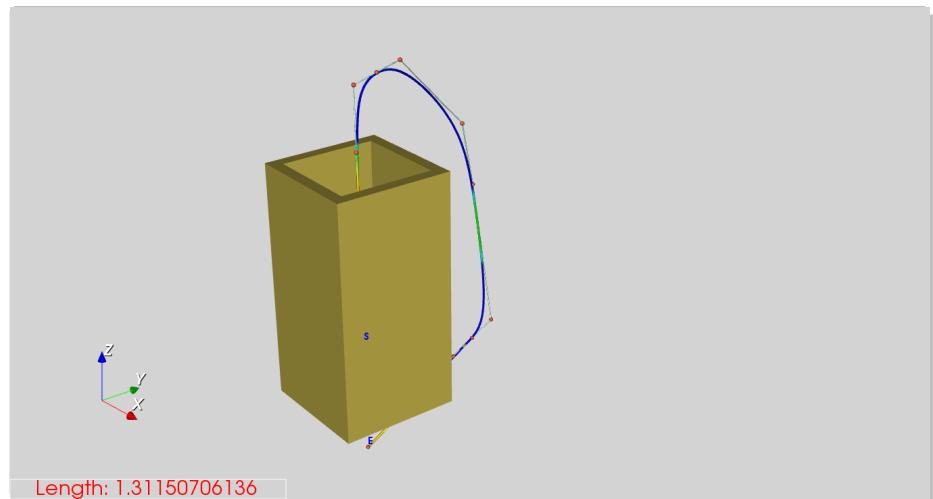


Figure 86.: Test 58; Scene 3; $s \rightarrow e [0.5,0.5,0.4] \rightarrow [0.5,0.5,0.2]$; Deg. 4; Meth. A; Post proc. ✓; Part. U.

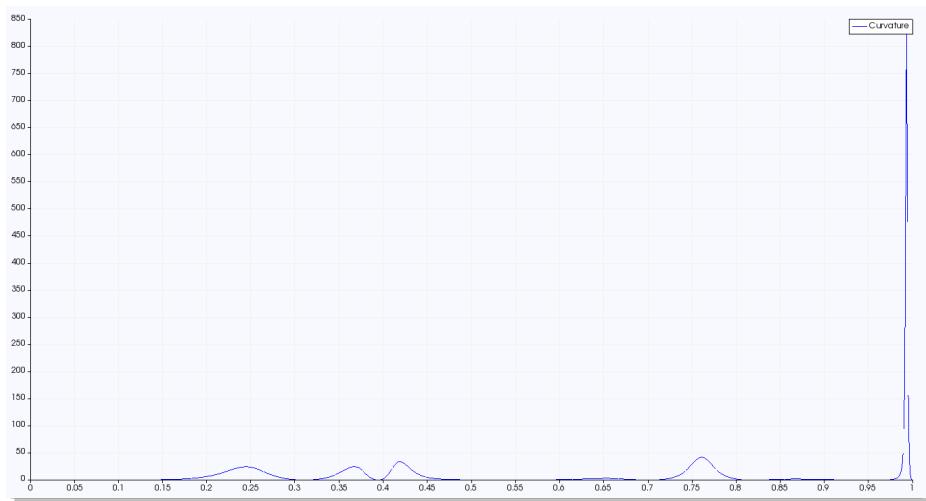
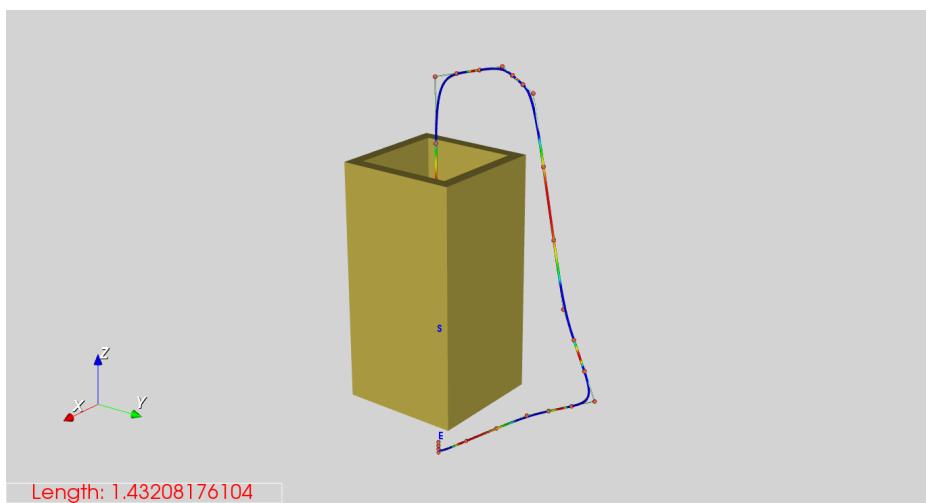
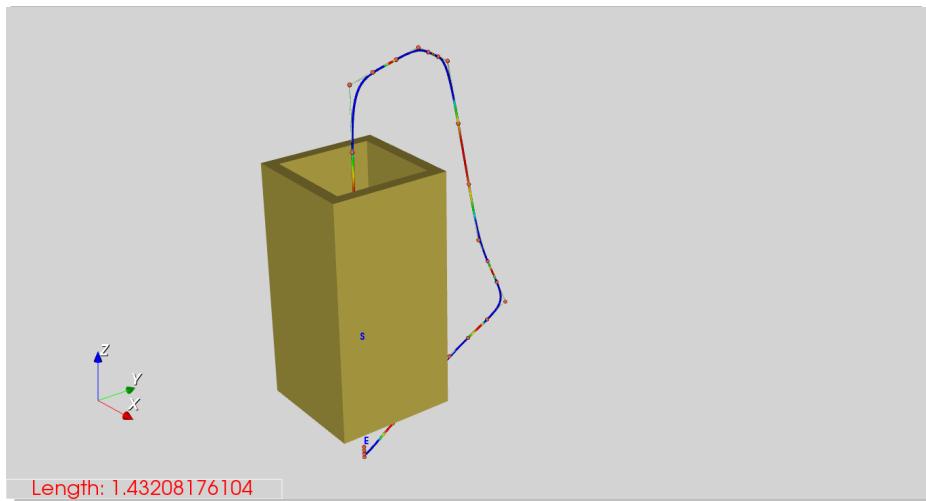


Figure 87.: Test 59; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. A; Post proc. X; Part. A.

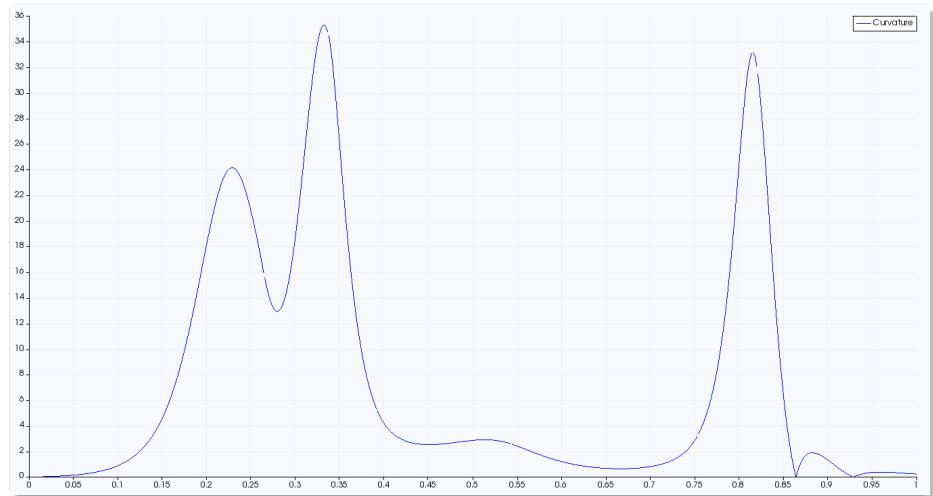
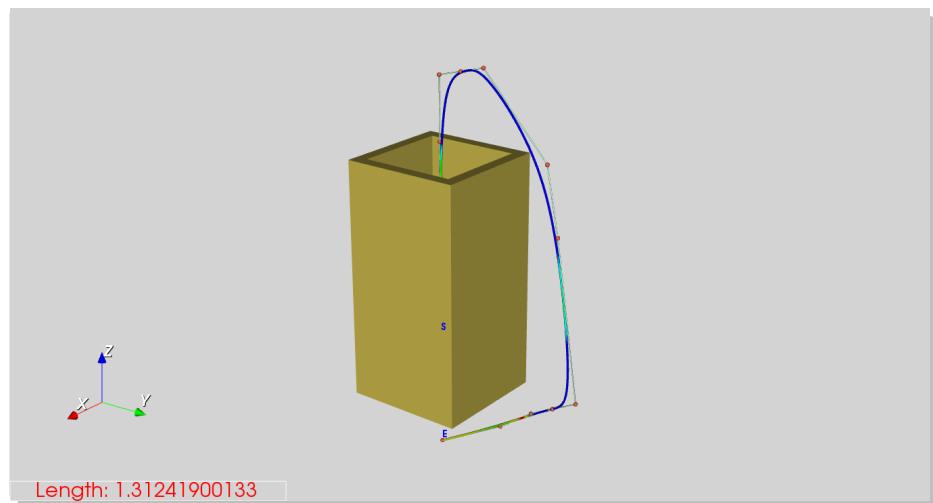
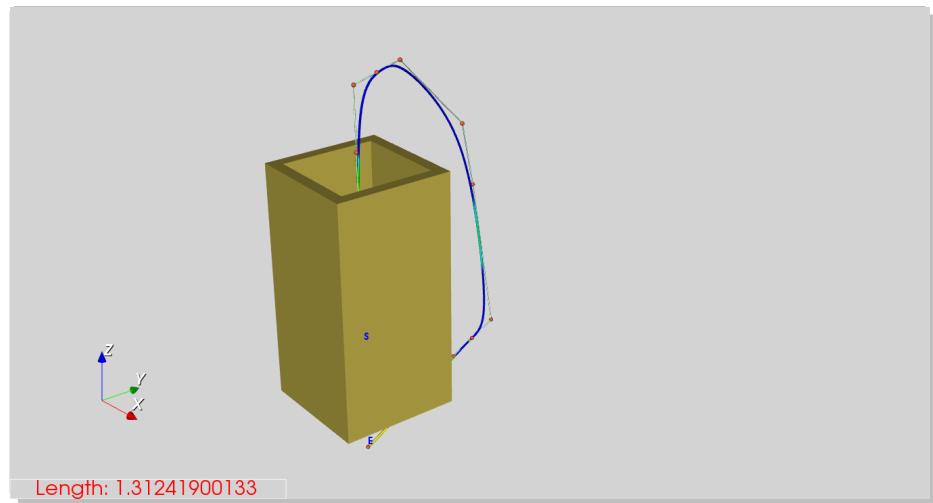


Figure 88.: Test 6o; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. A; Post proc. ✓; Part. A.

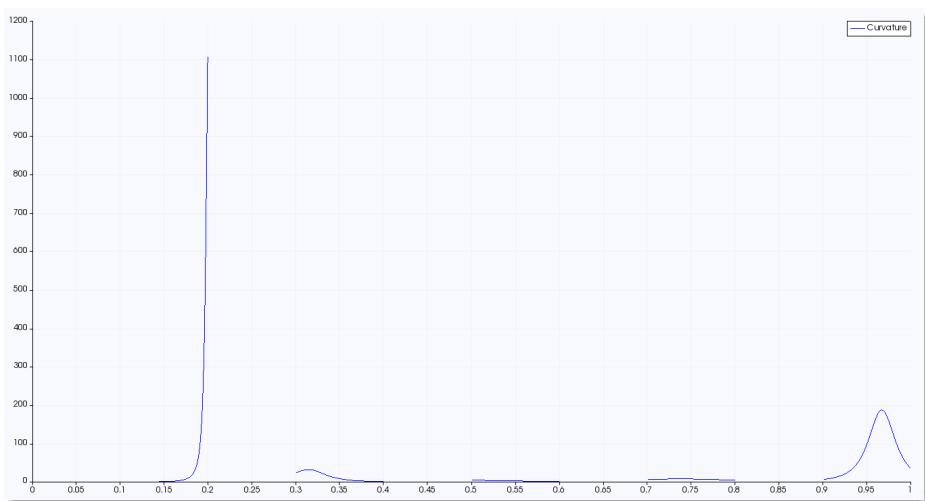
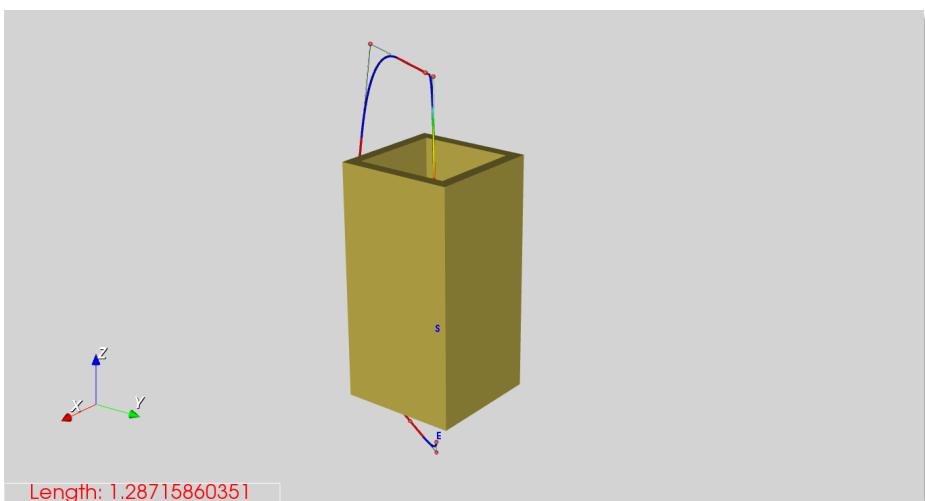
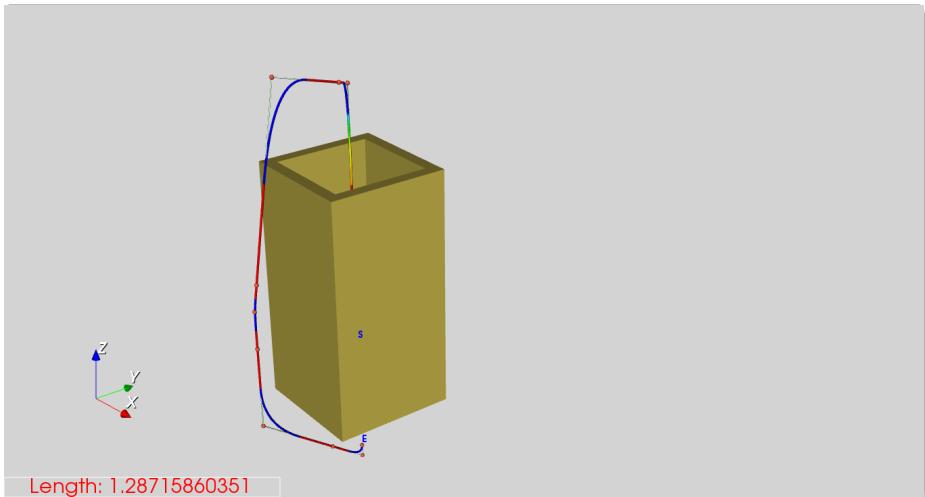


Figure 89.: Test 61; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. B; Post proc. X; Part. U.

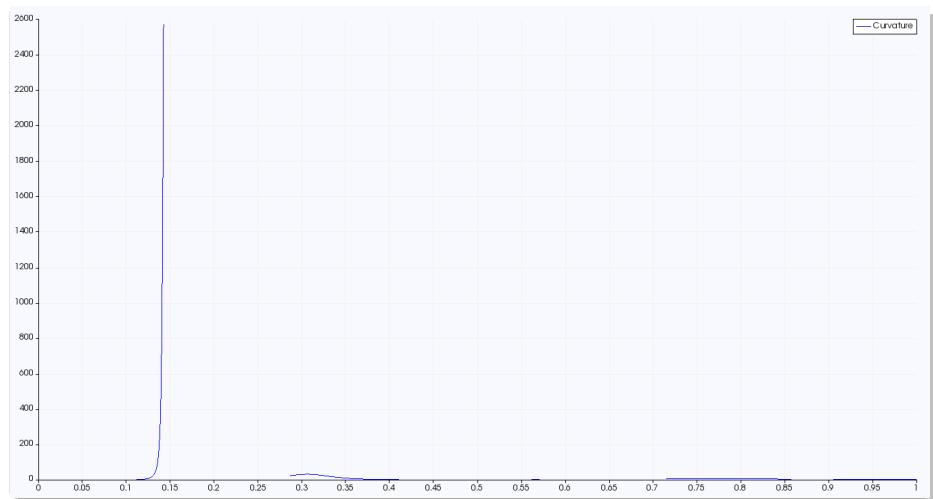
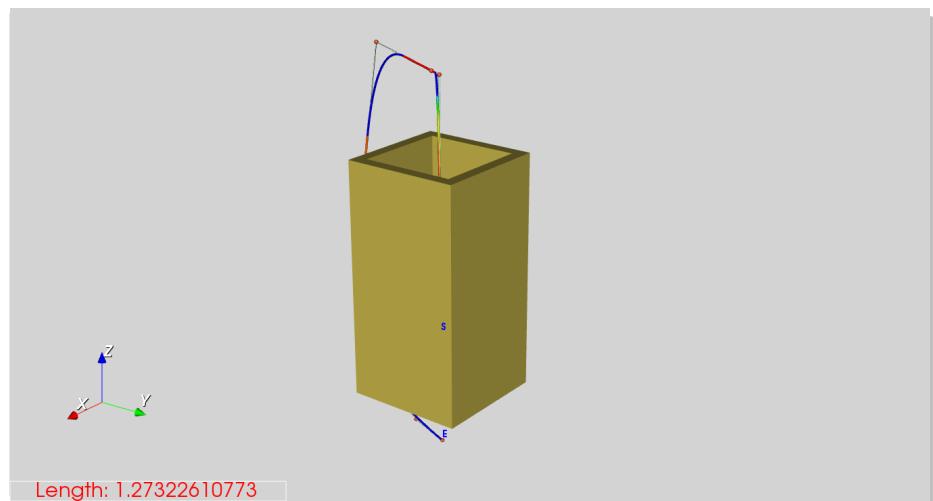
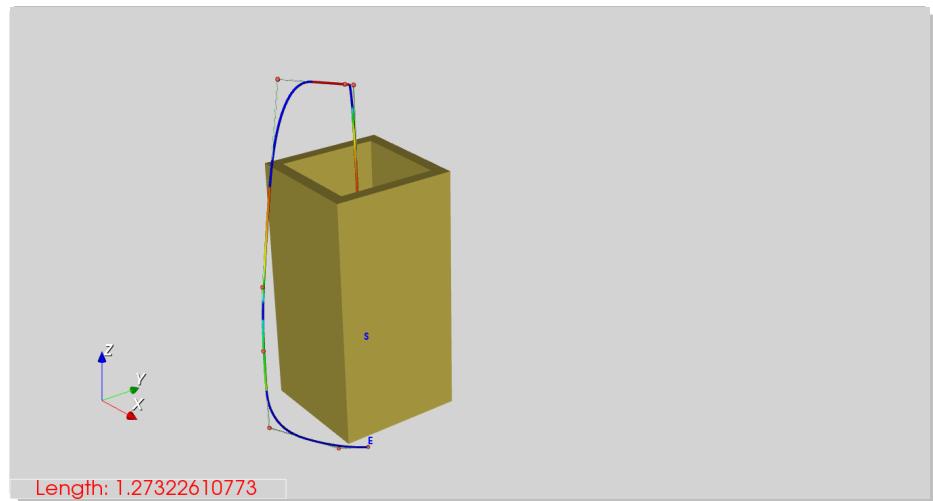


Figure 90.: Test 62; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. B; Post proc. ✓; Part. U.

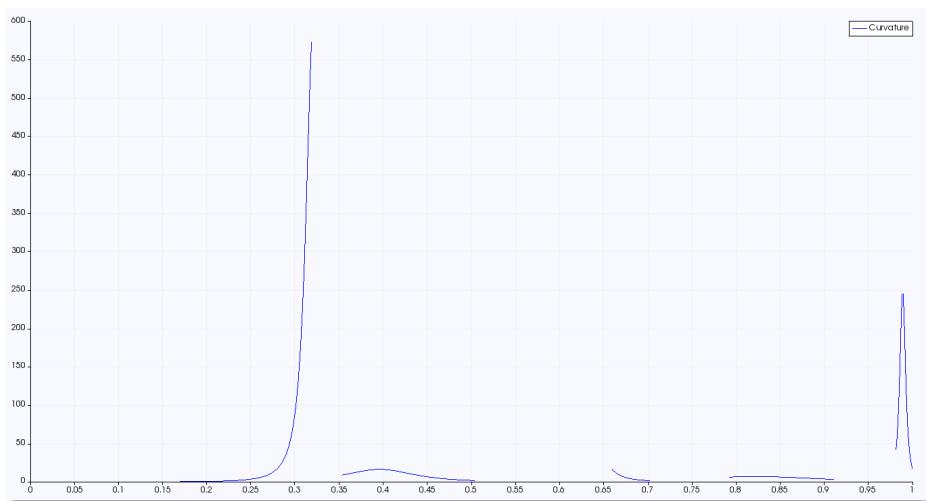
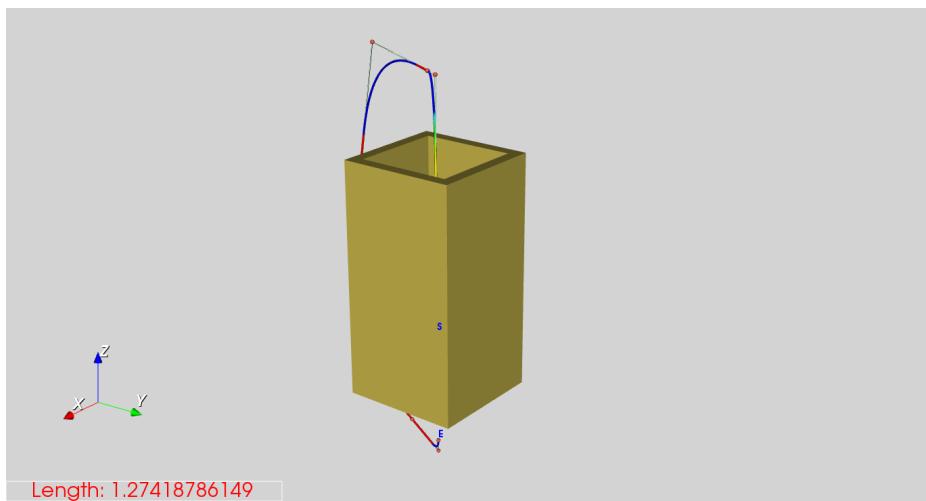
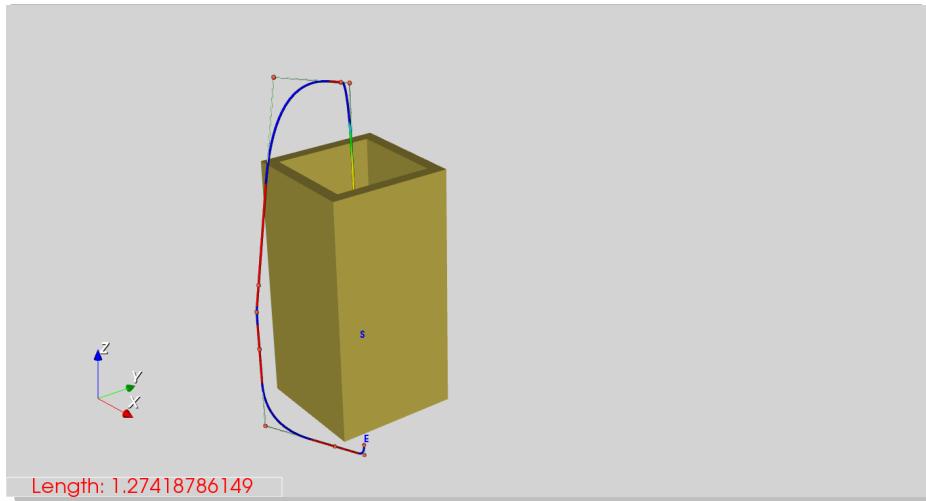


Figure 91.: Test 63; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. B; Post proc. X; Part. A.

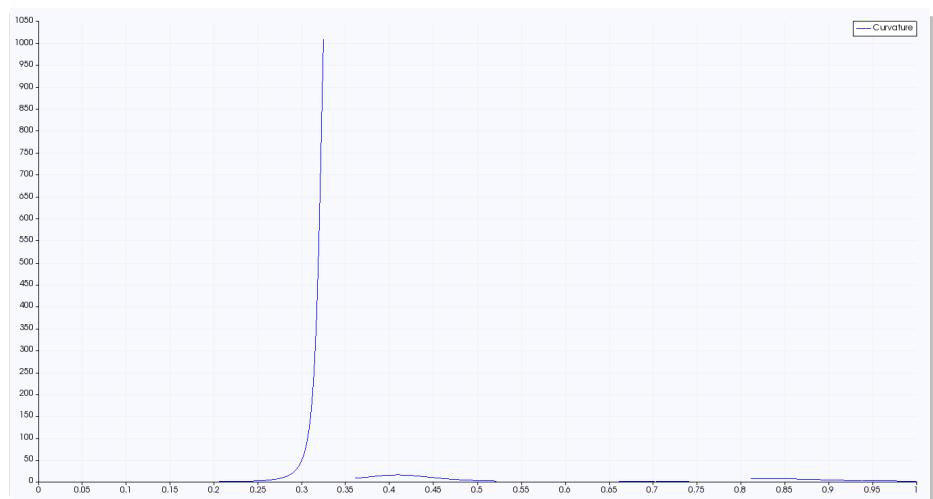
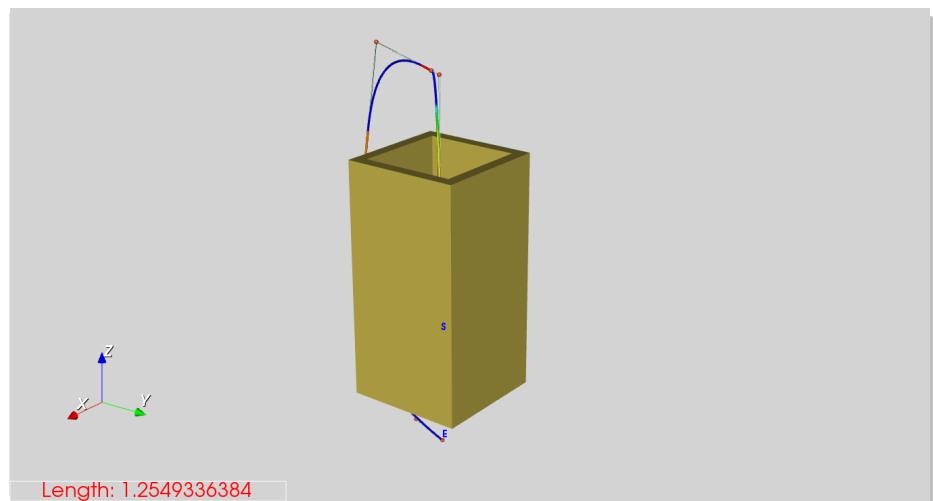
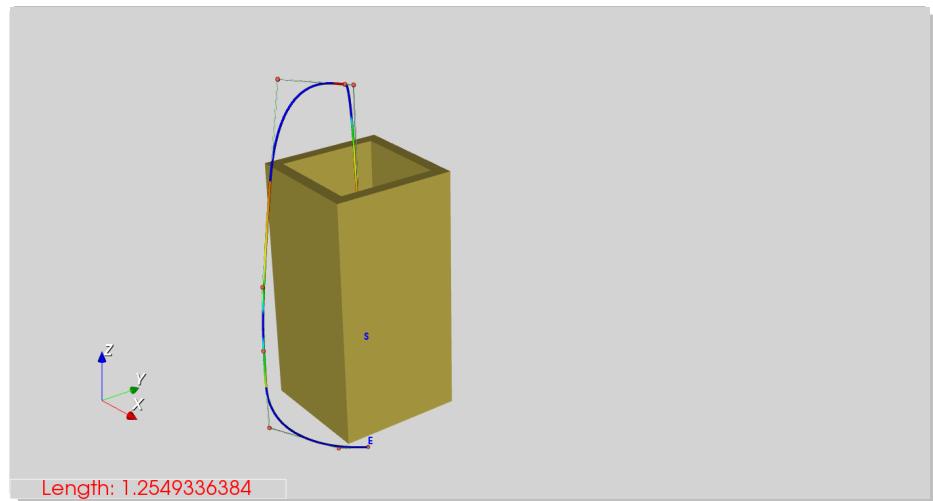


Figure 92.: Test 64; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. B; Post proc. ✓; Part. A.

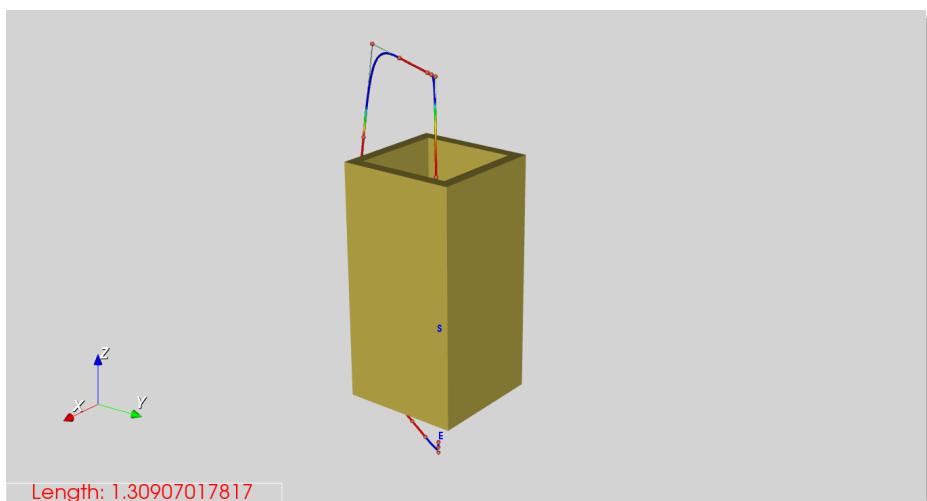
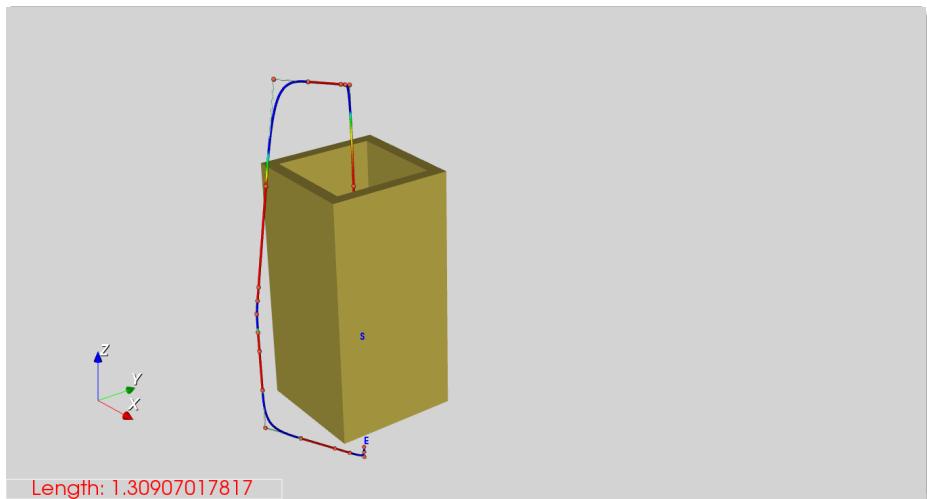


Figure 93.: Test 65; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 3; Meth. B; Post proc. X; Part. U.

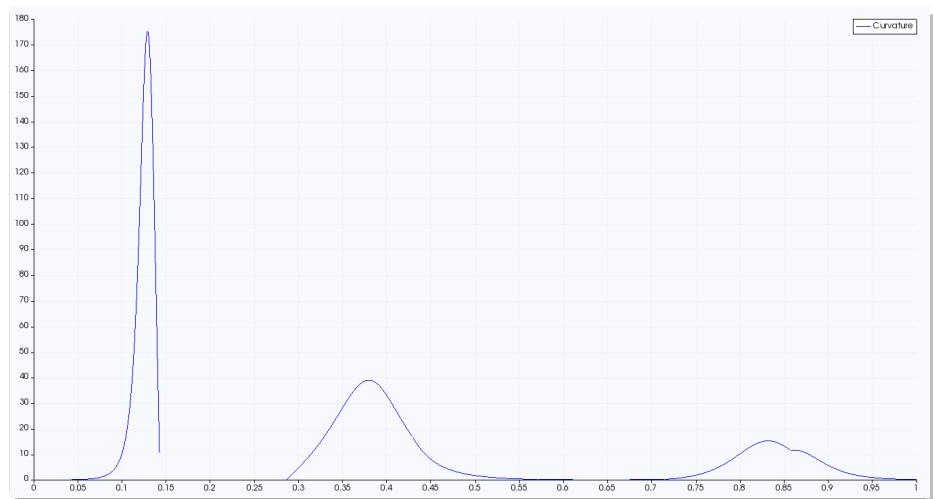
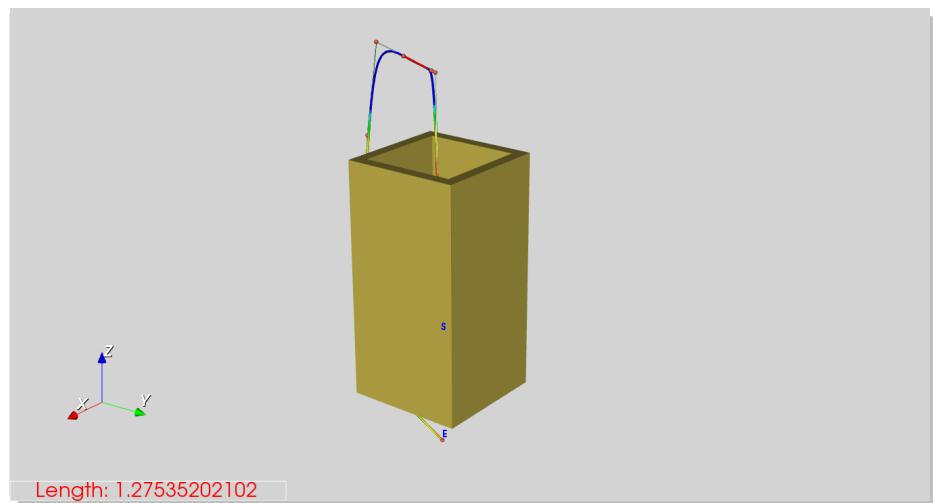
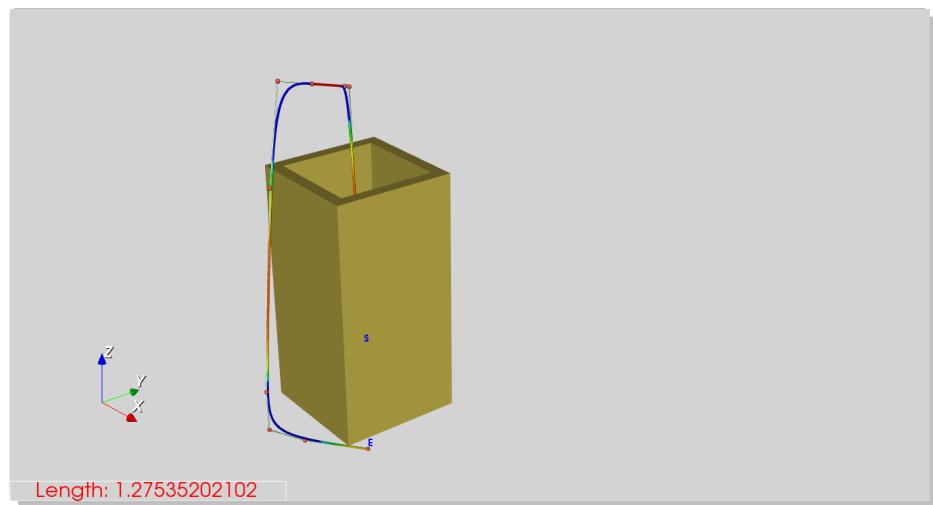


Figure 94.: Test 66; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 3; Meth. B; Post proc. ✓; Part. U.

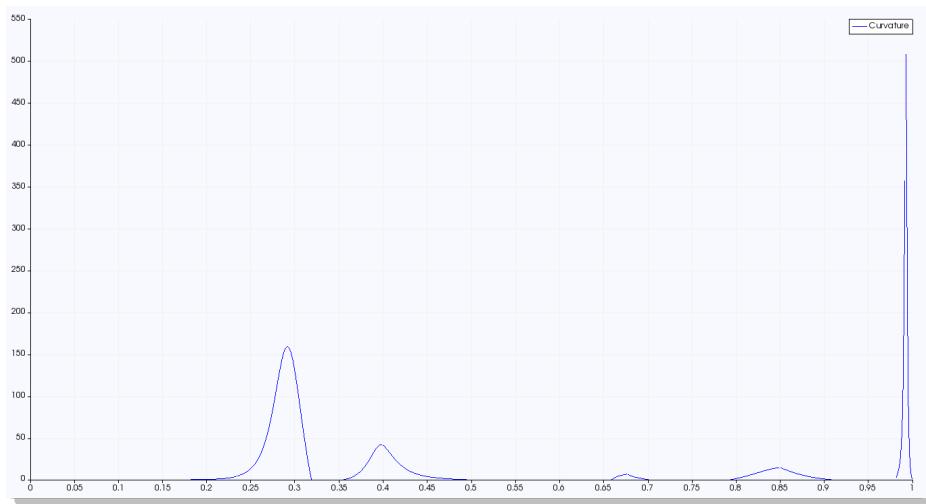
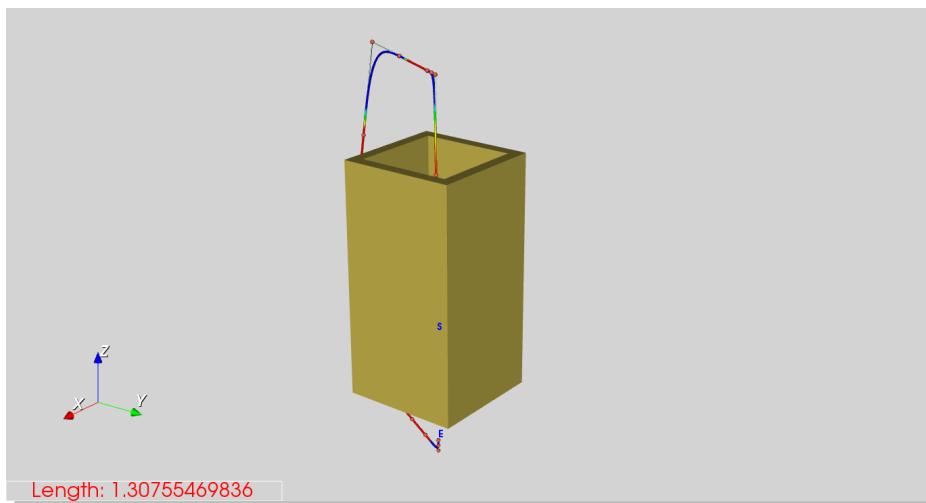
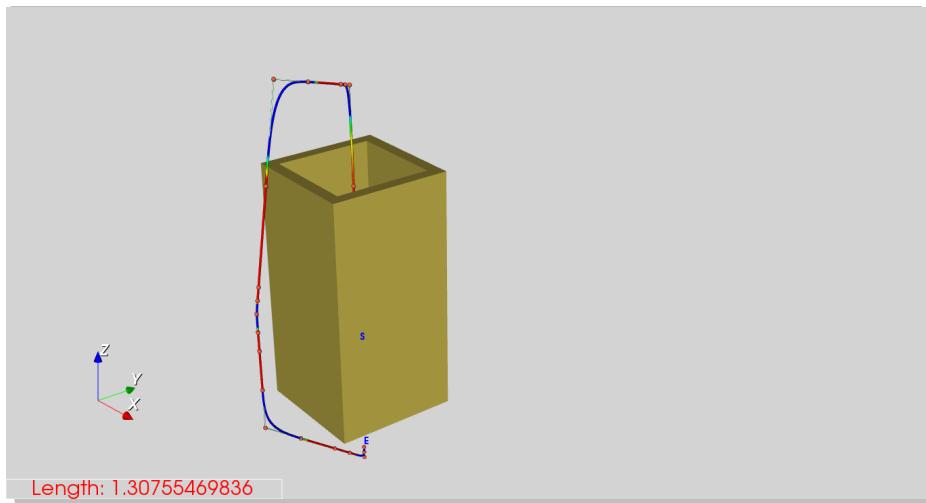


Figure 95.: Test 67; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 3; Meth. B; Post proc. X; Part. A.

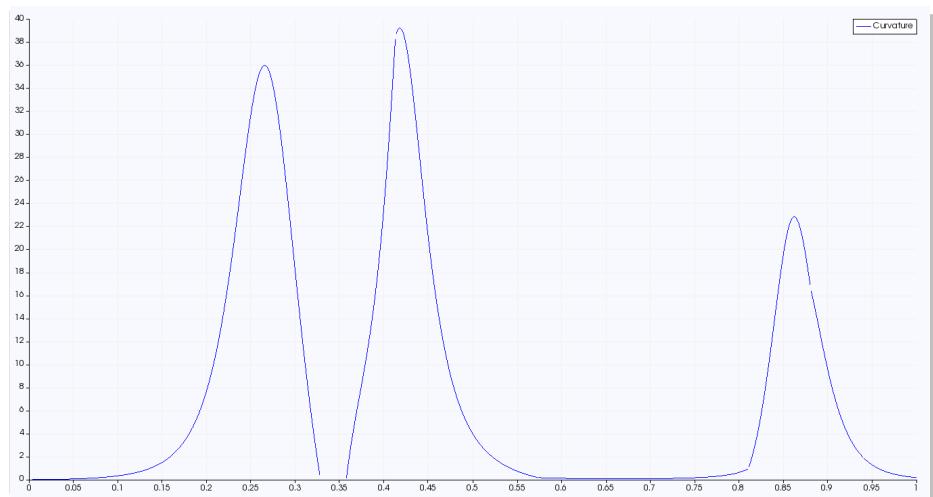
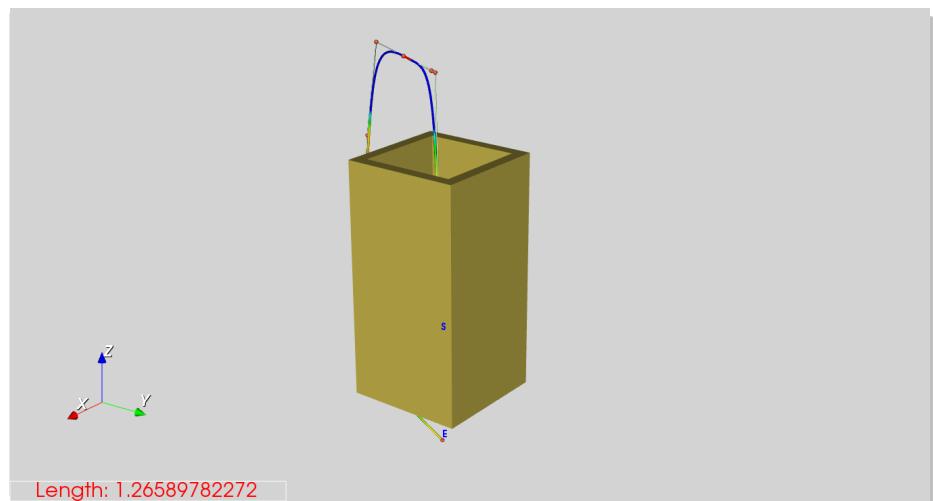
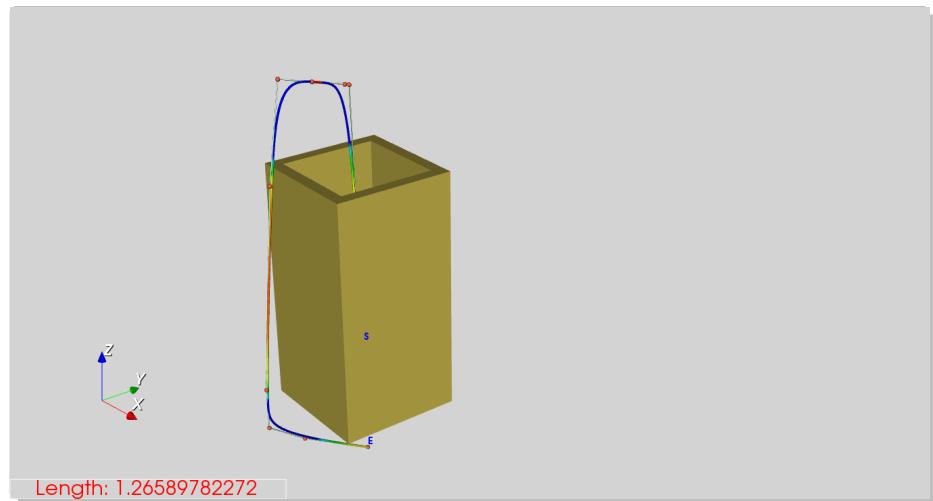


Figure 96.: Test 68; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 3; Meth. B; Post proc. ✓; Part. A.

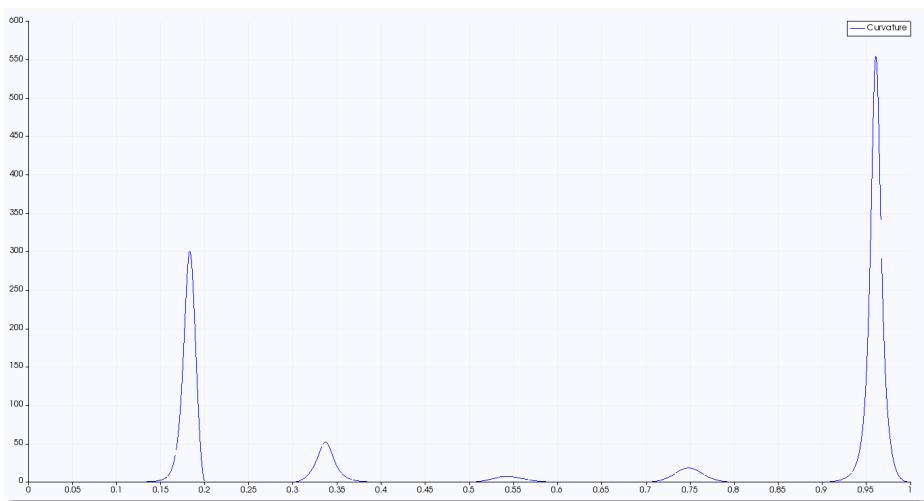
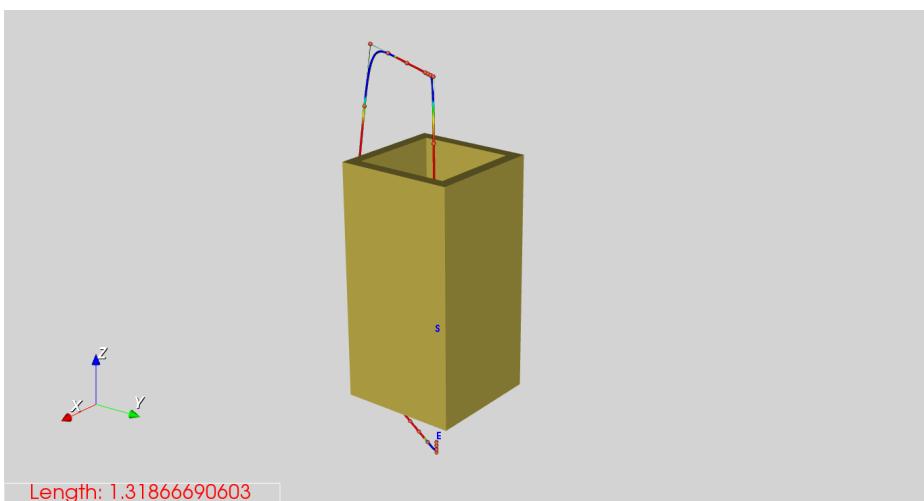
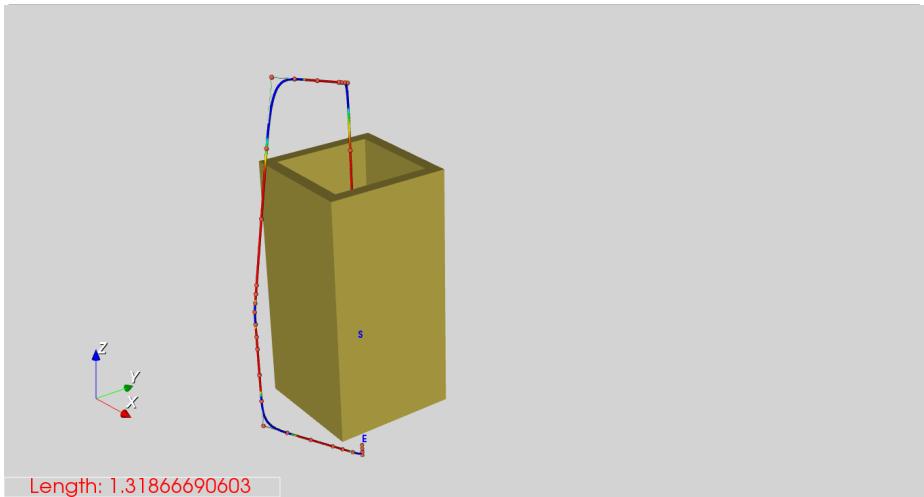


Figure 97.: Test 69; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. B; Post proc. χ ; Part. U.

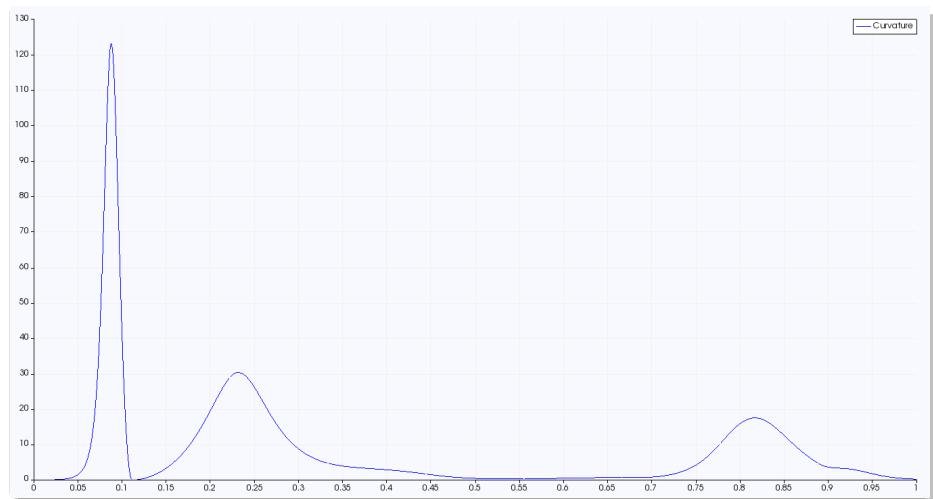
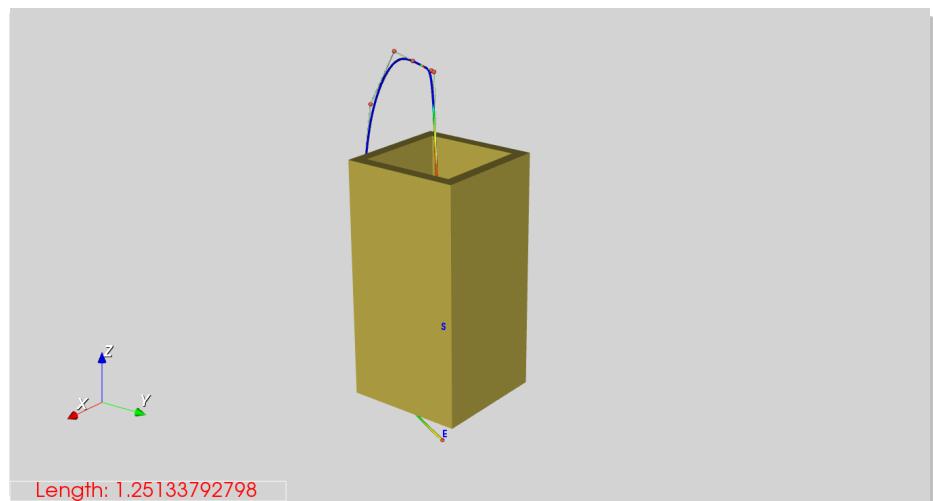
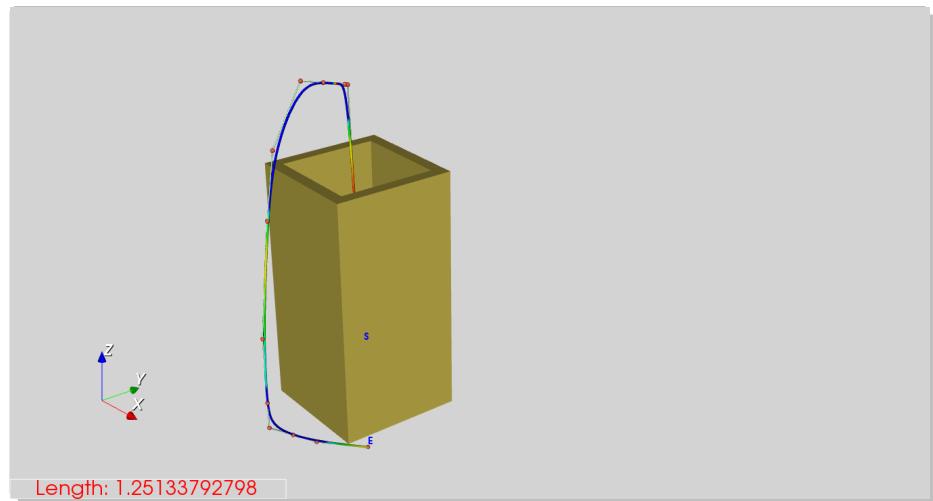


Figure 98.: Test 70; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. B; Post proc. ✓; Part. U.

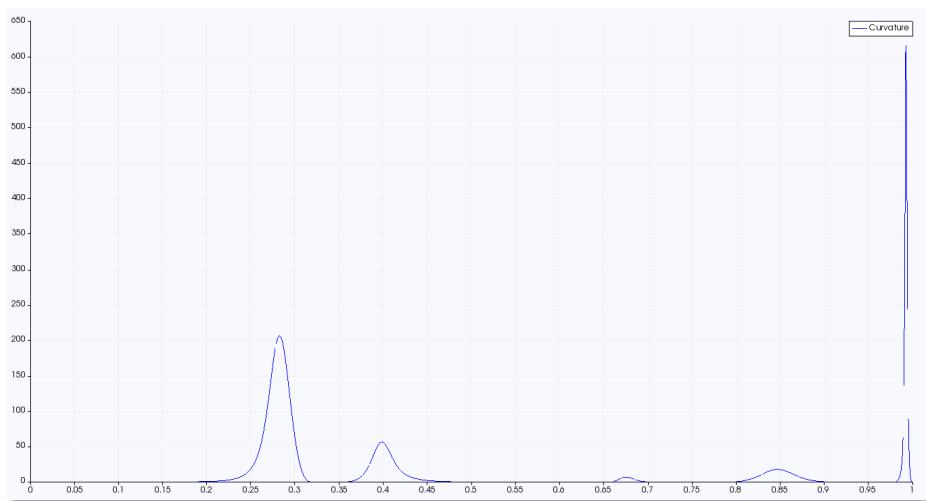
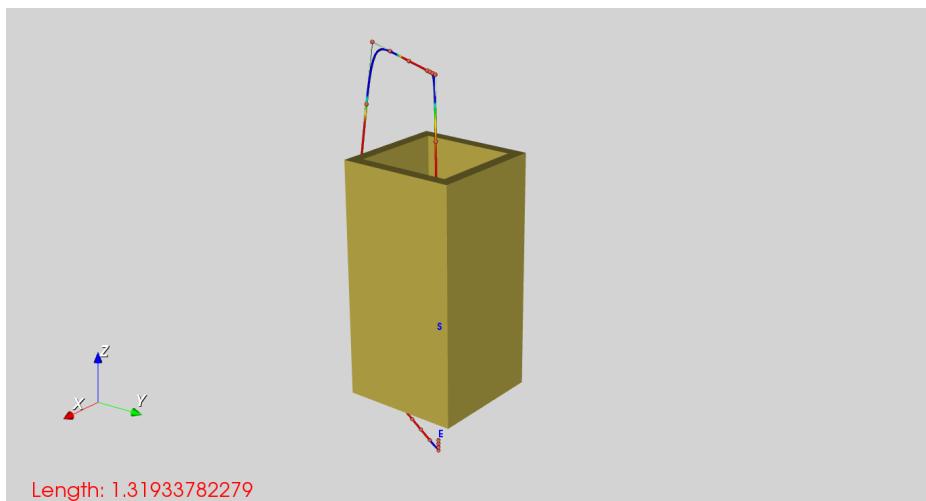
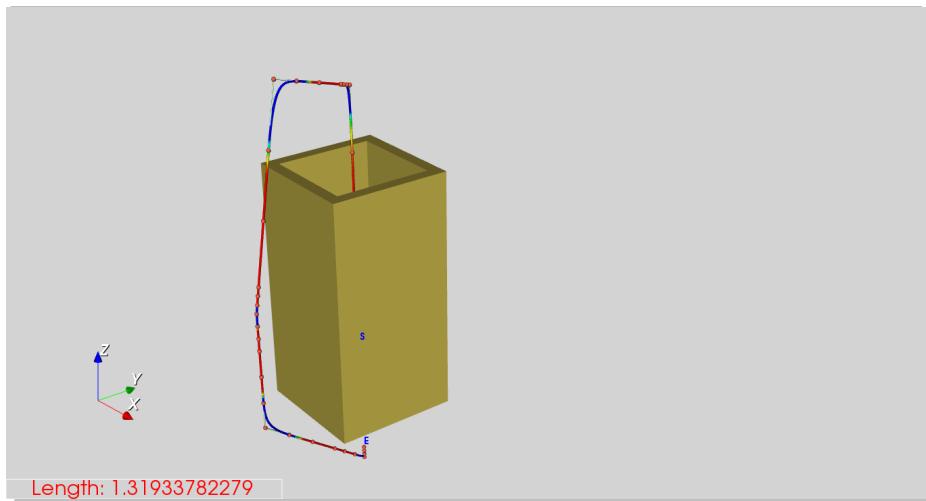


Figure 99.: Test 71; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. B; Post proc. X; Part. A.

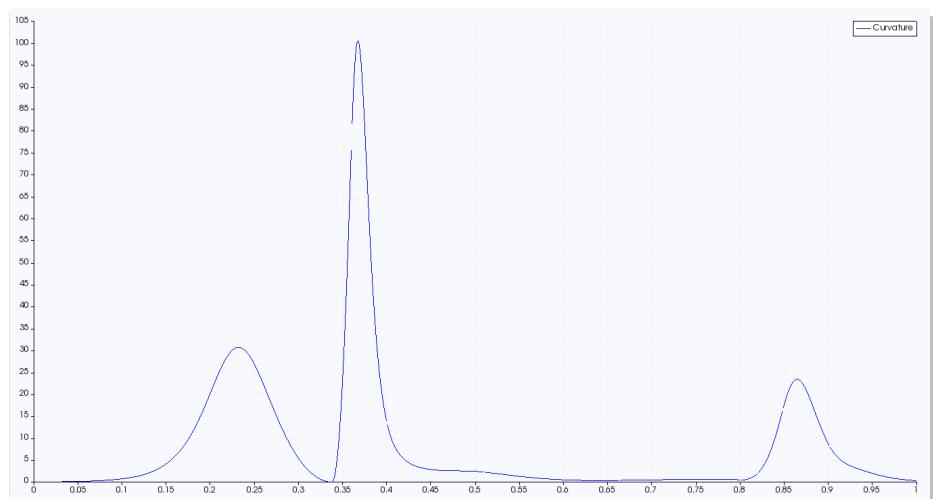
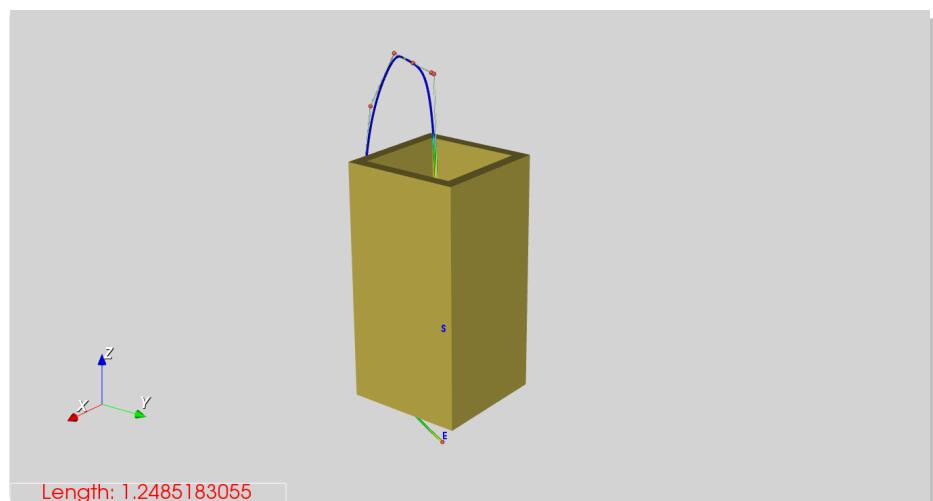
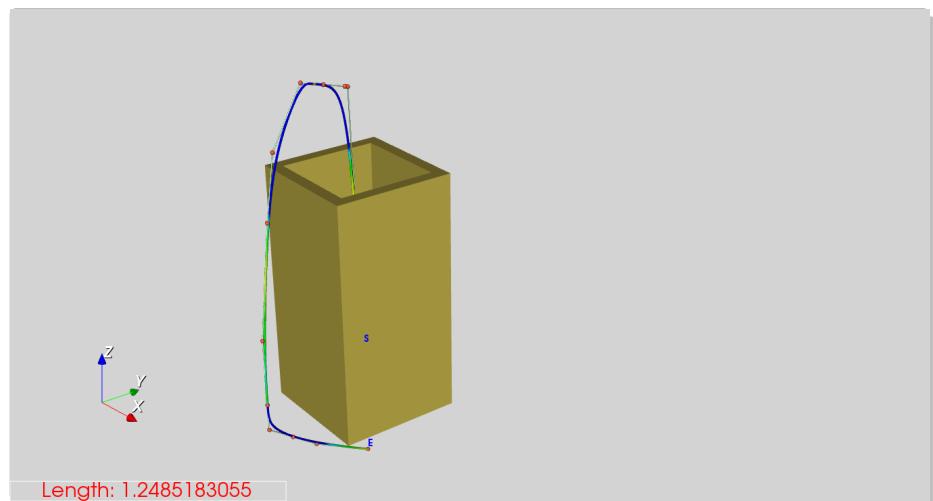


Figure 100.: Test 72; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. B; Post proc. ✓; Part. A.

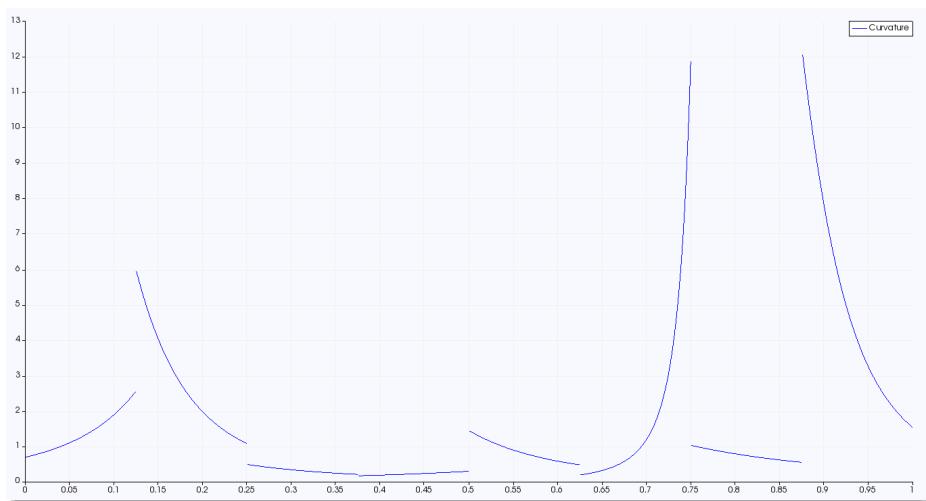
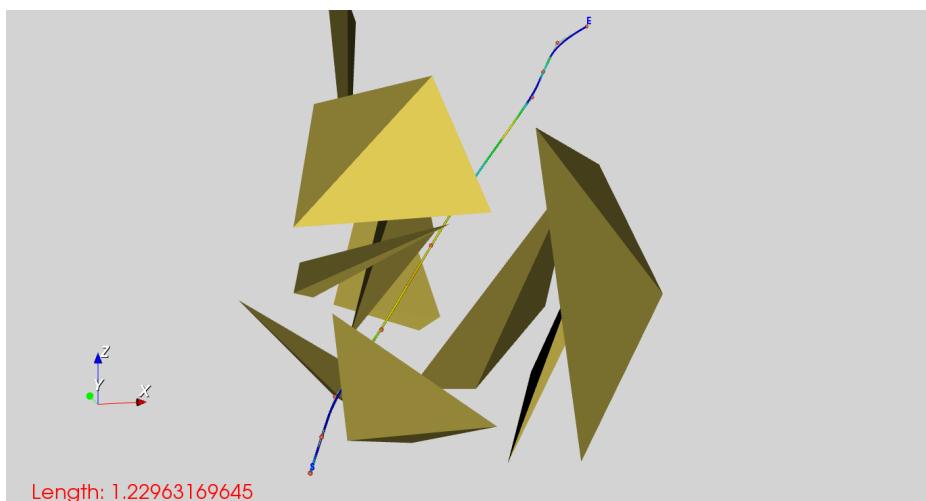
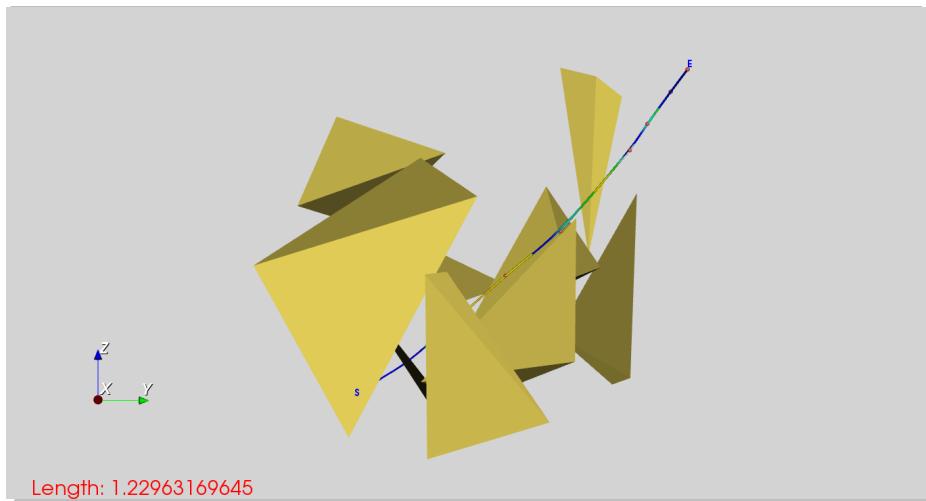


Figure 101.: Test 73; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. C; Part. U; Config. 1.

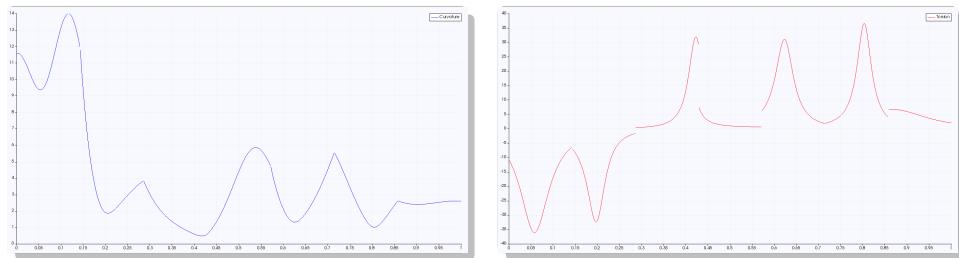
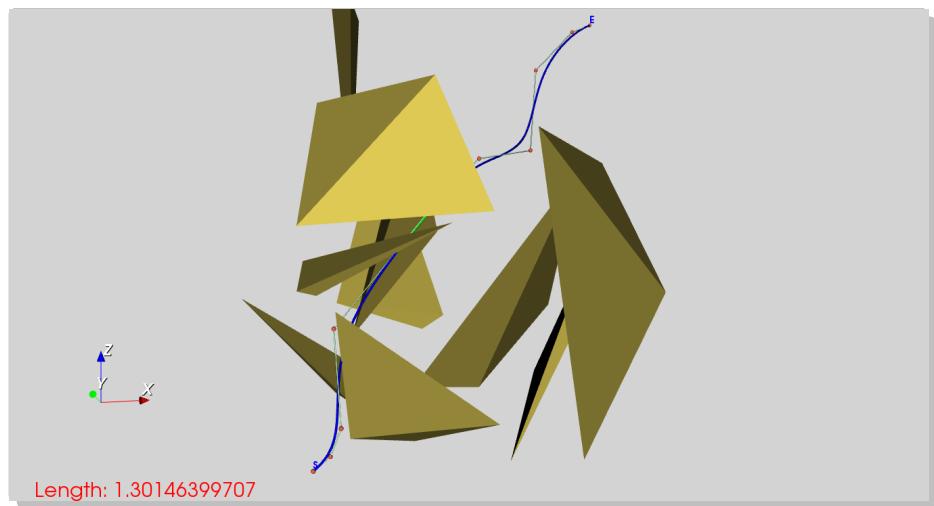
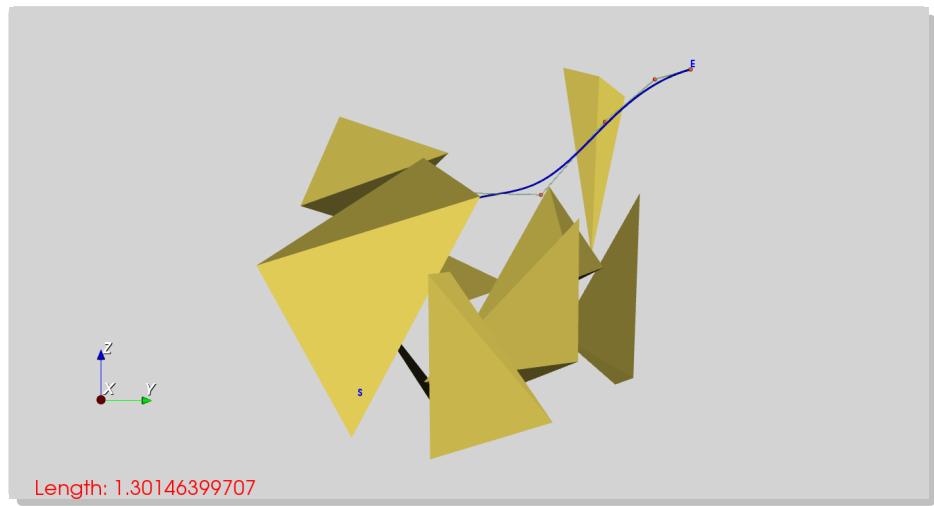


Figure 102.: Test 74; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. C; Part. U; Config. 1.

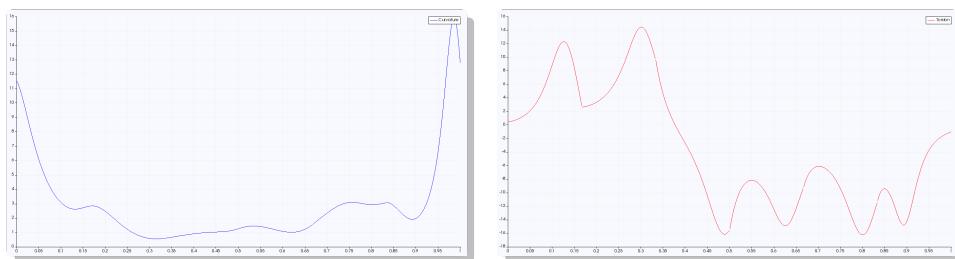
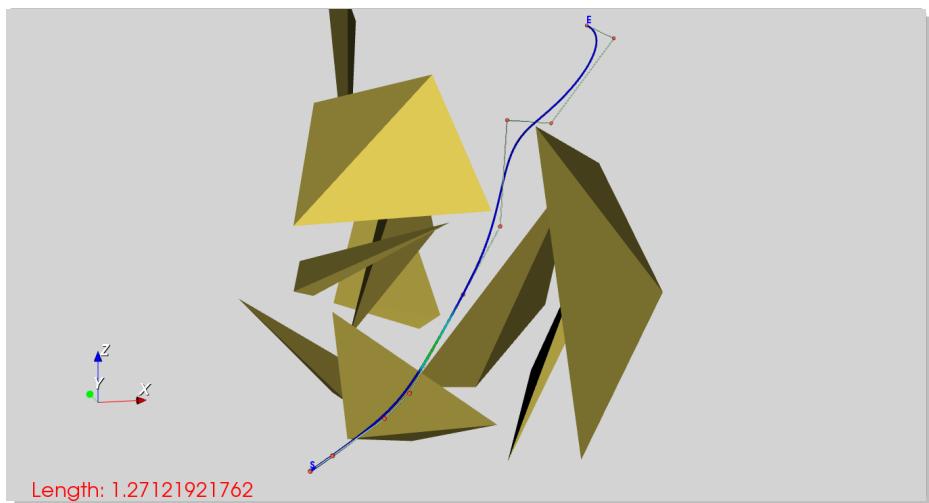
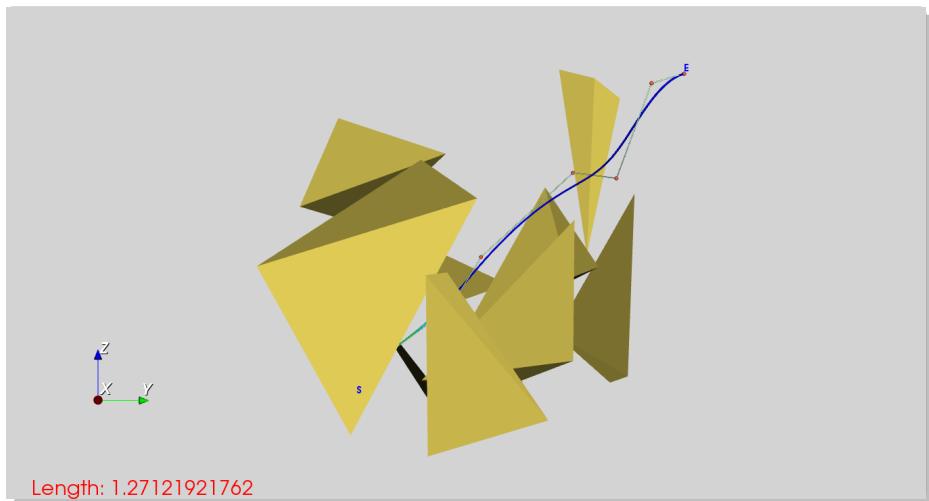


Figure 103.: Test 75; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. C; Part. U; Config. 1.

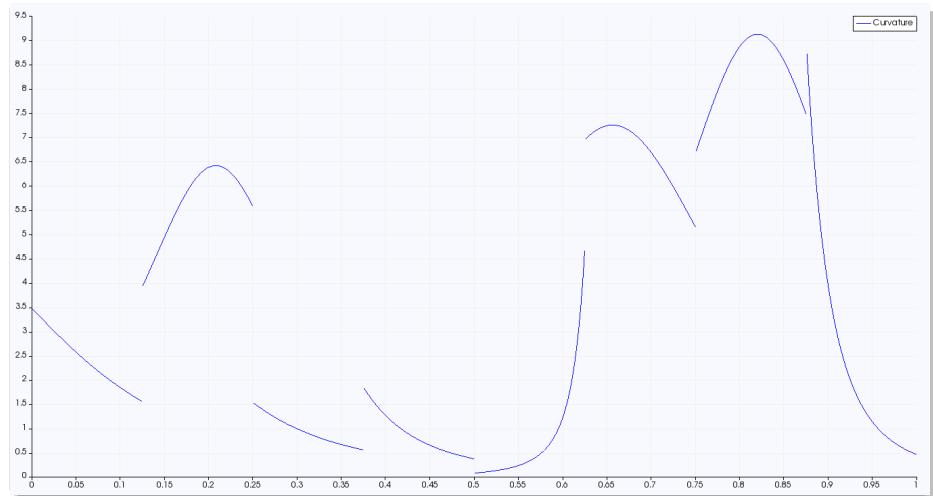
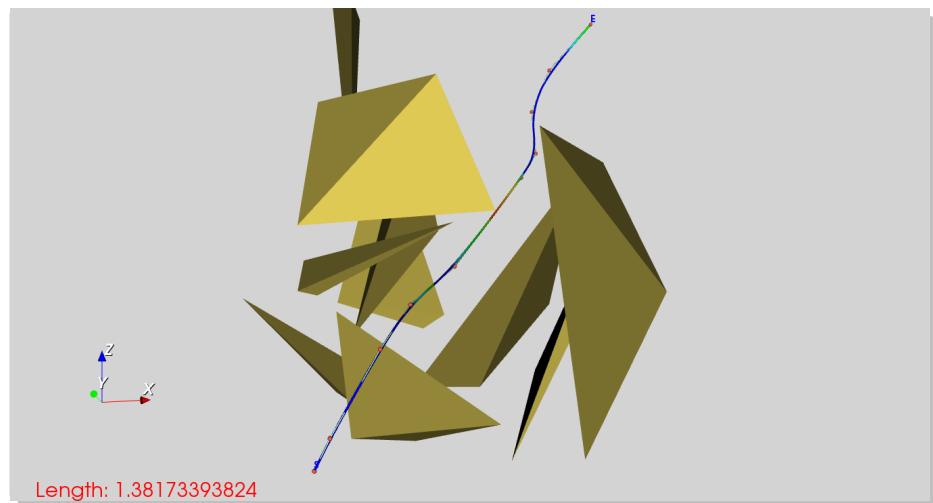
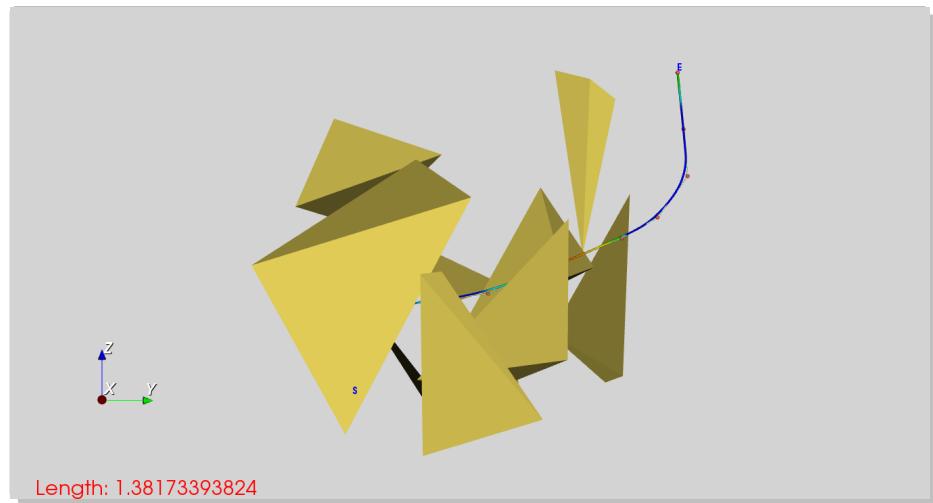


Figure 104.: Test 76; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. C; Part. U; Config. 2.

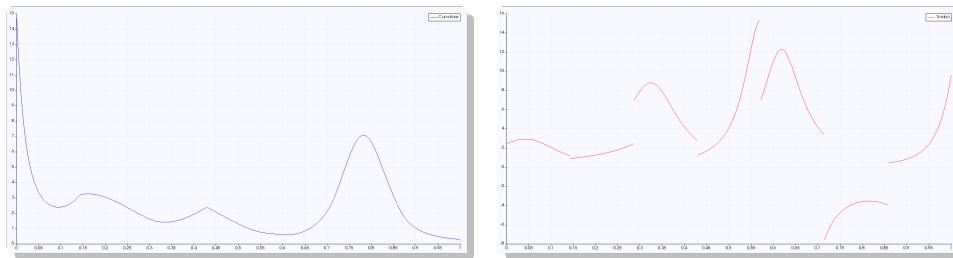
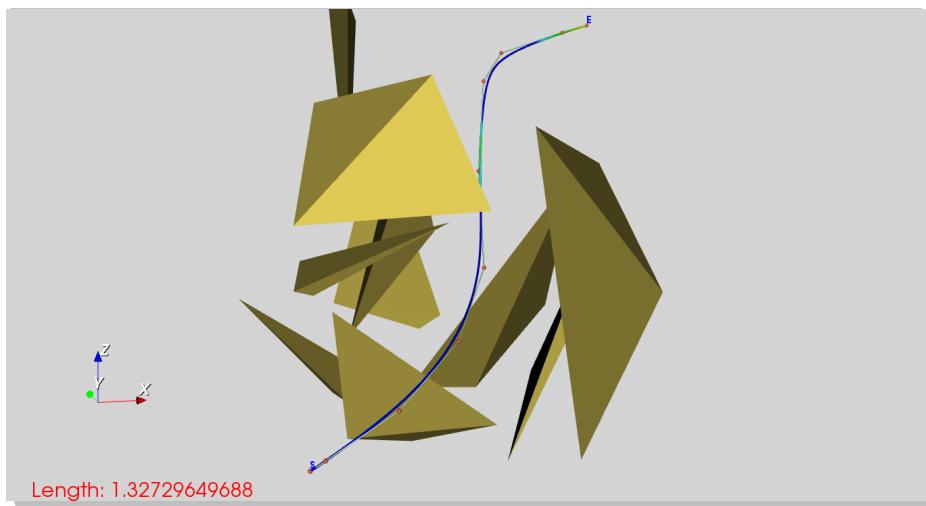
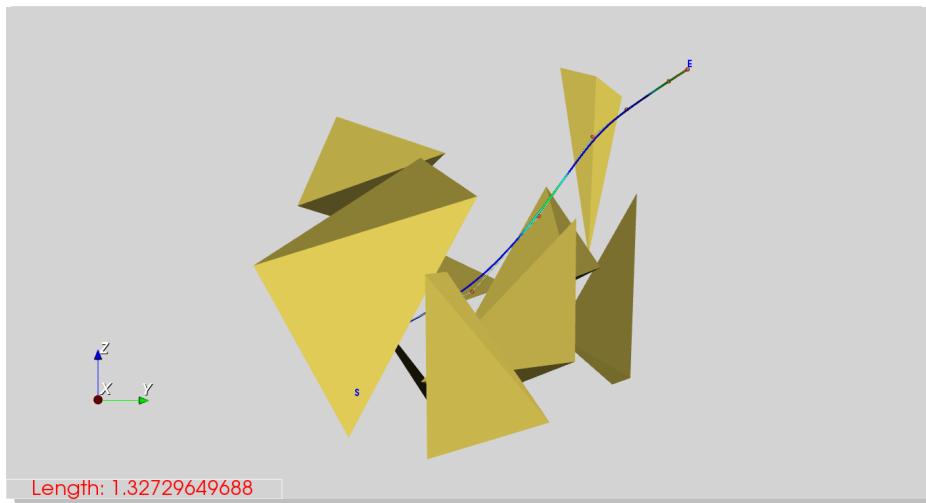


Figure 105.: Test 77; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. C; Part. U; Config. 2.

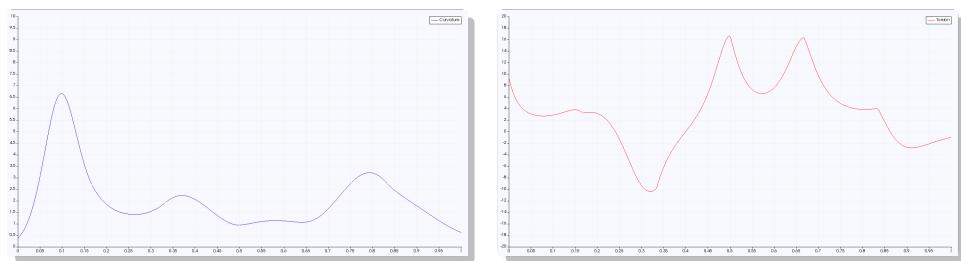
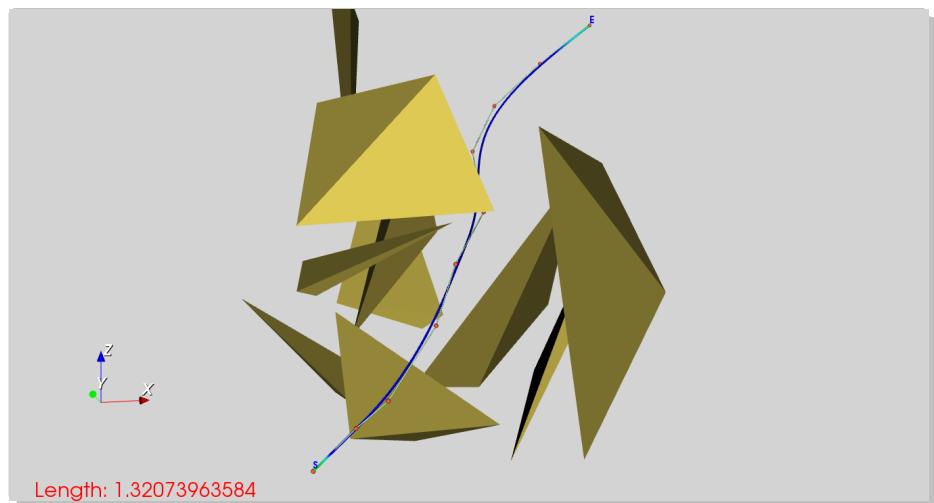
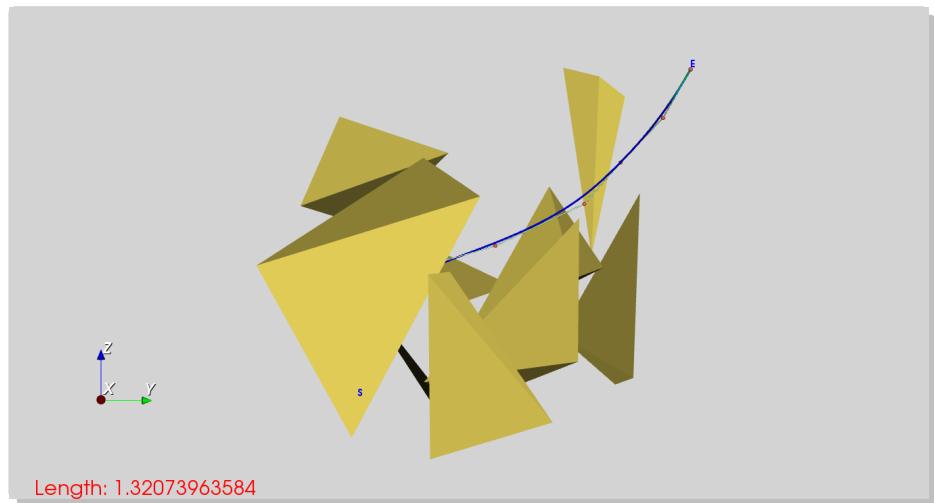


Figure 106.: Test 78; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. C; Part. U; Config. 2.

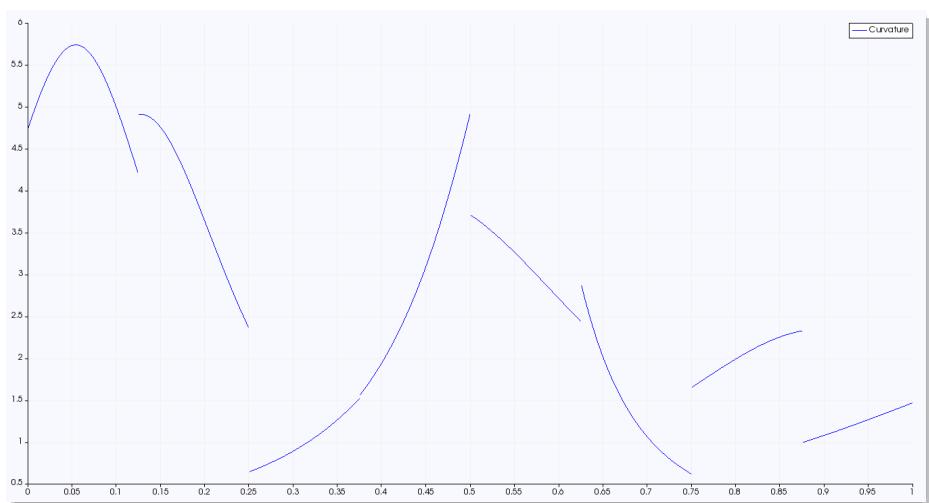
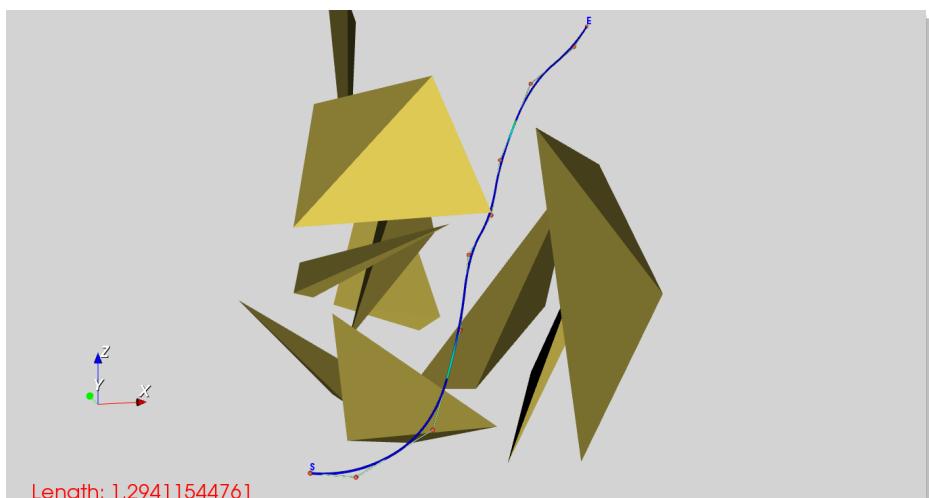
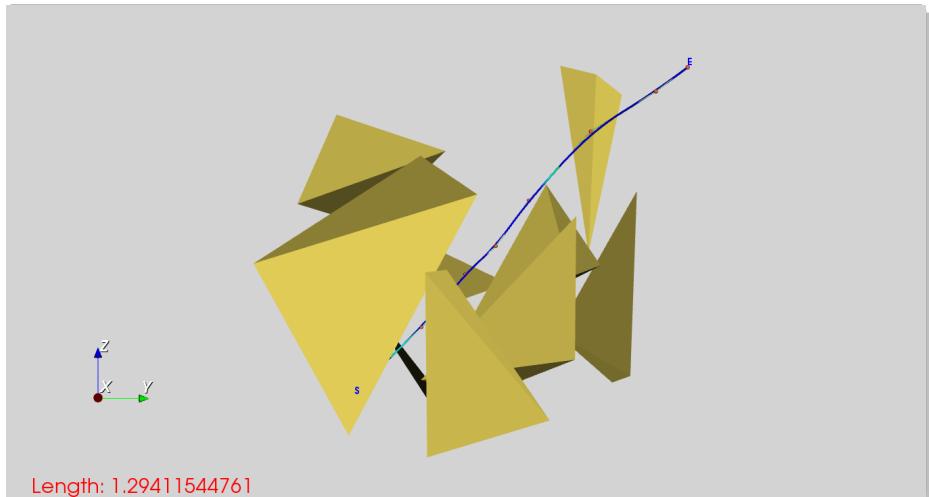


Figure 107.: Test 79; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 2; Meth. C; Part. U; Config. 3.

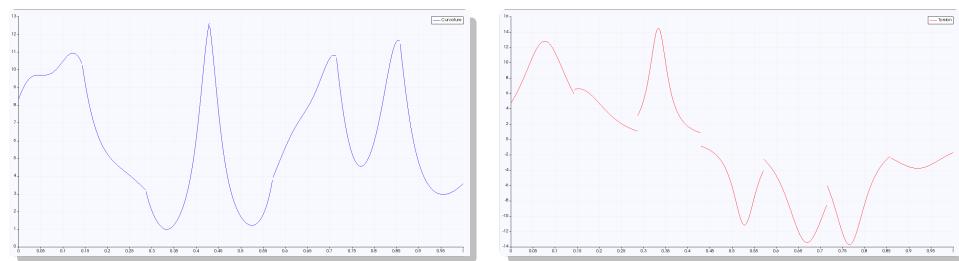
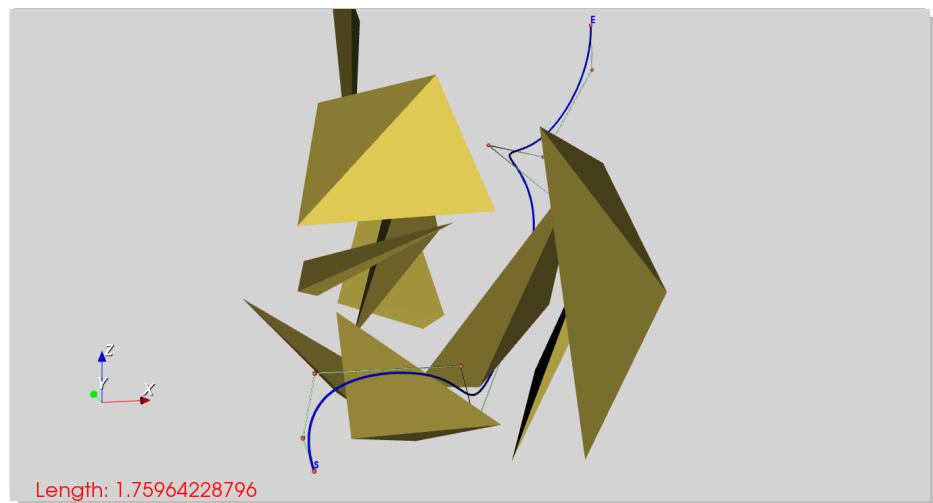
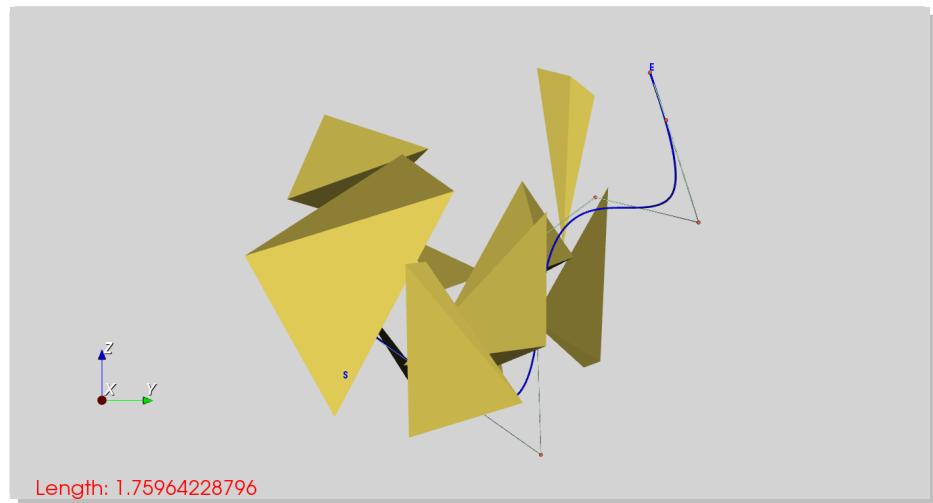


Figure 108.: Test 8o; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 3; Meth. C; Part. U; Config. 3.

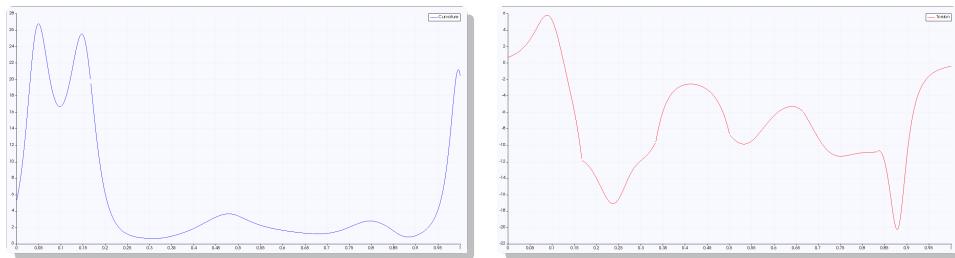
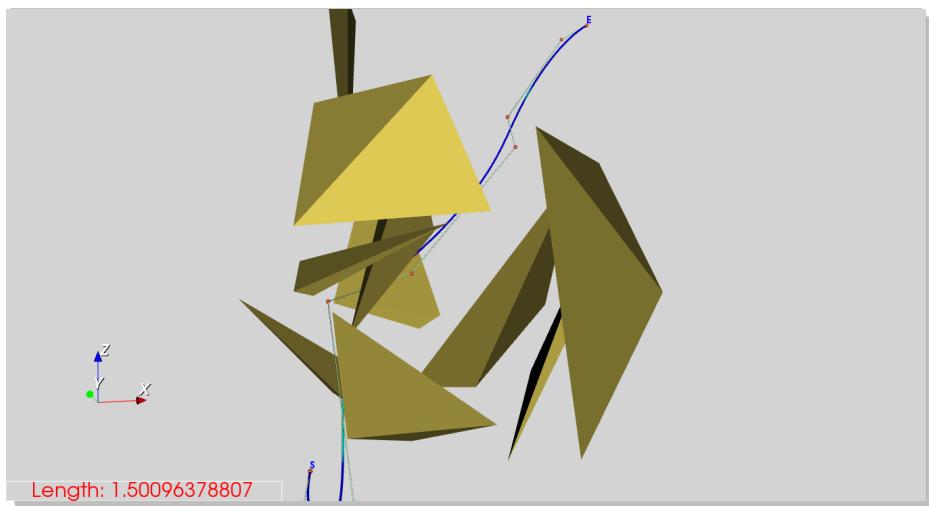
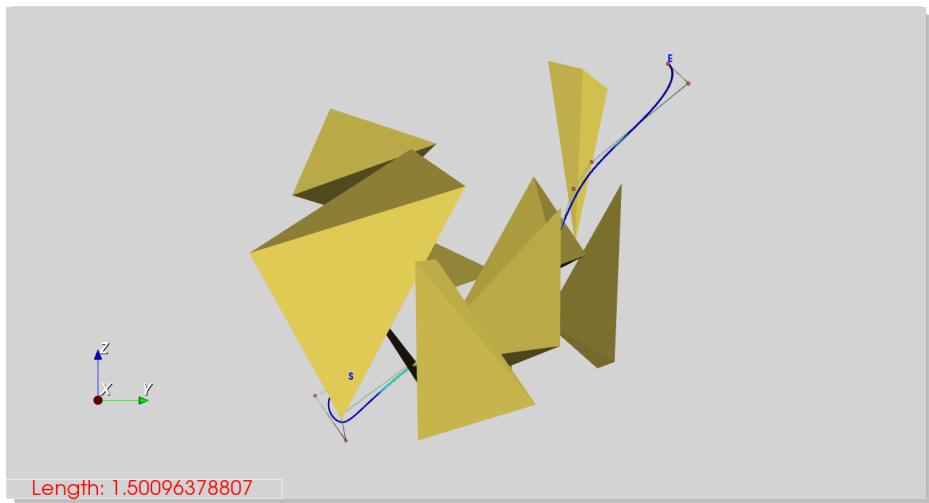


Figure 109.: Test 81; Scene 1; $s \rightarrow e$ $[0.2, 0.2, 0.2] \rightarrow [0.9, 0.9, 0.9]$; Deg. 4; Meth. C; Part. U; Config. 3.

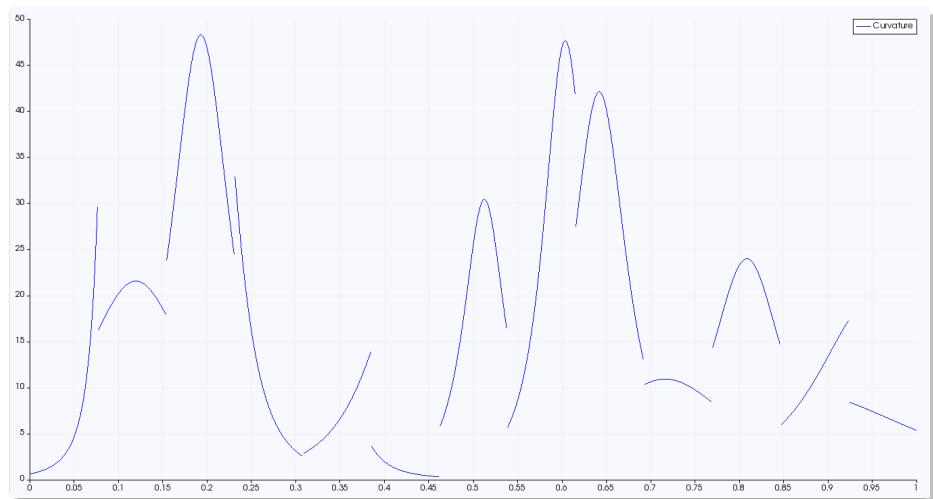
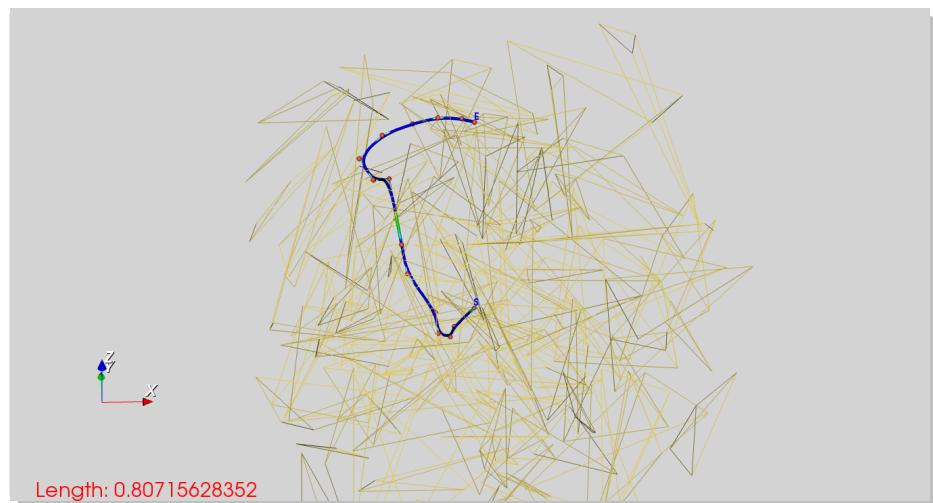
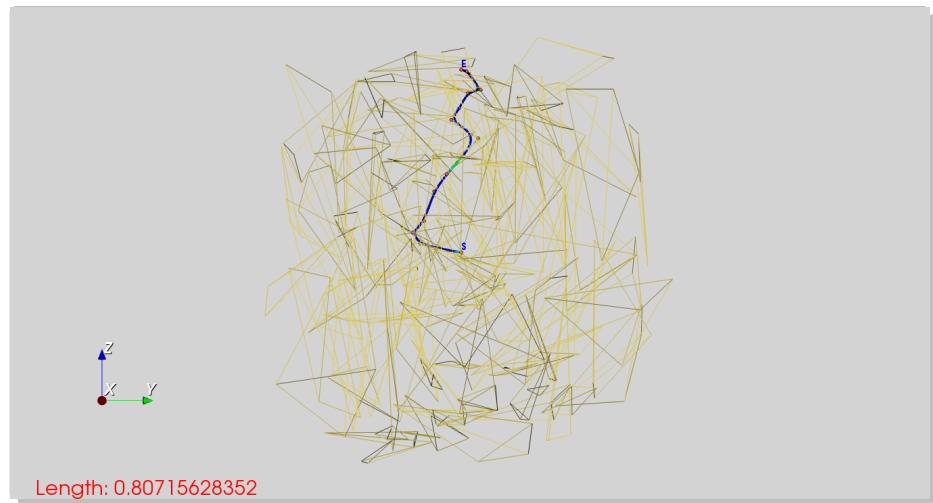


Figure 110.: Test 82; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 2; Meth. C; Part. U; Config. 1.

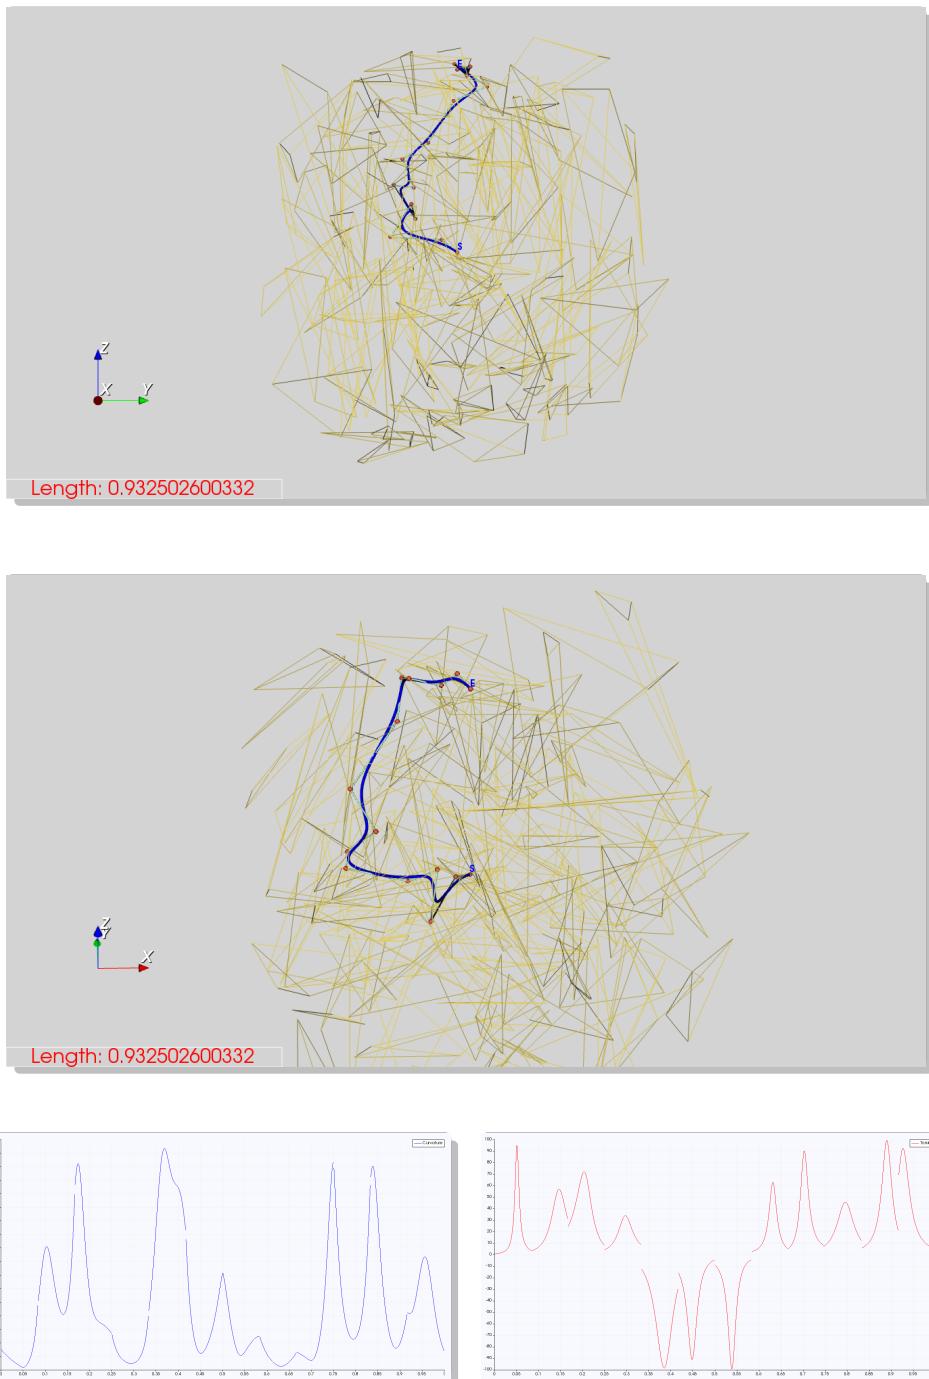


Figure 111.: Test 83; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 3; Meth. C; Part. U; Config. 1.

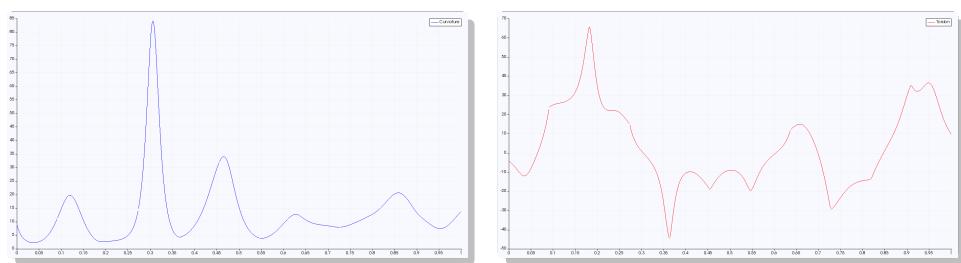


Figure 112.: Test 84; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 4; Meth. C; Part. U; Config. 1.

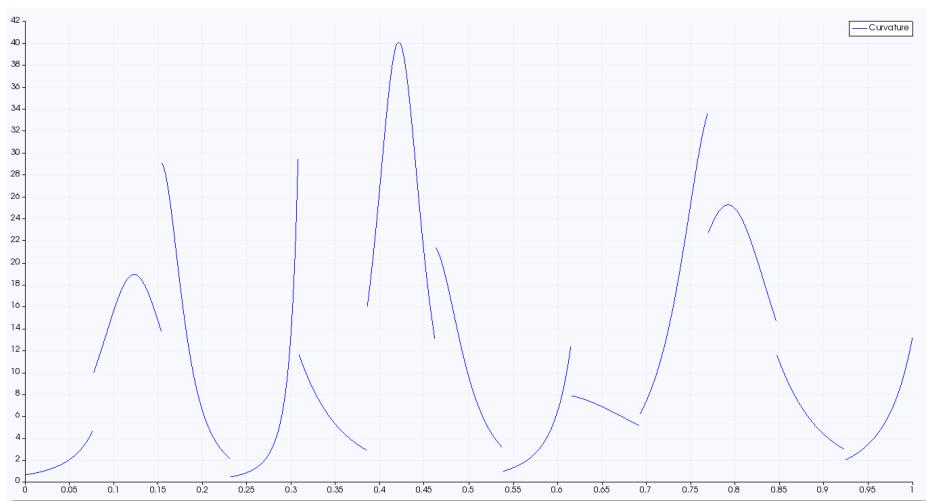


Figure 113.: Test 85; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 2; Meth. C; Part. U; Config. 2.

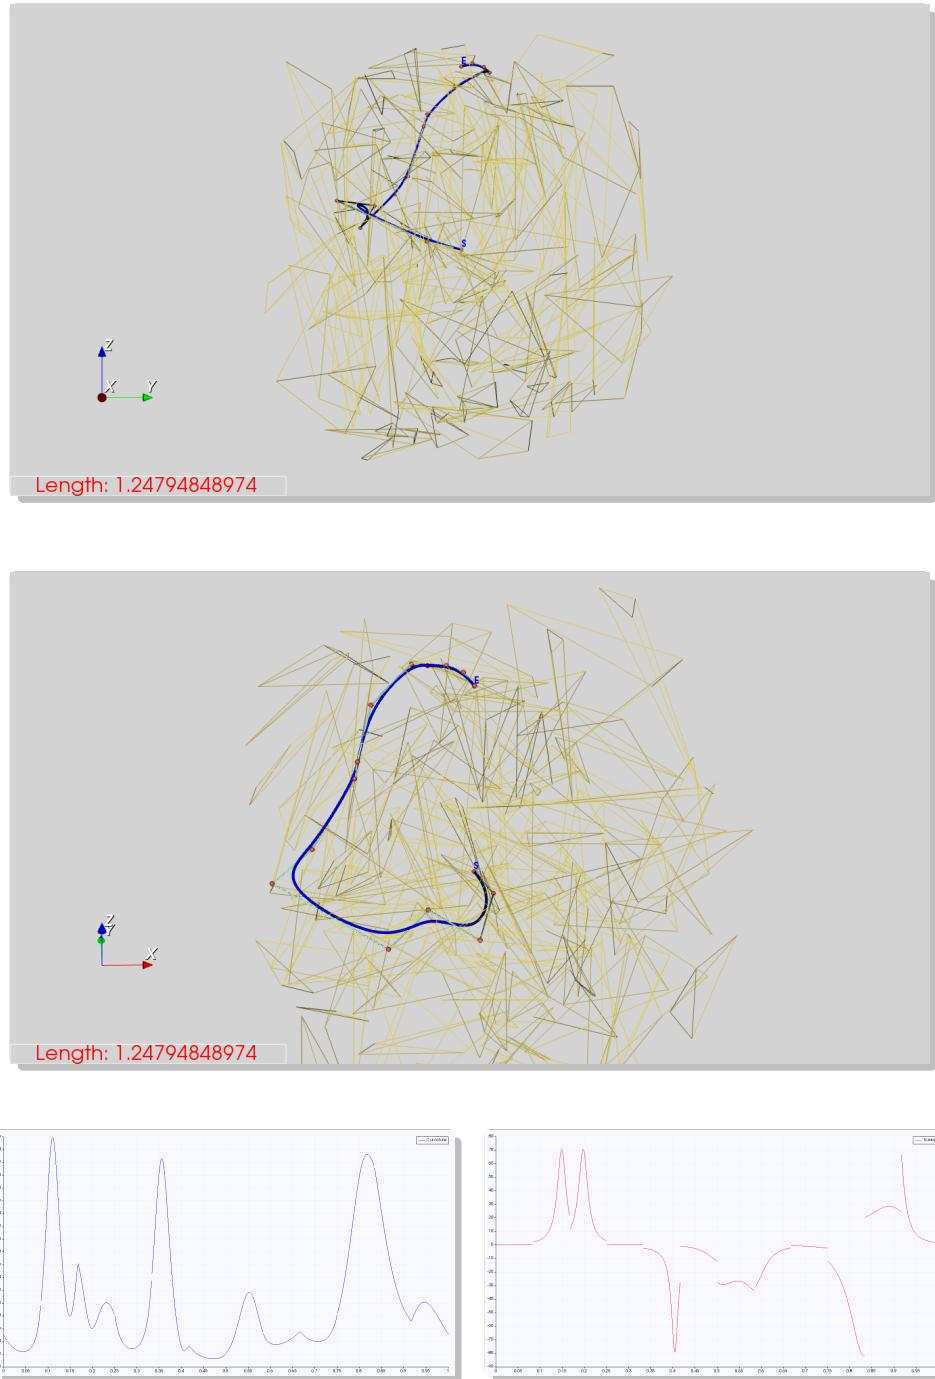


Figure 114.: Test 86; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 3; Meth. C; Part. U; Config. 2.

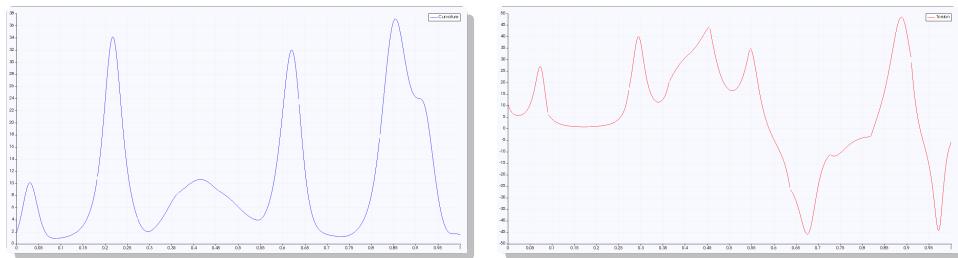


Figure 115.: Test 87; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 4; Meth. C; Part. U; Config. 2.

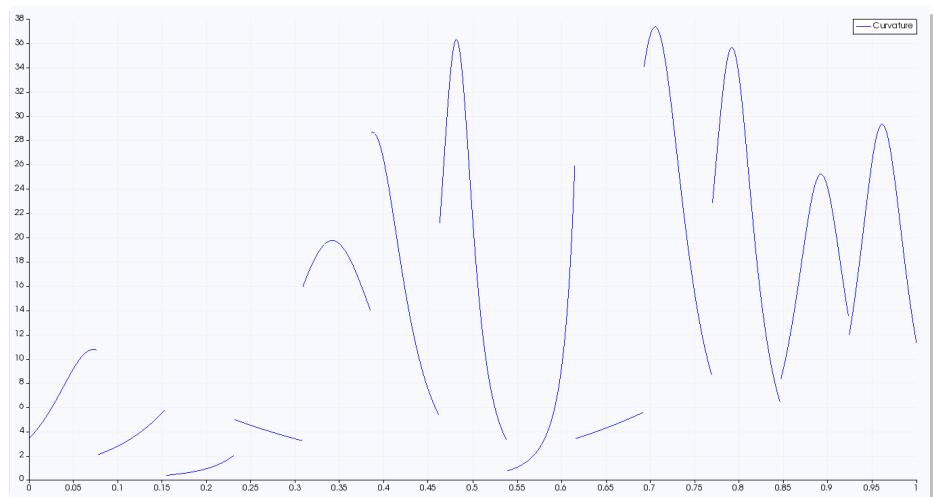
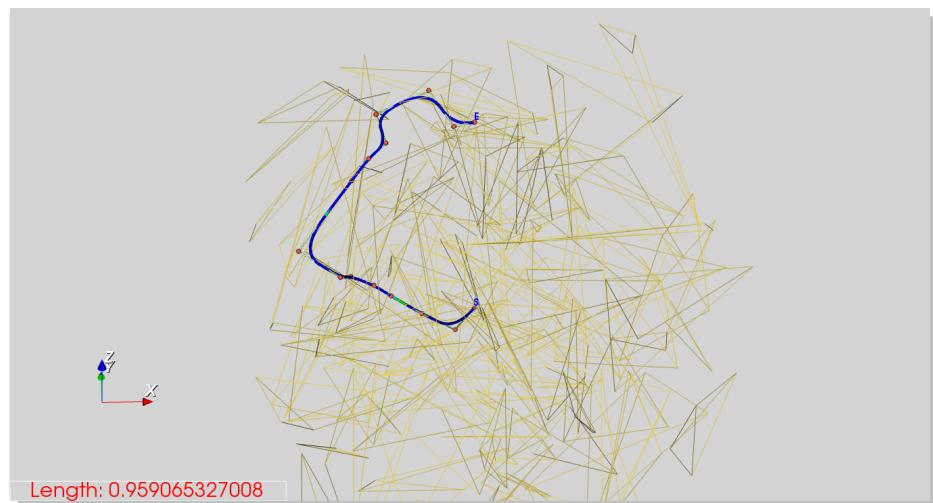


Figure 116.: Test 88; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 2; Meth. C; Part. U; Config. 3.

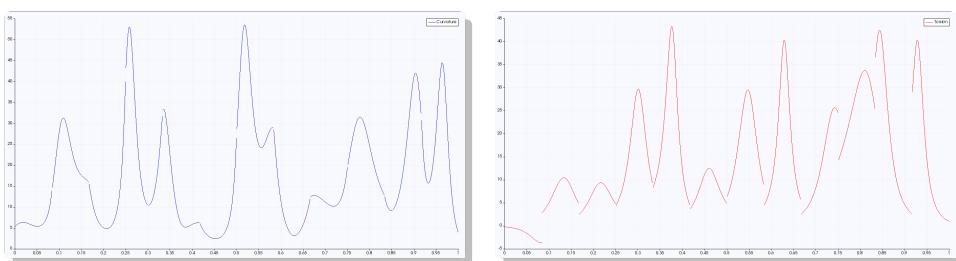
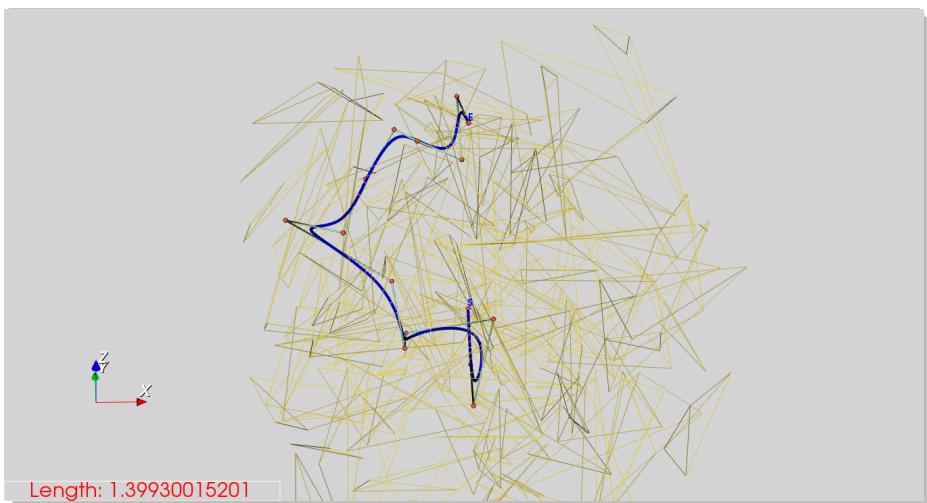


Figure 117.: Test 89; Scene 2; $s \rightarrow e$ $[0.5, 0.5, 0.5] \rightarrow [0.5, 0.5, 0.95]$; Deg. 3; Meth. C; Part. U; Config. 3.

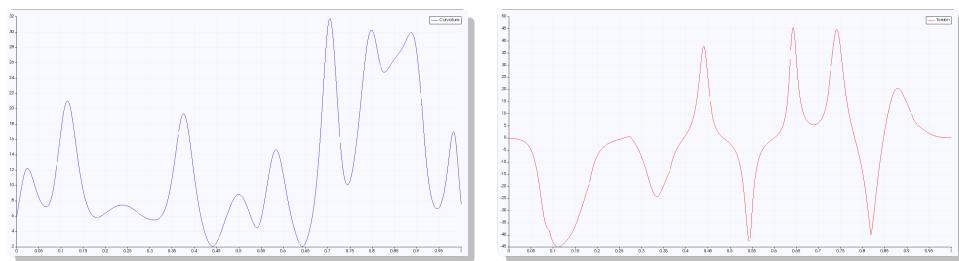
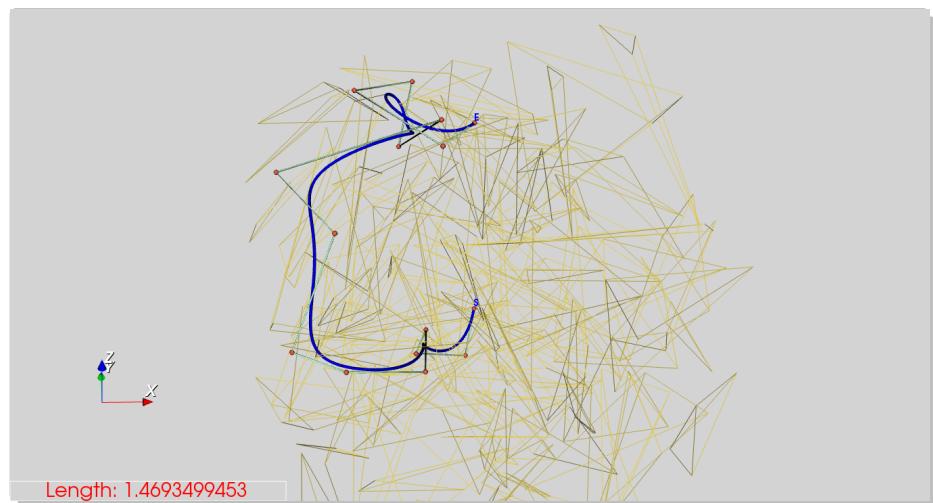
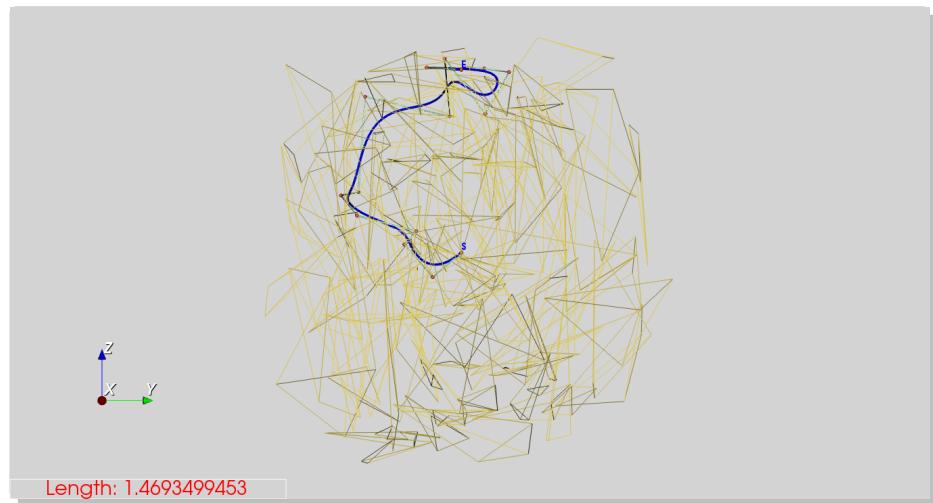


Figure 118.: Test 90; Scene 2; $s \rightarrow e$ $[0.5,0.5,0.5] \rightarrow [0.5,0.5,0.95]$; Deg. 4; Meth. C; Part. U; Config. 3.

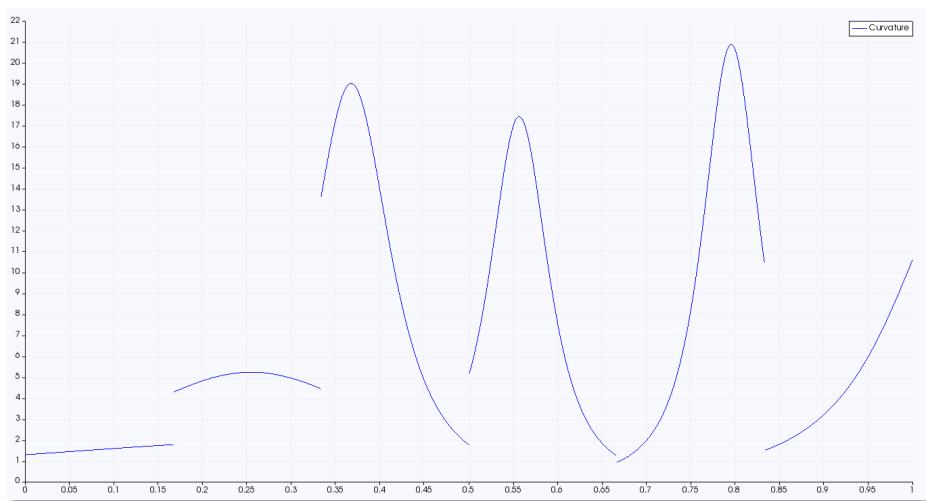
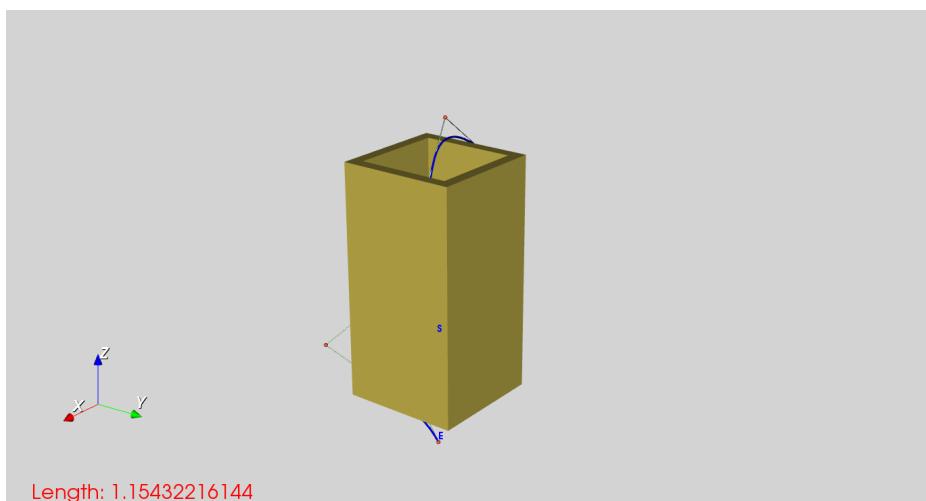
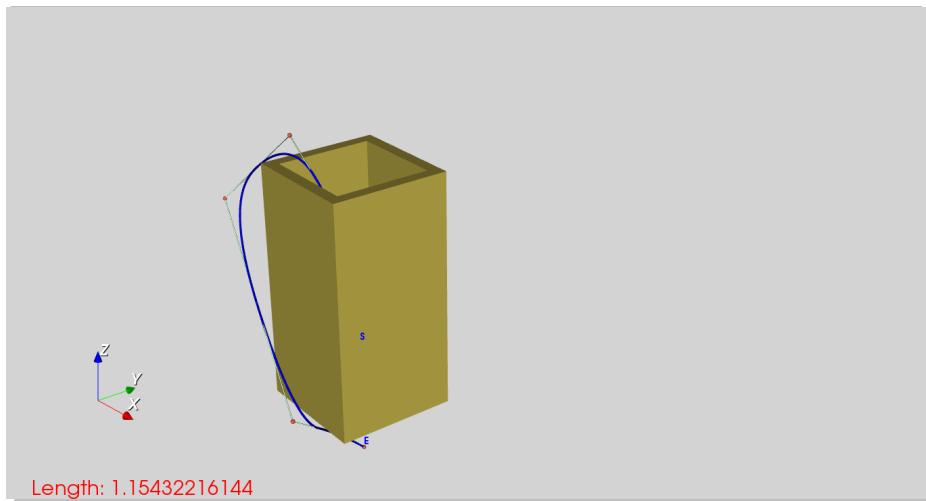


Figure 119.: Test 91; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. C; Part. U; Config. 1.

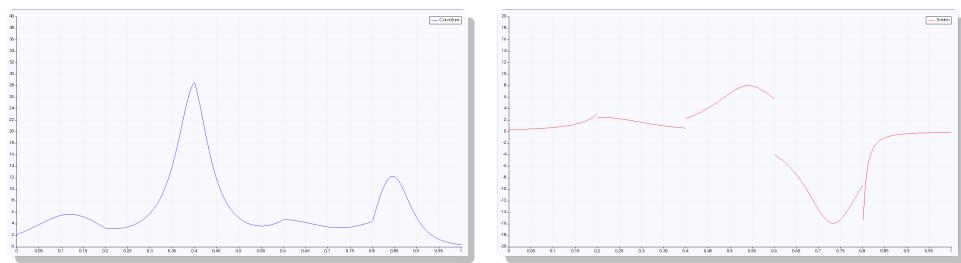
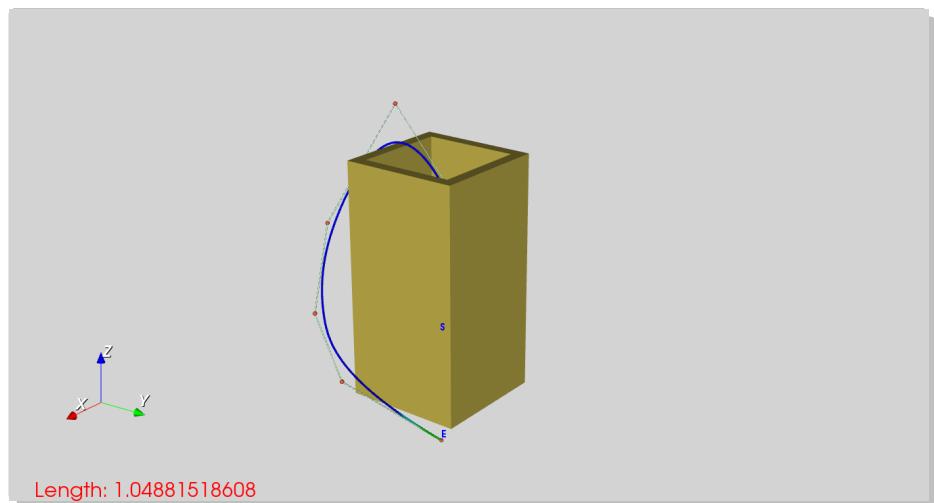
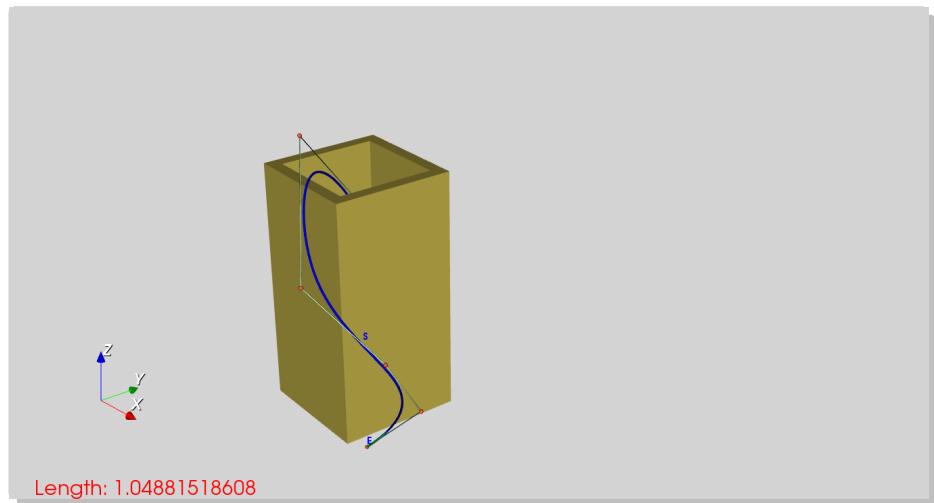


Figure 120.: Test 92; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 3; Meth. C; Part. U; Config. 1.

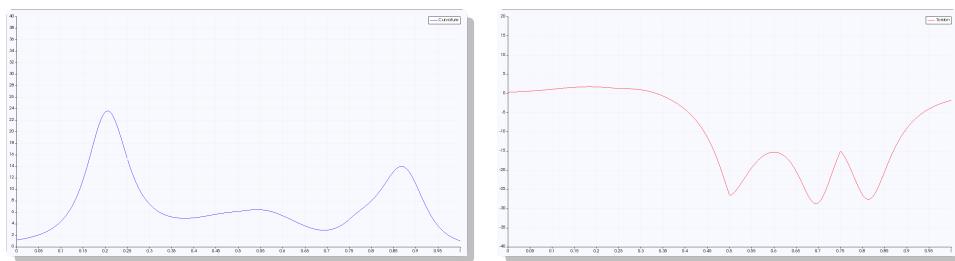
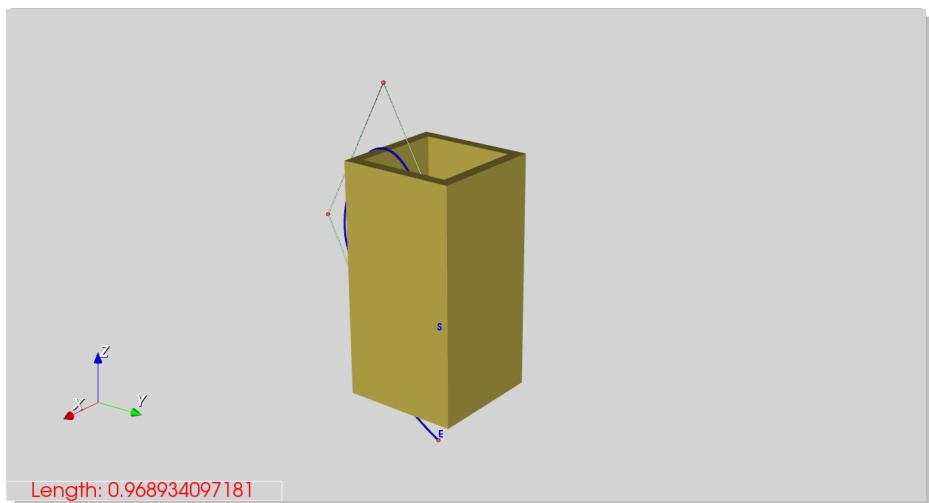
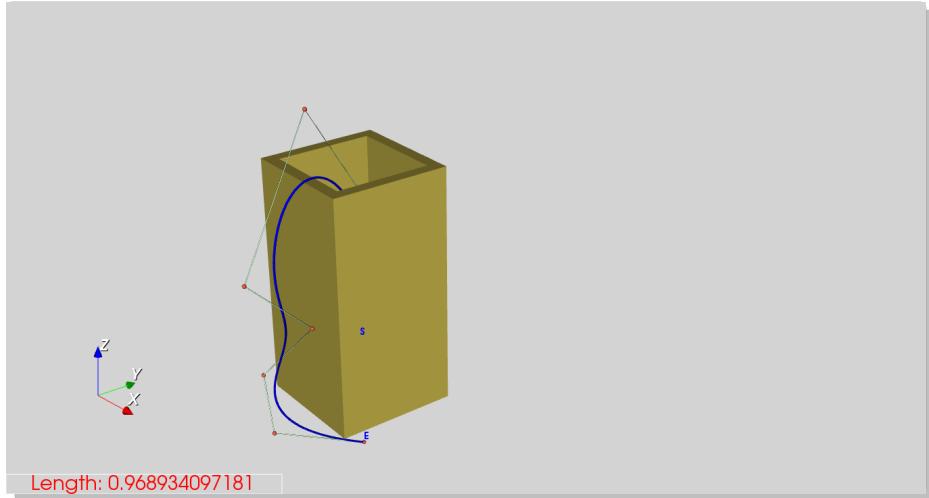


Figure 121.: Test 93; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. C; Part. U; Config. 1.

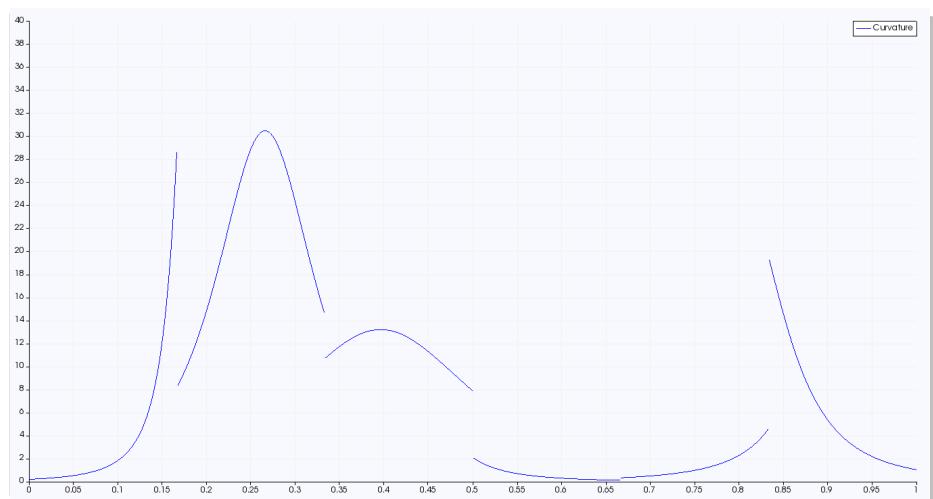
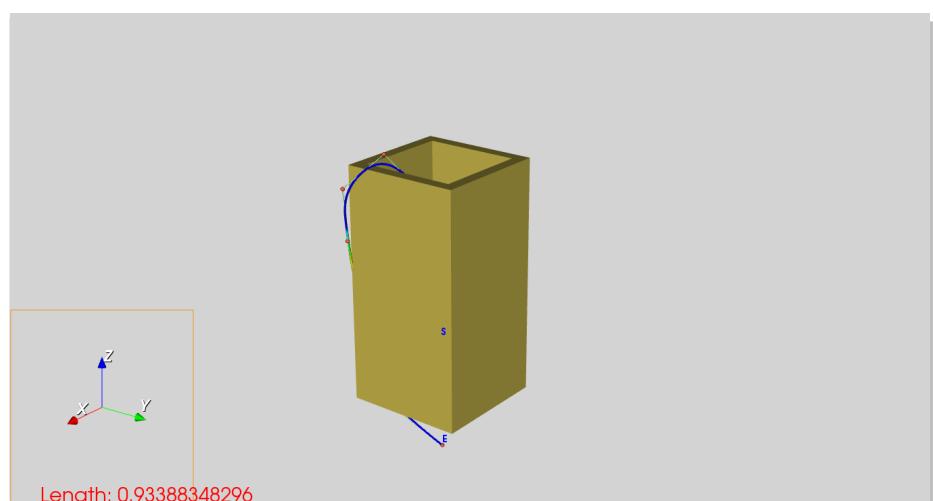
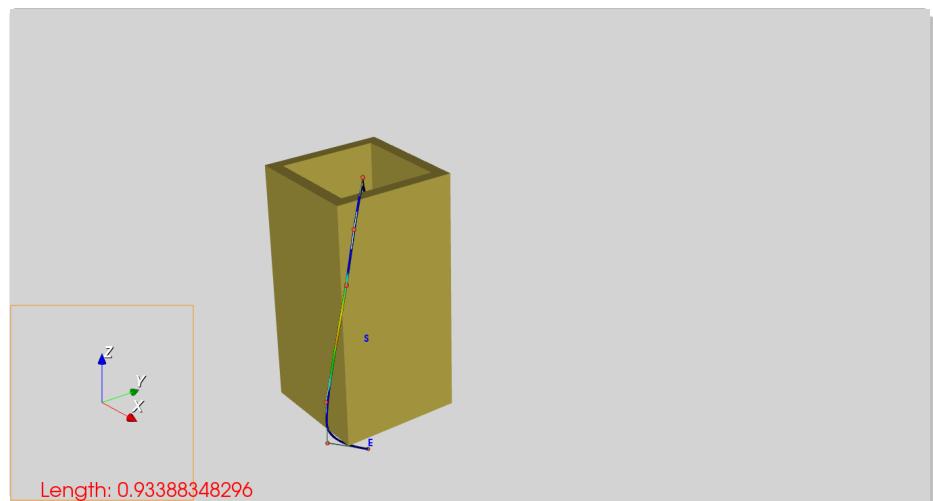


Figure 122.: Test 94; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. C; Part. U; Config. 2b.

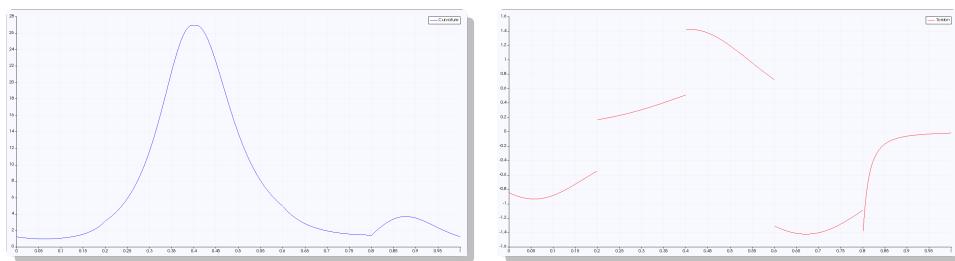
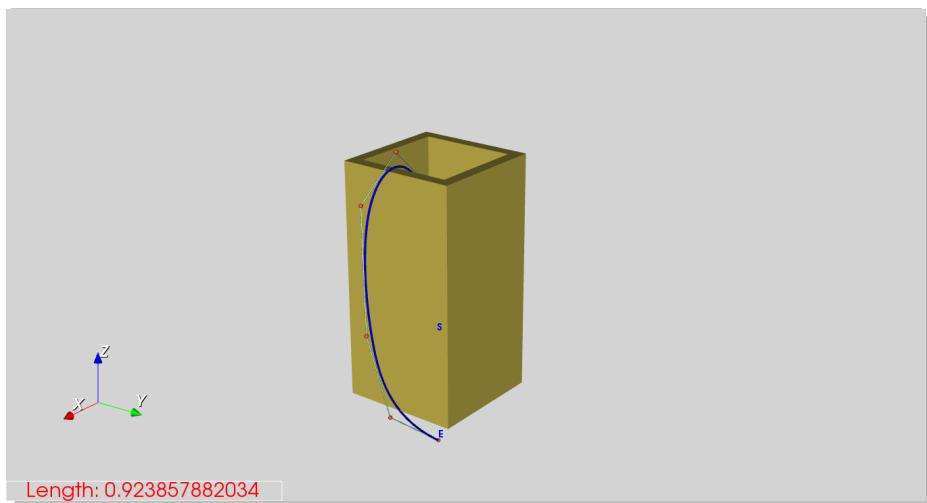
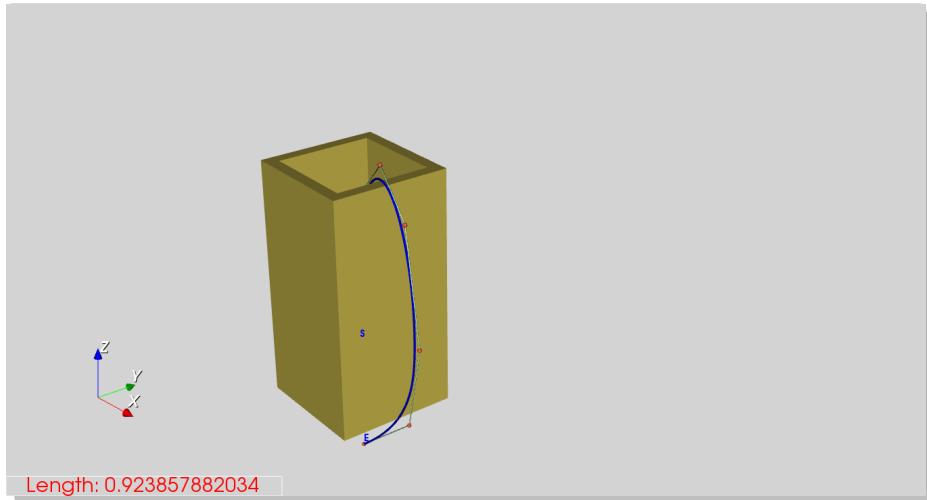


Figure 123.: Test 95; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 3; Meth. C; Part. U; Config. 2b.

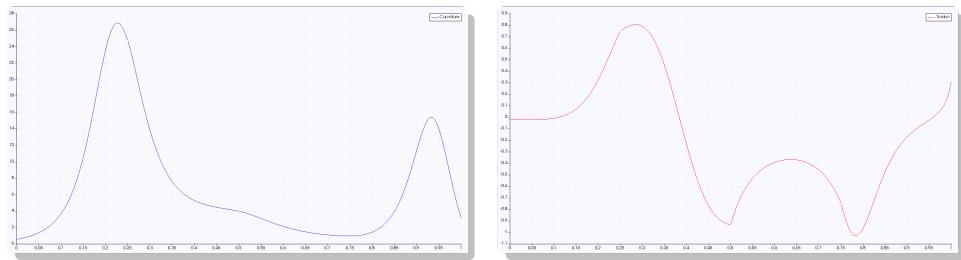
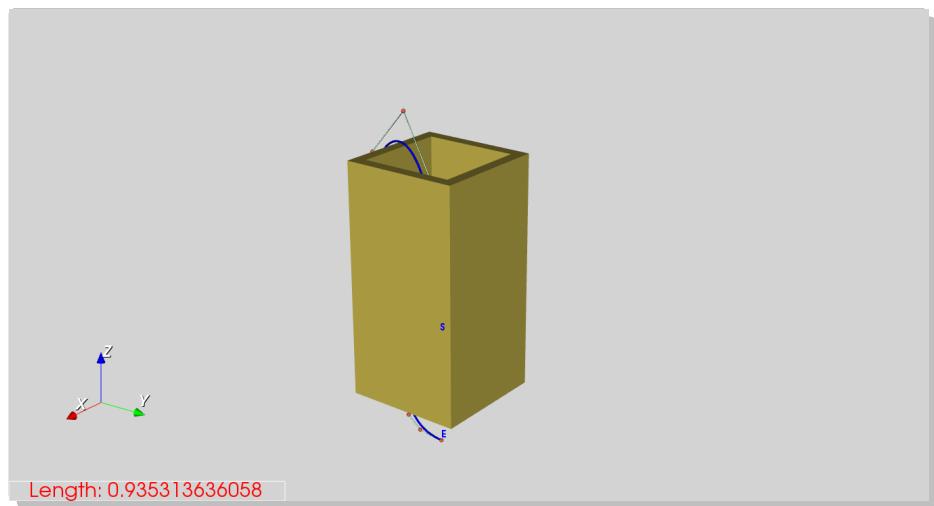
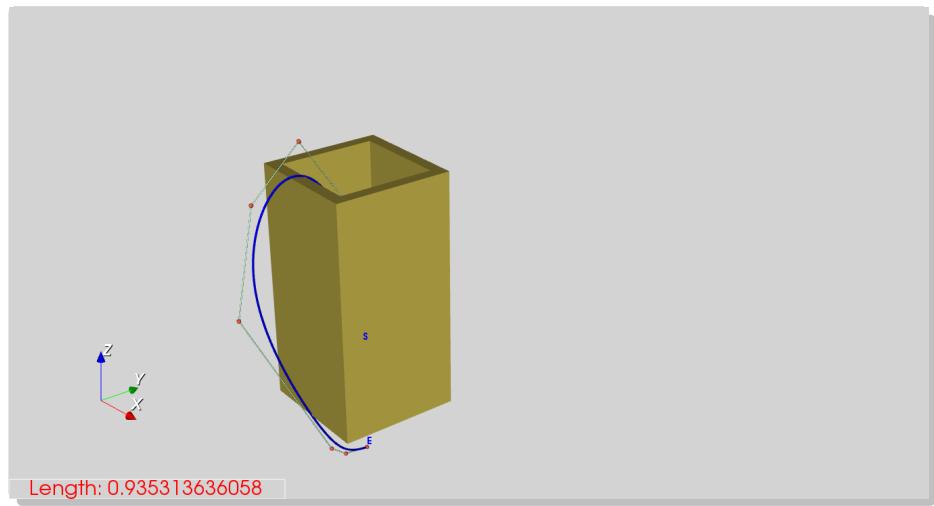


Figure 124.: Test 96; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. C; Part. U; Config. 2b.

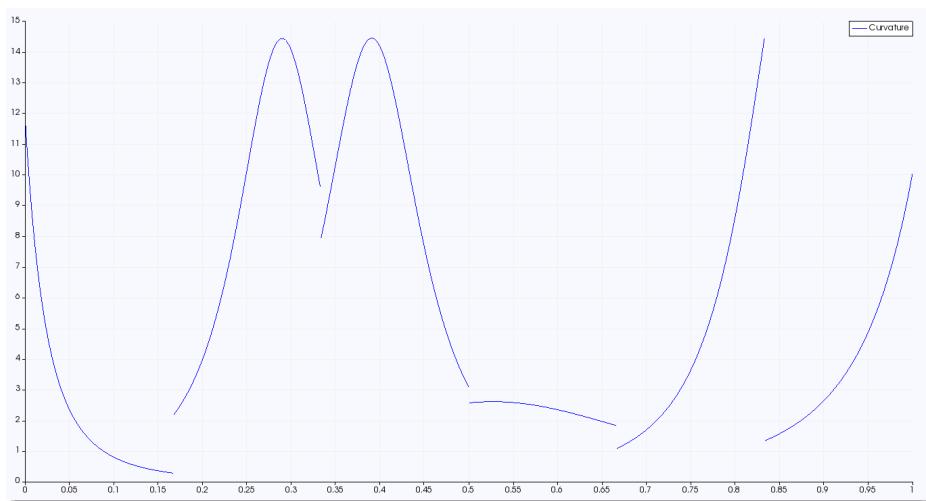
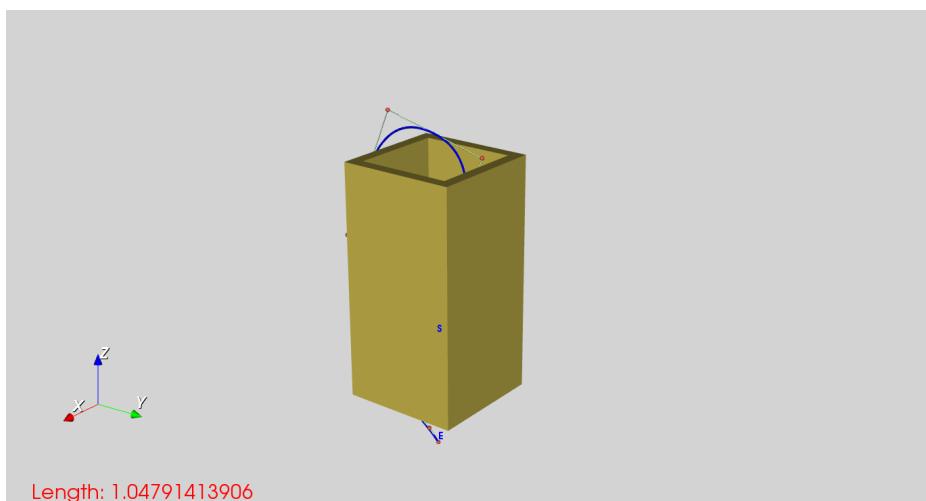
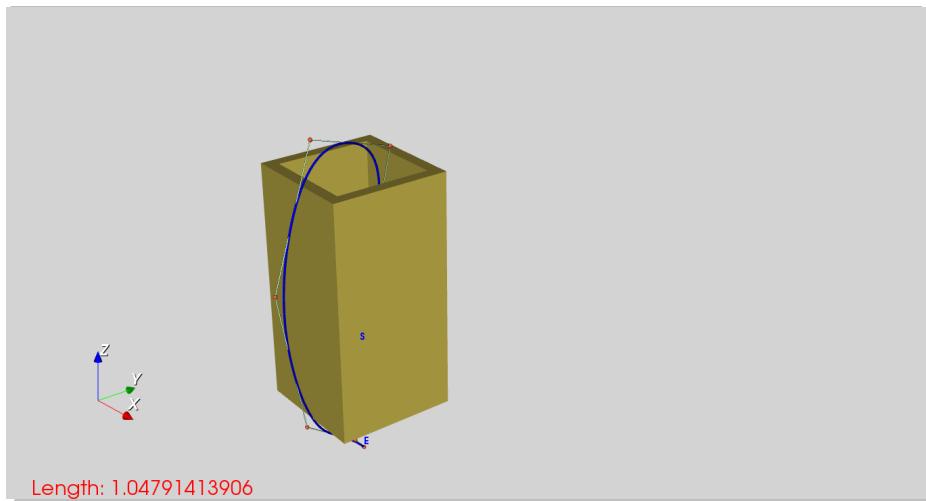


Figure 125.: Test 97; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 2; Meth. C; Part. U; Config. 3b.

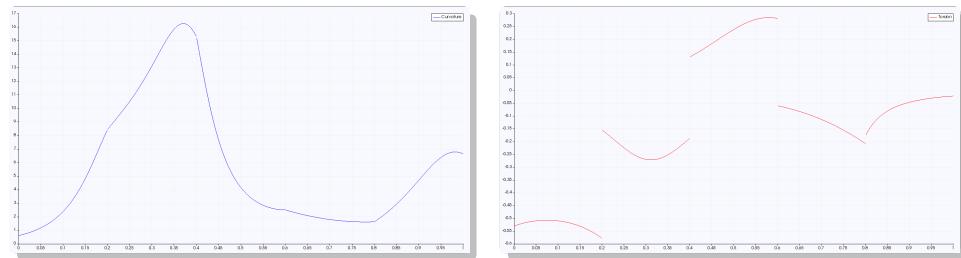
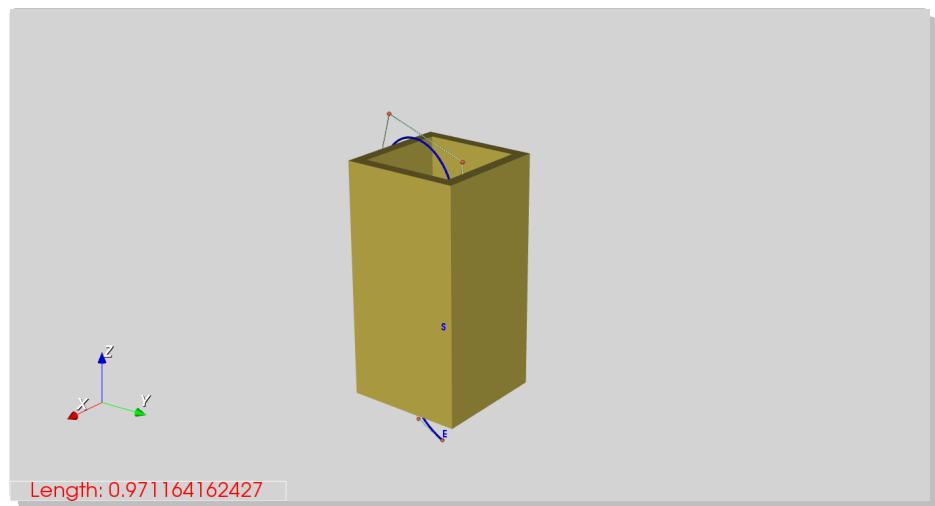
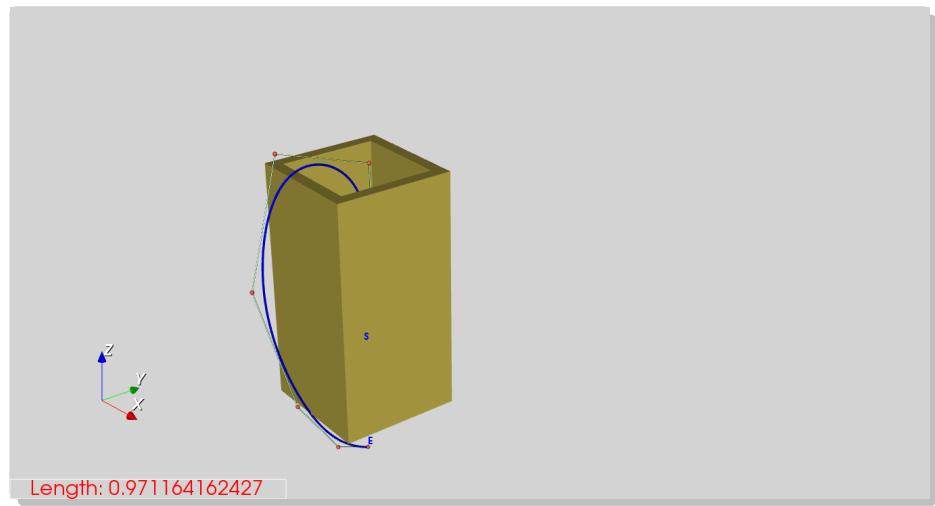


Figure 126.: Test 98; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 3; Meth. C; Part. U; Config. 3b.

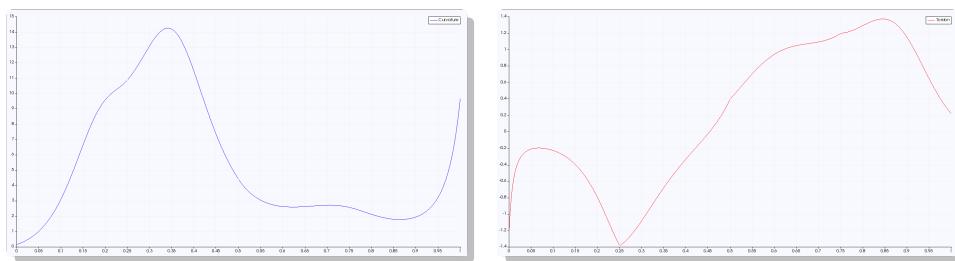
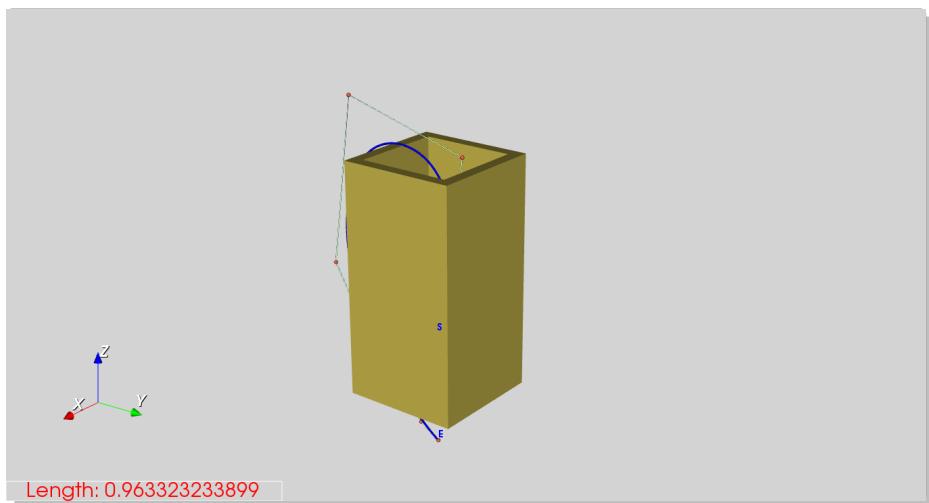
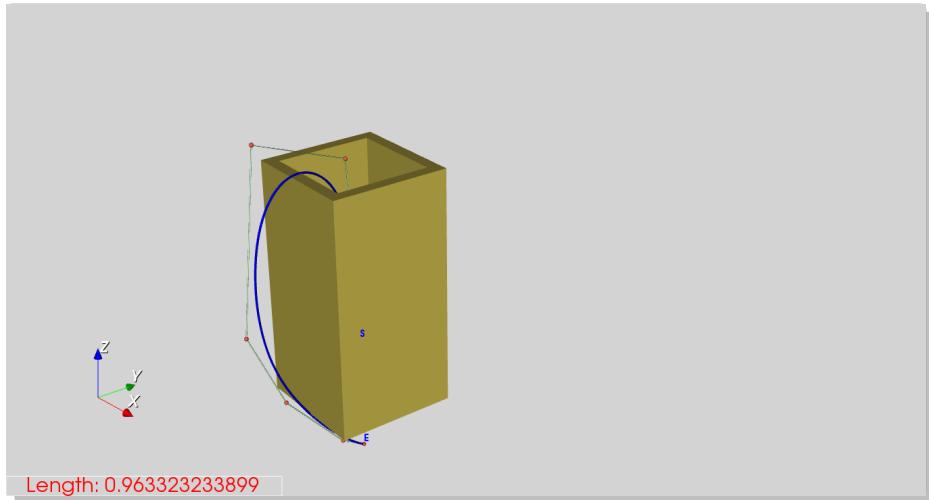


Figure 127.: Test 99; Scene 3; $s \rightarrow e$ $[0.5, 0.5, 0.4] \rightarrow [0.5, 0.5, 0.2]$; Deg. 4; Meth. C; Part. U; Config. 3b.

B

SOURCE CODE

B.1 CLASSES

B.1.1 *voronizer.py*

```
 1 import numpy as np
 2 import numpy.linalg
 3 import scipy as sp
 4 import scipy.spatial
 5 import networkx as nx
 6 import numpy.linalg
 7 import polyhedron
 8 import polyhedronsContainer
 9 import path
10 import uuid
11 import xml.etree.cElementTree as ET
12
13 class Voronizer:
14     _pruningMargin = 0.3
15
16     def __init__(self, sites=np.array([]), bsplineDegree=4, adaptivePartition=False):
17         self._shortestPath = path.Path(bsplineDegree, adaptivePartition)
18         self._sites = sites
19         self._graph = nx.Graph()
20         self._tGraph = nx.DiGraph()
21         self._startTriplet = None
22         self._endTriplet = None
23         self._polyhedronsContainer = polyhedronsContainer.PolyhedronsContainer()
24         self._pathStart = np.array([])
25         self._pathEnd = np.array([])
26         self._startId = uuid.uuid4()
27         self._endId = uuid.uuid4()
28         self._bsplineDegree = bsplineDegree
29
30     def setBsplineDegree(self, bsplineDegree):
31         self._bsplineDegree = bsplineDegree
32         self._shortestPath.setBsplineDegree(bsplineDegree)
33
34     def setAdaptivePartition(self, adaptivePartition):
35         self._shortestPath.setAdaptivePartition(adaptivePartition)
36
37     def setCustomSites(self, sites):
38         self._sites = sites
39
40     def setRandomSites(self, number, seed=None):
41         if seed != None:
42             np.random.seed(0)
43         self._sites = sp.rand(number,3)
44
45     def addPolyhedron(self, polyhedron):
46         self._polyhedronsContainer.addPolyhedron(polyhedron)
47
48     def addBoundingBox(self, a, b, maxEmptyArea=1, invisible=True, verbose=False):
49         if verbose:
50             print('Add bounding box', flush=True)
51
52         self._polyhedronsContainer.addBoundingBox(a,b,maxEmptyArea, invisible)
```

```

53
54     def setPolyhedronsSites(self, verbose=False):
55         if verbose:
56             print('Set sites for Voronoi', flush=True)
57
58         sites = []
59         for polyhedron in self._polyhedronsContainer.polyhedrons:
60             sites.extend(polyhedron.allPoints)
61
62         self._sites = np.array(sites)
63
64     def makeVoroGraph(self, prune=True, verbose=False, debug=False):
65         if verbose:
66             print('Calculate Voronoi cells', flush=True)
67         ids = {}
68         vor = sp.spatial.Voronoi(self._sites)
69
70         if verbose:
71             print('Make pruned Graph from cell edges ', end='', flush=True)
72             printDotBunch = 0
73         vorVer = vor.vertices
74         for ridge in vor.ridge_vertices:
75             if verbose:
76                 if printDotBunch == 0:
77                     print('.', end='', flush=True)
78                 printDotBunch = (printDotBunch+1)%10
79
80             for i in range(1, len(ridge)):
81                 for j in range(i):
82                     if (ridge[i] != -1) and (ridge[j] != -1):
83                         a = vorVer[ridge[i]]
84                         b = vorVer[ridge[j]]
85                         if (not prune) or (not self._polyhedronsContainer.segmentIntersectPolyhedrons(a,b, intersectionMargin
86                                         ↪ = self._pruningMargin)):
87                             if tuple(a) in ids.keys():
88                                 idA = ids[tuple(a)]
89                             else:
90                                 idA = uuid.uuid4()
91                                 self._graph.add_node(idA, coord=a)
92                                 ids[tuple(a)] = idA
93
94                             if tuple(b) in ids.keys():
95                                 idB = ids[tuple(b)]
96                             else:
97                                 idB = uuid.uuid4()
98                                 self._graph.add_node(idB, coord=b)
99                                 ids[tuple(b)] = idB
100
101                         self._graph.add_edge(idA, idB, weight=np.linalg.norm(a-b))
102
103             if verbose:
104                 print('', flush=True)
105
106     self._createTripleGraph(verbose, debug)
107
108     def calculateShortestPath(self, start, end, attachMode='near', prune=True, useMethod='cleanPath', postSimplify=True,
109                             ↪ verbose=False, debug=False):
110         """
111         useMethod: cleanPath; trijkstra; annealing; none
112         """
113         if useMethod == 'trijkstra' or useMethod == 'cleanPath' or useMethod == 'annealing' or useMethod == 'none':
114             if verbose:
115                 print('Attach start and end points', flush=True)
116             if attachMode=='near':
117                 self._attachToGraphNear(start, end, prune)
118             elif attachMode=='all':
119                 self._attachToGraphAll(start, end, prune)
120             else:
121                 self._attachToGraphNear(start, end, prune)
122
123             self._attachSpecialStartEndTriples(verbose)
124
125             self._pathStart = start
126             self._pathEnd = end
127
128             if useMethod == 'trijkstra':
129                 self._removeCollidingTriples(verbose, debug)
130
131             triPath = self._dijkstra(verbose, debug)
132             path = self._extractPath(triPath, verbose)
133             self._shortestPath.assignValues(path, self._polyhedronsContainer)

```

```

133     if useMethod == 'cleanPath':
134         self._shortestPath.clean(verbose, debug)
135     elif useMethod == 'annealing':
136         self._shortestPath.anneal(verbose)
137
138     #print(self._bsplineDegree):
139     if useMethod != 'annealing' and useMethod != 'none':
140         if self._bsplineDegree == 3:
141             self._shortestPath.addNALignedVertextes(1, verbose, debug)
142         if self._bsplineDegree == 4:
143             self._shortestPath.addNALignedVertextes(2, verbose, debug)
144
145     if postSimplify:
146         self._shortestPath.simplify(verbose, debug)
147
148
149 def plotSites(self, plotter, verbose=False):
150     if verbose:
151         print('Plot Sites', end='', flush=True)
152
153     if self._sites.size > 0:
154         plotter.addPoints(self._sites, plotter.COLOR_SITES, thick=True)
155
156 def plotPolyhedrons(self, plotter, verbose=False):
157     if verbose:
158         print('Plot Polyhedrons', end='', flush=True)
159
160     for poly in self._polyhedronsContainer.polyhedrons:
161         poly.plot(plotter)
162         if verbose:
163             print('.', end='', flush=True)
164
165     if verbose:
166         print('', flush=True)
167
168 def plotShortestPath(self, plotter, verbose=False):
169     if verbose:
170         print('Plot shortest path', flush=True)
171
172     if self._shortestPath.vertexes.size > 0:
173         if self._polyhedronsContainer.hasBoundingBox:
174             splineThickness = np.linalg.norm(np.array(self._polyhedronsContainer.boundingBoxB) - np.array(self._polyhedronsContainer.boundingBoxA)) / 1000.
175             pointThickness = splineThickness * 2.
176             lineThickness = splineThickness / 2.
177
178             plotter.addPolyLine(self._shortestPath.vertexes, plotter.COLOR_CONTROL_POLIG, thick=True, thickness=
179                                 ↪ lineThickness)
180             plotter.addPoints(self._shortestPath.vertexes, plotter.COLOR_CONTROL_POINTS, thick=True, thickness=
181                                 ↪ pointThickness)
182             plotter.addBSpline(self._shortestPath, self._bsplineDegree, plotter.COLOR_PATH, thick=True, thickness=
183                                 ↪ splineThickness)
184
185     else:
186         plotter.addPolyLine(self._shortestPath.vertexes, plotter.COLOR_CONTROL_POLIG, thick=True)
187         plotter.addPoints(self._shortestPath.vertexes, plotter.COLOR_CONTROL_POINTS, thick=True)
188         plotter.addBSpline(self._shortestPath, self._bsplineDegree, plotter.COLOR_PATH, thick=True)
189
190
191     plotter.addGraph(self._graph, plotter.COLOR_GRAPH)
192
193 def extractXmlTree(self, root):
194     if self._polyhedronsContainer.hasBoundingBox:
195         xmlBoundingBox = ET.SubElement(root, 'boundingBox')
196         ET.SubElement(xmlBoundingBox, 'a', x=str(self._polyhedronsContainer.boundingBoxA[0]), y=str(self._polyhedronsContainer.boundingBoxA[1]), z=str(self._polyhedronsContainer.boundingBoxA[2]))
197         ET.SubElement(xmlBoundingBox, 'b', x=str(self._polyhedronsContainer.boundingBoxB[0]), y=str(self._polyhedronsContainer.boundingBoxB[1]), z=str(self._polyhedronsContainer.boundingBoxB[2]))
198
199         xmlPolyhedrons = ET.SubElement(root, 'polyhedrons')
200         for polyhedron in self._polyhedronsContainer.polyhedrons:
201             xmlPolyhedron = polyhedron.extractXmlTree(xmlPolyhedrons)
202
203 def importXmlTree(self, root, maxEmptyArea):
204     xmlBoundingBox = root.find('boundingBox')
205     if xmlBoundingBox:
206         xmlA = xmlBoundingBox.find('a')
207         xmlB = xmlBoundingBox.find('b')

```

```

209         self._polyhedronsContainer.hasBoundingBox = True
210         self._polyhedronsContainer.boundingBoxA = [float(xmlA.attrib['x']), float(xmlA.attrib['y']), float(xmlA.attrib['z']
211             ↪ ''])]
212         self._polyhedronsContainer.boundingBoxB = [float(xmlB.attrib['x']), float(xmlB.attrib['y']), float(xmlB.attrib['z'
213             ↪ ''])]
214
215     xmlPolyhedrons = root.find('polyhedrons')
216     if xmlPolyhedrons:
217         for xmlPolyhedron in xmlPolyhedrons.iter('polyhedron'):
218             invisible = False
219             if 'invisible' in xmlPolyhedron.attrib.keys():
220                 invisible = bool(eval(xmlPolyhedron.attrib['invisible']))
221
222             boundingBox = False
223             if 'boundingBox' in xmlPolyhedron.attrib.keys():
224                 boundingBox = bool(eval(xmlPolyhedron.attrib['boundingBox']))
225
226             faces = []
227             for xmlFace in xmlPolyhedron.iter('face'):
228                 vertexes = []
229                 for xmlVertex in xmlFace.iter('vertex'):
230                     vertexes.append([float(xmlVertex.attrib['x']), float(xmlVertex.attrib['y']), float(xmlVertex.attrib['
231                         ↪ z'])])
232
233                 faces.append(vertexes)
234
235             newPolyhedron = polyhedron.Polyhedron(faces=np.array(faces), invisible=invisible, maxEmptyArea=maxEmptyArea,
236             ↪ boundingBox=boundingBox)
237             self._polyhedronsContainer.addPolyhedron(newPolyhedron)
238
239     def _attachToGraphNear(self, start, end, prune):
240         firstS = True
241         firstE = True
242         minAttachS = None
243         minAttachE = None
244         minDistS = 0.
245         minDistE = 0.
246         for node, nodeAttr in self._graph.node.items():
247             if (not prune) or (not self._polyhedronsContainer.segmentIntersectPolyhedrons(start, nodeAttr['coord'],
248                 ↪ intersectionMargin= self._pruningMargin)):
249                 if firstS:
250                     minAttachS = node
251                     minDistS = np.linalg.norm(start - nodeAttr['coord'])
252                     firstS = False
253                 else:
254                     currDist = np.linalg.norm(start - nodeAttr['coord'])
255                     if currDist < minDistS:
256                         minAttachS = node
257                         minDistS = currDist
258
259             if (not prune) or (not self._polyhedronsContainer.segmentIntersectPolyhedrons(end, nodeAttr['coord'],
260                 ↪ intersectionMargin= self._pruningMargin)):
261                 if firstE:
262                     minAttachE = node
263                     minDistE = np.linalg.norm(end - nodeAttr['coord'])
264                     firstE = False
265                 else:
266                     currDist = np.linalg.norm(end - nodeAttr['coord'])
267                     if currDist < minDistE:
268                         minAttachE = node
269                         minDistE = currDist
270
271             if minAttachS != None:
272                 self._addNodeToTGraph(self._startId, start, minAttachS, minDistS, rightDirection=True)
273             if minAttachE != None:
274                 self._addNodeToTGraph(self._endId, end, minAttachE, minDistE, rightDirection=False)
275
276     def _attachToGraphAll(self, start, end, prune):
277         for node, nodeAttr in self._graph.node.items():
278             if (not prune) or (not self._polyhedronsContainer.segmentIntersectPolyhedrons(start, nodeAttr['coord'],
279                 ↪ intersectionMargin= self._pruningMargin)):
280                 self._addNodeToTGraph(self._startId, start, node, np.linalg.norm(start - nodeAttr['coord']), rightDirection=
281                     ↪ True)
282             if (not prune) or (not self._polyhedronsContainer.segmentIntersectPolyhedrons(end, nodeAttr['coord'],
283                 ↪ intersectionMargin= self._pruningMargin)):
284                 self._addNodeToTGraph(self._endId, end, node, np.linalg.norm(end - nodeAttr['coord']), rightDirection=False)
285
286     def _addNodeToTGraph(self, newId, coord, attachId, dist, rightDirection):
287         self._graph.add_node(newId, coord=coord)
288         self._graph.add_edge(newId, attachId, weight=dist)
289         for otherId in filter(lambda node: node != newId, self._graph.neighbors(attachId)):
290             newTriplet = uuid.uuid4()

```

```

282         if rightDirection:
283             self._tGraph.add_node(newTriplet, triplet=[newId,attachId,otherId])
284             self._tGraph.add_edges_from([(newTriplet, otherTriplet, {'weight':dist}) for otherTriplet in self._tGraph.
285                                         ↪ nodes() if self._tGraph.node[otherTriplet]['triplet'][0] == attachId and self._tGraph.node[
286                                         ↪ otherTriplet]['triplet'][1] == otherId])
287
288     else:
289         self._tGraph.add_node(newTriplet, triplet=[otherId,attachId,newId])
290         self._tGraph.add_edges_from([(otherTriplet, newTriplet, {'weight':dist}) for otherTriplet in self._tGraph.
291                                         ↪ nodes() if self._tGraph.node[otherTriplet]['triplet'][1] == otherId and self._tGraph.node[
292                                         ↪ otherTriplet]['triplet'][2] == attachId])
293
294     def _attachSpecialStartEndTriples(self, verbose):
295         #attach special starting and ending triplet
296         if verbose:
297             print('Create starting and ending triples', flush=True)
298
299         self._startTriplet = uuid.uuid4()
300         self._endTriplet = uuid.uuid4()
301         self._tGraph.add_node(self._startTriplet, triplet = [self._startId,self._startId,self._startId], hit = False)
302         self._tGraph.add_node(self._endTriplet, triplet = [self._endId,self._endId,self._endId], hit = False)
303         self._tGraph.add_edges_from([(self._startTriplet, n, {'weight':0.}) for n in self._tGraph.nodes() if self._tGraph.
304                                     ↪ node[n]['triplet'][0] == self._startId])
305         self._tGraph.add_edges_from([(n, self._endTriplet, {'weight':0.}) for n in self._tGraph.nodes() if self._tGraph.node[
306                                     ↪ n]['triplet'][2] == self._endId])
307
308     def _createTripleGraph(self, verbose, debug):
309         #create triplets
310
311         if debug:
312             triplets_file = open("triplets.txt","w")
313
314         if verbose:
315             print('Create triplets ', end='', flush=True)
316             printDotBunch = 0
317
318         tripletIdList = {}
319         def getUniqueId(triplet):
320             if tuple(triplet) in tripletIdList.keys():
321                 tripletId = tripletIdList[tuple(triplet)]
322             else:
323                 tripletId = uuid.uuid4()
324                 tripletIdList[tuple(triplet)] = tripletId
325                 self._tGraph.add_node(tripletId, triplet = triplet)
326
327         return tripletId
328
329         for edge in self._graph.edges():
330             if verbose:
331                 if printDotBunch == 0:
332                     print('.', end='', flush=True)
333                 printDotBunch = (printDotBunch+1)%10
334
335         tripletsSxOutgoing = []
336         tripletsSxIngoing = []
337         tripletsDxOutgoing = []
338         tripletsDxIngoing = []
339
340         for nodeSx in filter(lambda node: node != edge[1], self._graph.neighbors(edge[0])):
341             tripletId = getUniqueId([nodeSx,edge[0],edge[1]])
342             tripletsSxOutgoing.append(tripletId)
343             if debug:
344                 triplets_file.write('Sx0: {}\\n'.format(self._tGraph.node[tripletId]['triplet']))
345
346             tripletId = getUniqueId([edge[1],edge[0],nodeSx])
347             tripletsSxIngoing.append(tripletId)
348             if debug:
349                 triplets_file.write('SxI: {}\\n'.format(self._tGraph.node[tripletId]['triplet']))
350
351         for nodeDx in filter(lambda node: node != edge[0], self._graph.neighbors(edge[1])):
352             tripletId = getUniqueId([nodeDx,edge[1],edge[0]])
353             tripletsDxOutgoing.append(tripletId)
354             if debug:
355                 triplets_file.write('Dx0: {}\\n'.format(self._tGraph.node[tripletId]['triplet']))
356
357             tripletId = getUniqueId([edge[0],edge[1],nodeDx])
358             tripletsDxIngoing.append(tripletId)
359             if debug:
360                 triplets_file.write('DxI: {}\\n'.format(self._tGraph.node[tripletId]['triplet']))
361
362         for tripletSx in tripletsSxOutgoing:
363             for tripletDx in tripletsDxIngoing:
364

```

```

358         self._tGraph.add_edge(tripletSx, tripletDx, {'weight':self._graph.edge[self._tGraph.node[tripletSx]['
359             ↪ triplet'][0]][self._tGraph.node[tripletDx]['triplet'][0]]['weight']})
360
361     for tripletDx in tripletsDxOutgoing:
362         for tripletSx in tripletsSxIngoing:
363             self._tGraph.add_edge(tripletDx, tripletSx, {'weight':self._graph.edge[self._tGraph.node[tripletDx]['
364                 ↪ triplet'][0]][self._tGraph.node[tripletSx]['triplet'][0]]['weight']})
365
366     if verbose:
367         print('', flush=True)
368
369     if debug:
370         triplets_file.close()
371
372 def _dijkstra(self, verbose, debug):
373     try:
374         if verbose:
375             print('Dijkstra algorithm', flush=True)
376
377         length,triPath=nx.bidirectional_dijkstra(self._tGraph, self._startTriplet, self._endTriplet)
378
379     except (nx.NetworkXNoPath, nx.NetworkXError):
380         print('ERROR: Impossible to find a path')
381         triPath = []
382
383     return triPath
384
385 def _extractPath(self, triPath, verbose):
386     if verbose:
387         print('Extract path', flush=True)
388
389     path = []
390     for t in triPath:
391         path.append(self._graph.node[self._tGraph.node[t]['triplet'][1]]['coord'])
392
393     return np.array(path)
394
395 def _removeCollidingTriples(self, verbose, debug):
396     if verbose:
397         print('Remove colliding triples', flush=True)
398         printDotBunch = 0
399
400     toRemove = []
401     for triple in self._tGraph:
402         if verbose:
403             if printDotBunch == 0:
404                 print('.', end='', flush=True)
405             printDotBunch = (printDotBunch+1)%10
406
407             a = self._graph.node[self._tGraph.node[triple]['triplet'][0]]['coord']
408             b = self._graph.node[self._tGraph.node[triple]['triplet'][1]]['coord']
409             c = self._graph.node[self._tGraph.node[triple]['triplet'][2]]['coord']
410             intersect,intersectRes = self._polyhedronsContainer.triangleIntersectPolyhedrons(a, b, c)
411             if intersect:
412                 toRemove.append(triple)
413
414         if verbose:
415             print ("", flush=True)
416
417     for triple in toRemove:
418         self._tGraph.remove_node(triple)

```

B.1.2 *path.py*

```

1 import random
2 import math
3 import numpy as np
4 import scipy as sp
5 import scipy.interpolate
6
7 class Path:
8     _initialTemperature = 10#1000
9     _trials = 10#100
10    _warmingRatio = 0.9#0.9

```

```

11     _minTemperature=0.00001#0.0000001
12     _minDeltaEnergy=0.000001
13     _maxVlambdaPert = 1000.
14     _maxVertexPertFactor = 100.
15     _initialVlambda = 0.
16     _changeVlambdaProbability = 0.05
17     #####1
18     #_useArcLen = True
19     #_ratioCurvTorsLen = [0.1, 0.1, 0.8]
20     #####2
21     _useArcLen = False
22     _ratioCurvTorsLen = [0.1, 0.1, 0.8]
23     #####3
24     #_useArcLen = True
25     #_ratioCurvTorsLen = [0.3, 0.3, 0.4]
26
27     def __init__(self, bsplineDegree, adaptivePartition):
28         self._bsplineDegree = bsplineDegree
29         self._adaptivePartition = adaptivePartition
30         self._vertexes = np.array([])
31         self._dimC = 0
32         self._polyhedronsContainer = []
33         self._vlambda = self._initialVlambda
34
35     @property
36     def vertexes(self):
37         return self._vertexes
38
39     def assignValues(self, path, polyhedronsContainer):
40         self._vertexes = path
41         self._dimC = self._vertexes.shape[1]
42
43         self._polyhedronsContainer = polyhedronsContainer
44         tau, u, spline, splineD1, splineD2, splineD3, curv, tors, arcLength, polLength = self._splinePoints(self._vertexes)
45         self._maxVertexPert = polLength / self._maxVertexPertFactor
46
47
48     def setBsplineDegree(self, bsplineDegree):
49         self._bsplineDegree = bsplineDegree
50
51     def setAdaptivePartition(self, adaptivePartition):
52         self._adaptivePartition = adaptivePartition
53
54     def clean(self, verbose, debug):
55         if verbose:
56             print('Clean path (avoid obstacles)', flush=True)
57
58         newPath = []
59         if len(self._vertexes) > 0:
60             a = self._vertexes[0]
61             newPath.append(self._vertexes[0])
62
63         for i in range(1, len(self._vertexes)-1):
64             v = self._vertexes[i]
65             b = self._vertexes[i+1]
66
67             intersect,intersectRes = self._polyhedronsContainer.triangleIntersectPolyhedrons(a, v, b)
68             if intersect:
69                 alpha = intersectRes[1]
70
71                 a1 = (1.-alpha)*a + alpha*v
72                 b1 = alpha*v + (1.-alpha)*b
73
74                 newPath.append(a1)
75                 newPath.append(v)
76                 newPath.append(b1)
77
78                 a = b1
79             else:
80                 newPath.append(v)
81
82             a = v
83
84         if len(self._vertexes) > 0:
85             newPath.append(self._vertexes[len(self._vertexes)-1])
86
87         self._vertexes = np.array(newPath)
88
89     def anneal(self, verbose):
90         if verbose:
91
92

```

```

93         print('Anneal path', flush=True)
94
95     tau, u, self._spline, splineD1, splineD2, splineD3, curv, tors, arcLength, polLength = self._splinePoints(self.
96         ↪ _vertexes)
97     self._currentEnergy, self._maxCurvatureLength, self._currentConstraints = self._initializePathEnergy(self._vertexes,
98         ↪ self._spline, splineD1, splineD2, self._vlambda)
99
100    temperature = self._initialTemperature
101   while True:
102       initialEnergy = self._currentEnergy
103       numMovedLambda = 0
104       numMovedVertex = 0
105       for i in range(self._trials):
106           movedLambda,movedVertex = self._tryMove(temperature)
107           if movedLambda:
108               numMovedLambda += 1
109           if movedVertex:
110               numMovedVertex += 1
111           deltaEnergy = abs(initialEnergy - self._currentEnergy)
112           temperature = temperature * self._warmingRatio
113           if verbose:
114               print("T:{}; E:{}; DE:{}; L:{}; C:{}; ML:{}; MV:{}".format(temperature, self._currentEnergy, deltaEnergy,
115                   ↪ self._vlambda, self._currentConstraints, numMovedLambda, numMovedVertex), flush=True)
116           #print(self._vertexes)
117
118           if (temperature < self._minTemperature) or (numMovedVertex > 0 and (deltaEnergy < self._minDeltaEnergy) and self.
119               ↪ _currentConstraints == 0.):
120               break
121
122   def simplify(self, verbose, debug):
123       if verbose:
124           print('Simplify path (remove useless triples)', flush=True)
125       if self._bsplineDegree == 2:
126           self._simplify2()
127       elif self._bsplineDegree == 3:
128           self._simplify3()
129       elif self._bsplineDegree == 4:
130           self._simplify4()
131
132       def _simplify2(self):
133           simplifiedPath = []
134           if len(self._vertexes) > 0:
135               a = self._vertexes[0]
136               simplifiedPath.append(self._vertexes[0])
137               first = True
138               for i in range(1,len(self._vertexes)-1):
139                   v = self._vertexes[i]
140                   b = self._vertexes[i+1]
141                   keepV = False
142
143                   intersectCurr,nihil = self._polyhedronsContainer.triangleIntersectPolyhedrons(a, v, b)
144
145                   if not intersectCurr:
146                       if first:
147                           intersectPrec = False
148                       else:
149                           #a1 = self._vertexes[i-2]
150                           intersectPrec,nihil = self._polyhedronsContainer.triangleIntersectPolyhedrons(a1, a, b)
151
152                       if i == len(self._vertexes)-2:
153                           intersectSucc = False
154                       else:
155                           b1 = self._vertexes[i+2]
156                           intersectSucc,nihil = self._polyhedronsContainer.triangleIntersectPolyhedrons(a, b, b1)
157
158                       if intersectPrec or intersectSucc:
159                           keepV = True
160
161                   else:
162                       keepV = True
163
164                   if keepV:
165                       first = False
166                       simplifiedPath.append(v)
167                       a1 = a
168                       a = v
169
170           if len(self._vertexes) > 0:
171               simplifiedPath.append(self._vertexes[len(self._vertexes)-1])

```

```

171         self._vertexes = np.array(simplifiedPath)
172
173     def _simplify3(self):
174         simp = list(self._vertexes)
175         toEval = 0
176         while toEval < len(simp)-2:
177             toEval += 1
178             if toEval >= 3:
179                 if toEval < len(simp)-1:
180                     if self._polyhedronsContainer.convexHullIntersectsPolyhedrons([simp[toEval-3], simp[toEval-2], simp[
181                         ↪ toEval-1], simp[toEval+1]]):
182                         continue
183
184             if toEval >= 2:
185                 if toEval < len(simp)-2:
186                     if self._polyhedronsContainer.convexHullIntersectsPolyhedrons([simp[toEval-2], simp[toEval-1], simp[
187                         ↪ toEval+1], simp[toEval+2]]):
188                         continue
189
190             if toEval < len(simp)-3:
191                 if self._polyhedronsContainer.convexHullIntersectsPolyhedrons([simp[toEval-1], simp[toEval+1], simp[toEval[
192                         ↪ +2], simp[toEval+3]]]):
193                         continue
194
195             del simp[toEval]
196             toEval -= 1
197
198         self._vertexes = np.array(simp)
199
200     def _simplify4(self):
201         simp = list(self._vertexes)
202         toEval = 0
203         while toEval < len(simp)-2:
204             toEval += 1
205             if toEval >= 4:
206                 if toEval < len(simp)-1:
207                     if self._polyhedronsContainer.convexHullIntersectsPolyhedrons([simp[toEval-4], simp[toEval-3], simp[
208                         ↪ toEval-2], simp[toEval-1], simp[toEval+1]]):
209                         continue
210
211             if toEval >= 3:
212                 if toEval < len(simp)-2:
213                     if self._polyhedronsContainer.convexHullIntersectsPolyhedrons([simp[toEval-3], simp[toEval-2], simp[
214                         ↪ toEval-1], simp[toEval+1], simp[toEval+2]]):
215                         continue
216
217             if toEval >= 2:
218                 if toEval < len(simp)-3:
219                     if self._polyhedronsContainer.convexHullIntersectsPolyhedrons([simp[toEval-2], simp[toEval-1], simp[
220                         ↪ toEval+1], simp[toEval+2], simp[toEval+3]]):
221                         continue
222
223             if toEval < len(simp)-4:
224                 if self._polyhedronsContainer.convexHullIntersectsPolyhedrons([simp[toEval-1], simp[toEval+1], simp[toEval[
225                         ↪ +2], simp[toEval+3], simp[toEval+4]]]):
226                         continue
227
228             del(simp[toEval])
229             toEval -= 1
230
231         self._vertexes = np.array(simp)
232
233     def addNAlignedVertexes(self, numVertexes, verbose, debug):
234         if verbose:
235             print('Increase degree', flush=True)
236
237         newPath = []
238         for i in range(1, len(self._vertexes)):
239             a = self._vertexes[i-1]
240             b = self._vertexes[i]
241             newPath.append(a)
242
243             if numVertexes == 1:
244                 n = 0.5 * a + 0.5 * b
245                 newPath.append(n)
246
247             elif numVertexes == 2:
248                 n1 = 0.33 * b + 0.67 * a
249                 n2 = 0.33 * a + 0.67 * b
250                 newPath.append(n1)
251                 newPath.append(n2)
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
589
590
591
592
593
594
595
596
597
598
599
599
600
601
602
603
604
605
606
607
608
609
609
610
611
612
613
614
615
616
617
618
619
619
620
621
622
623
624
625
626
627
628
629
629
630
631
632
633
634
635
636
637
637
638
639
639
640
641
642
643
644
644
645
646
646
647
647
648
648
649
649
650
650
651
651
652
652
653
653
654
654
655
655
656
656
657
657
658
658
659
659
660
660
661
661
662
662
663
663
664
664
665
665
666
666
667
667
668
668
669
669
670
670
671
671
672
672
673
673
674
674
675
675
676
676
677
677
678
678
679
679
680
680
681
681
682
682
683
683
684
684
685
685
686
686
687
687
688
688
689
689
690
690
691
691
692
692
693
693
694
694
695
695
696
696
697
697
698
698
699
699
700
700
701
701
702
702
703
703
704
704
705
705
706
706
707
707
708
708
709
709
710
710
711
711
712
712
713
713
714
714
715
715
716
716
717
717
718
718
719
719
720
720
721
721
722
722
723
723
724
724
725
725
726
726
727
727
728
728
729
729
730
730
731
731
732
732
733
733
734
734
735
735
736
736
737
737
738
738
739
739
740
740
741
741
742
742
743
743
744
744
745
745
746
746
747
747
748
748
749
749
750
750
751
751
752
752
753
753
754
754
755
755
756
756
757
757
758
758
759
759
760
760
761
761
762
762
763
763
764
764
765
765
766
766
767
767
768
768
769
769
770
770
771
771
772
772
773
773
774
774
775
775
776
776
777
777
778
778
779
779
780
780
781
781
782
782
783
783
784
784
785
785
786
786
787
787
788
788
789
789
790
790
791
791
792
792
793
793
794
794
795
795
796
796
797
797
798
798
799
799
800
800
801
801
802
802
803
803
804
804
805
805
806
806
807
807
808
808
809
809
810
810
811
811
812
812
813
813
814
814
815
815
816
816
817
817
818
818
819
819
820
820
821
821
822
822
823
823
824
824
825
825
826
826
827
827
828
828
829
829
830
830
831
831
832
832
833
833
834
834
835
835
836
836
837
837
838
838
839
839
840
840
841
841
842
842
843
843
844
844
845
845
846
846
847
847
848
848
849
849
850
850
851
851
852
852
853
853
854
854
855
855
856
856
857
857
858
858
859
859
860
860
861
861
862
862
863
863
864
864
865
865
866
866
867
867
868
868
869
869
870
870
871
871
872
872
873
873
874
874
875
875
876
876
877
877
878
878
879
879
880
880
881
881
882
882
883
883
884
884
885
885
886
886
887
887
888
888
889
889
890
890
891
891
892
892
893
893
894
894
895
895
896
896
897
897
898
898
899
899
900
900
901
901
902
902
903
903
904
904
905
905
906
906
907
907
908
908
909
909
910
910
911
911
912
912
913
913
914
914
915
915
916
916
917
917
918
918
919
919
920
920
921
921
922
922
923
923
924
924
925
925
926
926
927
927
928
928
929
929
930
930
931
931
932
932
933
933
934
934
935
935
936
936
937
937
938
938
939
939
940
940
941
941
942
942
943
943
944
944
945
945
946
946
947
947
948
948
949
949
950
950
951
951
952
952
953
953
954
954
955
955
956
956
957
957
958
958
959
959
960
960
961
961
962
962
963
963
964
964
965
965
966
966
967
967
968
968
969
969
970
970
971
971
972
972
973
973
974
974
975
975
976
976
977
977
978
978
979
979
980
980
981
981
982
982
983
983
984
984
985
985
986
986
987
987
988
988
989
989
990
990
991
991
992
992
993
993
994
994
995
995
996
996
997
997
998
998
999
999
1000
1000
1001
1001
1002
1002
1003
1003
1004
1004
1005
1005
1006
1006
1007
1007
1008
1008
1009
1009
1010
1010
1011
1011
1012
1012
1013
1013
1014
1014
1015
1015
1016
1016
1017
1017
1018
1018
1019
1019
1020
1020
1021
1021
1022
1022
1023
1023
1024
1024
1025
1025
1026
1026
1027
1027
1028
1028
1029
1029
1030
1030
1031
1031
1032
1032
1033
1033
1034
1034
1035
1035
1036
1036
1037
1037
1038
1038
1039
1039
1040
1040
1041
1041
1042
1042
1043
1043
1044
1044
1045
1045
1046
1046
1047
1047
1048
1048
1049
1049
1050
1050
1051
1051
1052
1052
1053
1053
1054
1054
1055
1055
1056
1056
1057
1057
1058
1058
1059
1059
1060
1060
1061
1061
1062
1062
1063
1063
1064
1064
1065
1065
1066
1066
1067
1067
1068
1068
1069
1069
1070
1070
1071
1071
1072
1072
1073
1073
1074
1074
1075
1075
1076
1076
1077
1077
1078
1078
1079
1079
1080
1080
1081
1081
1082
1082
1083
1083
1084
1084
1085
1085
1086
1086
1087
1087
1088
1088
1089
1089
1090
1090
1091
1091
1092
1092
1093
1093
1094
1094
1095
1095
1096
1096
1097
1097
1098
1098
1099
1099
1100
1100
1101
1101
1102
1102
1103
1103
1104
1104
1105
1105
1106
1106
1107
1107
1108
1108
1109
1109
1110
1110
1111
1111
1112
1112
1113
1113
1114
1114
1115
1115
1116
1116
1117
1117
1118
1118
1119
1119
1120
1120
1121
1121
1122
1122
1123
1123
1124
1124
1125
1125
1126
1126
1127
1127
1128
1128
1129
1129
1130
1130
1131
1131
1132
1132
1133
1133
1134
1134
1135
1135
1136
1136
1137
1137
1138
1138
1139
1139
1140
1140
1141
1141
1142
1142
1143
1143
1144
1144
1145
1145
1146
1146
1147
1147
1148
1148
1149
1149
1150
1150
1151
1151
1152
1152
1153
1153
1154
1154
1155
1155
1156
1156
1157
1157
1158
1158
1159
1159
1160
1160
1161
1161
1162
1162
1163
1163
1164
1164
1165
1165
1166
1166
1167
1167
1168
1168
1169
1169
1170
1170
1171
1171
1172
1172
1173
1173
1174
1174
1175
1175
1176
1176
1177
1177
1178
1178
1179
1179
1180
1180
1181
1181
1182
1182
1183
1183
1184
1184
1185
1185
1186
1186
1187
1187
1188
1188
1189
1189
1190
1190
1191
1191
1192
1192
1193
1193
1194
1194
1195
1195
1196
1196
1197
1197
1198
1198
1199
1199
1200
1200
1201
1201
1202
1202
1203
1203
1204
1204
1205
1205
1206
1206
1207
1207
1208
1208
1209
1209
1210
1210
1211
1211
1212
1212
1213
1213
1214
1214
1215
1215
1216
1216
1217
1217
1218
1218
1219
1219
1220
1220
1221
1221
1222
1222
1223
1223
1224
1224
1225
1225
1226
1226
1227
1227
1228
1228
1229
1229
1230
1230
1231
1231
1232
1232
1233
1233
1234
1234
1235
1235
1236
1236
1237
1237
1238
1238
1239
1239
1240
1240
1241
1241
1242
1242
1243
1243
1244
1244
1245
1245
1246
1246
1247
1247
1248
1248
1249
1249
1250
1250
1251
1251
1252
1252
1253
1253
1254
1254
1255
1255
1256
1256
1257
1257
1258
1258
1259
1259
1260
1260
1261
1261
1262
1262
1263
1263
1264
1264
1265
1265
1266
1266
1267
1267
1268
1268
1269
1269
1270
1270
1271
1271
1272
1272
1273
1273
1274
1274
1275
1275
1276
1276
1277
1277
1278
1278
1279
1279
1280
1280
1281
1281
1282
1282
1283
1283
1284
1284
1285
1285
1286
1286
1287
1287
1288
1288
1289
1289
1290
1290
1291
1291
1292
1292
1293
1293
1294
1294
1295
1295
1296
1296
1297
1297
1298
1298
1299
1299
1300
1300
1301
1301
1302
1302
1303
1303
1304
1304
1305
1305
1306
1306
1307
1307
1308
1308
1309
1309
1310
1310
1311
1311
1312
1312
1313
1313
1314
1314
1315
1315
1316
1316
1317
1317
1318
1318
1319
1319
1320
1320
1321
1321
1322
1322
1323
1323
1324
1324
1325
1325
1326
1326
1327
1327
1328
1328
1329
1329
1330
1330
1331
1331
1332
1332
1333
1333
1334
1334
1335
1335
1336
1336
1337
1337
1338
1338
1339
1339
1340
1340
1341
1341
1342
1342
1343
1343
1344
1344
1345
1345
1346
1346
1347
1347
1348
1348
1349
1349
1350
1350
1351
1351
1352
1352
1353
1353
1354
1354
1355
1355
1356
1356
1357
1357
1358
1358
1359
1359
1360
1360
1361
1361
1362
1362
1363
1363
1364
1364
1365
1365
1366
1366
1367
1367
1368
1368
1369
1369
1370
1370
1371
1371
1372
1372
1373
1373
1374
1374
1375
1375
1376
1376
1377
1377
1378
1378
1379
1379
1380
1380
1381
1381
1382
1382
1383
1383
1384
1384
1385
1385
1386
1386
1387
1387
1388
1388
1389
1389
1390
1390
1391
1391
1392
1392
1393
1393
1394
1394
1395
1395
1396
1396
1397
1397
1398
1398
1399
1399
1400
1400
1401
1401
1402
1402
1403
1403
1404
1404
1405
1405
1406
1406
1407
1407
1408
1408
1409
1409
1410
1410
1411
1411
1412
1412
1413
1413
1414
1414
1415
1415
1416
1416
1417
1417
1418
1418
1419
1419
1420
1420
1421
1421
1422
1422
1423
1423
1424
1424
1425
1425
1426
1426
1427
1427
1428
1428
1429
1429
1430
1430
1431
1431
1432
1432
1433
1433
1434
1434
1435
1435
1436
1436
1437
1437
1438
1438
1439
1439
1440
1440
1441
1441
1442
1442
1443
1443
1444
1444
1445
1445
1446
1446
1447
1447
1448
1448
1449
1449
1450
1450
1451
1451
1452
1452
1453
1453
1454
1454
1455
1455
1456
1456
1457
1457
1458
1458
1459
1459
1460
1460
1461
1461
1462
1462
1463
1463
1464
1464
1465
1465
1466
1466
1467
1467
1468
1468
1469
1469
1470
1470
1471
1471
1472
1472
1473
1473
1474
1474
1475
1475
1476
1476
1477
1477
1478
1478
1479
1479
1480
1480
1481
1481
1482
1482
1483
1483
1484
1484
1485
1485
1486
1486
1487
1487
1488
1488
1489
1489
1490
1490
1491
1491
1492
1492
1493
1493
1494
1494
1495
1495
1496
1496
1497
1497
1498
1498
1499
1499
1500
1500
1501
1501
1502
1502
1503
1503
1504
1504
1505
1505
1506
1506
1507
1507
1508
1508
1509
1509
1510
1510
1511
1511
1512
1512
1513
1513
1514
1514
1515
1515
1516
1516
1517
1517
1518
1518
1519
1519
1520
1520
1521
1521
1522
1522
1523
1523
1524
1524
1525
1525
1526
1526
1527
1527
1528
1528
1529
1529
1530
1530
1531
1531
1532
1532
1533
1533
1534
1534
1535
1535
1536
1536
1537
1537
1538
1538
1539
1539
1540
1540
1541
1541
1542
1542
1543
1543
1544
1544
1545
1545
1546
1546
1547
1547
1548
1548
1549
1549
1550
1550
1551
1551
1552
1552
1553
1553
1554
1554
1555
1555
1556
1556
1557
1557
1558
1558
1559

```

```

246     if len(self._vertices) > 0:
247         newPath.append(self._vertices[len(self._vertices)-1])
248
249     self._vertices = np.array(newPath)
250
251     def splinePoints(self):
252         return self._splinePoints(self._vertices)
253
254     def _splinePoints(self, vertices):
255
256         x = vertices[:,0]
257         y = vertices[:,1]
258         z = vertices[:,2]
259
260         polLen = self._calculatePolyLength(vertices)
261
262         tau,t = self._createKnotPartition(vertices)
263
264         #[knots, coeff, degree]
265         tck = [t,[x,y,z], self._bsplineDegree]
266
267         u=np.linspace(0,1,(max(polLen*5,1000)),endpoint=True)
268
269         out = sp.interpolate.splev(u, tck)
270         outD1 = sp.interpolate.splev(u, tck, 1)
271         outD2 = sp.interpolate.splev(u, tck, 2)
272
273         spline = np.stack(out).T
274         splineD1 = np.stack(outD1).T
275         splineD2 = np.stack(outD2).T
276
277         if self._bsplineDegree >= 3:
278             outD3 = sp.interpolate.splev(u, tck, 3)
279             splineD3 = np.stack(outD3).T
280         else:
281             splineD3 = None
282
283         curv = []
284         tors = []
285         arcLength = 0.
286         for i in range(len(u)):
287             d1Xd2 = np.cross(splineD1[i], splineD2[i])
288             Nd1Xd2 = np.linalg.norm(d1Xd2)
289             Nd1 = np.linalg.norm(splineD1[i])
290
291             currCurv = 0.
292             if Nd1 >0.: #>= 1.:
293                 currCurv = Nd1Xd2 / math.pow(Nd1,3)
294
295             currTors = 0.
296             if self._bsplineDegree >= 3 and Nd1Xd2 > 0.: #>= 1.:
297                 try:
298                     currTors = np.dot(d1Xd2, splineD3[i]) / math.pow(Nd1Xd2, 2)
299                 except RuntimeWarning:
300                     currTors = 0.
301
302             curv.append(currCurv)
303             tors.append(currTors)
304
305             if i >= 1:
306                 dMin = min(prevNd1, Nd1)
307                 dMax = max(prevNd1, Nd1)
308                 arcLength += (u[i]-u[i-1]) * (dMin + ((dMax-dMin) / 2.))
309
310             prevNd1 = Nd1
311
312         return (tau, u, spline, splineD1, splineD2, splineD3, curv, tors, arcLength, polLen)
313
314     def _createKnotPartition(self, controlPolygon):
315         nv = len(controlPolygon)
316         nn = nv - self._bsplineDegree + 1
317
318         if not self._adaptivePartition:
319             T = np.linspace(0,1,nv-self._bsplineDegree+1,endpoint=True)
320         else:
321             d = [0]
322             for j in range(1, nv):
323                 d.append(d[j-1] + np.linalg.norm(controlPolygon[j] - controlPolygon[j-1]))
324             t = []
325             for i in range(nn-1):
326                 a = i * (nv-1) / (nn-1)
327                 ai = math.floor(a)

```

```

328         ad = a - ai
329         p = ad * controlPolygon[ai+1] + (1-ad) * controlPolygon[ai]
330         l = d[ai] + np.linalg.norm(p - controlPolygon[ai])
331         t.append(l / d[nv-1])
332
333         t.append(1.)
334
335         T = np.array(t)
336
337         Text = np.append([0]*self._bsplineDegree, T)
338         Text = np.append(Text, [1]*self._bsplineDegree)
339
340         return (T,Text)
341
342     def _initializePathEnergy(self, vertexes, spline, splineD1, splineD2, vlambd):
343         tau, u, spline, splineD1, splineD2, splineD3, curv, tors, arcLength, polLength = self._splinePoints(vertexes)
344         if self._useArLen:
345             length = arcLength
346         else:
347             length = polLength
348
349         self._initialLength = length
350         maxCurvatureLength = self._calculateMaxCurvatureLength(length, curv, tors)
351         constraints = self._calculateConstraints(spline)
352         energy = maxCurvatureLength + vlambd * constraints
353
354         return (energy, maxCurvatureLength, constraints)
355
356     def _tryMove(self, temperature):
357         """
358             Move the path or lambda multipliers in a neighbouring state,
359             with a certain acceptance probability.
360             Pick a random vertex (except extremes), and move
361             it in a random direction (with a maximum perturbation).
362             Use a lagrangian relaxation because we need to evaluate
363             min(measure(path)) given the constraint that all quadrilaterals
364             formed by 4 consecutive points in the path must be collision
365             free; where measure(path) is, depending of the choose method,
366             the length of the path or the mean
367             of the supplementary angles of each pair of edges of the path.
368             If neighbourMode=0 then move the node uniformly, if
369             neighbourMode=1 then move the node with gaussian probabilities
370             with mean in the perpendicular direction respect to the
371             previous-next nodes axis.
372
373
374             movedLambda = False
375             movedVertex = False
376             moveVlambd = random.random() < self._changeVlambdProbability
377             if moveVlambd:
378                 newVlambd = self._vlambd
379                 newVlambd = newVlambd + (random.uniform(-1.,1.) * self._maxVlambdPert)
380
381                 newEnergy = self._calculatePathEnergyLambda(newVlambd)
382
383                 #attention, different formula from below
384                 if (newEnergy > self._currentEnergy) or (math.exp(-(self._currentEnergy-newEnergy)/temperature) >= random.random
385                     ↪ ()):
386                     self._vlambd = newVlambd
387                     self._currentEnergy = newEnergy
388                     movedLambda = True
389
390             else:
391                 newVertexes = np.copy(self._vertexes)
392                 movedV = random.randint(1,len(self._vertexes) - 2) #don't change extremes
393
394                 moveC = random.randint(0,self._dimC - 1)
395                 newVertexes[movedV][moveC] = newVertexes[movedV][moveC] + (random.uniform(-1.,1.) * self._maxVertexPert)
396
397                 newEnergy,newMaxCurvatureLength,newConstraints = self._calculatePathEnergyVertex(newVertexes)
398
399                 #attention, different formula from above
400                 if (newEnergy < self._currentEnergy) or (math.exp(-(newEnergy-self._currentEnergy)/temperature) >= random.random
401                     ↪ ()):
402                     self._vertexes = newVertexes
403                     self._currentEnergy = newEnergy
404                     self._currentMaxCurvatureLength = newMaxCurvatureLength
405                     self._currentConstraints = newConstraints
406                     movedVertex = True
407
408         return (movedLambda, movedVertex)

```

```

408     def _calculatePathEnergyLambda(self, vlambda):
409         """
410             calculate the energy when lambda is moved.
411         """
412         return (self._currentEnergy - (self._vlambda * self._currentConstraints) + (vlambda * self._currentConstraints))
413
414     def _calculatePathEnergyVertex(self, vertexes):
415         """
416             calculate the energy when a vertex is moved and returns it.
417         """
418         tau, u, spline, splineD1, splineD2, splineD3, curv, tors, arcLength, polLength = self._splinePoints(vertexes)
419         if self._useArcLen:
420             length = arcLength
421         else:
422             length = polLength
423
424         constraints = self._calculateConstraints(spline)#this is bottleneck
425         maxCurvatureLength = self._calculateMaxCurvatureLength(length, curv, tors)
426
427         energy = maxCurvatureLength + self._vlambda * constraints
428
429         return (energy, maxCurvatureLength, constraints)
430
431     def _calculatePolyLength(self, vertexes):
432         length = 0.
433         for i in range(1, len(vertexes)):
434             length += sp.spatial.distance.euclidean(vertexes[i-1], vertexes[i])
435             #length += np.linalg.norm(np.subtract(vertexes[i], vertexes[i-1]))
436         return length
437
438     def _calculateMaxCurvatureLength(self, length, curv, tors):
439         normLength = length/self._initialLength * 100 #for making the ratio indipendent of the initial length
440
441         maxCurvature = 0.
442         maxTorsion = 0.
443         for i in range(0, len(curv)):
444             currCurv = curv[i]
445             currTors = abs(tors[i])
446             if currCurv > maxCurvature:
447                 maxCurvature = currCurv
448             if currTors > maxTorsion:
449                 maxTorsion = currTors
450
451         return self._ratioCurvTorsLen[0]*maxCurvature + self._ratioCurvTorsLen[1]*maxTorsion + self._ratioCurvTorsLen[2]*→ normLength
452
453     def _calculateConstraints(self, spline):
454         """
455             calculate the constraints function. Is the ratio of the points
456             of the calculated spline that are inside obstacles respect the
457             total number of points of the spline.
458         """
459         pointsInside = 0
460         for p in spline:
461             if self._polyhedronsContainer.pointInsidePolyhedron(p):
462                 pointsInside = pointsInside + 1
463
464         constraints = pointsInside / len(spline)
465
466         return constraints

```

B.1.3 plotter.py

```

1 import numpy as np
2 import scipy as sp
3 import scipy.interpolate
4 import scipy.spatial
5 import pickle
6 import vtk
7 import vtk.util.colors
8 import math
9 import warnings
10 warnings.filterwarnings("error")
11
12 class Plotter:
13     COLOR_BG = vtk.util.colors.light_grey

```

```

14 COLOR_BG_PLOT = vtk.util.colors.ghost_white
15 #vtk.util.colors.ivory
16 COLOR_OBSTACLE = vtk.util.colors.banana
17 COLOR_SITES = vtk.util.colors.cobalt
18 COLOR_PATH = vtk.util.colors.brick
19 COLOR_CONTROL_POINTS = vtk.util.colors.tomato
20 COLOR_CONTROL_POLIG = vtk.util.colors.mint
21 COLOR_GRAPH = vtk.util.colors.sepia
22 COLOR_PLOT_CURV = vtk.util.colors.blue
23 COLOR_PLOT_TORS = vtk.util.colors.red
24 COLOR_LABELS = vtk.util.colors.blue
25 COLOR_LENGTH = vtk.util.colors.red
26
27 _DEFAULT_LINE_THICKNESS = 0.0005
28 _DEFAULT_POINT_THICKNESS = 0.002
29 _DEFAULT_BSPLINE_THICKNESS = 0.001
30
31 class KeyPressInteractorStyle(vtk.vtkInteractorStyleUnicam):
32     _screenshotFile = "/tmp/screenshot.png"
33     _cameraFile = "/tmp/cameraData.dat"
34     _cameraFile2 = "/tmp/cameraData2.dat"
35     def __init__(self, parent=None):
36         self.AddObserver("KeyPressEvent", self._keyPressEvent)
37         self.AddObserver("RightButtonPressEvent", self._mousePressEvent)
38         super(KeyPressInteractorStyle, self).__init__()
39
40     def SetCamera(self, camera):
41         self._camera = camera
42
43     def SetRenderer(self, renderer):
44         self._renderer = renderer
45
46     def SetRenderWindow(self, renderWindow):
47         self._renderWindow = renderWindow
48
49     def _keyPressEvent(self, obj, event):
50         if obj.GetInteractor().GetKeySym() == "l":
51             print("Scene screenshot in "+self._screenshotFile)
52             w2if = vtk.vtkWindowToImageFilter()
53             w2if.SetInput(self._renderWindow)
54             w2if.Update()
55
56             writer = vtk.vtkPNGWriter()
57             writer.SetFileName(self._screenshotFile)
58             writer.SetInputData(w2if.GetOutput())
59             writer.Update()
60
61         elif obj.GetInteractor().GetKeySym() == "c":
62             print("Save camera data in "+self._cameraFile)
63             record = {}
64             record['position'] = self._camera.GetPosition()
65             record['focalPoint'] = self._camera.GetFocalPoint()
66             record['viewAngle'] = self._camera.GetViewAngle()
67             record['viewUp'] = self._camera.GetViewUp()
68             record['clippingRange'] = self._camera.GetClippingRange()
69
70             with open(self._cameraFile, 'wb') as f:
71                 pickle.dump(record, f)
72
73         elif obj.GetInteractor().GetKeySym() == "v":
74             print("Restore camera data from "+self._cameraFile)
75
76             with open(self._cameraFile, 'rb') as f:
77                 record = pickle.load(f)
78
79                 self._camera.SetPosition(record['position'])
80                 self._camera.SetFocalPoint(record['focalPoint'])
81                 self._camera.SetViewAngle(record['viewAngle'])
82                 self._camera.SetViewUp(record['viewUp'])
83                 self._camera.SetClippingRange(record['clippingRange'])
84
85                 self._renderWindow.Render()
86
87         elif obj.GetInteractor().GetKeySym() == "b":
88             print("Restore camera data from "+self._cameraFile2)
89
90             with open(self._cameraFile2, 'rb') as f:
91                 record = pickle.load(f)
92
93                 self._camera.SetPosition(record['position'])
94                 self._camera.SetFocalPoint(record['focalPoint'])
95                 self._camera.SetViewAngle(record['viewAngle'])

```

```

96         self._camera.SetViewUp(record['viewUp'])
97         self._camera.SetClippingRange(record['clippingRange'])
98
99         self._renderWindow.Render()
100
101     self.OnKeyPress()
102
103     def _mousePressEvent(self, obj, event):
104         clickPos = obj.GetInteractor().GetEventPosition()
105         picker = vtk.vtkPropPicker()
106         picker.Pick(clickPos[0], clickPos[1], 0, self._renderer)
107         pos = picker.GetPickPosition()
108         print(pos)
109
110
111 class KeyPressContextInteractorStyle(vtk.vtkContextInteractorStyle):
112     _screenshotFile = "/tmp/screenshot.png"
113
114     def __init__(self, parent=None):
115         self.AddObserver("KeyPressEvent", self._keyPressEvent)
116
117     def SetRenderWindow(self, renderWindow):
118         self._renderWindow = renderWindow
119
120     def _keyPressEvent(self, obj, event):
121         if obj.GetInteractor().GetKeySym() == "l":
122             print("Plot screenshot in "+self._screenshotFile)
123             w2if = vtk.vtkWindowToImageFilter()
124             w2if.SetInput(self._renderWindow)
125             w2if.Update()
126
127             writer = vtk.vtkPNGWriter()
128             writer.SetFileName(self._screenshotFile)
129             writer.SetInputData(w2if.GetOutput())
130             writer.Write()
131
132
133     def __init__(self):
134         self._rendererScene = vtk.vtkRenderer()
135         self._rendererScene.SetBackground(self.COLOR_BG)
136
137         self._renderWindowScene = vtk.vtkRenderWindow()
138         self._renderWindowScene.AddRenderer(self._rendererScene)
139         self._renderWindowInteractor = vtk.vtkRenderWindowInteractor()
140         self._renderWindowInteractor.SetRenderWindow(self._renderWindowScene)
141 #self._interactorStyle = vtk.vtkInteractorStyleUnicam()
142         self._interactorStyle = self.KeyPressInteractorStyle()
143         self._interactorStyle.SetCamera(self._rendererScene.GetActiveCamera())
144         self._interactorStyle.SetRenderer(self._rendererScene)
145         self._interactorStyle.SetRenderWindow(self._renderWindowScene)
146
147         self._contextViewPlotCurv = vtk.vtkContextView()
148         self._contextViewPlotCurv.GetRenderer().SetBackground(self.COLOR_BG_PLOT)
149
150         self._contextInteractorStyleCurv = self.KeyPressContextInteractorStyle()
151         self._contextInteractorStyleCurv.SetRenderWindow(self._contextViewPlotCurv.GetRenderWindow())
152
153         self._chartXYCurv = vtk.vtkChartXY()
154         self._contextViewPlotCurv.GetScene().AddItem(self._chartXYCurv)
155         self._chartXYCurv.SetShowLegend(True)
156         self._chartXYCurv.GetAxis(vtk.vtkAxis.LEFT).SetTitle("")
157         self._chartXYCurv.GetAxis(vtk.vtkAxis.BOTTOM).SetTitle("")
158
159         self._contextViewPlotTors = vtk.vtkContextView()
160         self._contextViewPlotTors.GetRenderer().SetBackground(self.COLOR_BG_PLOT)
161
162         self._contextInteractorStyleTors = self.KeyPressContextInteractorStyle()
163         self._contextInteractorStyleTors.SetRenderWindow(self._contextViewPlotTors.GetRenderWindow())
164
165         self._chartXYTors = vtk.vtkChartXY()
166         self._contextViewPlotTors.GetScene().AddItem(self._chartXYTors)
167         self._chartXYTors.SetShowLegend(True)
168         self._chartXYTors.GetAxis(vtk.vtkAxis.LEFT).SetTitle("")
169         self._chartXYTors.GetAxis(vtk.vtkAxis.BOTTOM).SetTitle("")
170
171         self._textActor = vtk.vtkTextActor()
172         self._textActor.GetTextProperty().SetColor(self.COLOR_LENGTH)
173
174         self._addedBSpline = False
175
176     def draw(self):

```

```

178     self._renderWindowInteractor.Initialize()
179     self._renderWindowInteractor.SetInteractorStyle(self._interactorStyle)
180
181     axes = vtk.vtkAxesActor()
182     widget = vtk.vtkOrientationMarkerWidget()
183     widget.SetOutlineColor(0.9300, 0.5700, 0.1300)
184     widget.SetOrientationMarker(axes)
185     widget.SetInteractor(self._renderWindowInteractor)
186     #widget.SetViewport(0.0, 0.0, 0.1, 0.1)
187     widget.SetViewport(0.0, 0.0, 0.2, 0.4)
188     widget.SetEnabled(True)
189     widget.InteractiveOn()
190
191     textWidget = vtk.vtkTextWidget()
192
193     textRepresentation = vtk.vtkTextRepresentation()
194     textRepresentation.GetPositionCoordinate().SetValue(.0,.0)
195     textRepresentation.GetPosition2Coordinate().SetValue(.3,.04)
196     textWidget.SetRepresentation(textRepresentation)
197
198     textWidget.SetInteractor(self._renderWindowInteractor)
199     textWidget.SetTextActor(self._textActor)
200     textWidget.SelectableOff()
201     textWidget.On()
202
203     self._rendererScene.ResetCamera()
204     camPos = self._rendererScene.GetActiveCamera().GetPosition()
205     self._rendererScene.GetActiveCamera().SetPosition((camPos[2],camPos[1],camPos[0]))
206     self._rendererScene.GetActiveCamera().SetViewUp((0.0,0.0,1.0))
207     self._rendererScene.GetActiveCamera().Zoom(1.4)
208
209     self._renderWindowScene.Render()
210
211 if self._addedBSpline:
212     self._contextViewPlotCurv.GetRenderWindow().SetMultiSamples(0)
213     self._contextViewPlotCurv.GetInteractor().Initialize()
214     self._contextViewPlotCurv.GetInteractor().SetInteractorStyle(self._contextInteractorStyleCurv)
215     #self._contextViewPlotCurv.GetInteractor().Start()
216
217     self._contextViewPlotTors.GetRenderWindow().SetMultiSamples(0)
218     self._contextViewPlotTors.GetInteractor().Initialize()
219     self._contextViewPlotTors.GetInteractor().SetInteractorStyle(self._contextInteractorStyleTors)
220     self._contextViewPlotTors.GetInteractor().Start()
221 else:
222     self._renderWindowInteractor.Start()
223
224
225 def addTetrahedron(self, vertexes, color):
226     vtkPoints = vtk.vtkPoints()
227     vtkPoints.InsertNextPoint(vertexes[0][0], vertexes[0][1], vertexes[0][2])
228     vtkPoints.InsertNextPoint(vertexes[1][0], vertexes[1][1], vertexes[1][2])
229     vtkPoints.InsertNextPoint(vertexes[2][0], vertexes[2][1], vertexes[2][2])
230     vtkPoints.InsertNextPoint(vertexes[3][0], vertexes[3][1], vertexes[3][2])
231
232     unstructuredGrid = vtk.vtkUnstructuredGrid()
233     unstructuredGrid.SetPoints(vtkPoints)
234     unstructuredGrid.InsertNextCell(vtk.VTK_TETRA, 4, range(4))
235
236     mapper = vtk.vtkDataSetMapper()
237     mapper.SetInputData(unstructuredGrid)
238
239     actor = vtk.vtkActor()
240     actor.SetMapper(mapper)
241     actor.GetProperty().SetColor(color)
242
243     self._rendererScene.AddActor(actor)
244
245 def addTriangles(self, triangles, color):
246     vtkPoints = vtk.vtkPoints()
247     idPoint = 0
248     allIdsTriangle = []
249
250     for triangle in triangles:
251         idsTriangle = []
252
253         for point in triangle:
254             vtkPoints.InsertNextPoint(point[0], point[1], point[2])
255             idsTriangle.append(idPoint)
256             idPoint += 1
257
258         allIdsTriangle.append(idsTriangle)
259

```

```

260     unstructuredGrid = vtk.vtkUnstructuredGrid()
261     unstructuredGrid.SetPoints(vtkPoints)
262     for idsTriangle in allIdsTriangle:
263         unstructuredGrid.InsertNextCell(vtk.VTK_TRIANGLE, 3, idsTriangle)
264
265     mapper = vtk.vtkDataSetMapper()
266     mapper.SetInputData(unstructuredGrid)
267
268     actor = vtk.vtkActor()
269     actor.SetMapper(mapper)
270     actor.GetProperty().SetColor(color)
271
272     self._rendererScene.AddActor(actor)
273
274 def addPolyLine(self, points, color, thick=False, thickness=_DEFAULT_LINE_THICKNESS):
275     vtkPoints = vtk.vtkPoints()
276     for point in points:
277         vtkPoints.InsertNextPoint(point[0], point[1], point[2])
278
279     if thick:
280         cellArray = vtk.vtkCellArray()
281         cellArray.InsertNextCell(len(points))
282         for i in range(len(points)):
283             cellArray.InsertCellPoint(i)
284
285         polyData = vtk.vtkPolyData()
286         polyData.SetPoints(vtkPoints)
287         polyData.SetLines(cellArray)
288
289         tubeFilter = vtk.vtkTubeFilter()
290         tubeFilter.SetNumberOfSides(8)
291         tubeFilter.SetInputData(polyData)
292         tubeFilter.SetRadius(thickness)
293         tubeFilter.Update()
294
295         mapper = vtk.vtkPolyDataMapper()
296         mapper.SetInputConnection(tubeFilter.GetOutputPort())
297
298     else:
299         unstructuredGrid = vtk.vtkUnstructuredGrid()
300         unstructuredGrid.SetPoints(vtkPoints)
301         for i in range(1, len(points)):
302             unstructuredGrid.InsertNextCell(vtk.VTK_LINE, 2, [i-1, i])
303
304         mapper = vtk.vtkDataSetMapper()
305         mapper.SetInputData(unstructuredGrid)
306
307         actor = vtk.vtkActor()
308         actor.SetMapper(mapper)
309         actor.GetProperty().SetColor(color)
310
311         self._rendererScene.AddActor(actor)
312
313 def addPoints(self, points, color, thick=False, thickness=_DEFAULT_POINT_THICKNESS):
314     vtkPoints = vtk.vtkPoints()
315     for point in points:
316         vtkPoints.InsertNextPoint(point[0], point[1], point[2])
317
318     pointsPolyData = vtk.vtkPolyData()
319     pointsPolyData.SetPoints(vtkPoints)
320
321     if thick:
322         sphereSource = vtk.vtkSphereSource()
323         sphereSource.SetRadius(thickness)
324
325         glyph3D = vtk.vtkGlyph3D()
326         glyph3D.SetSourceConnection(sphereSource.GetOutputPort())
327         glyph3D.SetInputData(pointsPolyData)
328         glyph3D.Update()
329
330         mapper = vtk.vtkPolyDataMapper()
331         mapper.SetInputConnection(glyph3D.GetOutputPort())
332     else:
333         vertexFilter = vtk.vtkVertexGlyphFilter()
334         vertexFilter.SetInputData(pointsPolyData)
335         vertexFilter.Update()
336
337         mapper = vtk.vtkPolyDataMapper()
338         mapper.SetInputData(vertexFilter.GetOutput())
339
340         actor = vtk.vtkActor()
341         actor.SetMapper(mapper)

```

```

342     actor.GetProperty().SetColor(color)
343
344     self._rendererScene.AddActor(actor)
345
346     def addBSpline(self, path, degree, color, thick=False, thickness=_DEFAULT_BSPLINE_THICKNESS):
347         self._addedBSpline = True
348
349         tau, u, spline, splineD1, splineD2, splineD3, curv, tors, arcLength, polLength = path.splinePoints()
350
351         self._textActor.SetInput("Length: "+str(arcLength))
352
353         numIntervals = len(tau)-1
354
355         curvPlotActor = vtk.vtkXYPlotActor()
356         curvPlotActor.SetTitle("Curvature")
357         curvPlotActor.SetXTitle("")
358         curvPlotActor.SetYTitle("")
359         curvPlotActor.SetXValuesToIndex()
360
361         torsPlotActor = vtk.vtkXYPlotActor()
362         torsPlotActor.SetTitle("Torsion")
363         torsPlotActor.SetXTitle("")
364         torsPlotActor.SetYTitle("")
365         torsPlotActor.SetXValuesToIndex()
366
367         uArrays = []
368         curvArrays = []
369         torsArrays = []
370         for i in range(numIntervals):
371             uArrays.append(vtk.vtkDoubleArray())
372             uArrays[i].SetName("t")
373
374             curvArrays.append(vtk.vtkDoubleArray())
375             curvArrays[i].SetName("Curvature")
376
377             torsArrays.append(vtk.vtkDoubleArray())
378             torsArrays[i].SetName("Torsion")
379
380             curvTorsArray = vtk.vtkDoubleArray()
381
382             #minCurv = minTors = minNd1Xd2 = float("inf")
383             #maxCurv = maxTors = float("-inf")
384
385             for i in range(len(u)):
386                 for j in range(numIntervals):
387                     if u[i] >= tau[j] and u[i] < tau[j+1]:
388                         break
389
390                     uArrays[j].InsertNextValue(u[i])
391                     curvArrays[j].InsertNextValue(curv[i])
392                     torsArrays[j].InsertNextValue(tors[i])
393
394                     curvTorsArray.InsertNextValue(curv[i]# + abs(tors[i]))
395
396             #print("minCurv: {:e}; maxCurv: {:e}; minTors: {:e}; maxTors: {:e}; minNd1Xd2: {:e}.".format(minCurv, maxCurv, minTors
397             #    ↪ , maxTors, minNd1Xd2))
398
399             for inter in range(numIntervals):
400                 plotTable = vtk.vtkTable()
401                 plotTable.AddColumn(uArrays[inter])
402                 plotTable.AddColumn(curvArrays[inter])
403                 plotTable.AddColumn(torsArrays[inter])
404
405                 points = self._chartXYCurv.AddPlot(vtk.vtkChart.LINE)
406                 points.SetInputData(plotTable, 0, 1)
407                 points.SetColor(self.COLOR_PLOT_CURV[0], self.COLOR_PLOT_CURV[1], self.COLOR_PLOT_CURV[2])
408                 points.SetWidth(1.0)
409                 if inter > 0:
410                     points.SetLegendVisibility(False)
411
412                 points = self._chartXYTors.AddPlot(vtk.vtkChart.LINE)
413                 points.SetInputData(plotTable, 0, 2)
414                 points.SetColor(self.COLOR_PLOT_TORS[0], self.COLOR_PLOT_TORS[1], self.COLOR_PLOT_TORS[2])
415                 points.SetWidth(1.0)
416                 if inter > 0:
417                     points.SetLegendVisibility(False)
418
419                 vtkPoints = vtk.vtkPoints()
420                 for point in spline:
421                     vtkPoints.InsertNextPoint(point[0], point[1], point[2])
422

```

```

423     polyDataLabelP = vtk.vtkPolyData()
424     polyDataLabelP.SetPoints(vtkPoints)
425
426     labels = vtk.vtkStringArray()
427     labels.SetNumberOfValues(len(spline))
428     labels.SetName("labels")
429     for i in range(len(spline)):
430         if i == 0:
431             labels.SetValue(i, "S")
432         elif i == len(spline)-1:
433             labels.SetValue(i, "E")
434         else:
435             labels.SetValue(i, "")
436
437     polyDataLabelP.GetPointData().AddArray(labels)
438
439     sizes = vtk.vtkIntArray()
440     sizes.SetNumberOfValues(len(spline))
441     sizes.SetName("sizes")
442     for i in range(len(spline)):
443         if i == 0 or i == len(spline)-1:
444             sizes.SetValue(i, 10)
445         else:
446             sizes.SetValue(i, 1)
447
448     polyDataLabelP.GetPointData().AddArray(sizes)
449
450     pointMapper = vtk.vtkPolyDataMapper()
451     pointMapper.SetInputData(polyDataLabelP)
452
453     pointActor = vtk.vtkActor()
454     pointActor.SetMapper(pointMapper)
455
456     pointSetToLabelHierarchyFilter = vtk.vtkPointSetToLabelHierarchy()
457     pointSetToLabelHierarchyFilter.SetInputData(polyDataLabelP)
458     pointSetToLabelHierarchyFilter.SetLabelArrayName("labels")
459     pointSetToLabelHierarchyFilter.SetPriorityArrayName("sizes")
460     pointSetToLabelHierarchyFilter.GetTextProperty().SetColor(self.COLOR_LABELS)
461     pointSetToLabelHierarchyFilter.GetTextProperty().SetFontFamily(15)
462     pointSetToLabelHierarchyFilter.GetTextProperty().SetBold(True)
463     pointSetToLabelHierarchyFilter.Update()
464
465     labelMapper = vtk.vtkLabelPlacementMapper()
466     labelMapper.SetInputConnection(pointSetToLabelHierarchyFilter.GetOutputPort())
467     labelActor = vtk.vtkActor2D()
468     labelActor.SetMapper(labelMapper)
469
470     self._rendererScene.AddActor(labelActor)
471
472     if thick:
473         cellArray = vtk.vtkCellArray()
474         cellArray.InsertNextCell(len(spline))
475         for i in range(len(spline)):
476             cellArray.InsertCellPoint(i)
477
478         polyData = vtk.vtkPolyData()
479         polyData.SetPoints(vtkPoints)
480         polyData.SetLines(cellArray)
481
482         polyData.GetPointData().SetScalars(curvTorsArray)
483
484         tubeFilter = vtk.vtkTubeFilter()
485         tubeFilter.SetNumberOfSides(8)
486         tubeFilter.SetInputData(polyData)
487         tubeFilter.SetRadius(thickness)
488         tubeFilter.Update()
489
490         mapper = vtk.vtkPolyDataMapper()
491         mapper.SetInputConnection(tubeFilter.GetOutputPort())
492
493     else:
494         unstructuredGrid = vtk.vtkUnstructuredGrid()
495         unstructuredGrid.SetPoints(vtkPoints)
496         for i in range(1, len(spline)):
497             unstructuredGrid.InsertNextCell(vtk.VTK_LINE, 2, [i-1, i])
498
499         unstructuredGrid.GetPointData().SetScalars(curvArray)
500
501         mapper = vtk.vtkDataSetMapper()
502         mapper.SetInputData(unstructuredGrid)
503
504     actor = vtk.vtkActor()

```

```

505     actor.SetMapper(mapper)
506     actor.GetProperty().SetColor(color)
507
508     self._rendererScene.AddActor(actor)
509
510
511     #self.addPolyLine(list(zip(out[0], out[1], out[2])), color, thick, thickness)
512
513     def addBSplineDEPRECATED(self, controlPolygon, degree, color, thick=False, thickness=_DEFAULT_BSPLINE_THICKNESS):
514         x = controlPolygon[:,0]
515         y = controlPolygon[:,1]
516         z = controlPolygon[:,2]
517
518         polLen = 0.
519         for i in range(1, len(controlPolygon)):
520             polLen += sp.spatial.distance.euclidean(controlPolygon[i-1], controlPolygon[i])
521
522         t = range(len(controlPolygon))
523         ipl_t = np.linspace(0.0, len(controlPolygon) - 1, max(polLen*100,100))
524
525         x_tup = sp.interpolate.splrep(t, x, k = degree)
526         y_tup = sp.interpolate.splrep(t, y, k = degree)
527         z_tup = sp.interpolate.splrep(t, z, k = degree)
528
529         x_list = list(x_tup)
530         xl = x.tolist()
531         x_list[1] = xl + [0.0, 0.0, 0.0, 0.0]
532
533         y_list = list(y_tup)
534         yl = y.tolist()
535         y_list[1] = yl + [0.0, 0.0, 0.0, 0.0]
536
537         z_list = list(z_tup)
538         zl = z.tolist()
539         z_list[1] = zl + [0.0, 0.0, 0.0, 0.0]
540
541         x_i = sp.interpolate.splev(ipl_t, x_list)
542         y_i = sp.interpolate.splev(ipl_t, y_list)
543         z_i = sp.interpolate.splev(ipl_t, z_list)
544
545         self.addPolyLine(list(zip(x_i, y_i, z_i)), color, thick, thickness)
546
547     def addGraph(self, graph, color):
548         vtkPoints = vtk.vtkPoints()
549         vtkId = 0
550         graph2VtkId = {}
551
552         for node in graph.nodes():
553             vtkPoints.InsertNextPoint(graph.node[node]['coord'][0], graph.node[node]['coord'][1], graph.node[node]['coord']
554                                         ↪ ])[2])
555             graph2VtkId[node] = vtkId
556             vtkId += 1
557
558         unstructuredGrid = vtk.vtkUnstructuredGrid()
559         unstructuredGrid.SetPoints(vtkPoints)
560
561         for edge in graph.edges():
562             unstructuredGrid.InsertNextCell(vtk.VTK_LINE, 2, [graph2VtkId[edge[0]], graph2VtkId[edge[1]]])
563
564         mapper = vtk.vtkDataSetMapper()
565         mapper.SetInputData(unstructuredGrid)
566
567         actor = vtk.vtkActor()
568         actor.SetMapper(mapper)
569         actor.GetProperty().SetColor(color)
570
571         self._rendererScene.AddActor(actor)

```

B.1.4 polyhedronsContainer.py

```

1 import numpy as np
2 import scipy as sp
3 import scipy.spatial
4 import polyhedron
5 import parallelepiped
6

```

```

7  class PolyhedronsContainer:
8      def __init__(self):
9          self._polyhedrons = []
10         self._hasBoundingBox = False
11         self._boundingBoxA = None
12         self._boundingBoxB = None
13
14     @property
15     def polyhedrons(self):
16         return self._polyhedrons
17
18     @property
19     def hasBoundingBox(self):
20         return self._hasBoundingBox
21
22     @hasBoundingBox.setter
23     def hasBoundingBox(self, value):
24         self._hasBoundingBox = value
25
26     @property
27     def boundingBoxA(self):
28         return self._boundingBoxA
29
30     @boundingBoxA.setter
31     def boundingBoxA(self, value):
32         self._boundingBoxA = value
33
34     @property
35     def boundingBoxB(self):
36         return self._boundingBoxB
37
38     @boundingBoxB.setter
39     def boundingBoxB(self, value):
40         self._boundingBoxB = value
41
42     def addPolyhedron(self, polyhedron):
43         self._polyhedrons.append(polyhedron)
44
45     def addBoundingBox(self, a, b, maxEmptyArea, invisible):
46         self._hasBoundingBox = True
47         self._boundingBoxA = a
48         self._boundingBoxB = b
49
50         self.addPolyhedron(parallelepiped.Parallelepiped(a=a, b=b, invisible=invisible, maxEmptyArea=maxEmptyArea,
51                                         ↪ boundingBox=True))
52
53     def pointInsidePolyhedron(self, p):
54         inside = False
55         if self._hasBoundingBox:
56             if (p < self._boundingBoxA).any() or (p > self._boundingBoxB).any():
57                 inside = True
58
59         if not inside:
60             for polyhedron in self._polyhedrons:
61                 if (not polyhedron.isBoundingBox()) and polyhedron.hasPointInside(p):
62                     inside = True
63                     break
64
65         return inside
66
67     def segmentIntersectPolyhedrons(self, a, b, intersectionMargin = 0.):
68         intersect = False
69         if self._hasBoundingBox:
70             if ((a < self._boundingBoxA).any() or (a > self._boundingBoxB).any() or (b < self._boundingBoxA).any() or (b > self.
71                                         ↪ _boundingBoxB).any()):
72                 intersect = True
73
74         if not intersect:
75             minS = np.array([min(a[0],b[0]),min(a[1],b[1]),min(a[2],b[2])])
76             maxS = np.array([max(a[0],b[0]),max(a[1],b[1]),max(a[2],b[2])])
77
78             for polyhedron in self._polyhedrons:
79                 if polyhedron.intersectSegment(a,b,minS,maxS, intersectionMargin=intersectionMargin)[0]:
80                     intersect = True
81                     break
82
83         return intersect
84
85     def triangleIntersectPolyhedrons(self, a, b, c):
86         triangle = polyhedron.Polyhedron(faces=np.array([[a,b,c]]), distributePoints = False)
87         intersect = False

```

```

87     result = np.array([])
88     for currPolyhedron in self._polyhedrons:
89         currIntersect,currResult = currPolyhedron.intersectPathTriple(triangle)
90         if currIntersect and (not intersect or (currResult[1] > result[1])):
91             intersect = True
92             result = currResult
93
94     return (intersect, result)
95
96 def convexHullIntersectsPolyhedrons(self, vertexes):
97     convHull = sp.spatial.ConvexHull(vertexes, qhull_options="QJ Pp")
98     for simplex in convHull.simplices:
99         if self._triangleIntersectPolyhedrons(convHull.points[simplex[0]], convHull.points[simplex[1]], convHull.points[
100            ↪ simplex[2]])[0]:
101             return True
102
103     return False

```

B.1.5 polyhedron.py

```

1 import numpy as np
2 import scipy as sp
3 import scipy.spatial
4 import math
5 import xml.etree.cElementTree as ET
6
7 class Polyhedron:
8     def __init__(self, faces, invisible=False, distributePoints=True, maxEmptyArea=0.1, boundingBox=False):
9         """
10             can be composed only by combined triangles
11             faces -> an np.array of triangular faces
12             if invisible=True when plot will be called it will be useless
13         """
14         self._faces = faces
15         self._invisible = invisible
16         self._boundingBox = boundingBox
17
18         self._minV = np.array([float('inf'), float('inf'), float('inf')])
19         self._maxV = np.array([float('-inf'), float('-inf'), float('-inf')])
20         for face in self._faces:
21             for vertex in face:
22                 for i in range(len(vertex)):
23                     if vertex[i] < self._minV[i]:
24                         self._minV[i] = vertex[i]
25
26                     for i in range(len(vertex)):
27                         if vertex[i] > self._maxV[i]:
28                             self._maxV[i] = vertex[i]
29
30             if distributePoints:
31                 self.distributePoints(maxEmptyArea)
32             else:
33                 self._allPoints = np.array([])
34
35     @property
36     def allPoints(self):
37         return self._allPoints
38
39     @property
40     def minV(self):
41         return self._minV
42
43     @property
44     def maxV(self):
45         return self._maxV
46
47     def isBoundingBox(self):
48         return self._boundingBox
49
50     def _area(self, triangle):
51         a = np.linalg.norm(triangle[1]-triangle[0])
52         b = np.linalg.norm(triangle[2]-triangle[1])
53         c = np.linalg.norm(triangle[0]-triangle[2])
54         s = (a+b+c) / 2.
55         return math.sqrt(s * (s-a) * (s-b) * (s-c))
56

```

```

57     _comb2 = lambda self,a,b: 0.5*a + 0.5*b
58     #_comb3 = lambda self,a,b,c: 0.33*a + 0.33*b + 0.33*c
59
60     def distributePoints(self, maxEmptyArea):
61         allPoints = []
62         triangles = []
63
64         for face in self._faces:
65             triangles.append(face)
66
67         while triangles:
68             triangle = triangles.pop(0)
69             a = triangle[0]
70             b = triangle[1]
71             c = triangle[2]
72             if not any((a == x).all() for x in allPoints):
73                 allPoints.append(a)
74             if not any((b == x).all() for x in allPoints):
75                 allPoints.append(b)
76             if not any((c == x).all() for x in allPoints):
77                 allPoints.append(c)
78             if (self._area(triangle) > maxEmptyArea):
79                 ab = self._comb2(a,b)
80                 bc = self._comb2(b,c)
81                 ca = self._comb2(c,a)
82                 #abc = self._comb3(a,b,c)
83
84                 triangles.append(np.array([a,ab,ca]))
85                 triangles.append(np.array([ab,b,bc]))
86                 triangles.append(np.array([bc,c,ca]))
87                 triangles.append(np.array([ab,bc,ca]))
88                 #triangles.append(np.array([a,ab,abc]))
89                 #triangles.append(np.array([ab,b,abc]))
90                 #triangles.append(np.array([b,bc,abc]))
91                 #triangles.append(np.array([bc,c,abc]))
92                 #triangles.append(np.array([c,ca,abc]))
93                 #triangles.append(np.array([ca,a,abc]))
94
95         self._allPoints = np.array(allPoints)
96
97     def hasPointInside(self, p):
98         """
99             check if a point is inside the convex hull of obstacle vertexes
100        """
101        outside = True
102        if (p>self._minV).all() and (p<self._maxV).all():
103            vertexes = [p]
104            for triangle in self._faces:
105                vertexes.append(triangle[0])
106                vertexes.append(triangle[1])
107                vertexes.append(triangle[2])
108
109            chull = sp.spatial.ConvexHull(np.array(vertexes))
110            outside = False
111            for vertex in chull.vertices:
112                if (p == chull.points[vertex]).all():
113                    outside = True
114                    break
115                # for simplex in chull.simplices:
116                #     if (p == chull.points[simplex[0]]).all() or (p == chull.points[simplex[1]]).all() or (p == chull.points[
117                #         simplex[2]]).all():
118                #         outside = True
119                #         break
120
121        return not outside
122
123    def intersectSegment(self, a, b, minS=None, maxS=None, intersectionMargin=0.):
124        if minS is None or maxS is None:
125            minS = np.array([min(a[0],b[0]),min(a[1],b[1]),min(a[2],b[2]))]
126            maxS = np.array([max(a[0],b[0]),max(a[1],b[1]),max(a[2],b[2]))]
127
128        if not ((self._minV > maxS).any() or (self._maxV < minS).any()):
129            for triangle in self._faces:
130                #solve {
131                #      a+k(b-a) = v*triangle[0] + w*triangle[1] + s*triangle[2]
132                #      v+w+s = 1
133                #      }
134                # for variables k, v, w, s
135
136                #simplified in
137                #      a+k(b-a) = (1-w-s)*triangle[0] + w*triangle[1] + s*triangle[2]
138                # for variables k, w, s

```

```

138
139     diffba = b-a
140     difft0t1 = triangle[0] - triangle[1]
141     difft0t2 = triangle[0] - triangle[2]
142     difft0a = triangle[0] - a
143
144     A = np.array([
145         [diffba[0], difft0t1[0], difft0t2[0]],
146         [diffba[1], difft0t1[1], difft0t2[1]],
147         [diffba[2], difft0t1[2], difft0t2[2]]])
148     B = np.array([difft0a[0], difft0a[1], difft0a[2]])
149
150     try:
151         x = np.linalg.solve(A,B)
152         # check (with margins) if
153         #      0 < k < 1,
154         #      w > 0
155         #      s > 0
156         #      w+s < 1
157         if (x[0] >= 0. - intersectionMargin) and (x[0] <= 1. + intersectionMargin) and (x[1] >= 0. - +
158             ↪ intersectionMargin) and (x[2] >= 0. - intersectionMargin) and (x[1]+x[2] <= 1. +
159             ↪ intersectionMargin):
160             return (True, x)
161     except np.linalg.LinAlgError:
162         pass
163
164     return (False,np.array([]))
165
166 def intersectPolyhedron(self, polyhedron):
167     """alert, not case of one polyhedron inside other"""
168     if not ((self._minV > polyhedron.maxV).any() or (self._maxV < polyhedron.minV).any()):
169         for otherFace in polyhedron._faces:
170             for myFace in self._faces:
171                 if (
172                     self.intersectSegment(otherFace[0],otherFace[1])[0] or
173                     self.intersectSegment(otherFace[1],otherFace[2])[0] or
174                     self.intersectSegment(otherFace[2],otherFace[0])[0] or
175                     polyhedron.intersectSegment(myFace[0], myFace[1])[0] or
176                     polyhedron.intersectSegment(myFace[1], myFace[2])[0] or
177                     polyhedron.intersectSegment(myFace[2], myFace[0])[0]):
178                     return True
179     return False
180
181 def intersectPathTriple(self, triple):
182     """alert, not case of one polyhedron inside other, and only
183     check if the segments of self intersect the triple."""
184     intersect = False
185     result = np.array([])
186
187     if not ((self._minV > triple.maxV).any() or (self._maxV < triple.minV).any()):
188         for myFace in self._faces:
189             intersect1, result1 = triple.intersectSegment(myFace[0], myFace[1])
190             intersect2, result2 = triple.intersectSegment(myFace[1], myFace[2])
191             intersect3, result3 = triple.intersectSegment(myFace[2], myFace[0])
192
193             if intersect1:
194                 intersect = True
195                 result = result1
196             if intersect2 and (not intersect or (result2[1] > result[1])):
197                 intersect = True
198                 result = result2
199             if intersect3 and (not intersect or (result3[1] > result[1])):
200                 intersect = True
201                 result = result3
202
203     return intersect, result
204
205 def plotAllPoints(self, plotter):
206     if self._allPoints.size > 0:
207         plotter.addPoints(self._allPoints, plotter.COLOR_SITES)
208
209 def plot(self, plotter):
210     if self._invisible == False:
211         plotter.addTriangles(self._faces, plotter.COLOR_OBSTACLE)
212
213 def extractXmlTree(self, root):
214     xmlPolyhedron = ET.SubElement(root, 'polyhedron', invisible=str(self._invisible), boundingBox=str(self._boundingBox))
215     for face in self._faces:
216         xmlFace = ET.SubElement(xmlPolyhedron, 'face')
217         for vertex in face:
218             xmlVertex = ET.SubElement(xmlFace, 'vertex', x=str(vertex[0]), y=str(vertex[1]), z=str(vertex[2]))

```

B.1.6 compositePolyhedron.py

```

1 import numpy as np
2 import polyhedron
3
4 class CompositePolyhedron(polyhedron.Polyhedron):
5     def __init__(self, components):
6         self._components = components
7
8     self._boundingBox = False
9
10    self._minV = np.array([float('inf'), float('inf'), float('inf')])
11    self._maxV = np.array([float('-inf'), float('-inf'), float('-inf')])
12
13    for component in self._components:
14        for i in range(3):
15            if component.minV[i] < self._minV[i]:
16                self._minV[i] = component.minV[i]
17
18            if component.maxV[i] > self._maxV[i]:
19                self._maxV[i] = component.maxV[i]
20
21    @property
22    def allPoints(self):
23        allPoints = []
24        for component in self._components:
25            allPoints.extend(list(component.allPoints))
26
27        return np.array(allPoints)
28
29    @property
30    def minV(self):
31        return self._minV
32
33    @property
34    def maxV(self):
35        return self._maxV
36
37    def distributePoints(self, maxEmptyArea):
38        for component in self._components:
39            component.distributePoints(maxEmptyArea)
40
41    def hasPointInside(self, p):
42        hasPI = False
43        for component in self._components:
44            if component.hasPointInside(p):
45                hasPI = True
46                break
47
48        return hasPI
49
50    def intersectSegment(self, a, b, minS=None, maxS=None, intersectionMargin=0.):
51        intersect = (False, np.array([]))
52        for component in self._components:
53            current = component.intersectSegment(a, b, minS, maxS, intersectionMargin)
54            if current[0]:
55                intersect = current
56                break
57
58        return intersect
59
60    def intersectPolyhedron(self, polyhedron):
61        intersect = False
62        for component in self._components:
63            if component.intersectPolyhedron(polyhedron):
64                intersect = True
65                break
66
67        return intersect
68
69    def intersectPathTriple(self, triple):
70        intersect = (False, np.array([]))
71        for component in self._components:
72            current = component.intersectPathTriple(triple)
73            if current[0]:
74                intersect = current
75                break
76
77        return intersect
78

```

```

79
80     def plotAllPoints(self, plotter):
81         for component in self._components:
82             component.plotAllPoints(plotter)
83
84     def plot(self, plotter):
85         for component in self._components:
86             component.plot(plotter)
87
88     def extractXmlTree(self, root):
89         for component in self._components:
90             component.extractXmlTree(root)

```

B.1.7 tetrahedron.py

```

1 import numpy as np
2 import polyhedron
3
4 class Tetrahedron(polyhedron.Polyhedron):
5     def __init__(self, a, b, c, d, invisible=False, distributePoints=True, maxEmptyArea=0.1):
6         super(Tetrahedron, self).__init__(np.array([[a,b,c],[a,b,d],[b,c,d],[c,a,d]]), invisible, distributePoints,
7                                         maxEmptyArea)
8
9     self._vertexes = [a,b,c,d]
10
11    def plot(self, plotter):
12        if self._invisible == False:
13            plotter.addTetrahedron(self._vertexes, plotter.COLOR_OBSTACLE)

```

B.1.8 parallelepiped.py

```

1 import numpy as np
2 import polyhedron
3
4 class Parallelepiped(polyhedron.Polyhedron):
5     def __init__(self, a, b, invisible=False, distributePoints=True, maxEmptyArea=0.1, boundingBox=False):
6
7         c = [a[0], b[1], a[2]]
8         d = [b[0], a[1], a[2]]
9         e = [a[0], a[1], b[2]]
10        f = [b[0], b[1], a[2]]
11        g = [b[0], a[1], b[2]]
12        h = [a[0], b[1], b[2]]
13
14        super(Parallelepiped, self).__init__(faces=np.array([
15            [a,g,e],[a,d,g],[d,f,g],[f,b,g],[f,b,h],[f,h,c],
16            [h,a,e],[h,c,a],[e,h,g],[h,b,g],[a,d,f],[a,f,c]
17        ]), invisible=invisible, distributePoints=distributePoints, maxEmptyArea=maxEmptyArea, boundingBox=boundingBox)

```

B.1.9 convexHull.py

```

1 import numpy as np
2 import scipy as sp
3 import scipy.spatial
4 import polyhedron
5
6 class ConvexHull(polyhedron.Polyhedron):
7     def __init__(self, points, invisible=False, distributePoints=True, maxEmptyArea=0.1):
8         convHull = sp.spatial.ConvexHull(points)
9         faces = []
10        for simplex in convHull.simplices:
11            faces.append([convHull.points[simplex[0]], convHull.points[simplex[1]], convHull.points[simplex[2]]])
12
13        super(ConvexHull, self).__init__(np.array(faces), invisible, distributePoints, maxEmptyArea)

```

B.1.10 *bucket.py*

```

1 import numpy as np
2 import compositePolyhedron
3 import parallelepiped
4
5 class Bucket(compositePolyhedron.CompositePolyhedron):
6     def __init__(self, center, width, height, thickness, invisible=False, distributePoints=True, maxEmptyArea=0.1,
7                  ↪ boundingBox=False):
8         c = center
9         l = width
10        h = height
11        d = thickness
12        parallelepipeds = []
13
14        parallelepipeds.append(parallelepiped.Parallelepiped(
15            np.array([c[0]-(l/2), c[1]-(l/2), c[2]-(h/2)]), \
16            np.array([c[0]+(l/2), c[1]+(l/2), c[2]-(h/2)+d]), invisible, distributePoints, maxEmptyArea, boundingBox))
17
18        parallelepipeds.append(parallelepiped.Parallelepiped(
19            np.array([c[0]-(l/2), c[1]+(l/2)-d, c[2]-(h/2)+d]), \
20            np.array([c[0]+(l/2), c[1]+(l/2), c[2]+(h/2)]), invisible, distributePoints, maxEmptyArea, boundingBox))
21
22        parallelepipeds.append(parallelepiped.Parallelepiped(
23            np.array([c[0]-(l/2), c[1]-(l/2), c[2]-(h/2)+d]), \
24            np.array([c[0]+(l/2), c[1]-(l/2)+d, c[2]+(h/2)]), invisible, distributePoints, maxEmptyArea, boundingBox))
25
26        parallelepipeds.append(parallelepiped.Parallelepiped(
27            np.array([c[0]-(l/2)-d, c[1]-(l/2)+d, c[2]-(h/2)+d]), \
28            np.array([c[0]+(l/2)-d, c[1]+(l/2)-d, c[2]+(h/2)]), invisible, distributePoints, maxEmptyArea, boundingBox))
29
30        parallelepipeds.append(parallelepiped.Parallelepiped(
31            np.array([c[0]+(l/2)-d, c[1]-(l/2)+d, c[2]-(h/2)+d]), \
32            np.array([c[0]+(l/2), c[1]+(l/2)-d, c[2]+(h/2)]), invisible, distributePoints, maxEmptyArea, boundingBox))
33
34    super(Bucket, self).__init__(parallelepipeds)

```

B.2 SCRIPTS

B.2.1 *makeRandomScene.py*

```

1 #!/bin/python
2
3 import sys
4 import numpy as np
5 import random
6 import math
7 import pickle
8 import voronizer
9 import tetrahedron
10
11 if len(sys.argv) >= 14 and len(sys.argv) <= 15:
12     i = 1
13     minX = float(sys.argv[i])
14     i += 1
15     minY = float(sys.argv[i])
16     i += 1
17     minZ = float(sys.argv[i])
18     i += 1
19     maxX = float(sys.argv[i])
20     i += 1
21     maxY = float(sys.argv[i])
22     i += 1
23     maxZ = float(sys.argv[i])
24     i += 1
25     bbMargin = float(sys.argv[i])
26     i += 1
27     fixedRadius = bool(eval(sys.argv[i]))
28     i += 1
29     if fixedRadius:
30         radius = float(sys.argv[i])

```

```

31         i += 1
32     else:
33         minRadius = float(sys.argv[i])
34         i += 1
35         maxRadius = float(sys.argv[i])
36         i += 1
37     avoidCollisions = bool(eval(sys.argv[i]))
38     i += 1
39     numObstacles = int(sys.argv[i])
40     i += 1
41     maxEmptyArea = float(sys.argv[i])
42     i += 1
43     fileName = sys.argv[i]
44
45 else:
46     minX = float(input('Insert min scene X: '))
47     minY = float(input('Insert min scene Y: '))
48     minZ = float(input('Insert min scene Z: '))
49     maxX = float(input('Insert max scene X: '))
50     maxY = float(input('Insert max scene Y: '))
51     maxZ = float(input('Insert max scene Z: '))
52     bbMargin = float(input('Insert bounding box margin: '))
53     fixedRadius = bool(eval(input('Do you want fixed obstacle radius? (True/False): ')))
54     if fixedRadius:
55         radius = float(input('Insert obstacle radius: '))
56     else:
57         minRadius = float(input('Insert min obstacle radius: '))
58         maxRadius = float(input('Insert max obstacle radius: '))
59     avoidCollisions = bool(eval(input('Do you want to avoid collisions between obstacles? (True/False): ')))
60     numObstacles = int(input('Insert obstacles number: '))
61     maxEmptyArea = float(input('Insert max empty area (for points distribution in obstacles): '))
62
63     fileName = input('Insert file name: ')
64
65 voronoi = voronizer.Voronizer()
66 obstacles = []
67
68 for ob in range(numObstacles):
69     print('Creating obstacle {} '.format(ob+1), end='', flush=True)
70     ok = False
71     while not ok:
72         print('.', end='', flush=True)
73         if not fixedRadius:
74             radius = random.uniform(minRadius,maxRadius)
75             center = np.array([random.uniform(minX+radius,maxX-radius), random.uniform(minY+radius,maxY-radius), random.uniform(
76                 ↪ minZ+radius,maxZ-radius)])
77             points = []
78             for pt in range(4):
79                 elev = random.uniform(-math.pi/2., math.pi/2.)
80                 azim = random.uniform(0., 2.*math.pi)
81                 points[:0] = [center+np.array([
82                     radius*math.cos(elev)*math.cos(azim),
83                     radius*math.cos(elev)*math.sin(azim),
84                     radius*math.sin(elev)])]
85
85             newObstacle = tetrahedron.Tetrahedron(a = points[0], b = points[1], c = points[2], d = points[3], distributePoints =
86                 ↪ True, maxEmptyArea = maxEmptyArea)
87
87             ok = True
88             if avoidCollisions:
89                 for obstacle in obstacles:
90                     if newObstacle.intersectPolyhedron(obstacle):
91                         ok = False
92                         break
93
94             if ok:
95                 voronoi.addPolyhedron(newObstacle)
96                 if avoidCollisions:
97                     obstacles[:0] = [newObstacle]
98
99             print(' done', flush=True)
100
101 voronoi.addBoundingBox([minX-bbMargin, minY-bbMargin, minZ-bbMargin], [maxX+bbMargin, maxY+bbMargin, maxZ+bbMargin],
102                         ↪ maxEmptyArea, verbose=True)
103
104 voronoi.setPolyhedronsSites(verbose=True)
105 voronoi.makeVoroGraph(verbose=True)
106
106 print('Write file', flush=True)
107 record = {}
108 record['voronoi'] = voronoi
109

```

```
110     with open(fileName, 'wb') as f:
111         pickle.dump(record, f)
```

B.2.2 makeBucketScene.py

```
1 #!/bin/python
2
3 import sys
4 import numpy as np
5 import random
6 import math
7 import pickle
8 import voronizer
9 import bucket
10
11 if len(sys.argv) == 9:
12     i = 1
13     minPoint = np.array(tuple(eval(sys.argv[i])),dtype=float)
14     i += 1
15     maxPoint = np.array(tuple(eval(sys.argv[i])),dtype=float)
16     i += 1
17     center = np.array(tuple(eval(sys.argv[i])),dtype=float)
18     i += 1
19     width = float(sys.argv[i])
20     i += 1
21     height = float(sys.argv[i])
22     i += 1
23     thickness = float(sys.argv[i])
24     i += 1
25     maxEmptyArea = float(sys.argv[i])
26     i += 1
27     fileName = sys.argv[i]
28
29 else:
30     minPoint = np.array(tuple(eval(input('Insert min point (x,y,z): '))),dtype=float)
31     maxPoint = np.array(tuple(eval(input('Insert max point (x,y,z): '))),dtype=float)
32     center = np.array(tuple(eval(input('Insert bucket center point (x,y,z): '))),dtype=float)
33     width = float(input('Insert bucket width: '))
34     height = float(input('Insert bucket height: '))
35     thickness = float(input('Insert bucket thickness: '))
36     maxEmptyArea = float(input('Insert max empty area (for points distribution in obstacles): '))
37     fileName = input('Insert file name: ')
38
39 voronoi = voronizer.Voronizer()
40
41 print('Create bucket', flush=True)
42 voronoi.addPolyhedron(bucket.Bucket(center, width, height, thickness, distributePoints=True, maxEmptyArea=maxEmptyArea))
43 voronoi.addBoundingBox(minPoint, maxPoint, maxEmptyArea, verbose=True)
44 voronoi.setPolyhedronsSites(verbose=True)
45 voronoi.makeVoroGraph(verbose=True)
46
47 print('Write file', flush=True)
48 record = {}
49 record['voronoi'] = voronoi
50
51 with open(fileName, 'wb') as f:
52     pickle.dump(record, f)
```

B.2.3 plotScene.py

```
1 #!/bin/python
2
3 import sys
4 import pickle
5 import plotter
6
7 if len(sys.argv) >= 2:
8     if len(sys.argv) == 4:
9         i = 2
10        plotSites = bool(eval(sys.argv[i]))
```

```

11     i += 1
12     plotGraph = bool(eval(sys.argv[i]))
13 else:
14     plotSites = bool(eval(input('Do you want to plot Voronoi sites? (True/False): ')))
15     plotGraph = bool(eval(input('Do you want to plot graph? (True/False): ')))
16
17 print('Load file', flush=True)
18 with open(sys.argv[1], 'rb') as f:
19     record = pickle.load(f)
20
21 voronoi = record['voronoi']
22
23 print('Build renderer, window and interactor', flush=True)
24 plt = plotter.Plotter()
25
26 voronoi.plotPolyhedrons(plt, verbose = True)
27 if plotSites:
28     voronoi.plotSites(plt, verbose = True)
29 if plotGraph:
30     voronoi.plotGraph(plt, verbose = True)
31
32 print('Render', flush=True)
33 plt.draw()
34
35 else:
36     print('use: {} sceneFile [plotSites plotGraph]'.format(sys.argv[0]))
37

```

B.2.4 executeInScene.py

```

1 #!/bin/python
2
3 import sys
4 import numpy as np
5 import pickle
6 import plotter
7
8 if len(sys.argv) >= 2:
9     if len(sys.argv) == 8:
10         i = 2
11         startPoint = np.array(tuple(eval(sys.argv[i])),dtype=float)
12         i += 1
13         endPoint = np.array(tuple(eval(sys.argv[i])),dtype=float)
14         i += 1
15         bsplineDegree = int(sys.argv[i])
16         i += 1
17         useMethod = str(sys.argv[i])
18         i += 1
19         postSimplify = bool(eval(sys.argv[i]))
20         i += 1
21         adaptivePartition = bool(eval(sys.argv[i]))
22     else:
23         startPoint = np.array(tuple(eval(input('Insert start point (x,y,z): '))),dtype=float)
24         endPoint = np.array(tuple(eval(input('Insert end point (x,y,z): '))),dtype=float)
25         bsplineDegree = int(input('Insert B-spline degree (2/3/4): '))
26         useMethod = str(input('Which method you want to use? (none/trijkstra/cleanPath/annealing): '))
27         postSimplify = bool(eval(input('Do you want post processing? (True/False): ')))
28         adaptivePartition = bool(eval(input('Do you want adaptive partition? (True/False): ')))
29
30     print('Load file', flush=True)
31     with open(sys.argv[1], 'rb') as f:
32         record = pickle.load(f)
33
34     voronoi = record['voronoi']
35     voronoi.setBsplineDegree(bsplineDegree)
36     voronoi.setAdaptivePartition(adaptivePartition)
37
38     voronoi.calculateShortestPath(startPoint, endPoint, 'near', useMethod=useMethod, postSimplify=postSimplify, verbose=True,
39                                 ↪ debug=False)
40
41     print('Build renderer, window and interactor', flush=True)
42     plt = plotter.Plotter()
43
44     #voronoi.plotSites(plt, verbose = True)
45     voronoi.plotPolyhedrons(plt, verbose = True)
46     #voronoi.plotGraph(plt, verbose = True)

```

```

46     voronoi.plotShortestPath(plt, verbose = True)
47     print('Render', flush=True)
48     plt.draw()
49
50 else:
51     print('use: {} sceneFile [startPoint endPoint degree(2,4) useMethod postProcessing adaptivePartition]'.format(sys.argv
52         ↪ [0]))

```

B.2.5 *scene2coord.py*

```

1 #!/bin/python
2
3 import sys
4 import pickle
5 import xml.etree.cElementTree as ET
6
7 if len(sys.argv) == 3:
8
9     print('Load file', flush=True)
10    with open(sys.argv[1], 'rb') as f:
11        record = pickle.load(f)
12
13    voronoi = record['voronoi']
14
15    print('Create XML', flush=True)
16    xmlRoot = ET.Element('scene')
17    voronoi.extractXmlTree(xmlRoot)
18    xmlTree = ET.ElementTree(xmlRoot)
19
20    print('Write file', flush=True)
21    xmlTree.write(sys.argv[2])
22
23 else:
24     print('use: {} sceneFile coordinateFile'.format(sys.argv[0]))

```

B.2.6 *coord2scene.py*

```

1 #!/bin/python
2
3 import sys
4 import pickle
5 import xml.etree.cElementTree as ET
6 import voronizer
7
8 if len(sys.argv) == 4:
9     xmlFileName = sys.argv[1]
10    sceneFileName = sys.argv[2]
11    maxEmptyArea = float(sys.argv[3])
12
13    xmlRoot = ET.parse(xmlFileName).getroot()
14
15    voronoi = voronizer.Voronizer()
16
17    print('Import XML', flush=True)
18    voronoi.importXmlTree(xmlRoot, maxEmptyArea)
19
20    print('Set sites and make graph', flush=True)
21    voronoi.setPolyhedronsSites(verbose=True)
22    voronoi.makeVoroGraph(verbose=True)
23
24    print('Write file', flush=True)
25    record = {}
26    record['voronoi'] = voronoi
27    with open(sceneFileName, 'wb') as f:
28        pickle.dump(record, f)
29
30 else:
31     print('use: {} coordinateFile sceneFile maxEmptyArea'.format(sys.argv[0]))

```

BIBLIOGRAPHY

- [1] Adrian Bondy, U. M. (2008). *Graph theory*. Graduate texts in mathematics 244. Springer, 3rd corrected printing. edition. (Cited on pages 55 and 60.)
- [2] Aghababa, M. P. (2012). 3d path planning for underwater vehicles using five evolutionary optimization algorithms avoiding static and energetic obstacles. *Applied Ocean Research*, 38:48 – 62. (Cited on page 1.)
- [3] Barkema, M. and Newman, G. (1999). *Monte Carlo Methods in Statistical Physics*. Oxford University Press. (Cited on page 26.)
- [4] Bertsekas, D. P. (1999). *Nonlinear programming*. Athena Scientific, 2nd edition. (Cited on page 32.)
- [5] Bhattacharya, P. and Gavrilova, M. L. (2008). Roadmap-based path planning - using the voronoi diagram for a clearance-based shortest path. *IEEE Robot. Automat. Mag.*, 15(2):58–66. (Cited on page 46.)
- [6] Canny, J. F. (1988). *Complexity of Robot Motion Planning*. ACM Doctoral Dissertation Award. The MIT Press. (Cited on page 10.)
- [7] Choset H., e. a. (2005). *Principles of Robot Motion: Theory, Algorithms, and Implementations*. Intelligent Robotics and Autonomous Agents series. MIT. (Cited on pages 7, 9, and 11.)
- [8] de Berg, M., Cheong, O., van Kreveld, M., and Overmars, M. (2008). *Computational Geometry Algorithms and Applications*. Springer-Verlag, Berlin Heidelberg, 3 edition. (Cited on pages 9, 23, 24, 33, 43, and 48.)
- [9] de Boor, C. (1978). *A Practical Guide to Splines*. Springer-Verlag. (Cited on pages 15, 17, 18, and 21.)
- [10] Dijkstra, E. (1959). A note on two problems in connection with graphs. *Numerische Mathematik*, 1:269–271. (Cited on pages 9, 48, and 49.)
- [11] do Carmo, M. P. (1976). *Differential geometry of curves and surfaces*. Prentice Hall. (Cited on pages 22 and 63.)

- [12] Farin, G. E. (1990). *Curves and surfaces for computer aided geometric design - a practical guide* (2.ed.). Computer science and scientific computing. Academic Press. (Cited on pages 1, 15, 17, 19, 21, and 63.)
- [13] Farouki, R. T. (2008). *Pythagorean-Hodograph Curves: Algebra and Geometry Inseparable*. Geometry and Computing 1. Springer-Verlag Berlin Heidelberg, 1 edition. (Cited on page 1.)
- [14] Fortune, S. (1986). A sweepline algorithm for voronoi diagrams. In Aggarwal, A., editor, *Symposium on Computational Geometry*, pages 313–322. ACM. (Cited on pages 24 and 46.)
- [15] G. Farin, J. Hoschek, M.-S. K. (2002). *Handbook of Computer Aided Geometric Design*. North Holland, 1 edition. (Cited on page 1.)
- [16] Giannelli, C., Mugnaini, D., and Sestini, A. (2016). Path planning with obstacle avoidance by G^1 PH quintic splines. *Computer-Aided Design*, 75–76:47 – 60. (Cited on page 1.)
- [17] Goerzen, C., Kong, Z., and Mettler, B. (2009). A survey of motion planning algorithms from the perspective of autonomous uav guidance. *Journal of Intelligent and Robotic Systems*, 57(1):65–100. (Cited on pages 7, 8, and 9.)
- [18] Ho, Y.-J. and Liu, J.-S. (2009). Collision-free curvature-bounded smooth path planning using composite bezier curve based on voronoi diagram. In *CIRA*, pages 463–468. IEEE. (Cited on pages 1 and 46.)
- [19] Ho, Y.-J. and Liu, J.-S. (2010). Simulated annealing based algorithm for smooth robot path planning with different kinematic constraints. In Shin, S. Y., Ossowski, S., Schumacher, M., Palakal, M. J., and Hung, C.-C., editors, *SAC*, pages 1277–1281. ACM. (Cited on page 26.)
- [20] Hrabar, S. (2008). 3d path planning and stereo-based obstacle avoidance for rotorcraft uavs. In *2008 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 807–814. IEEE. (Cited on page 1.)
- [21] Hughes J.F., e. a. (2013). *Computer Graphics: Principles and Practice*. 3rd Edition. Addison-Wesley Professional, 3 edition. (Cited on pages 1 and 41.)
- [22] James D. Foley, e. a. (1995). *Computer Graphics. Principles and Practice in C*. Addison-Wesley, 2 edition. (Cited on pages 1 and 41.)

- [23] Kirkpatrick, S., Gelatt, C. D. J., and Vecchi, M. P. (1983). Optimization by simulated annealing. *Science*. (Cited on page 26.)
- [24] Knuth, D. E. (1977). A generalization of dijkstra's algorithm. *Information Processing Letters*, 6(1):1 – 5. (Cited on pages 48 and 49.)
- [25] Kroumov, V. and Yu, J. (2009). 3d path planning for mobile robots using annealing neural network. In *Networking, Sensing and Control, 2009. ICNSC '09. International Conference on*, pages 130–135. (Cited on page 1.)
- [26] LaValle, S. M. (2006). *Planning Algorithms*. Cambridge University Press. (Cited on pages 7, 8, 12, 55, and 60.)
- [27] Li, Z., Meek, D., and Walton, D. (2006). A smooth, obstacle-avoiding curve. *Computers & Graphics*, 30(4):581 – 587. (Cited on page 1.)
- [28] Maekawa, T., Noda, T., Tamura, S., Ozaki, T., and ichiro Machida, K. (2010). Curvature continuous path generation for autonomous vehicle using b-spline curves. *Computer-Aided Design*, 42(4):350–359. (Cited on page 1.)
- [29] Metropolis, N. and Ulam, S. (1949). The monte carlo method. *J. Am. Stat. Assoc.*, 44:335. (Cited on page 26.)
- [30] Paden, B., Cáp, M., Yong, S. Z., Yershov, D. S., and Frazzoli, E. (2016). A survey of motion planning and control techniques for self-driving urban vehicles. *CoRR*, abs/1604.07446. (Cited on page 7.)
- [31] Press, W. H., Flannery, B. P., Teukolsky, S. A., and Vetterling, W. T. (1992). *Numerical Recipes*. Cambridge University Press. (Cited on pages 23 and 43.)
- [32] Pukelsheim, F. (1994). The three sigma rule. *The American Statistician*, 48(2):88–91. (Cited on page 28.)
- [33] Richard H. Bartels, John C. Beatty, B. A. B. (1995). *An Introduction to Splines for Use in Computer Graphics and Geometric Modeling (The Morgan Kaufmann Series in Computer Graphics)*. The Morgan Kaufmann Series in Computer Graphics. Morgan Kaufmann, 1 edition. (Cited on pages 15 and 17.)
- [34] Salomon, D. (2006). *Curves and Surfaces for Computer Graphics*. Springer. (Cited on pages 15, 17, and 22.)

- [35] Schneider, P. J. and Eberly, D. (2002). *Geometric Tools for Computer Graphics*. Elsevier Science Inc., New York, NY, USA. (Cited on pages 33, 34, and 37.)
- [36] Sobol', I. M. (1994). *A primer for the Monte Carlo method*. CRC Press. (Cited on page 26.)
- [37] Stoer, J. and Bulirsch, R. (1992). *Introduction to numerical analysis*. Springer-Verlag, New York. (Cited on page 23.)
- [38] Šeda, M. and Pich, V. (2008). Robot motion planning using generalised voronoi diagrams. In *Proceedings of the 8th Conference on Signal Processing, Computational Geometry and Artificial Vision, ISCGAV'08*, pages 215–220, Stevens Point, Wisconsin, USA. World Scientific and Engineering Academy and Society (WSEAS). (Cited on page 46.)
- [39] Wah, B. W. and Wang, T. (1999). Constrained simulated annealing with applications in nonlinear continuous constrained global optimization. In *ICTAI*, pages 381–. IEEE Computer Society. (Cited on page 26.)
- [40] Yang, K. and Sukkarieh, S. (2008). 3d smooth path planning for a uav in cluttered natural environments. In *2008 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 794–800. IEEE. (Cited on page 1.)

ACRONYMS

- CAD** Computer-Aided Design
CAGD Computer-Aided Geometric Design
CAM Computer-Aided Manufacturing
CHP Convex Hull Property
LR Lagrangian Relaxation
MCM Monte Carlo Method
OOP Object Oriented Programming
OTF Obstacle Triangular Face
PCLT Probability central limit theorem
PDF Probability Density Function
PE Probable Error
PH Pythagorean Hodograph
RRT Rapidly-expanding Random Tree
SA Simulated Annealing
UAV Unmanned Aerial Vehicle
UML Unified Modeling Language
VD Voronoi Diagram
VTK Visualization Tool Kit
XML eXtensible Markup Language

INDEX

- G , 46
complexity, 48
- G_t , 49
complexity, 51
- Voronoi Diagrams (VDs), 23
- Lagrangian Relaxation (LR), 68
- Monte Carlo Method (MCM), 27
- Obstacle Triangular Face (OTF), 42
- Probability central limit theorem (PCLT), 27
- Probable Error (PE), 26
- Simulated Annealing (SA), 29, 67
algorithm, 30
complexity, 71
- Lagrangian Relaxation, 32
- B-splines, 17
Convex Hull Property (CHP), 19
aligned vertices, 20
arc length, 23
curvature and torsion, 21
end point interpolation, 21
higher degree, 61
knot selection, 63
properties, 19
smoothness, 20
- 3D geometry
point inside polyhedron, 33
segment-triangle intersection, 34
triangle-triangle intersection, 37
- 3D geometry, 32
- Arc length, 23
- Bounding box, 43
- Classic splines, 16
B-splines basis, 17
truncated-powers basis, 16
- Complexity
 G creation, 48
 G_t creation, 51
Simulated Annealing (SA), 71
Dijkstra's algorithm in G , 60
Dijkstra's algorithm in G_t , 55
post process, 67
- Curvature and torsion, 21
- Degree increase, 61
- Dijkstra, 52, 56
- Dijkstra in G , 56
complexity, 60
- Dijkstra in G_t , 52
complexity, 55
- Fortune's algorithm, 23
- Generalized splines, 16
- Graph, 46
triple's graph, 49
- intersections
segment-triangle, 34
triangle-triangle, 37
- Motion planning, 7
algorithm types, 9
problem types, 8

Obstacle, 42

Path planning, 11

Polygonal chain, 46

Post process, 65

complexity, 67

Smoothness, 20

Spline curves, 18