

## Temporal fusion

candidate



motion, entropy, attention  
stable patches keep  $t - 1$  tokens  
capped, keyframes bound drift

## Depth pruning

candidate



Block Influence ranking  
ends protected, none adjacent  
layers removed, not bypassed

## Guarded reuse


candidate



all pass: reuse  $a_{t-1}$

any fails: dense call

image and action gates before the call  
pass: skip the call, reuse  $a_{t-1}$

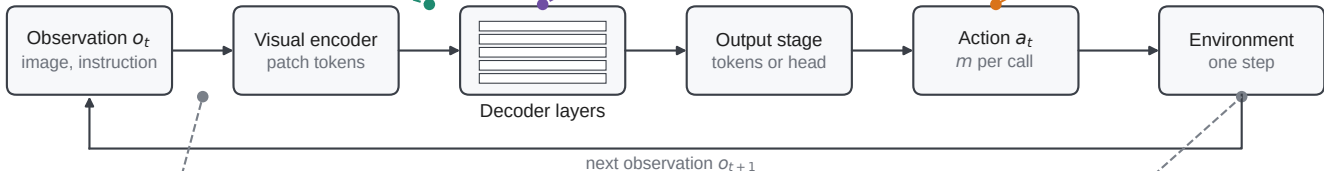

## Foveation

control



sharp disc, blurred  
periphery, same  
token count

## Protocol

dense reference under fused attention, weights frozen  
matched episodes paired by seed, on every backbone  
and environment with a checkpoint  
positive only if latency falls, own signal cost included,  
or success rises, the other within a margin

## Action repeat

control



hold each action  $k$  steps, no gate