


Transcriptome load per junction gapmer against chance expectation

176 distinct oligonucleotides at real exon junctions, ranked; exact plus ≤ 1 -mismatch matches over 186,185 transcripts.

◆ 118 of 176 fall at or below it; the line is what chance alone predicts, not a ceiling. Marked: the 9 designs spanning two or three partners' seams: one molecule, plotted once.

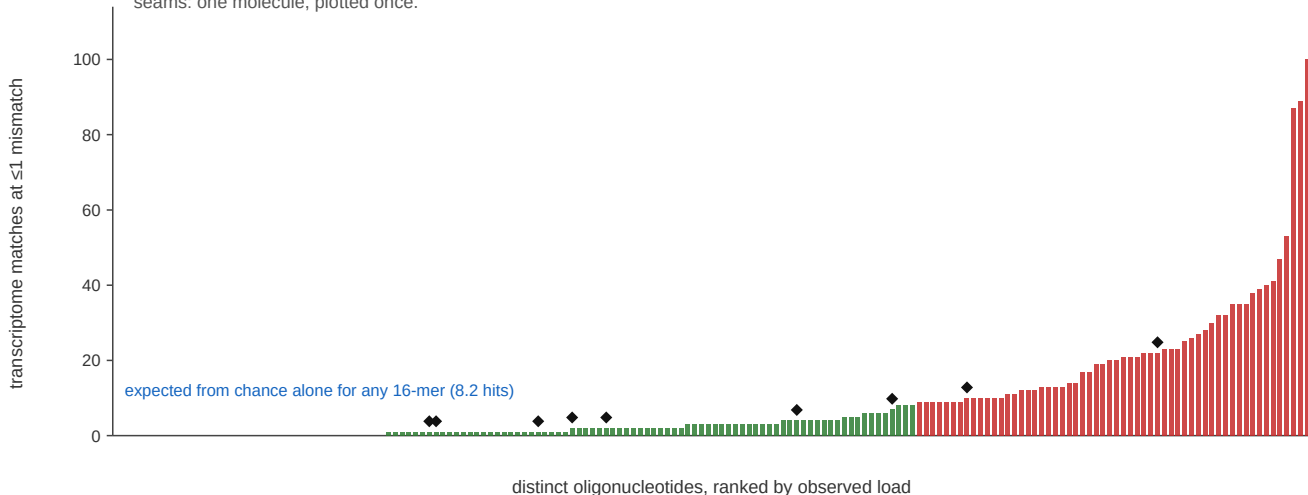

The chance expectation assumes independent uniform bases; the transcriptome span it is computed over is the exhaustive scan's measured one. It separates "more than chance" from "at chance" and is not a significance test.

Counts are predictions from sequence search, not measured off-target activity. 58 of the 176 plotted designs sit above it; on the mean the set comes in at chance.

Not plotted: 10 designs at 2 modelled breakpoints rather than real exon junctions; 4 of those sit above it, at 16–95 matches and 75.0–81.2% GC.