


Nguyễn Phạm Trí CE192008 LAB 1


1. Network for sever:

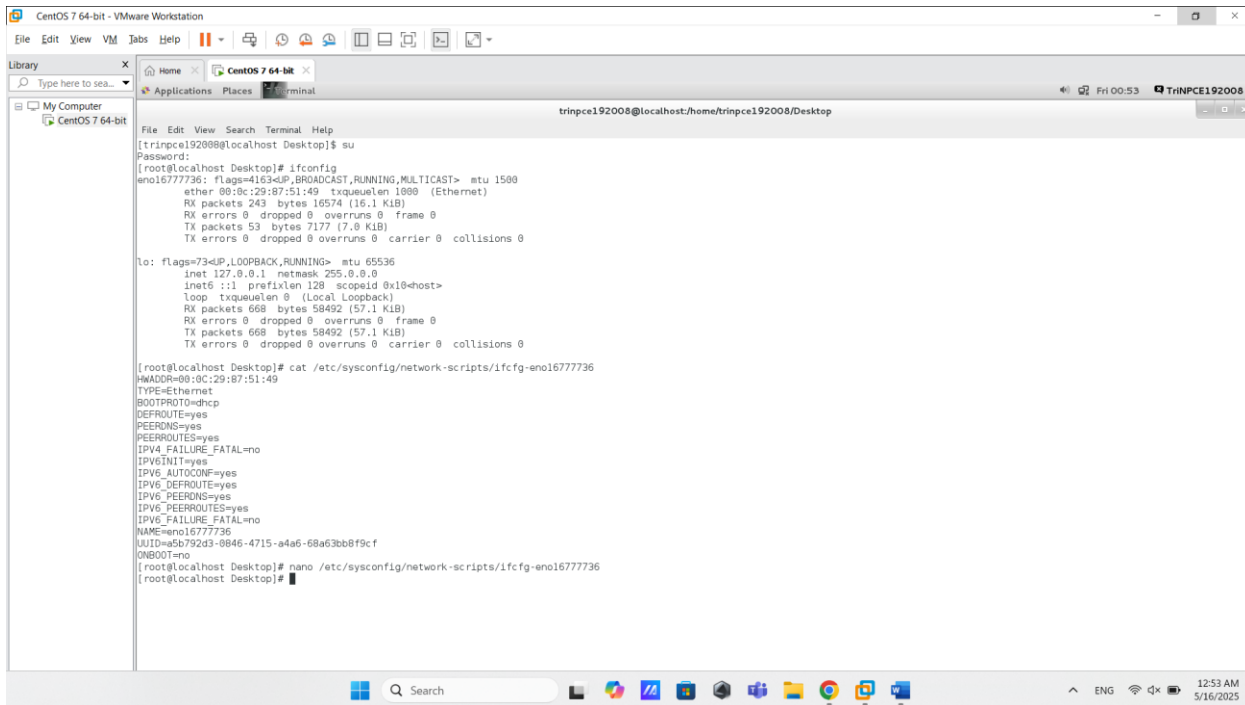

```
CentOS 7 64-bit - VMware Workstation
File Edit View VM Tabs Help
Library
My Computer
CentOS 7 64-bit
trinpce192008@localhost/home/trinpce192008/Desktop
File Edit View Search Terminal Help
[trinpce192008@localhost Desktop]$ su
Password:
[root@localhost Desktop]# ifconfig
eno16777736: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    ether 00:0c:29:87:51:49 txqueuelen 1000 (Ethernet)
    RX packets 243 bytes 16574 (16.1 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 53 bytes 7177 (7.0 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 0 (Local Loopback)
    RX packets 668 bytes 58492 (57.1 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 668 bytes 58492 (57.1 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

[root@localhost Desktop]# cat /etc/sysconfig/network-scripts/ifcfg-eno16777736
HWADDR=00:0c:29:87:51:49
TYPE=Ethernet
BOOTPROTO=dhcp
DEFROUTE=yes
PEERDNS=yes
PEERROUTES=yes
IPV4_FAILURE_FATAL=no
IPV6INIT=yes
IPV6_AUTOCONF=yes
IPV6_DEFROUTE=yes
IPV6_PEERDNS=yes
IPV6_PEERROUTES=yes
IPV6_FAILURE_FATAL=no
NAME=eno16777736
UUID=a5b792d3-0846-4715-a4a6-68a63bb8f9cf
ONBOOT=no
[root@localhost Desktop]# nano /etc/sysconfig/network-scripts/ifcfg-eno16777736
[root@localhost Desktop]#
```


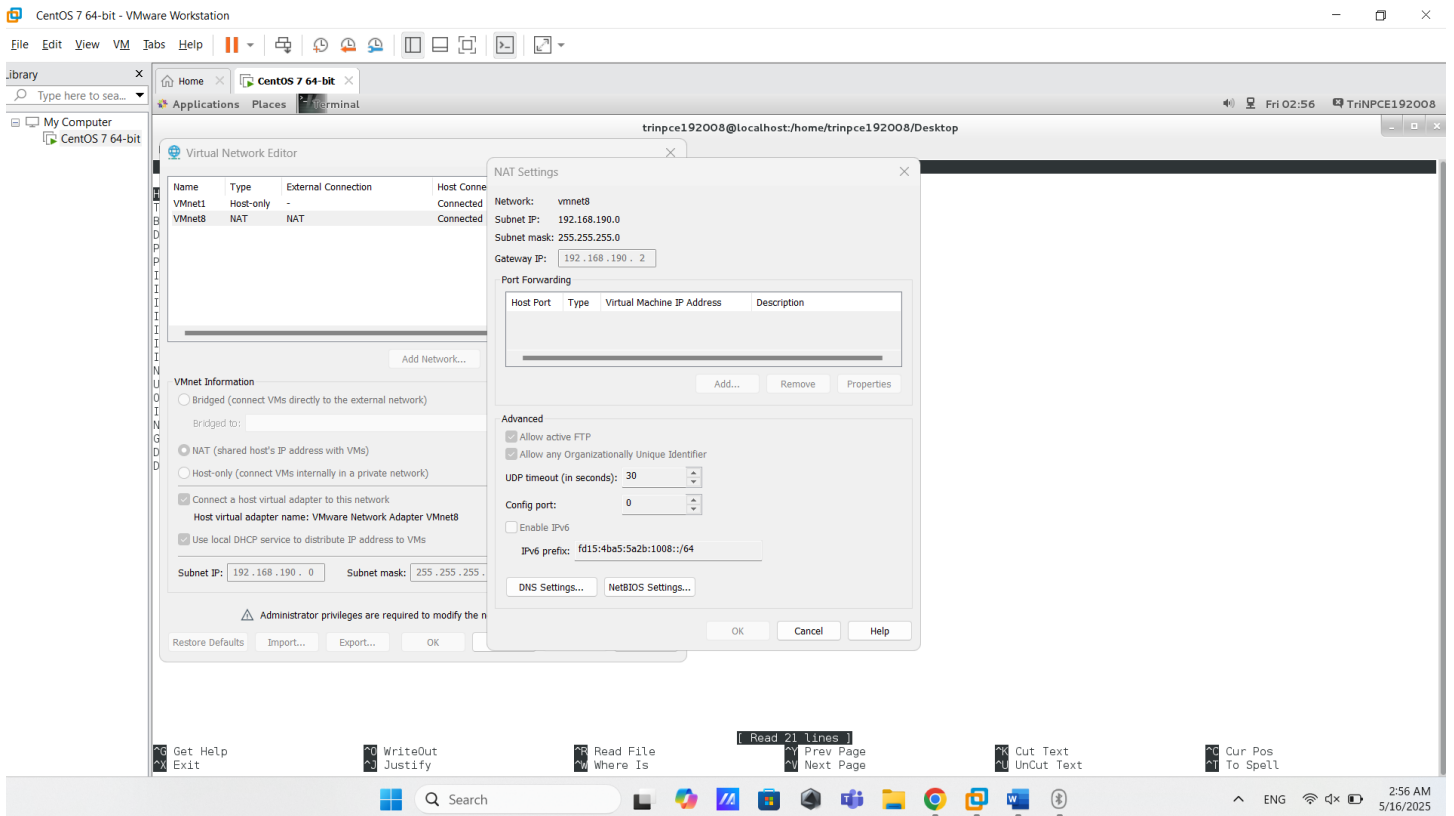



```
File Edit View Search Terminal Help
GNU nano 2.3.1 File: /etc/sysconfig/network-scripts/ifcfg-eno16777736 Modified
HWADDR=00:0C:29:87:51:49
TYPE=Ethernet
BOOTPROTO=none
DEFROUTE=yes
PEERDNS=no
PEERROUTES=yes
IPV4_FAILURE_FATAL=no
IPV6INIT=yes
IPV6_AUTOCONF=yes
IPV6_DEFROUTE=yes
IPV6_PEERDNS=yes
IPV6_PEERROUTES=yes
IPV6_FAILURE_FATAL=no
NAME=eno16777736
UUID=a5b792d3-0846-4715-a4a6-68a63bb8f9cf
ONBOOT=yes
IPADDR=192.168.190.100
NETMASK=255.255.255.0
GATEWAY=192.168.190.2
DNS1=8.8.8.8
DNS2=8.8.4.4

Get Help WriteOut Read File Prev Page Cut Text Cur Pos
Exit Justify Where Is Next Page UnCut Text To Spell
```


```
File Edit View Search Terminal Help
[root@localhost Desktop]# systemctl restart network
[root@localhost Desktop]# ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=128 time=28.2 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=128 time=25.3 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=128 time=27.4 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=128 time=24.7 ms
^C
--- 8.8.8.8 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3005ms
rtt min/avg/max/mdev = 24.784/26.446/28.267/1.440 ms
[root@localhost Desktop]# ping google.com
PING google.com (142.250.4.139) 56(84) bytes of data.
64 bytes from sm-in-f139.1e100.net (142.250.4.139): icmp_seq=1 ttl=128 time=23.1 ms
64 bytes from sm-in-f139.1e100.net (142.250.4.139): icmp_seq=2 ttl=128 time=26.0 ms
64 bytes from sm-in-f139.1e100.net (142.250.4.139): icmp_seq=3 ttl=128 time=29.0 ms
64 bytes from sm-in-f139.1e100.net (142.250.4.139): icmp_seq=4 ttl=128 time=26.3 ms
^C
--- google.com ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3007ms
rtt min/avg/max/mdev = 23.153/26.131/29.036/2.088 ms
[root@localhost Desktop]#
```



2. Command:

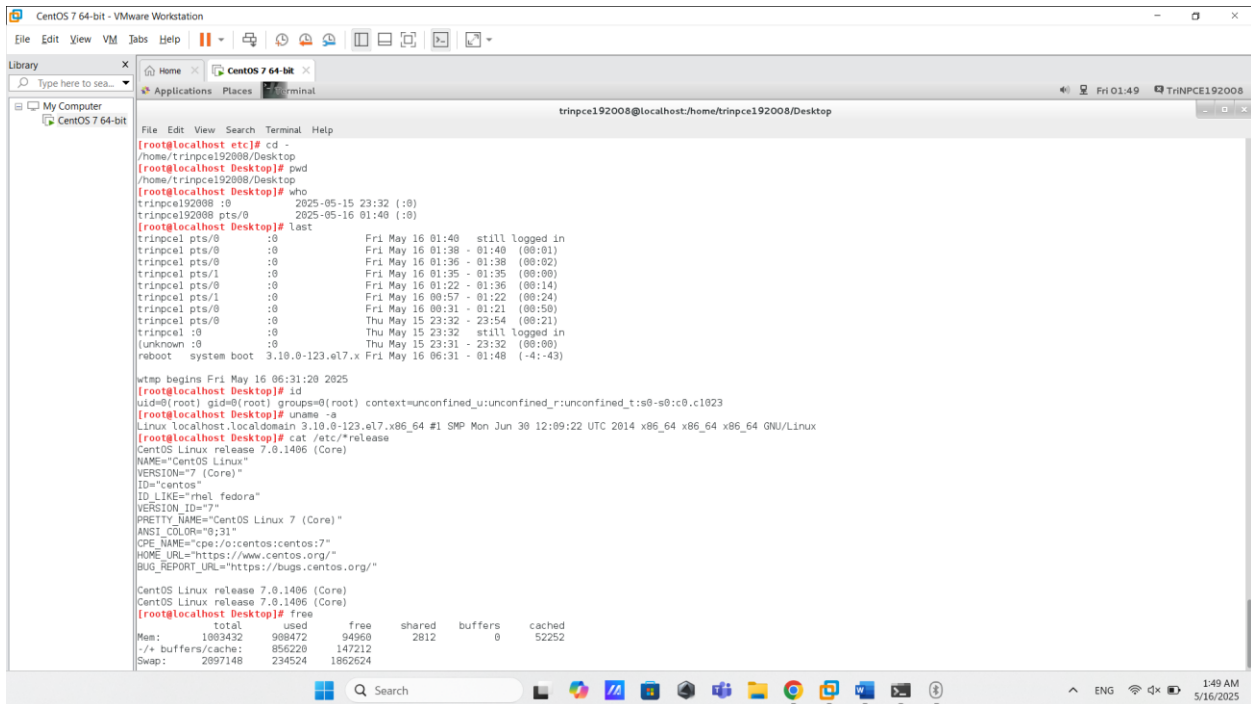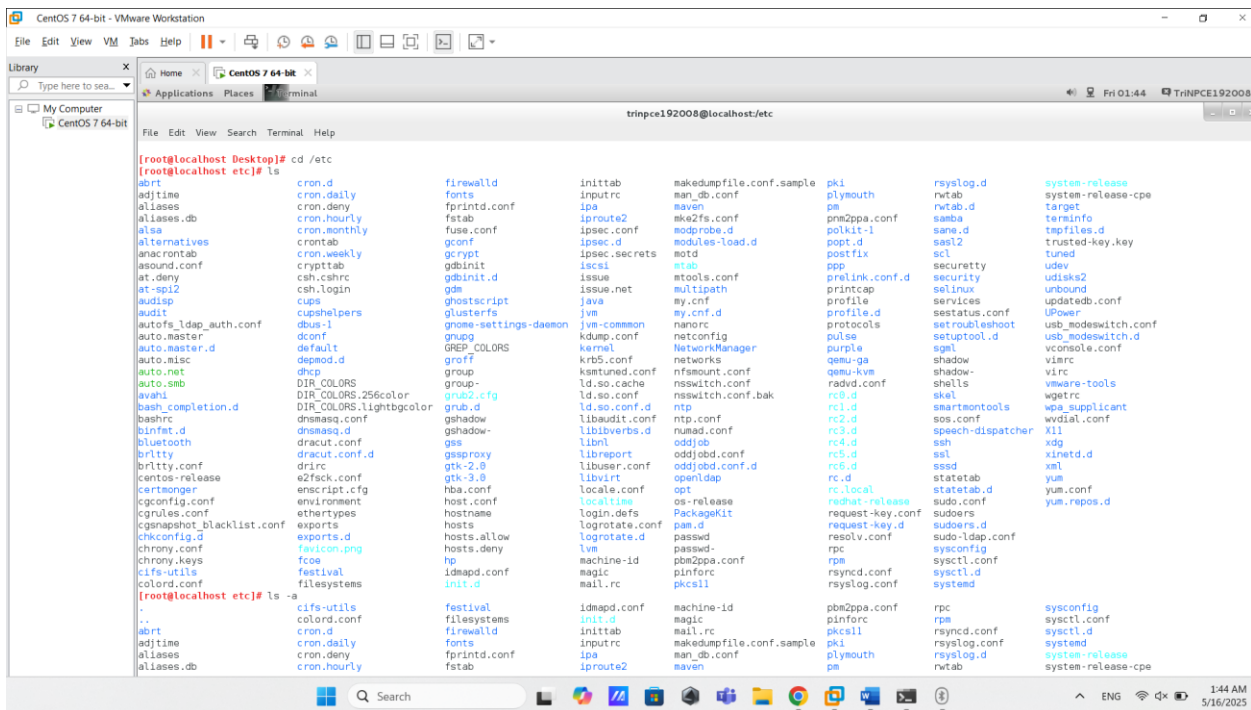

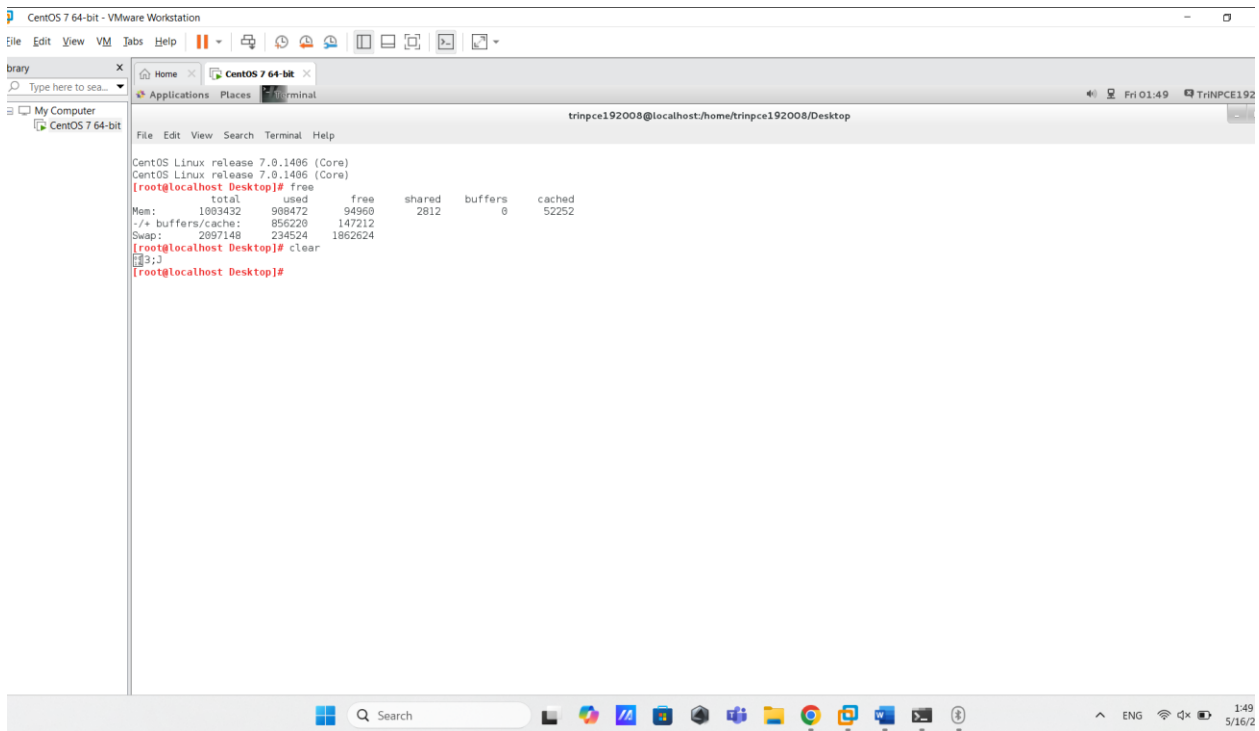


3. CONTROL:

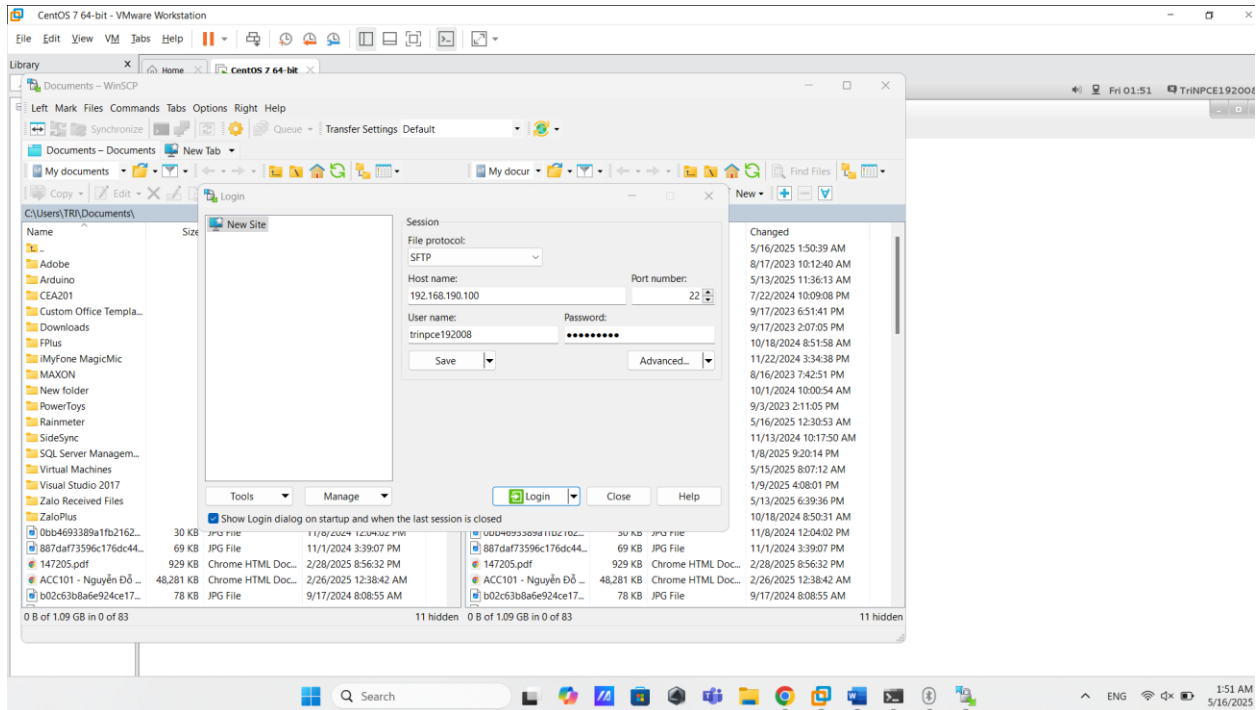


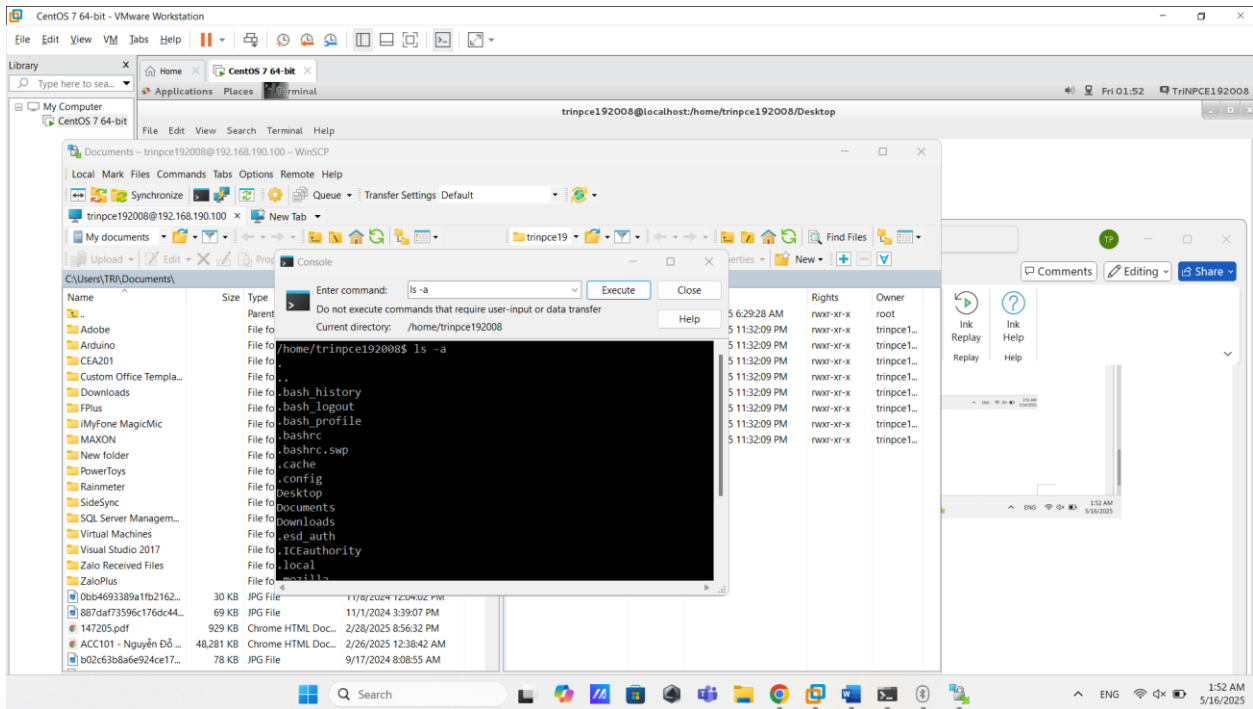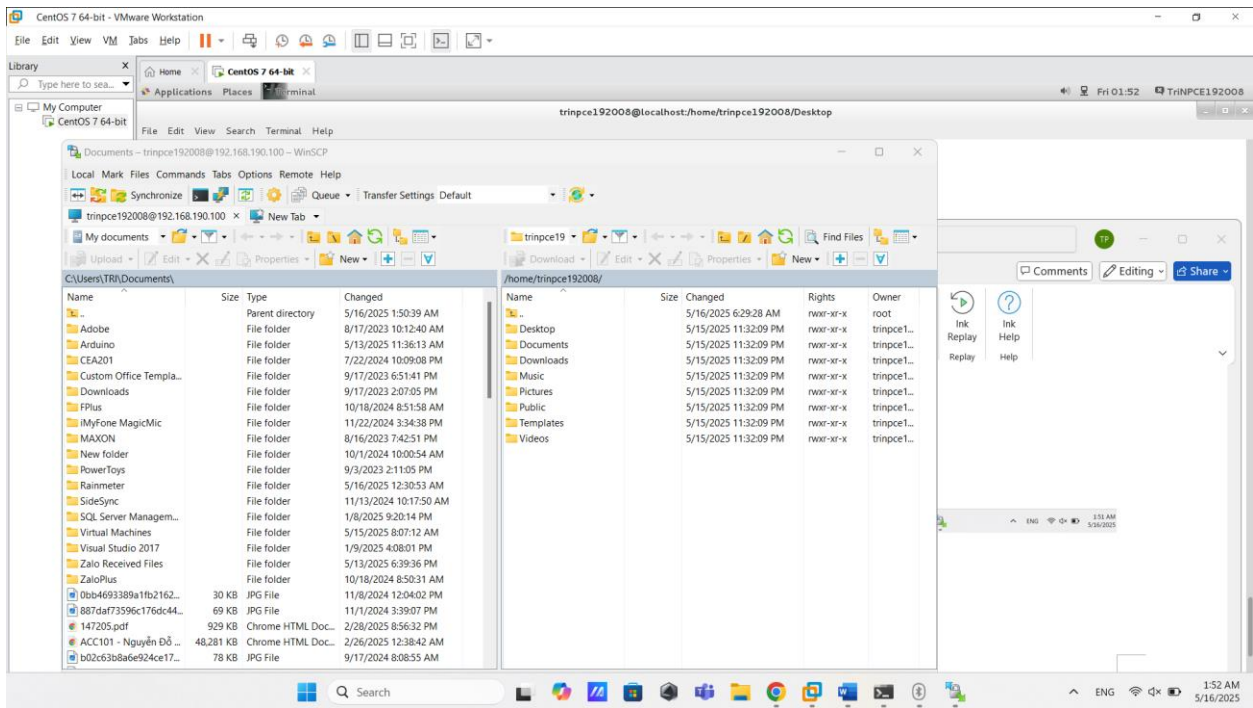

Ảnh Trên: control bằng winscp

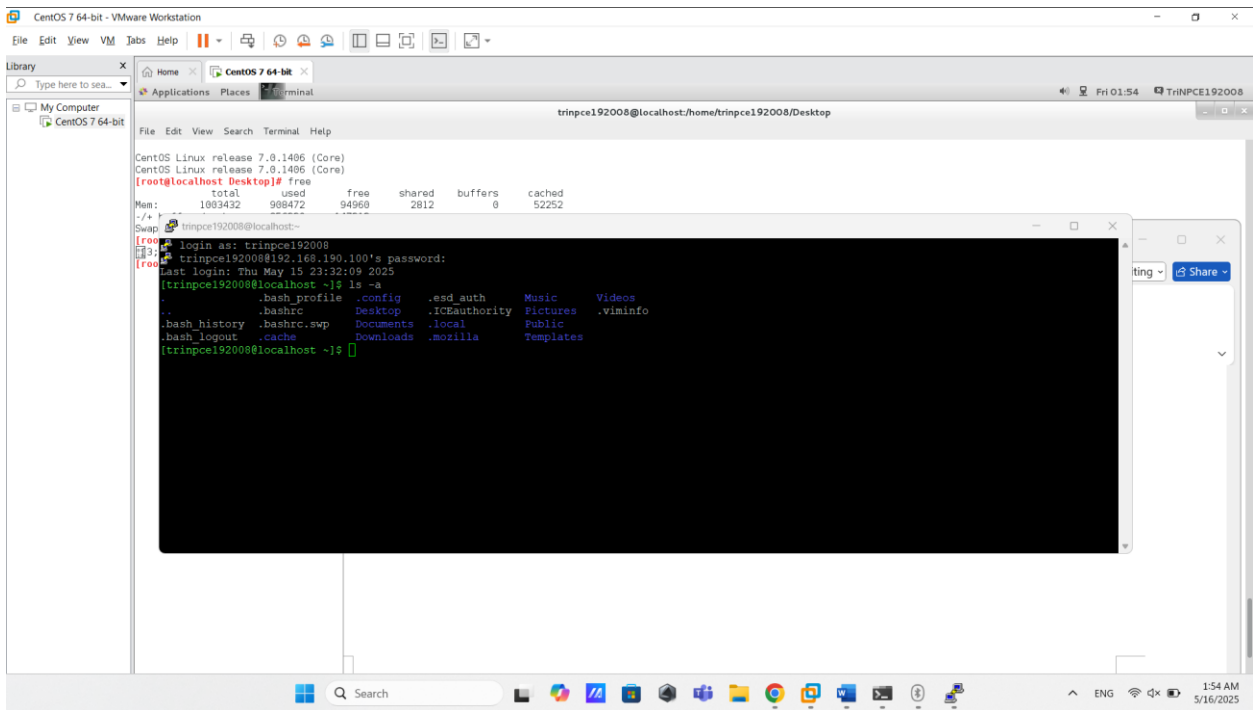

Ảnh trên: Control bằng PuTTY

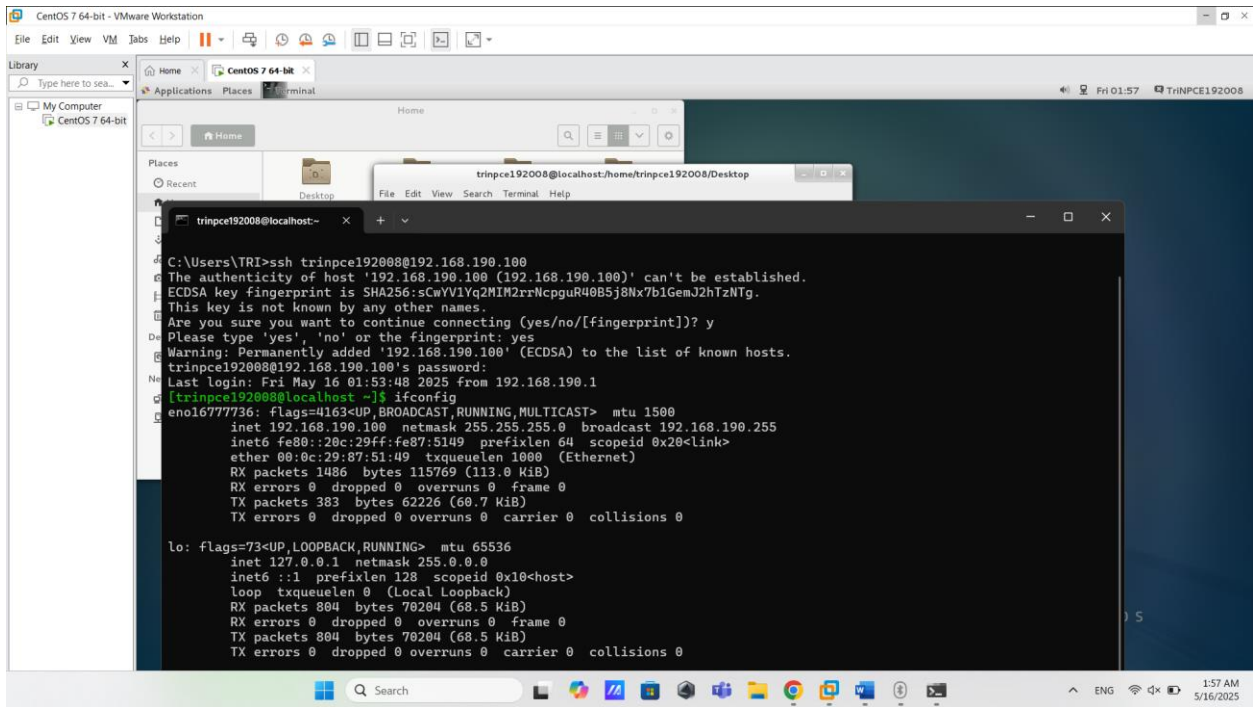

Ảnh trên: Control bằng cmd Window