PushT, one planning step from one start state: mean and variance over seeds

Same budget: cold methods 2000 samples × 5 iterations from zero knots (10,005 rollouts); KSOS 5 restarts × 1000 two-level samples (box 0.8^i, ADMM-cuda, 2 s limit) + refinement 1000 × 5 (10,010 rollouts); DIAL / MPPI temperature 0.01 / 0.1; seeds 0–4 (n = 5); std uses ddof = 1

Plan cost: mean ± std over seeds (dots = seeds)

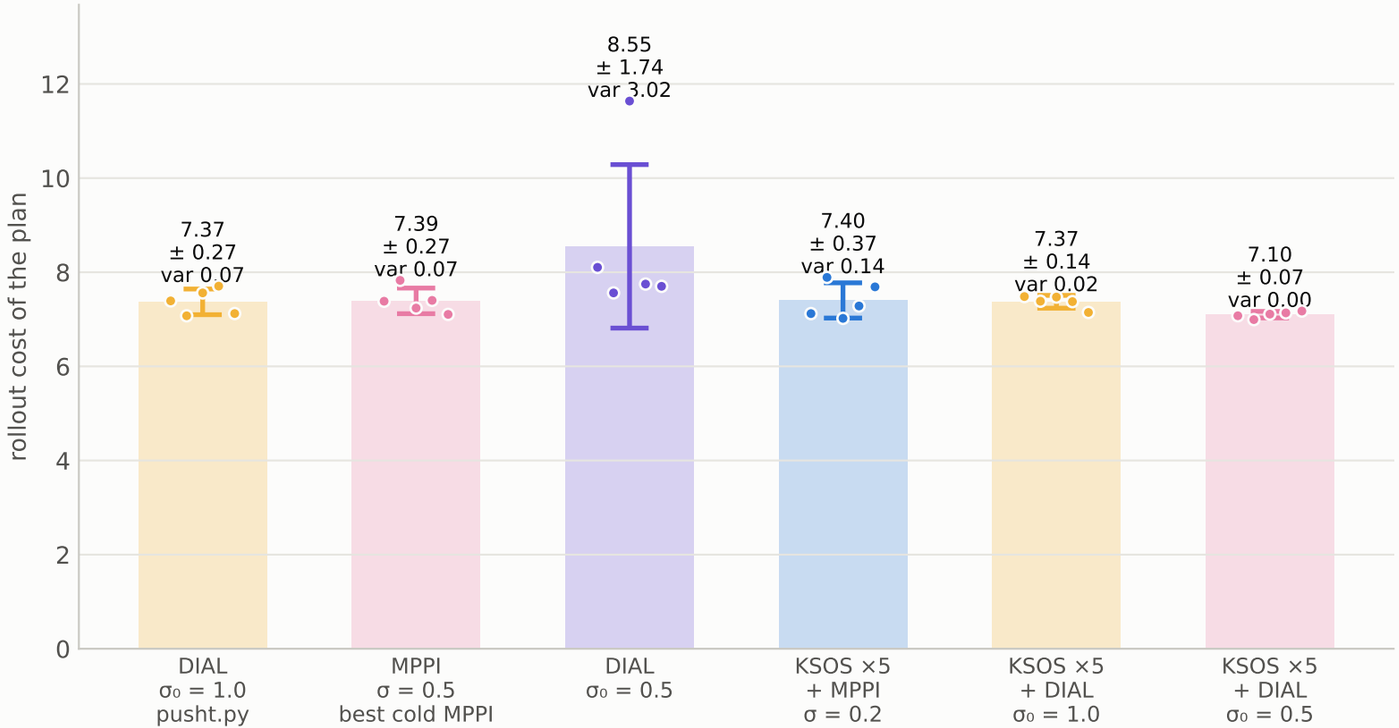
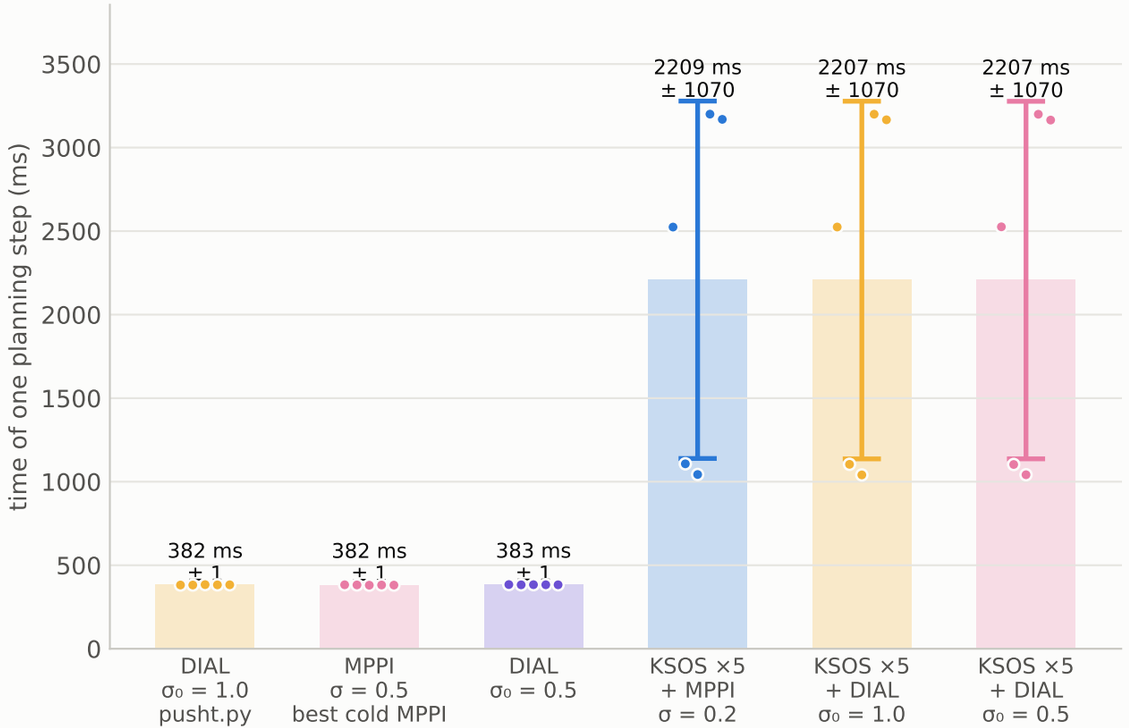
Planning time: mean ± std over seeds