PushT, one planning step from one start state: mean and variance over seeds

Same budget (about 10,000 rollouts): PS / MPPI / DIAL 2000 samples × 5 iterations; KSOS 5 restarts × 1000 samples + MPPI 1000 × 5 (σ = 0.2, temp 0.1); seeds 0–4 (n = 5); std uses ddof = 1

Plan cost: mean ± std over seeds (dots = seeds)

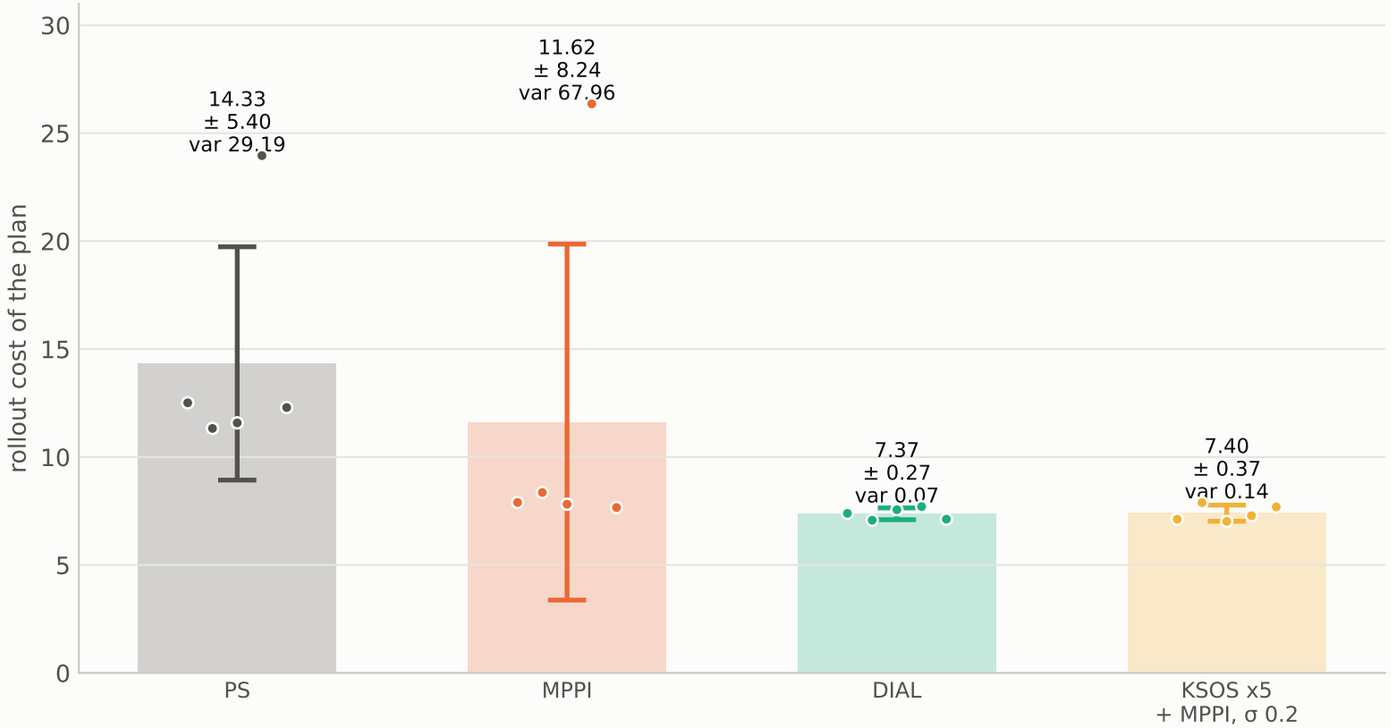
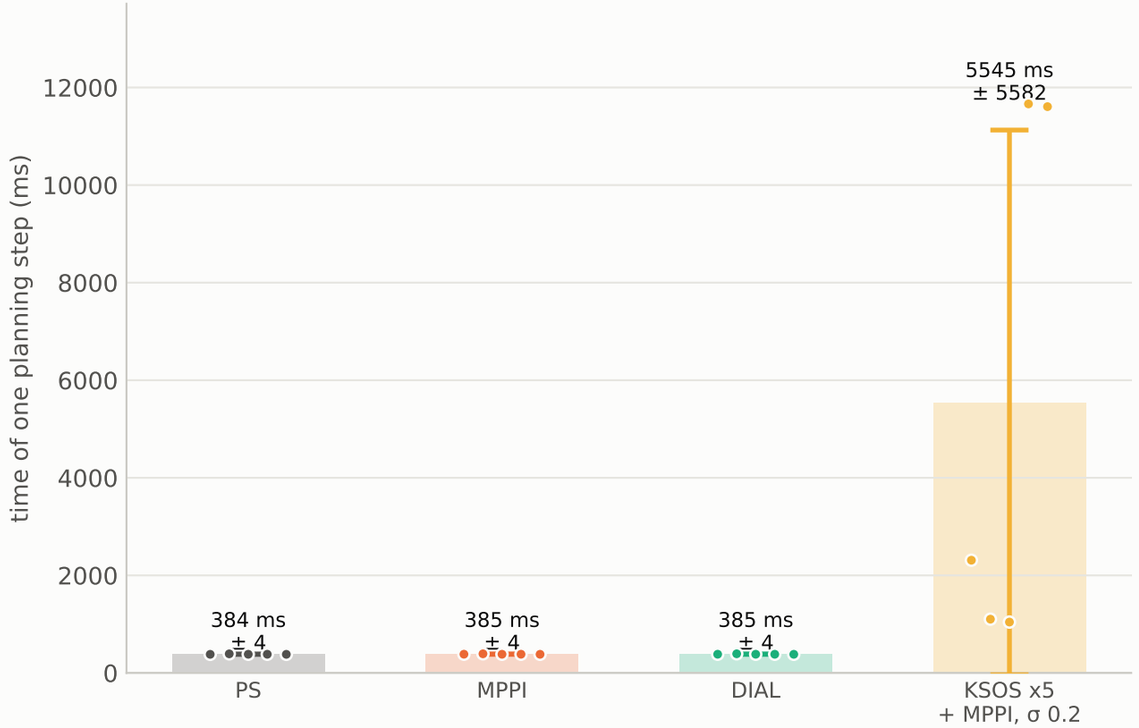
Planning time: mean ± std over seeds