PushT, one planning step from one start state: mean and variance over seeds
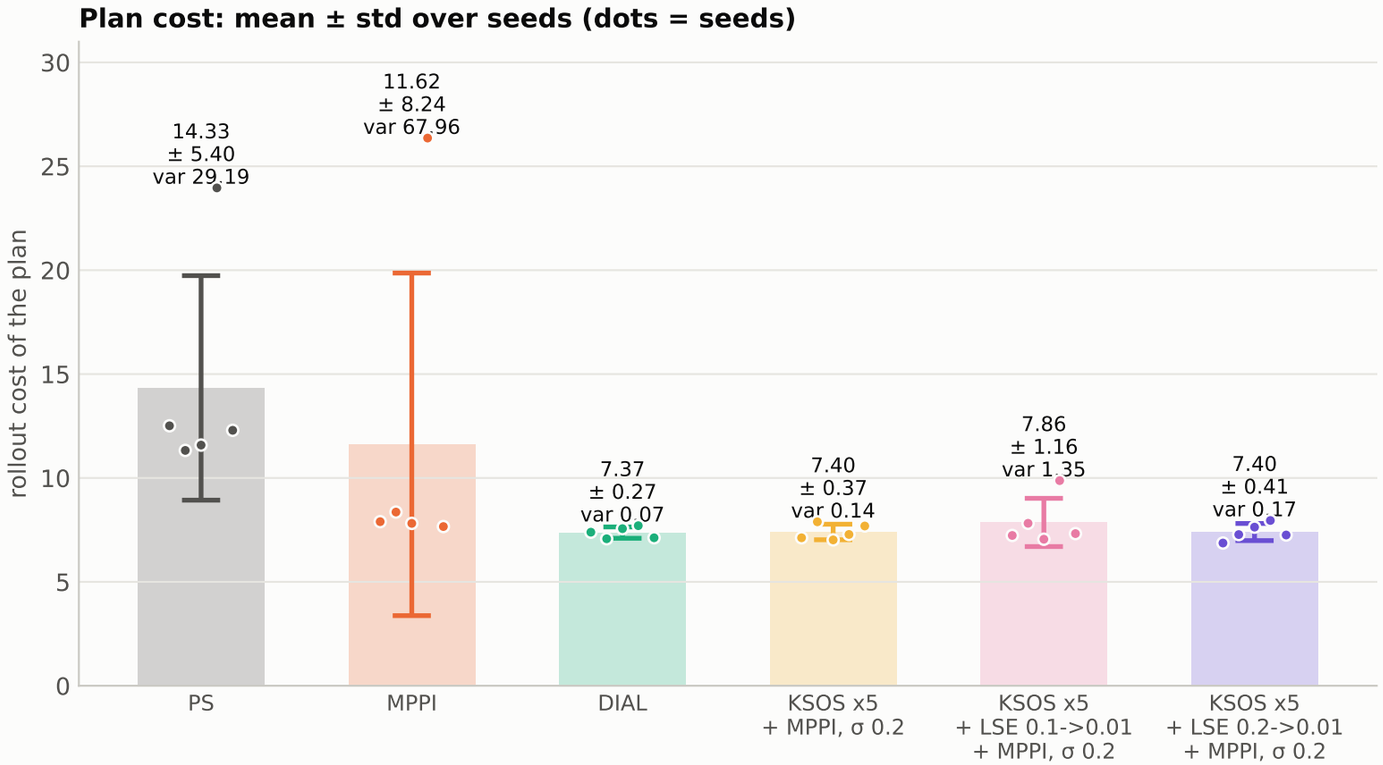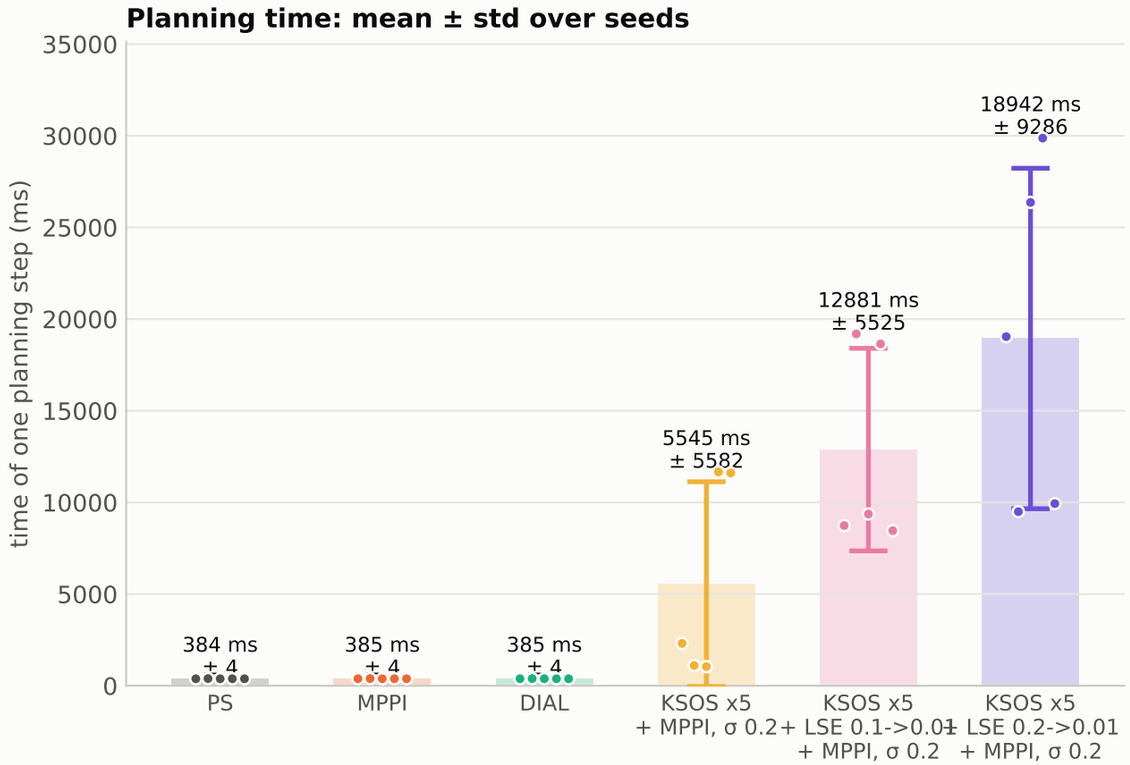
PS / MPPI / DIAL 2000 samples × 5 iterations (10,005 rollouts); KSOS 5 restarts × 1000 samples + MPPI 1000 × 5 (σ 0.2), without LSE (10,010 rollouts) or with LSE (100 perturbations per sample, σ_LSE 0.1 → 0.01 or 0.2 → 0.01, λ 0.1; 505,015 rollouts); seeds 0–4 (n = 5); std uses ddof = 1