PushT closed loop: GlobalMPPI (KSOS ADMM-cuda + MPPI) vs PS / MPPI / DIAL
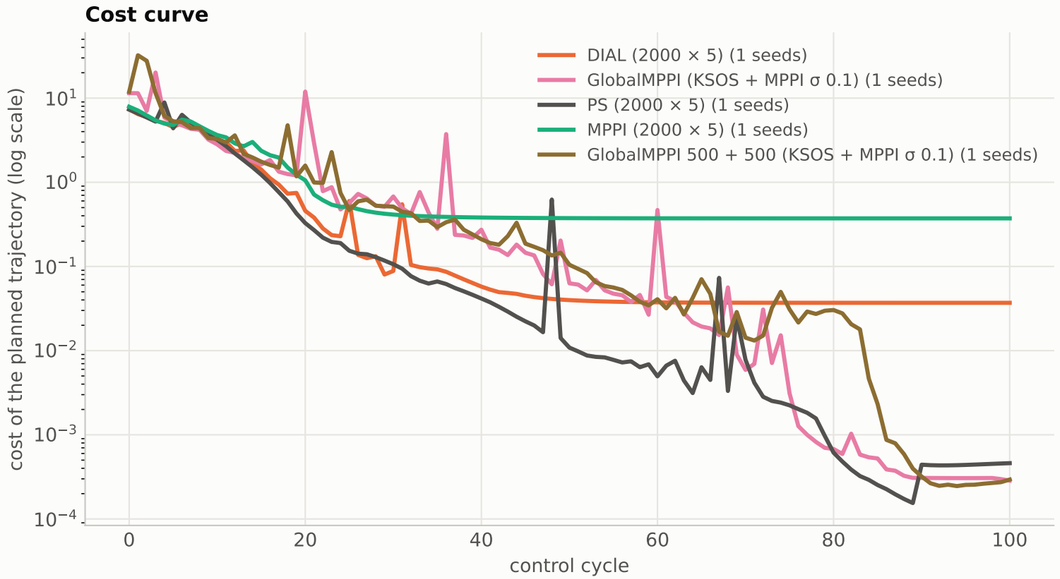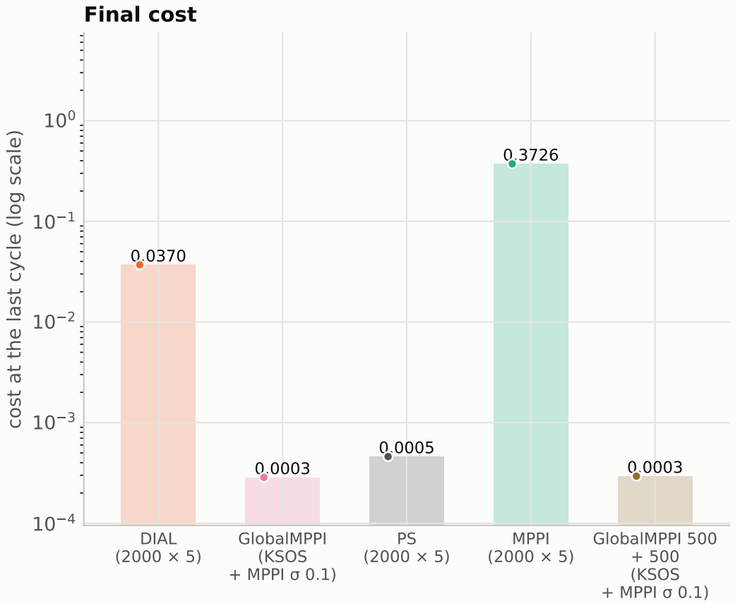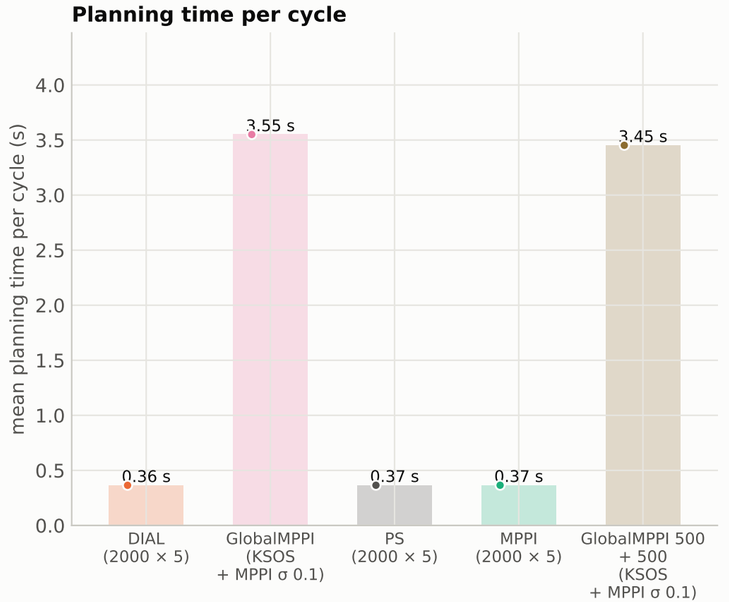
start: block (0.1, 0.1, 1.3), pusher (0, 0); 100 cycles at 50 Hz. GlobalMPPI: 5 restarts × 1000 two-level Sobol samples, ADMM-cuda (5,000 rollouts per cycle), then MPPI 1000 × 5 (σ 0.1, ≈ 10,000 rollouts in all; the 500 + 500 run halves both); PS / MPPI / DIAL: pusht.py settings with 2000 × 5 (≈ 10,000 rollouts). Time statistics leave out cycle 0 (JIT); std uses ddof = 1