PushT closed loop over seeds: GlobalMPPI (KSOS ADMM-cuda + MPPI) vs DIAL
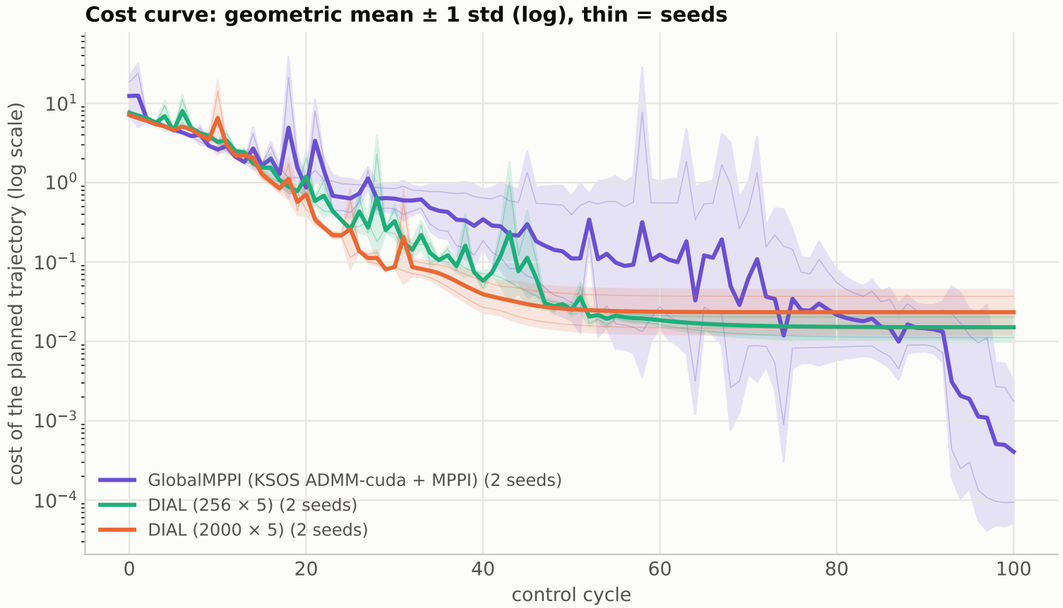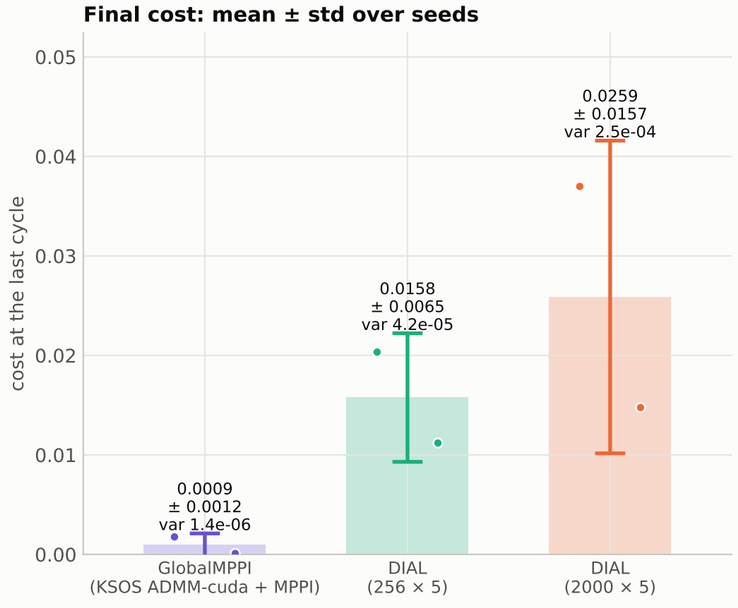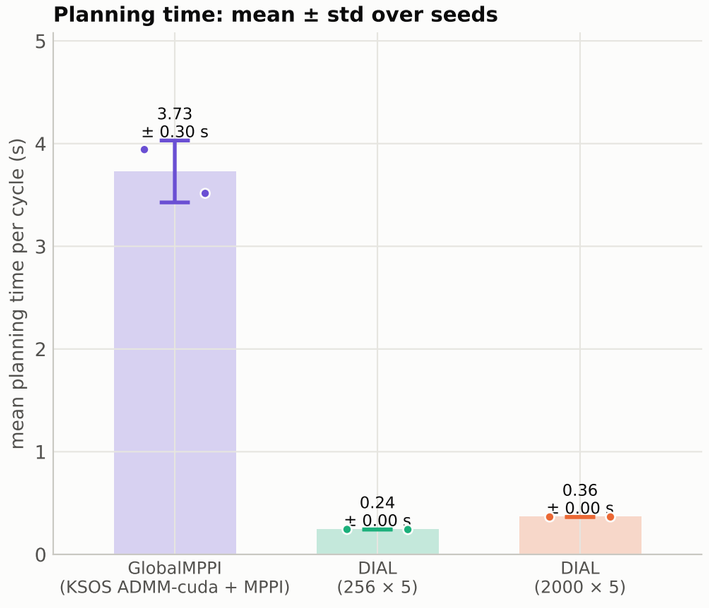
start: block (0.1, 0.1, 1.3), pusher (0, 0); 100 cycles at 50 Hz. GlobalMPPI: 5 restarts × 1000 two-level Sobol samples, ADMM-cuda, MPPI 1000 × 5 (σ 0.2) ≈ 10,000 rollouts per cycle; DIAL: pusht.py settings, 256 × 5 or 2000 × 5 (≈ 10,000 rollouts). Time statistics leave out cycle 0 (JIT); std uses ddof = 1