

Cuda speed test in C/C++

Oleksandr Hryshchuk

July 20, 2019

1 Random generation of numbers for testing

Default random function `rand()` was used for generating array with random elements. For generating more clear random numbers you should use function `srand(time(NULL))`;

Listing 1: Function for generating array of random numbers

```
vector<int> genRandomArray(int n){
    vector<int> resultv;
    for (int i=0; i<n; i++)
    {
        resultv.push_back(rand()%1000);
    }
    return resultv;
}
```

Program use two parameters: samples count, and step size. Sample count is integer number and represents count of arrays which will be generated by program. Another arguments it's a step between lengths of previous and next arrays. Also in code we have variable with name `step`, this variable contains length of array.

For compile and run this program compile file `random_generator.cpp`. For example:

```
$ g++ random_generator.cpp -o rand
$ ./rand 10000 12
```


2 Code for speed test

2.1 Speed test in serial CPU

2.2 Speed test on GPU with blocks

2.3 Speed test on GPU with blocks and threads

3 Result

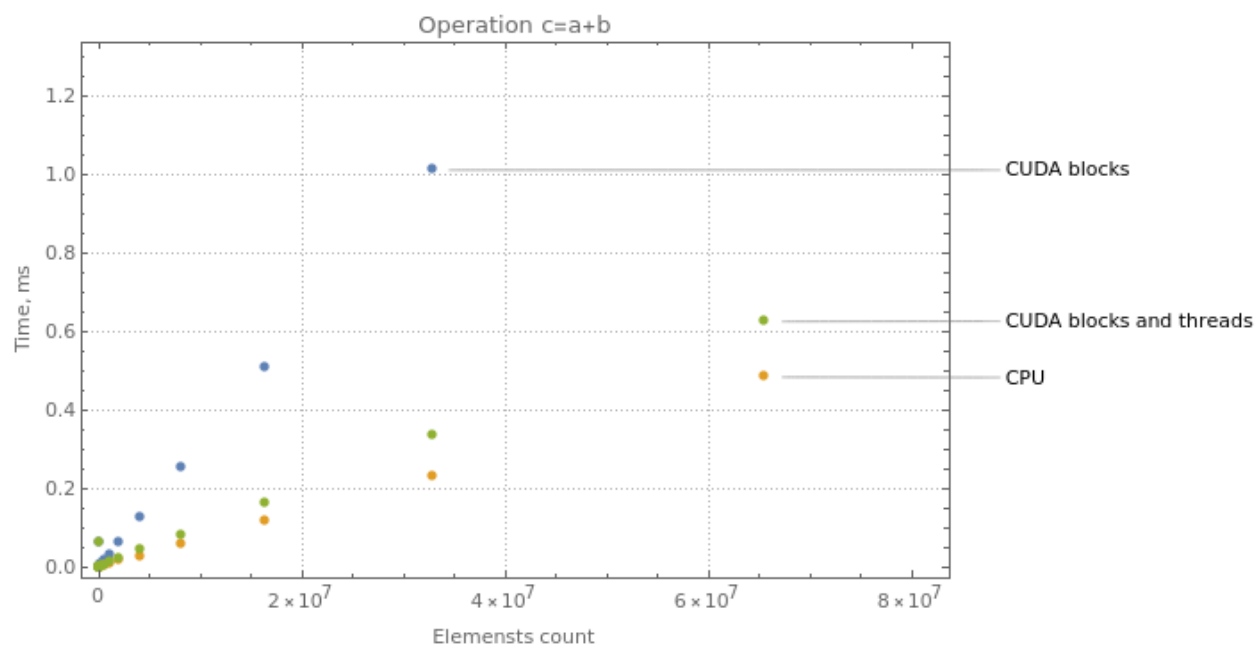

Contents

1	Random generation of numbers for testing	2
2	Code for speed test	3
2.1	Speed test in serial CPU	3
2.2	Speed test on GPU with blocks	3
2.3	Speed test on GPU with blocks and threads	3
3	Result	4

Listings

1	Function for generating array of random numbers	2
---	---	---