Phase 0 — Cross-Launch Shared-Memory Residue
4096 × uint32 = 16 KB, N=1000 trials | Hardware: RTX 4050 Laptop GPU (Ada Lovelace, sm_89)

⚠ DATA PROVENANCE CAVEAT: results/phase0_residue.json is missing from this repository.
N=1000 shown above is the NTRIALS constant from src/phase0_residue.cu, NOT read from a regenerated measurement.
Regenerate via docs/SETUP.md in WSL2 to remove this caveat.

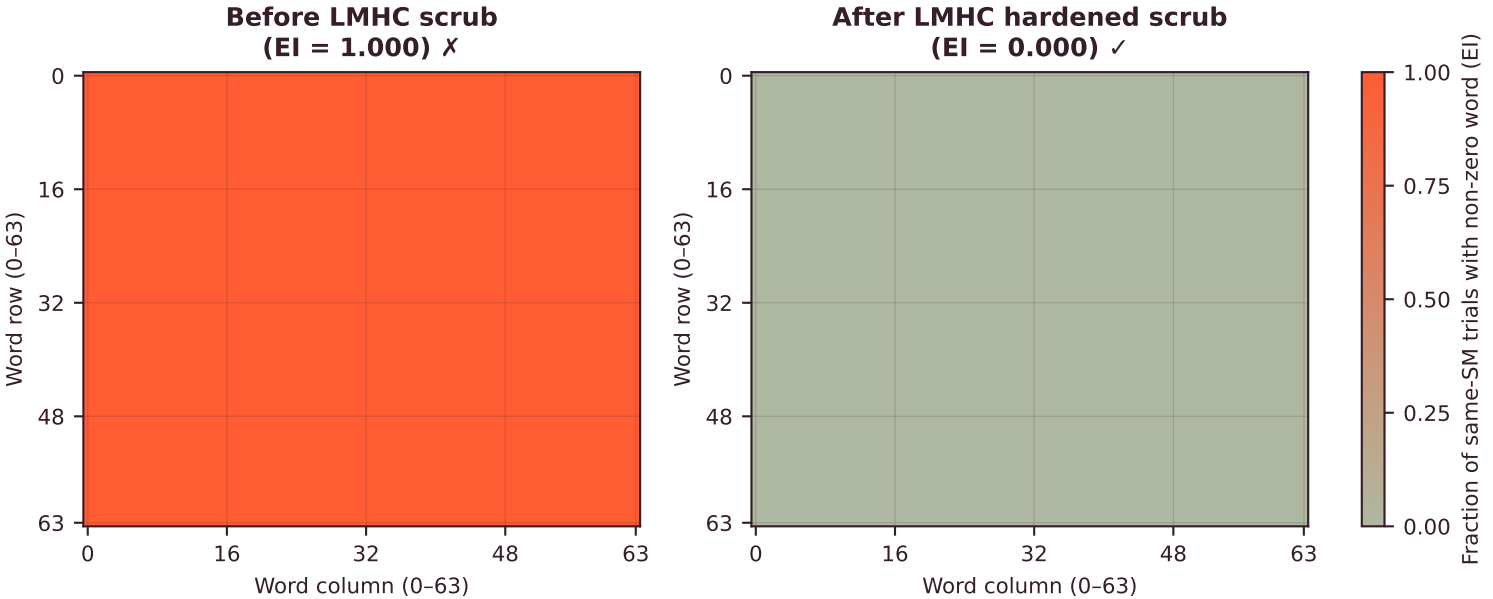

Residue is fully observable when the subsequent kernel is co-resident on the same SM — co-residency is forced in this experiment to demonstrate the window.
This is in-process cross-kernel shared-memory persistence, NOT cross-tenant LeftoverLocals on NVIDIA.