


# CalendarTravel — System Architecture

Traffic-aware drive-time blocks synced from a source Google Calendar into a dedicated travel calendar

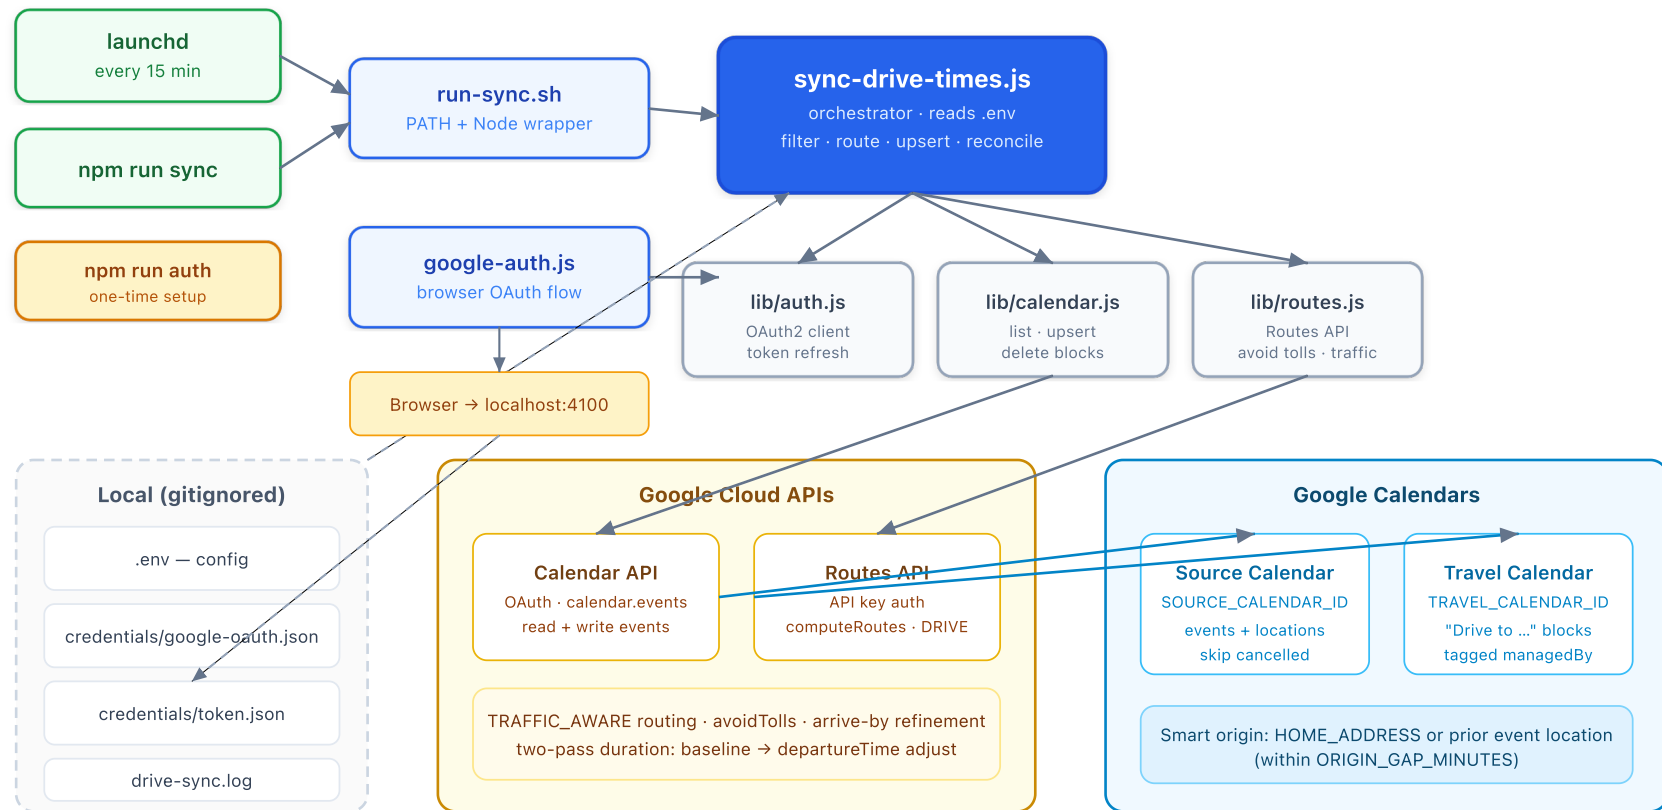

## SYNC PIPELINE (EACH RUN)

1. Load config from **.env** and authorize via **token.json**
2. Fetch timed, located, non-cancelled events from the source calendar (next **LOOKAHEAD\_DAYS**)
3. For each event: pick origin (home or chained prior location) → query Routes API → compute block start/end
4. Upsert tagged travel blocks in the travel calendar (create · update · skip if unchanged)
5. Reconcile: delete travel blocks whose source event was removed, cancelled, or no longer qualifies