
KiroClops architecture

OpenCV 5 measures every candidate a coding agent writes; the same measurement runs on AWS Graviton4 with COOL.

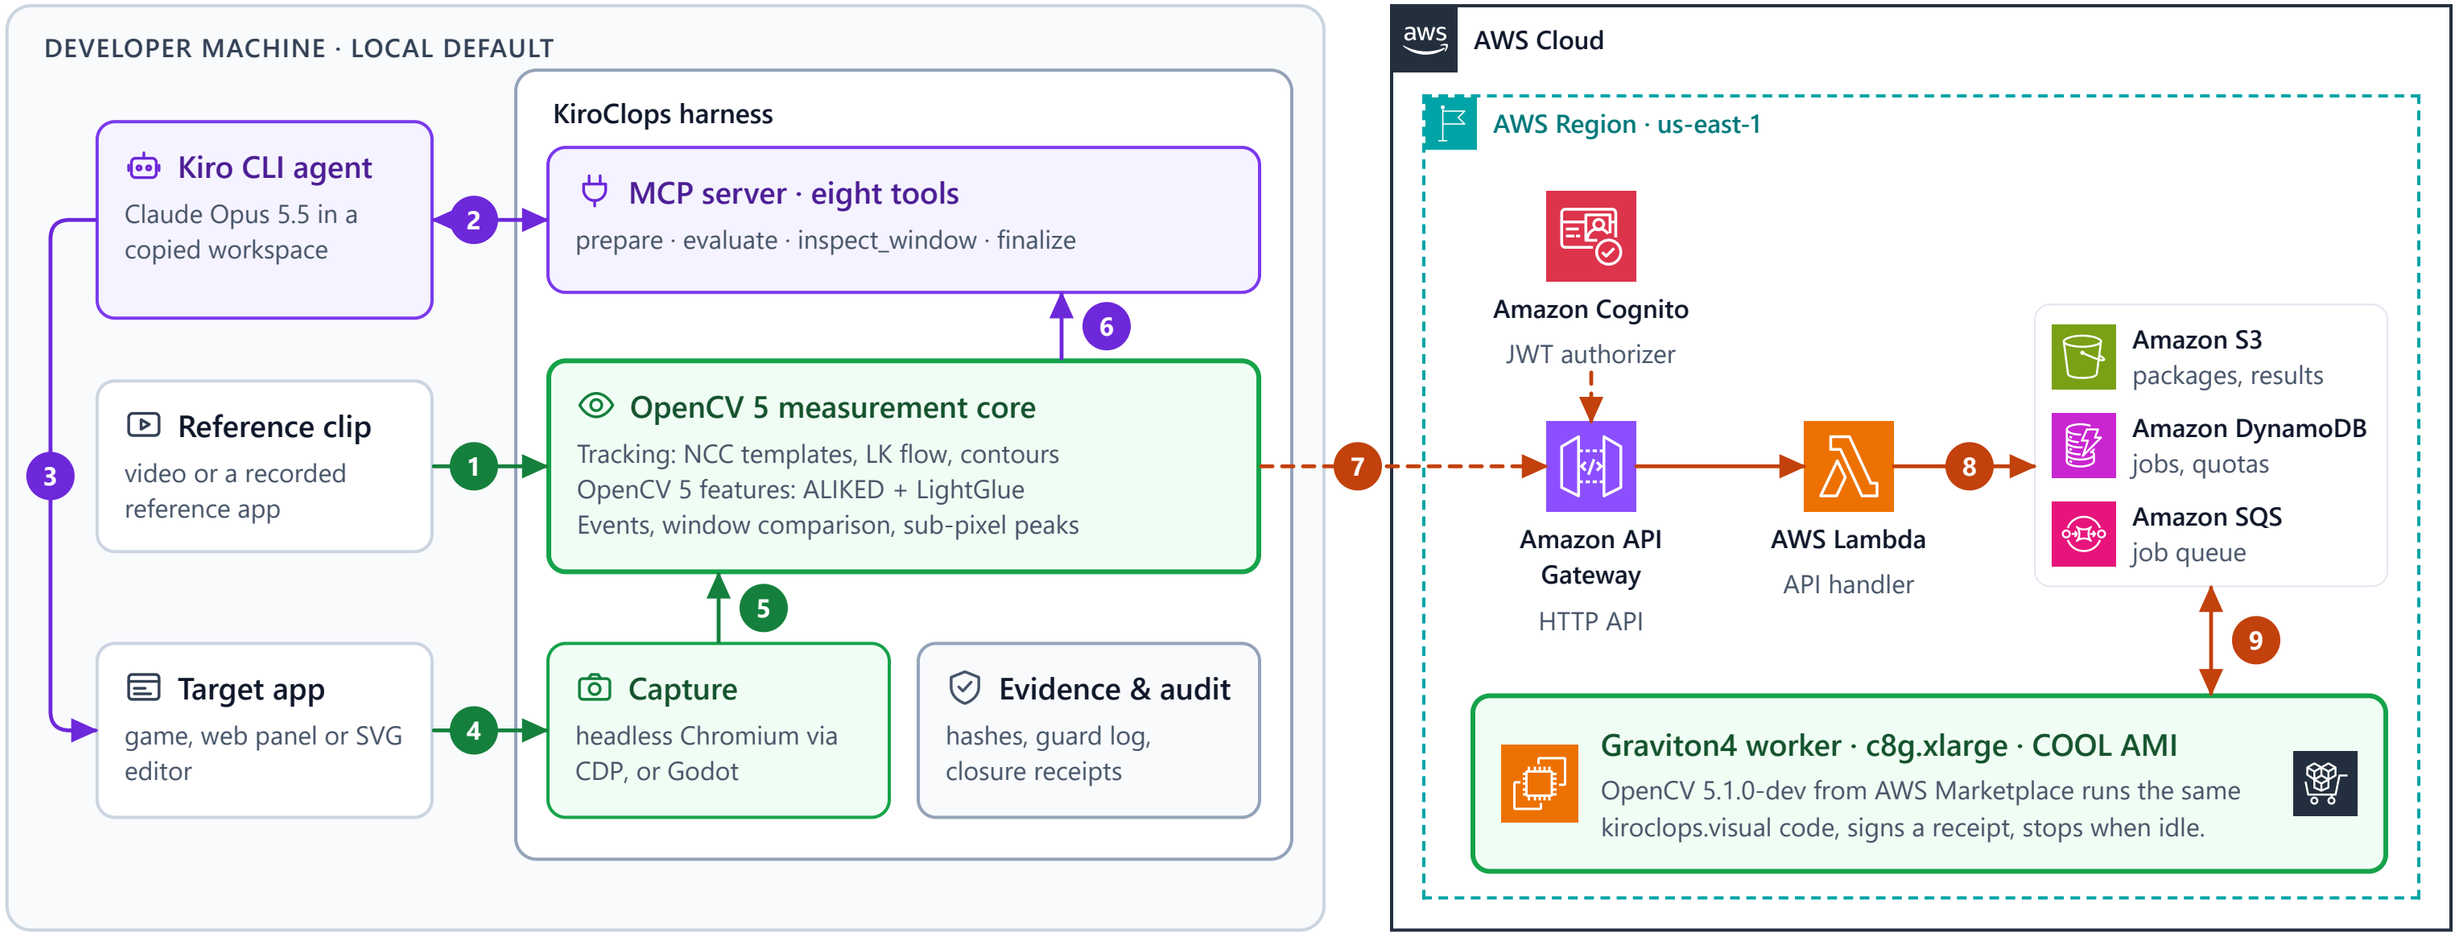

FLOW

1. The reference clip is measured once with OpenCV 5.
2. The agent calls KiroClops through eight MCP tools.
3. The agent edits only the target's motion code.
4. Every candidate is re-recorded in Chromium or Godot.
5. OpenCV 5 tracks objects, finds events, compares windows.
6. Feedback returns to the agent; held-out cases stay sealed.
7. Optional: the same request goes to the AWS API.
8. Lambda stores the job and queues it.
9. A Graviton4 COOL worker measures it and signs a receipt.

LEGEND

- Pixels and OpenCV 5 measurement
- Agent actions and feedback
- AWS cloud path
- Optional path or authorization
- Runs OpenCV 5