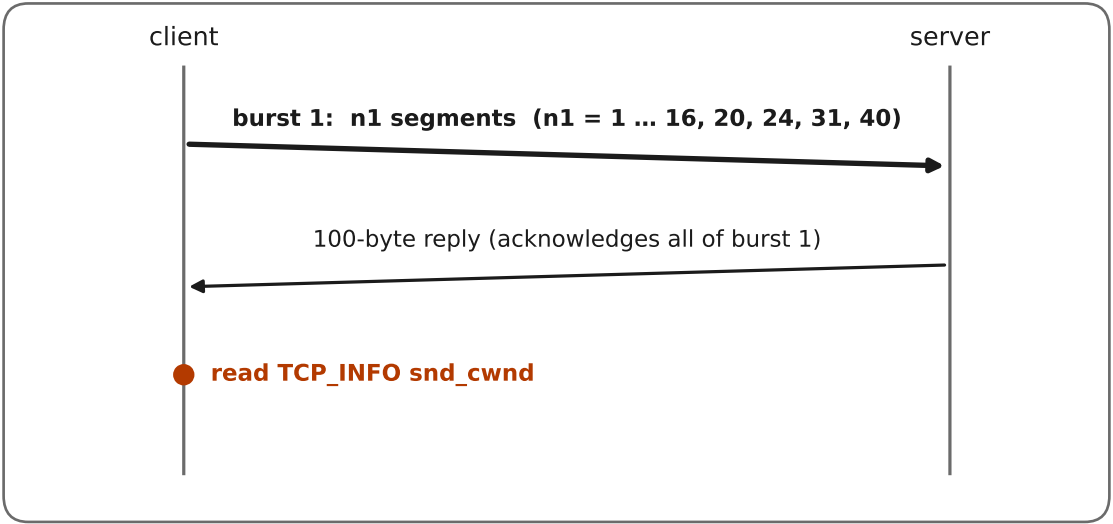
client
server
burst 1: n1 segments (n1 = 1 … 16, 20, 24, 31, 40)
100-byte reply (acknowledges all of burst 1)
read TCP_INFO snd_cwnd