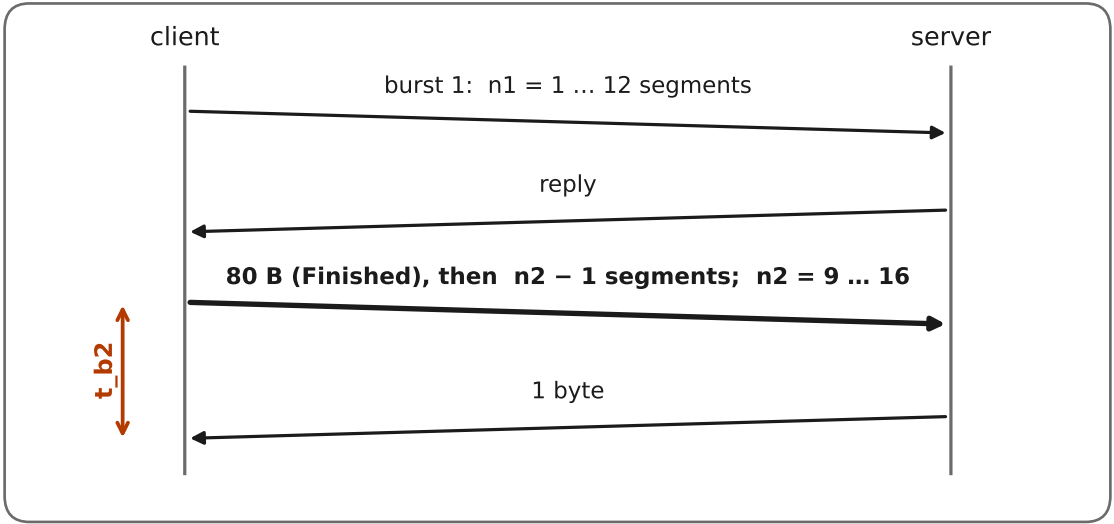
client
server
burst 1: n1 = 1 … 12 segments
reply
80 B (Finished), then n2 − 1 segments; n2 = 9 … 16
t_b2
1 byte