



ĐẠI HỌC ĐÀ NẴNG  
TRƯỜNG ĐẠI HỌC CÔNG NGHỆ THÔNG TIN VÀ TRUYỀN THÔNG VIỆT - HÀN  
Vietnam - Korea University of Information and Communication Technology

# SYSTEMS ANALYSIS AND DESIGN

**Lecturers:** Nguyen Thanh Binh – Nguyen Quang Vu – Le Viet Truong – Le Thi Bich Tra – Vo Van Luong – Nguyen Thi Hanh

**Faculty of Computer Science**

**Vietnam - Korea University of Information and Communication Technology (VKU)**

<http://vku.udn.vn/>



# Chapter 1.


## Introduction to object-oriented concepts

---

- Functional approach
- Object-oriented approach
- Object-oriented concepts
  - Objects
  - Classes
  - Encapsulation
  - Inheritance
  - Polymorphism
  - Abstraction

# Functional/procedural approach

- Based on specified functions of the system
  - A system consists of several functions
- Decomposition of functions into sub-functions
  - A system consists of sub-systems
  - A sub-system is divided into smaller subsystems

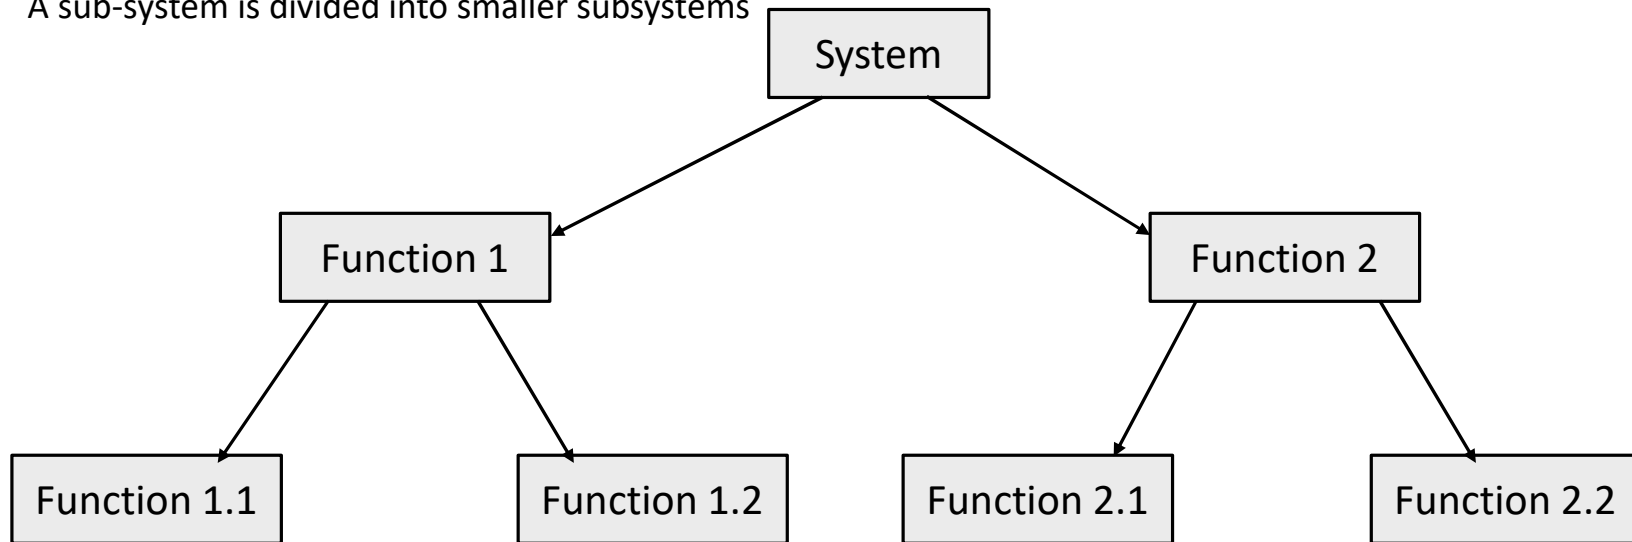

- Functions communicate using shared data or transfer of parameters




## Functional approach

- Advantages
  - Easy to apply
  - Work well when data are simple
  - Help to reduce complexity
  - Obtain expected results
- Disadvantages
  - Functions are separated from data
  - Structure of the system is defined based on the functions, therefore a change of functions will cause difficulties in change of the structure
  - The system is weakly open
  - Difficult to re-use
  - An significant maintainant cost

## Object-oriented approaches

- The solution of a problem is organized around the concept of objects
- The object is an abstraction of data also containing functions
- A system consists of objects and relationships between them
- Objects communicated by exchanging messages to perform a task
- No global variables
- Encapsulation
- Inheritance

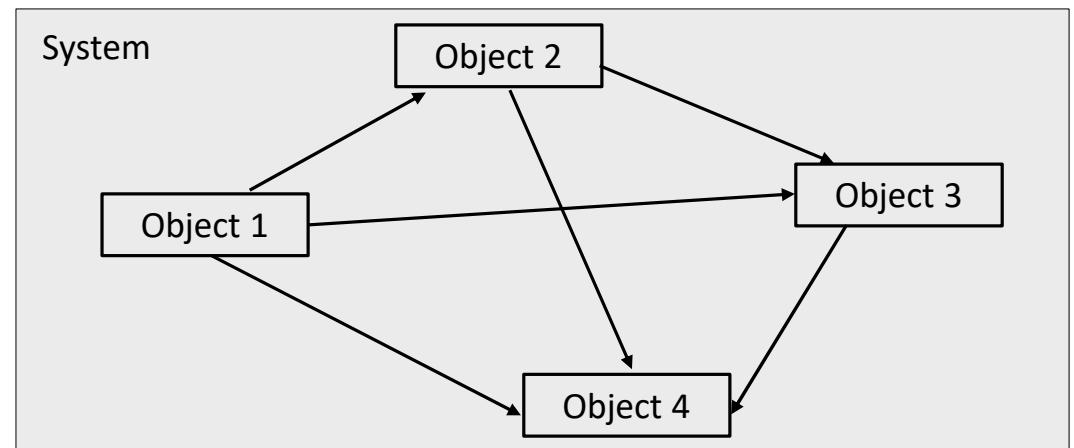



## Object-oriented approaches

- Advantages
  - Very close to the real world
  - Easy to reuse
  - Hide information (encapsulation)
  - Lower development cost (inheritance)
  - Suitable for complex systems
- Functional approach v.s. object-oriented approach
  - Functional approach
    - System = algorithms + data structures
  - Object-oriented approaches
    - System =  $\Sigma$  objects
    - Object = algorithms + data structures


## Objects

- Object is the concept describing an entity in the real world
- There are relationships between the objects
- Example
  - The Student “Michael” is an object
  - The Student can’t be an object !
- Object = state + behavior + identity
  - State (data) describes the characteristics of an object at a given time, and is saved in the variables
  - The behavior is expressed by the functions of the object
  - Each object has a unique identity

- Example

<u>aRectangle</u>
length = 2
width = 4
origin = aPoint
area()

<u>aPoint</u>
x = 0
y = 0
move()





## Objects

- State = Set of attributes
  - An attribute describes one property of the object
  - At every moment, an attribute has a value in a specific set of attributes area
  - Example
    - The car has properties: color, length, width, weight, number of kilometers, ...
    - A Renault 207 weighs 1300 pounds, it is red, ...
- Behavior = Set of functions
  - A function/method is the ability of the object to perform a task
- The behavior depends on state
  - Example: A car can start the engine then run, ...






## Objects


- Links

- Between objects, there may be links
- Example



- Communication between objects

- Send messages




- Message types

- constructor
- destructor
- getter
- setter
- others

## Classes

- A class is an abstract description of a set of objects having
  - similar properties
  - common behaviour
  - common relationship with other objects
- Class is an abstraction
  - Abstraction: search for common aspects and omit the differences

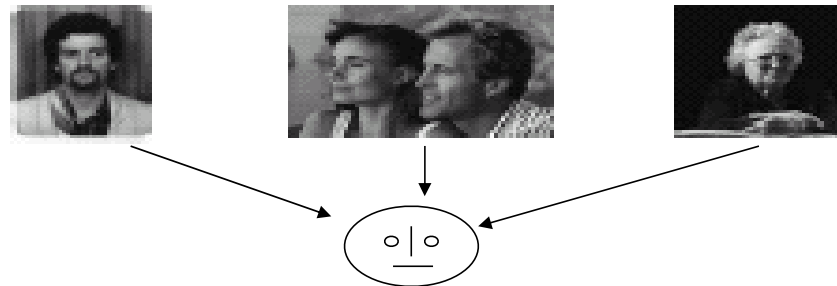


- Reduce the complexity



## Class


- Relationship
  - There may be relationship between classes
  - A relationship between classes is the set of links between their objects



- Class/Object
  - An object is an instance of a class
  - A value is an instance of an attribute
  - A link between objects is an instance of the relationship between classes

## Classes

- Example: Class / Object

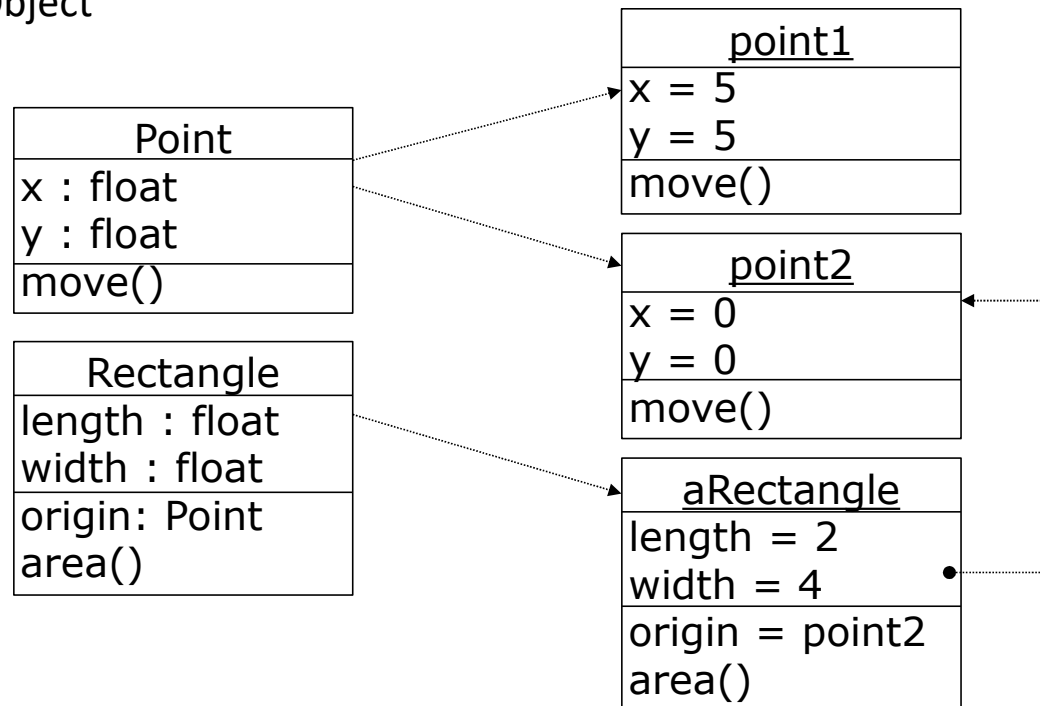



## Encapsulation

- Data + Processing of data = Object
- Attributes + Methods = Class

<b>Class</b>
attributes
methods

- The state of object is encapsulated by a set of attributes
- The behaviour is encapsulated by a set of methods
  - Users of an object know the messages that the object can receive (public methods)
  - The implementations of methods are hidden from external users




## Encapsulation

- Advantages
  - Hide the information
  - Restrict access to the information from the exterior
  - Avoid the global changes in the whole system: the internal implementation can be modified without affecting the external users
  - Facilitate the modularity
  - Easy to reuse
  - Easy to maintain

## Inheritance


- Inheritance allows the reuse of the state and the behaviour of a class by other classes
- A class is derived from one or more classes by sharing attributes and methods
- Subclass inherits attributes and methods of parent-class
- Generalisation / Specialisation
  - Generalisation: common attributes of sub-classes are used to construct the parent-class
  - Specialisation: sub-classes are constructed from the parent-class by adding other attributes that are unique to them

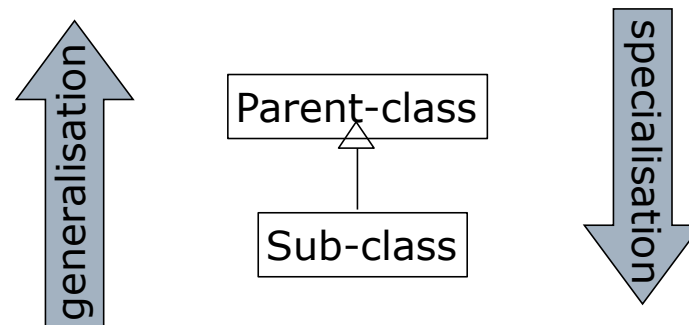

# Inheritance

- **Single inheritance:** a sub-class inherits from only one parent-class
- **Multiple inheritance:** a sub-class inherits from multiple parent-classes

- Example : a tree of inheritance

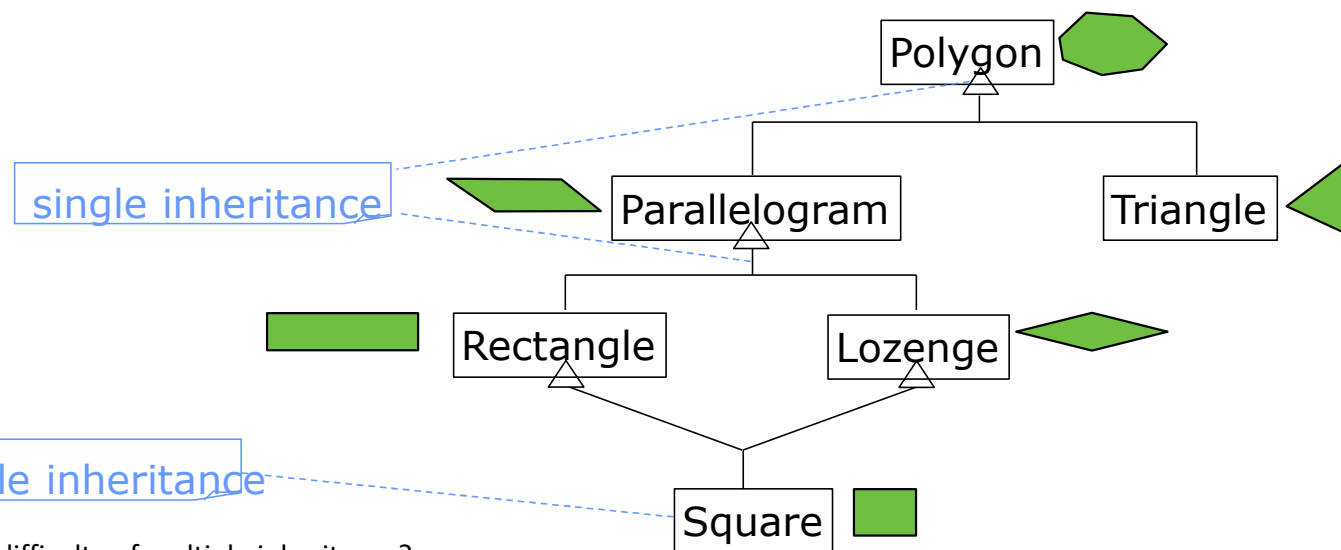


- What is the difficulty of multiple inheritance?



# Inheritance



- Advantages

- Organization of classes
  - classes are organized hierarchically
  - facilitation of the management of classes
- Construction of classes
  - sub-classes are constructed from parent-classes
- Reduction of development cost by avoiding to re-write the code
- Allowing to apply easily the technique of *polymorphism*

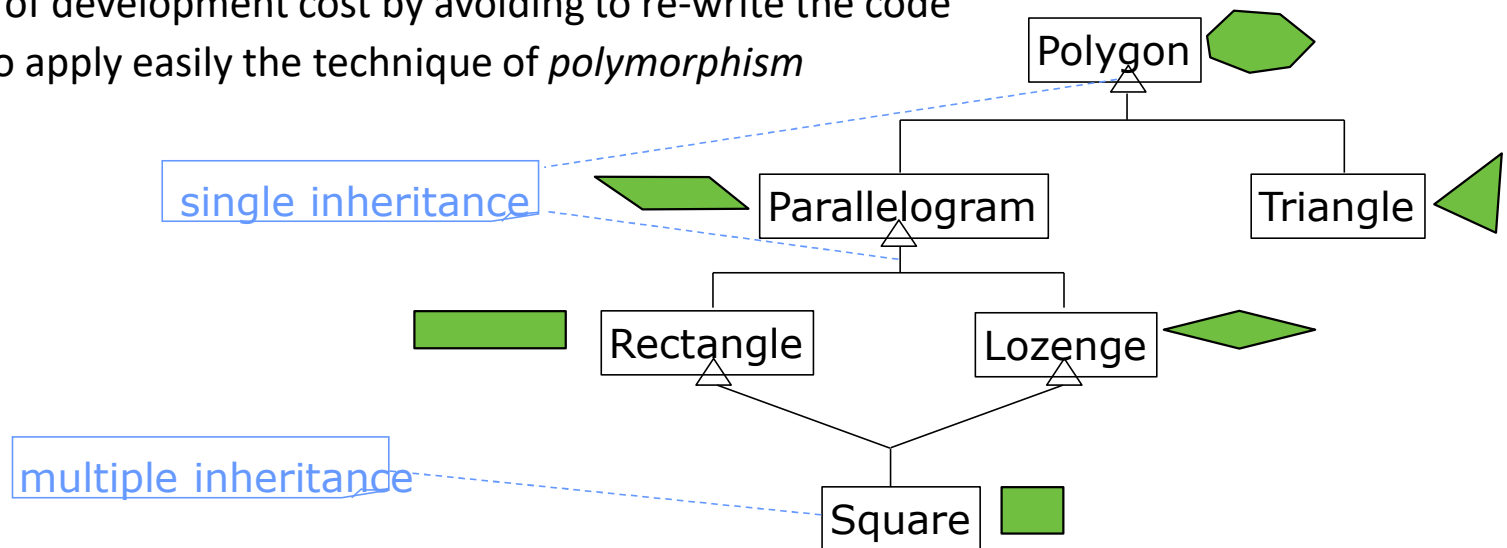


# Polymorphism

- Polymorphism of methods
  - Different methods are capable of answering to a request
  - Methods having the same name are defined differently (different behaviours) in different classes
  - Sub-classes inherit the specification of methods from parent-class and these methods can be re-defined appropriately
  - Reducing the use of conditional statements (e.g., if-else, switch)
- Procedural approach *versus* Object-oriented approach

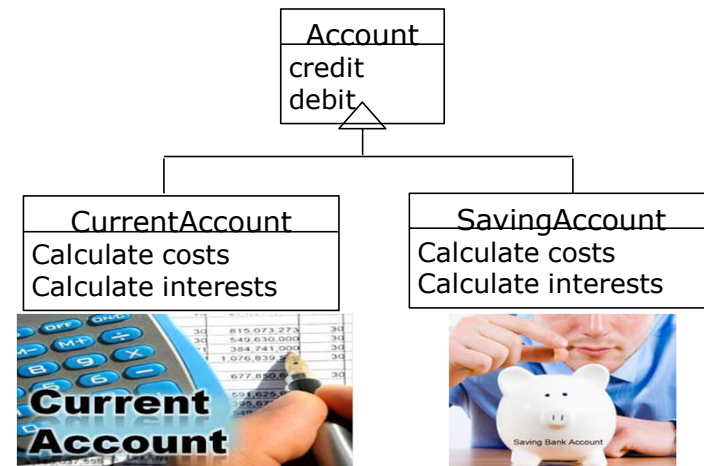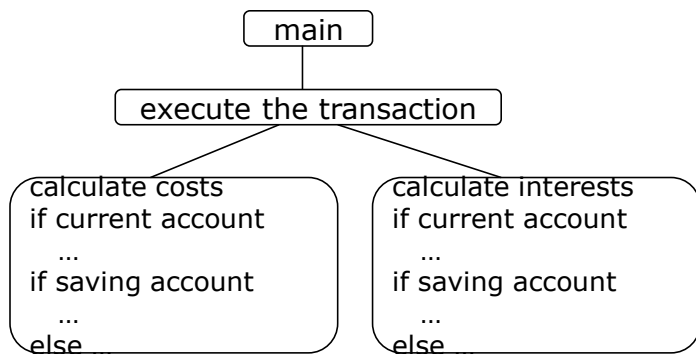

## Polymorphism: dynamic linking

- The method to be executed by an object depends on the class of the object: dynamic linking
- The dynamic linking is necessary when
  - A variable refers to an object whose class of membership is part of an inheritance tree
  - Several methods exist for the same message (name) in the inheritance tree (polymorphism)

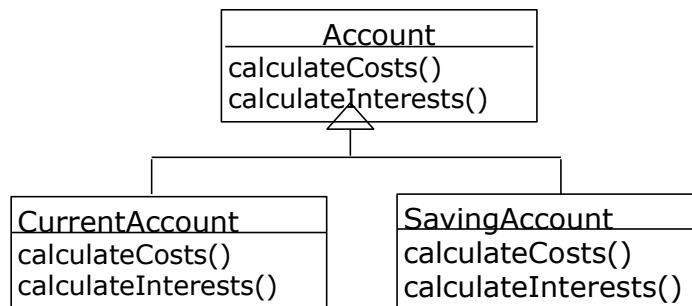

```


int calculateCost(Account accounts)
{
    int s = 0;
    for (int i = 0; i < accounts.length; i++)
        s = s + accounts[i]->calculateCosts();
    return s;
}
    
```

```

void main()
{
    Account accounts = new Account[2];
    accounts[0] = new CurrentAccount();
    accounts[1] = new SavingAccount();
    int s = calculateCost(accounts);
    ...
}
    
```


## Abstraction: abstract class

- An abstract class
  - indicates the common characteristics of the sub-classes
  - can't have instances/objects
- A concrete class
  - contains a complete characterization of real-world objects
  - is expected to have instances/objects

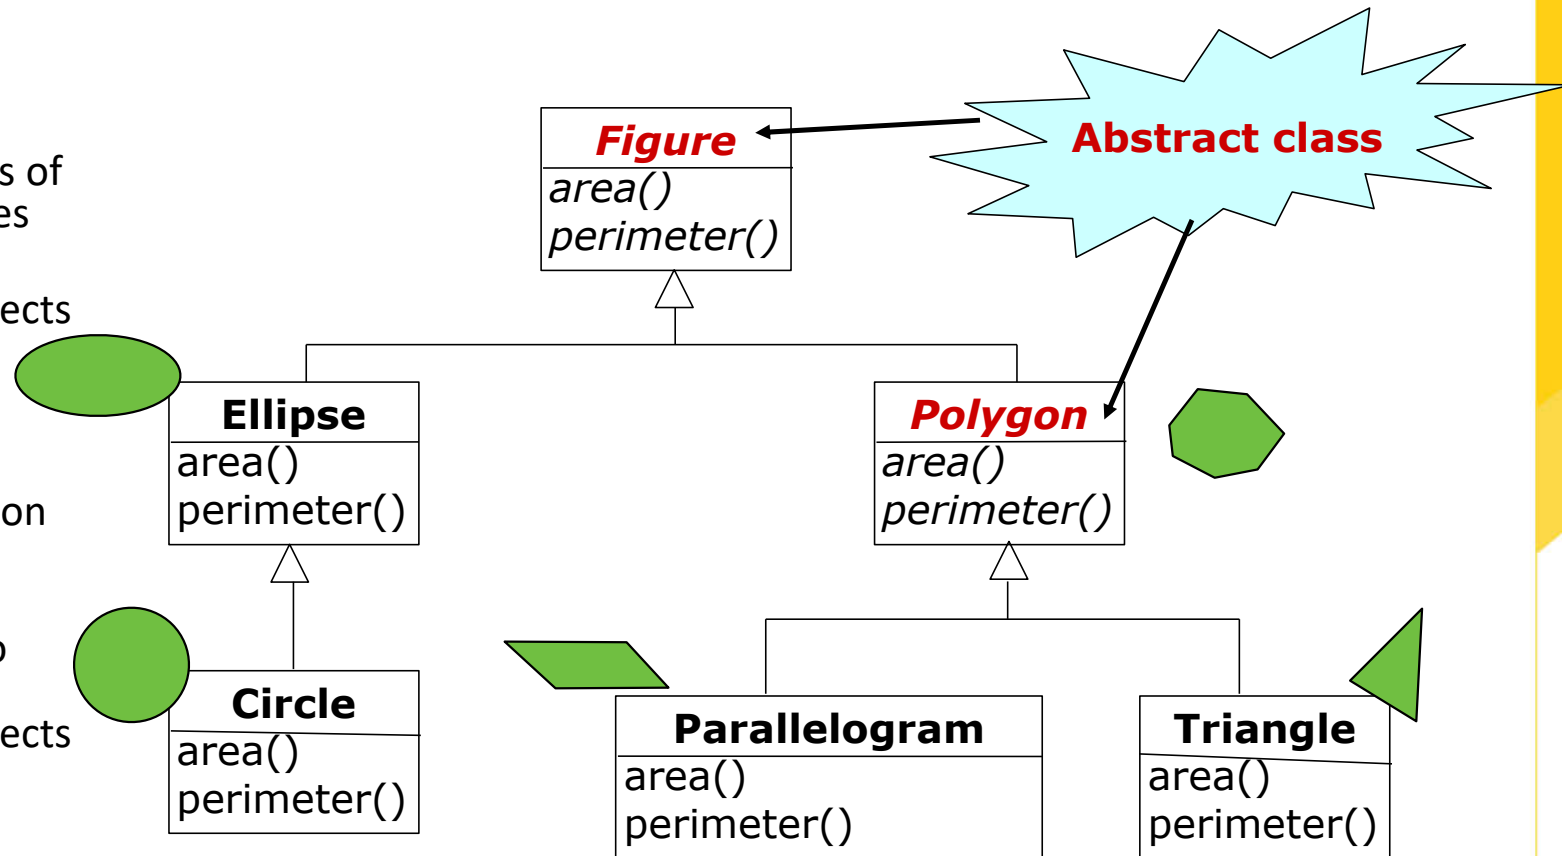

## Abstraction: abstract method

- A method should be defined at the highest possible abstraction level
  - At this level, the method can be abstract (i.e., no implementation)
  - In this case, the class is also abstract
  - If a class has an abstract method, at least one of its subclasses must implement this method
- All the methods of a class at the bottom of the inheritance tree must be concrete

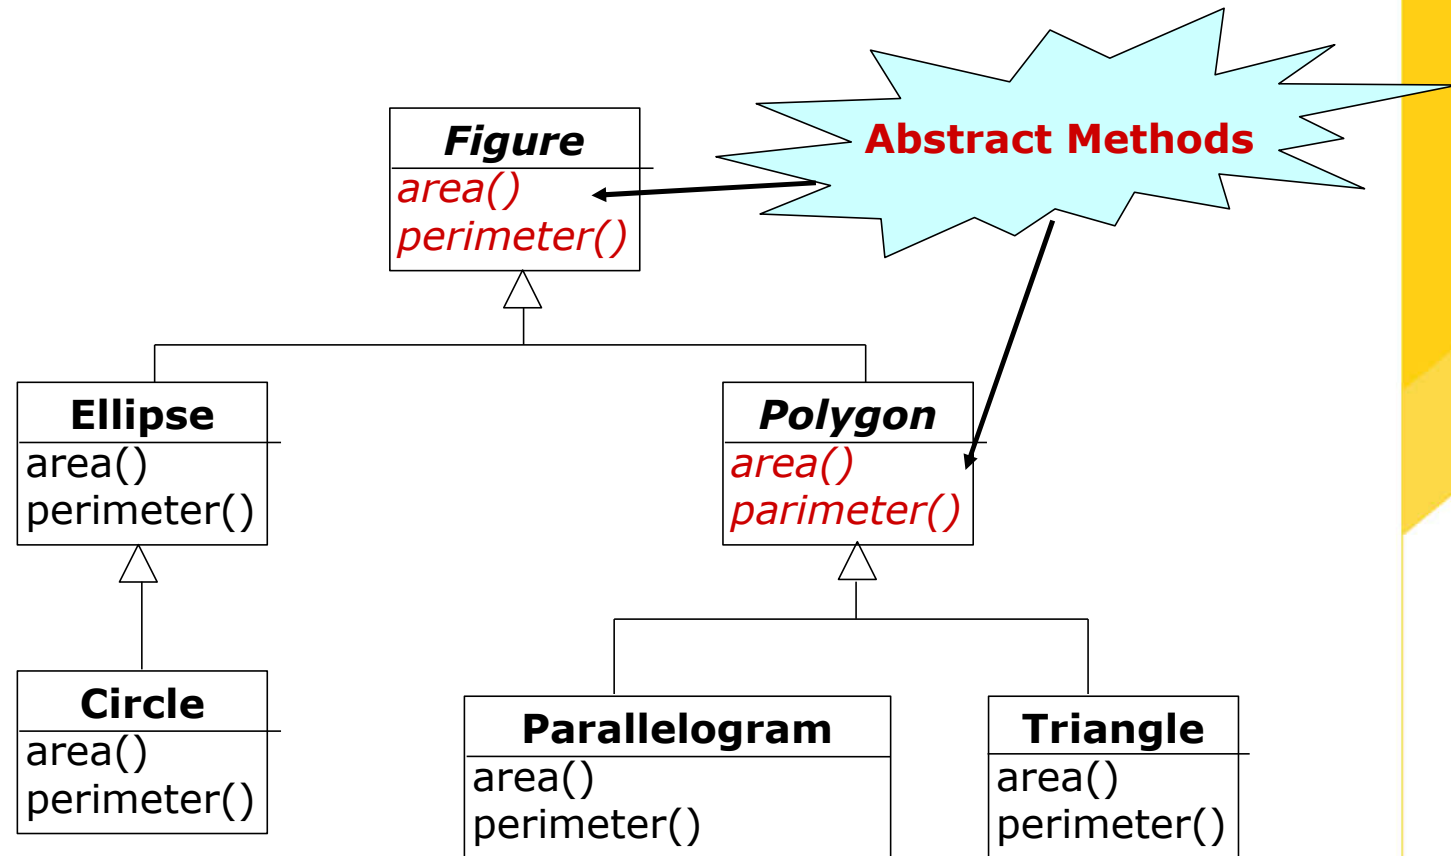



# Chapter 1.

## Introduction to object-oriented concepts

---

