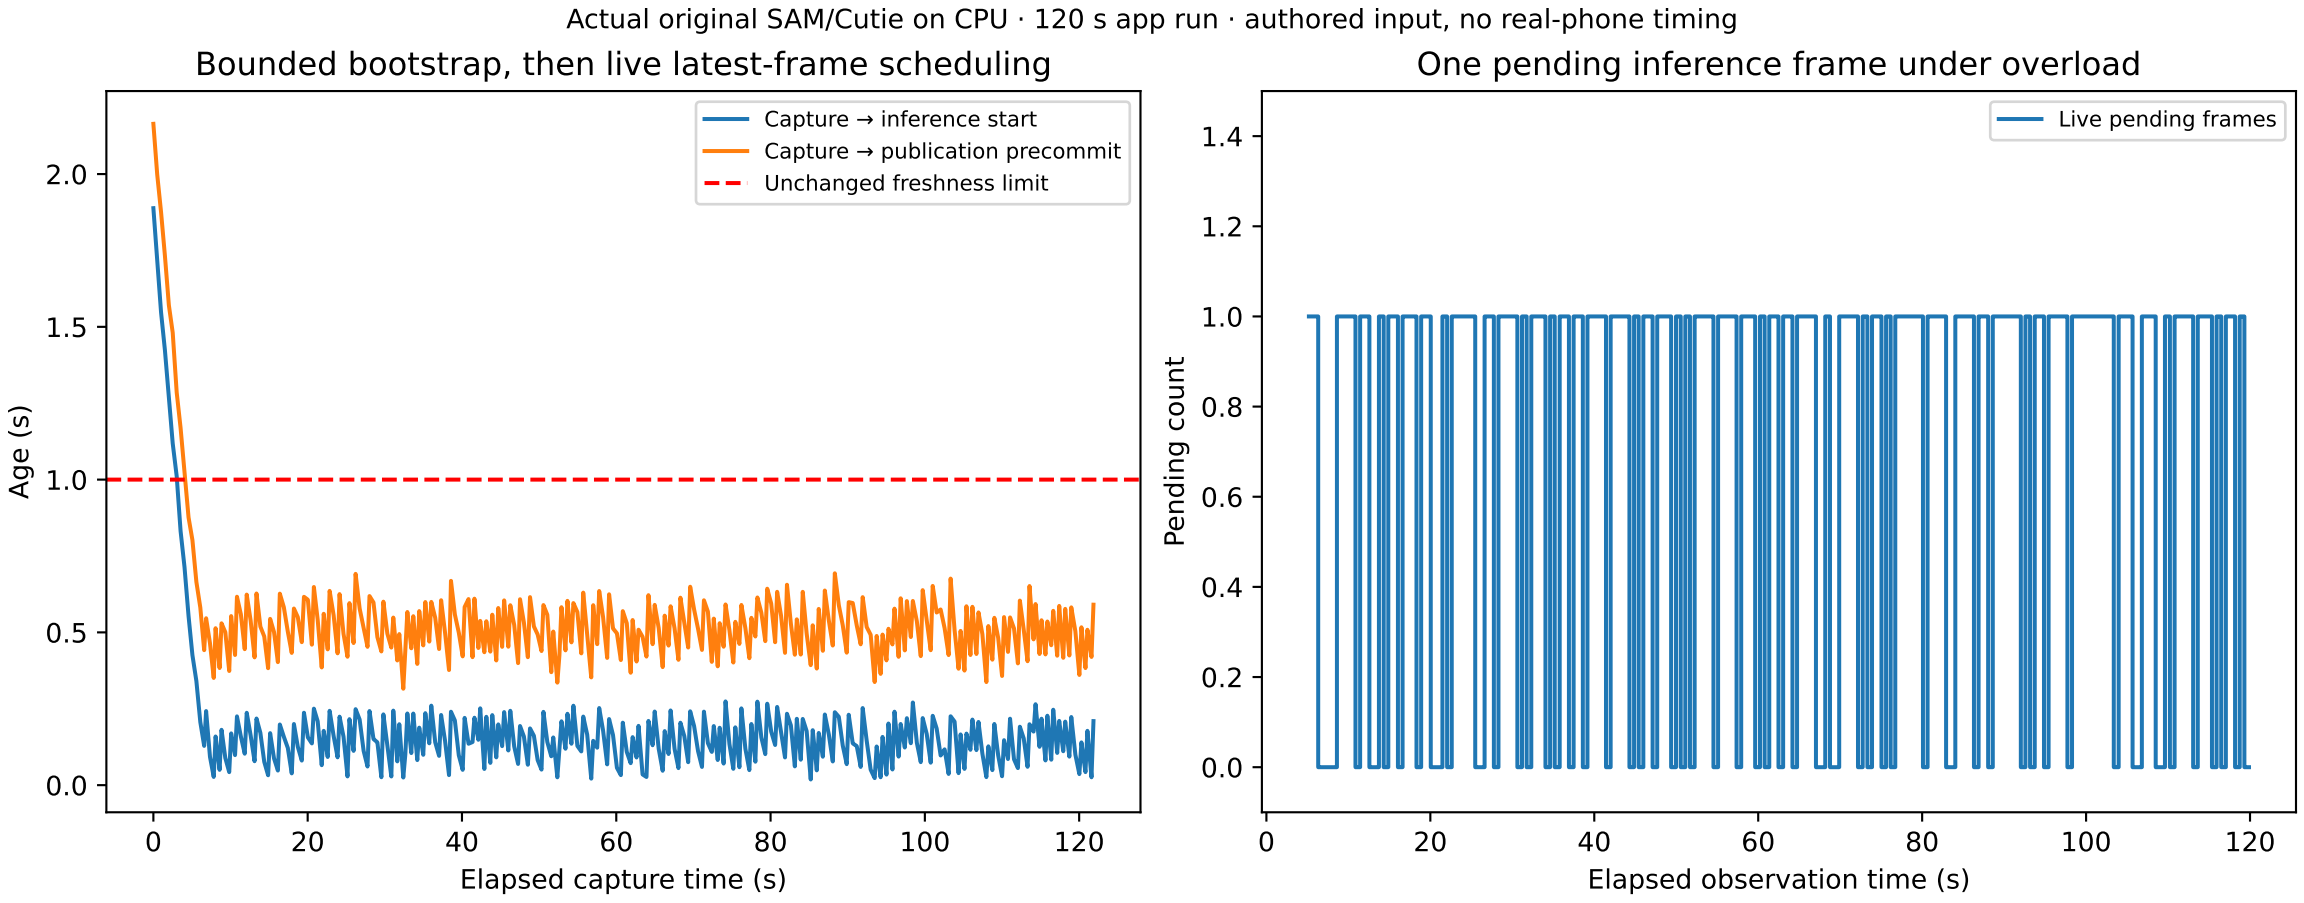

Actual original SAM/Cutie on CPU · 120 s app run · authored input, no real-phone timing
Bounded bootstrap, then live latest-frame scheduling
Capture → inference start
Capture → publication precommit
Unchanged freshness limit
Age (s)
Elapsed capture time (s)
One pending inference frame under overload
Live pending frames
Pending count
Elapsed observation time (s)

Authored renderer source; genuine upstream model masks

