


Bài tập 1.1:

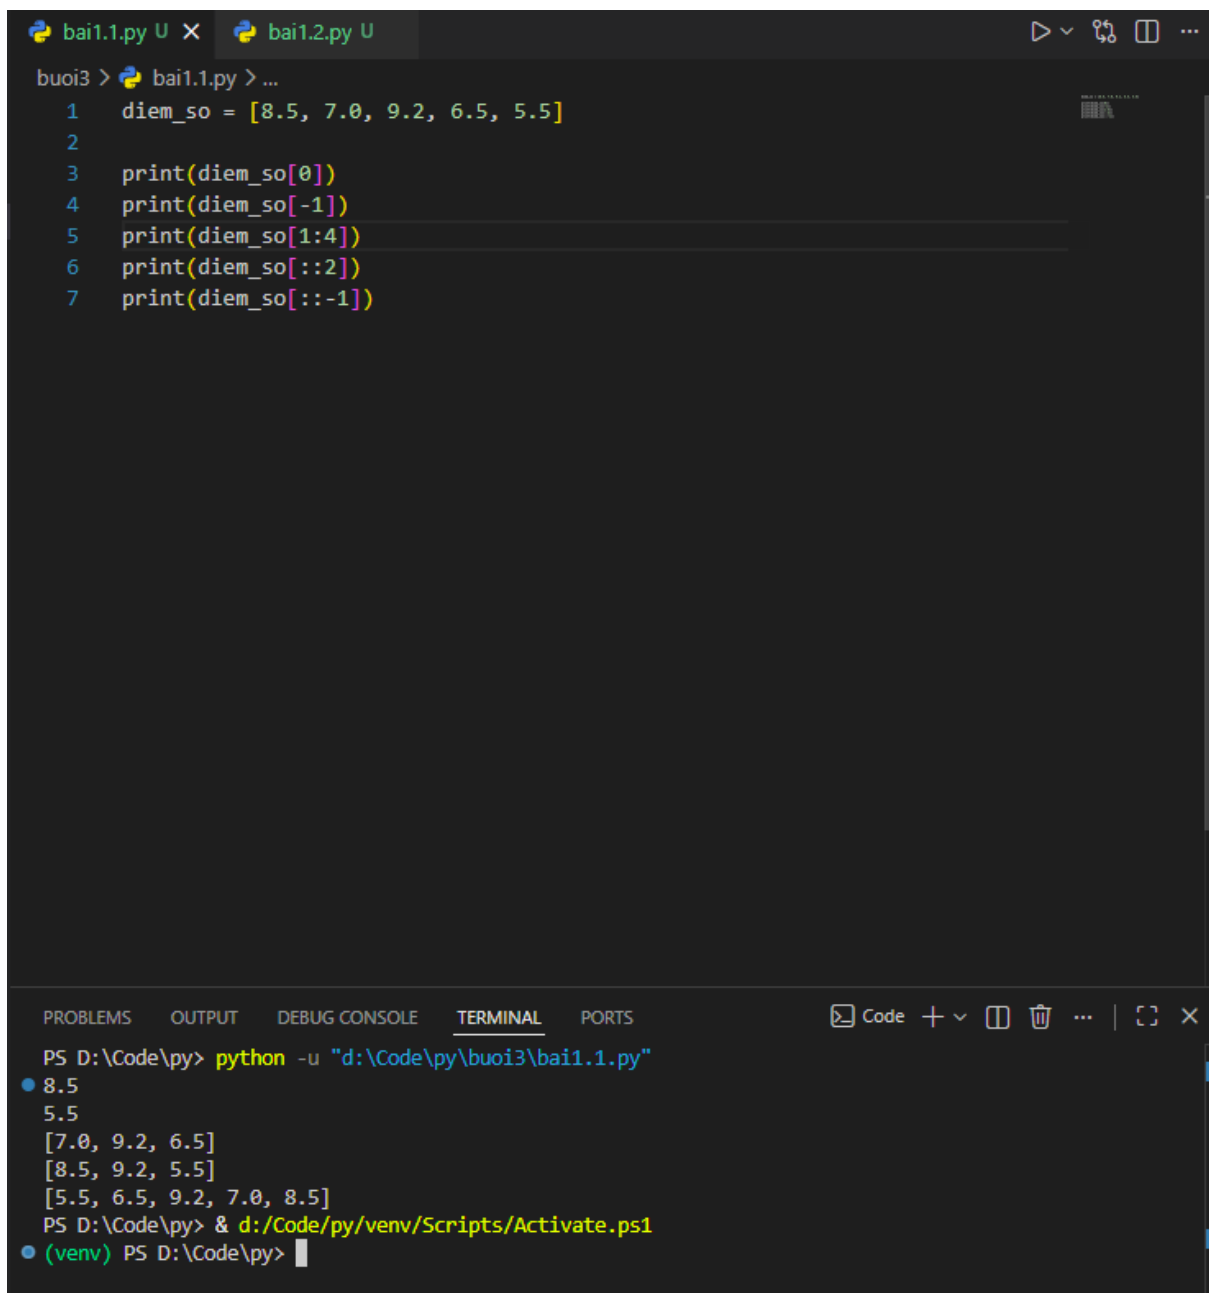

The image shows a Visual Studio Code editor window with two tabs: `bai1.1.py` and `bai1.2.py`. The `bai1.1.py` tab is active, displaying a Python script. Below the editor is a terminal window showing the execution of the script.

```
bai1.1.py
1 diem_so = [8.5, 7.0, 9.2, 6.5, 5.5]
2
3 print(diem_so[0])
4 print(diem_so[-1])
5 print(diem_so[1:4])
6 print(diem_so[::-2])
7 print(diem_so[::-1])
```

The terminal output shows the results of the script execution:

```
PS D:\Code\py> python -u "d:\Code\py\bui3\bai1.1.py"
8.5
5.5
[7.0, 9.2, 6.5]
[8.5, 9.2, 5.5]
[5.5, 6.5, 9.2, 7.0, 8.5]
PS D:\Code\py> & d:/Code/py/venv/Scripts/Activate.ps1
(venv) PS D:\Code\py>
```

Bài tập 1.2:

```
bai1.2.py U X
buoi3 > bai1.2.py > ...
1  ten_sv = ["An", "Binh", "Chi"]
2  ten_sv.append("Dung")
3  ten_sv.insert(1, "Em")
4  print(ten_sv)
5
6  ten_sv.remove("Chi")
7  pop_ra = ten_sv.pop()
8  print(ten_sv, " - da xoa: ", pop_ra)
9
10 ten_sv.sort()
11 print(ten_sv)
12 ten_sv.reverse()
13 print(ten_sv)
14
15 ten_sv.extend(["Giang ", "Hoa"])
16 print(ten_sv)

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS D:\Code\py> python -u "d:\Code\py\buoi3\bai1.2.py"
• ['An', 'Em', 'Binh', 'Chi', 'Dung']
['An', 'Em', 'Binh'] - da xoa: Dung
['An', 'Binh', 'Em']
['Em', 'Binh', 'An']
['Em', 'Binh', 'An', 'Giang ', 'Hoa']
PS D:\Code\py> & d:/Code/py/venv/Scripts/Activate.ps1
• (venv) PS D:\Code\py>
```

- remove không trả về giá trị, chỉ thực hiện xóa
- pop() có trả về giá trị và vị trí vừa xóa

Bài tập 2.1:

```
buoi3 > bai2.1.py > ...
1 diem_so = [8.5, 7.0, 9.2, 6.5, 5.5]
2 tong = 0
3 for diem in diem_so:
4     print(diem)
5     tong = tong + diem
6 print("Tong diem:", tong)
7 print("Diem trung binh:", round(tong / len(diem_so), 2))
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS D:\Code\py> python -u "d:\Code\py\buoi3\bai2.1.py"

- 8.5
- 7.0
- 9.2
- 6.5
- 5.5

Tong diem: 36.7
Diem trung binh: 7.34

PS D:\Code\py> & d:/Code/py/venv/Scripts/Activate.ps1

- (venv) PS D:\Code\py>

Bài tập 2.2:

```
Actions... > bai2.2.py > ...
1  ma_tran = [
2      [1, 2, 3],
3      [4, 5, 6],
4      [7, 8, 9]
5  ]
6
7  for hang in ma_tran:
8      print(hang)
9
10
11 for hang in ma_tran:
12     for phan_tu in hang:
13         print(phan_tu, end=" ")
14     print()
15
16 tong = 0
17 for hang in ma_tran:
18     for phan_tu in hang:
19         tong += phan_tu
20     print()
21
22 print("tong: ", tong)
23
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS D:\Code\py> python -u "d:\Code\py\buoi3\bai2.2.py"

• [1, 2, 3]
[4, 5, 6]
[7, 8, 9]
1 2 3
4 5 6
7 8 9

tong: 45
PS D:\Code\py> & d:/Code/py/venv/Scripts/Activate.ps1
• (venv) PS D:\Code\py>

Bài tập 3.1:

```
buoi3 > bai3.1.py > ...
1 day_so = list(range(1, 21)) |
2
3 so_chan = [x for x in day_so if x % 2 == 0]
4 so_le = [x for x in day_so if x % 2 != 0]
5
6 print("So chan:", so_chan)
7 print("So le:", so_le)
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS D:\Code\py> python -u "d:\Code\py\buoi3\bai3.1.py"

- So chan: [2, 4, 6, 8, 10, 12, 14, 16, 18, 20]
- So le: [1, 3, 5, 7, 9, 11, 13, 15, 17, 19]

PS D:\Code\py> & d:/Code/py/venv/Scripts/Activate.ps1

- (venv) PS D:\Code\py>

Bài tập 3.2:

buoi3 >  bai3.2.py > ...

```
1 diem_so = [8.5, 7.0, 9.2, 6.5, 5.5]
2 diem_cong = [round(diem + 0.5, 2) for diem in diem_so]
3 print(diem_cong)
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS D:\Code\py> python -u "d:\Code\py\buoi3\bai3.2.py"

• [9.0, 7.5, 9.7, 7.0, 6.0]

PS D:\Code\py> & d:/Code/py/venv/Scripts/Activate.ps1

• (venv) PS D:\Code\py> █