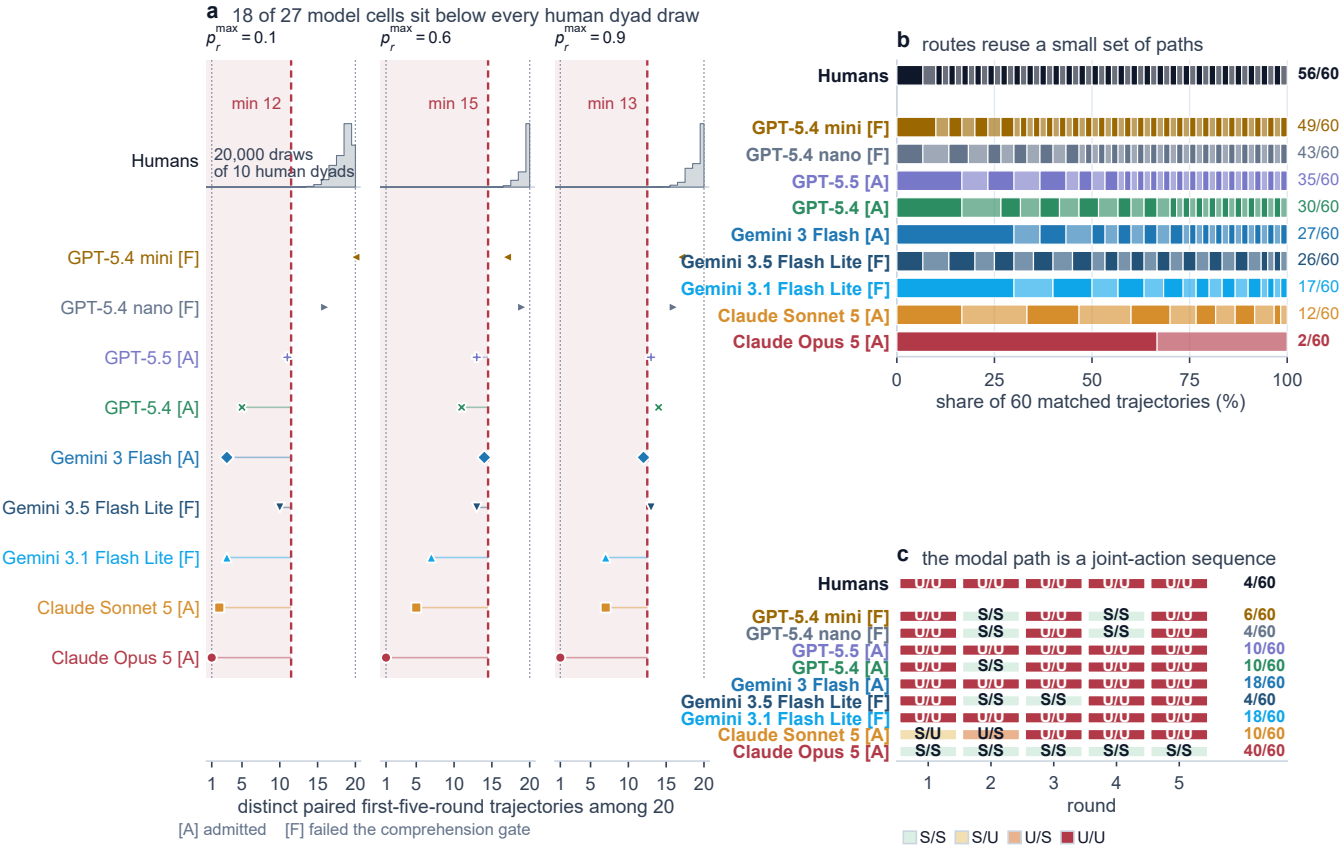

a
18 of 27 model cells sit below every human dyad draw
p_r^{max} = 0.1
p_r^{max} = 0.6
p_r^{max} = 0.9
min 12
min 15
min 13
Humans
20,000 draws
of 10 human dyads
GPT-5.4 mini [F]
GPT-5.4 nano [F]
GPT-5.5 [A]
GPT-5.4 [A]
Gemini 3 Flash [A]
Gemini 3.5 Flash Lite [F]
Gemini 3.1 Flash Lite [F]
Claude Sonnet 5 [A]
Claude Opus 5 [A]
1 5 10 15 20
distinct paired first-five-round trajectories among 20
[A] admitted [F] failed the comprehension gate
b
routes reuse a small set of paths
Humans 56/60
GPT-5.4 mini [F] 49/60
GPT-5.4 nano [F] 43/60
GPT-5.5 [A] 35/60
GPT-5.4 [A] 30/60
Gemini 3 Flash [A] 27/60
Gemini 3.5 Flash Lite [F] 26/60
Gemini 3.1 Flash Lite [F] 17/60
Claude Sonnet 5 [A] 12/60
Claude Opus 5 [A] 2/60
0 25 50 75 100
share of 60 matched trajectories (%)
c
the modal path is a joint-action sequence
Humans 4/60
GPT-5.4 mini [F] 6/60
GPT-5.4 nano [F] 4/60
GPT-5.5 [A] 10/60
GPT-5.4 [A] 10/60
Gemini 3 Flash [A] 18/60
Gemini 3.5 Flash Lite [F] 4/60
Gemini 3.1 Flash Lite [F] 18/60
Claude Sonnet 5 [A] 10/60
Claude Opus 5 [A] 40/60
1 2 3 4 5
round
S/S S/U U/S U/U