Trustable AI Course

Lesson 1

Trustable Overview

Powered By

Apache OpenServerless

Download

Install Docker Desktop

Windows (powershell)

```
irm n7s.co/get-trustable | irm
```

Mac/Linux

```
curl -sL n7s.co/get-trustable | bash
```

Installation & Access

Installation command

```
ops trustable setup
```

Access command

```
ops trustable signin
```

```
-bash
Opening http://trustable.miniops.me
Version: Trustable v0.3.2-alpha
Build: production_0.3.2-alpha_26.096.2128
Expiration: 2026/06/30
Trustable Doctor
────────────────────────────────────────────


# Prerequisites

  ✓ Docker in PATH: /usr/local/bin/docker
  ✓ Docker running: Docker daemon is responsive
  ✓ Docker internet: Can pull images and access internet
  ✓ Ollama container: Running
  ✓ Control plane container: Running

# Ports

  ✓ DNS miniops.me: resolves to 127.0.0.1
  ✓ DNS trustable.miniops.me: resolves to 127.0.0.1
  ✓ DNS opencode.miniops.me: resolves to 127.0.0.1
  ✓ DNS vite.miniops.me: resolves to 127.0.0.1
  ✓ Ollama HTTP: Ollama is running
  ✓ OpenWhisk API: OpenWhisk responding
  ✓ SSH port 2222: SSH-2.0-OpenSSH_9.2p1 Debian-2+deb12u7

# Kubernetes

  ✓ Node: nuvolaris-control-plane found
  ✓ Namespace: nuvolaris exists
  ✓ All pods status: All pods are Running or Completed

  Expected Running Pods

  ✓ Pod controller-0: controller-0 is Running
  ✓ Pod couchdb-0: couchdb-0 is Running
  ✓ Pod nuvolaris-etcd-0: nuvolaris-etcd-0 is Running
  ✓ Pod nuvolaris-mongodb-0: nuvolaris-mongodb-0 is Running
  ✓ Pod nuvolaris-operator-0: nuvolaris-operator-0 is Running
  ✓ Pod nuvolaris-postgres-1-0: nuvolaris-postgres-1-0 is Running
  ✓ Pod nuvolaris-static-0: nuvolaris-static-0 is Running
  ✓ Pod nuvolaris-streamer-api-0: nuvolaris-streamer-api-0 is Running
```

Signin

- Access the Ollama cloud
- Configure cloud models

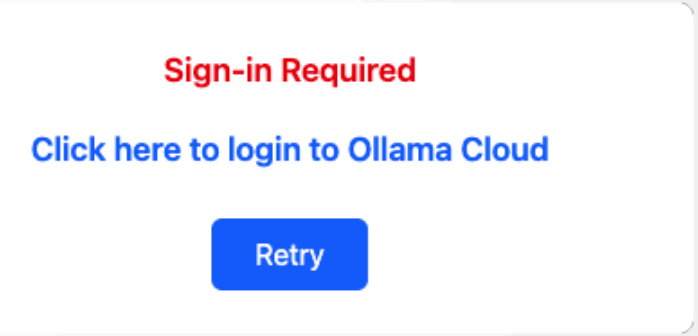

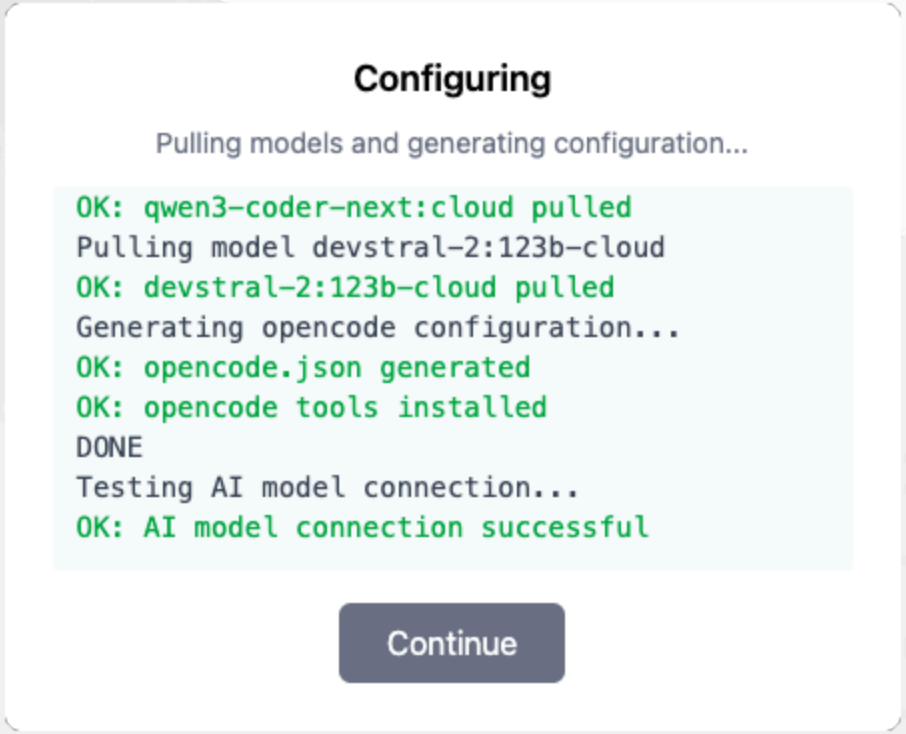

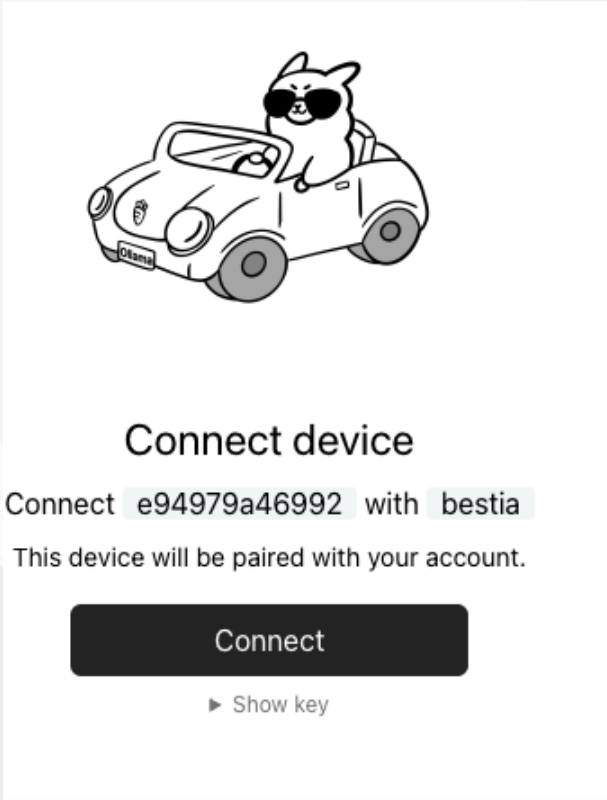

App Index

- Main Menu show lis of appis
- You can Configure and Add Apps
- You can Edit, set the Env, Push to Git and Publish the apps

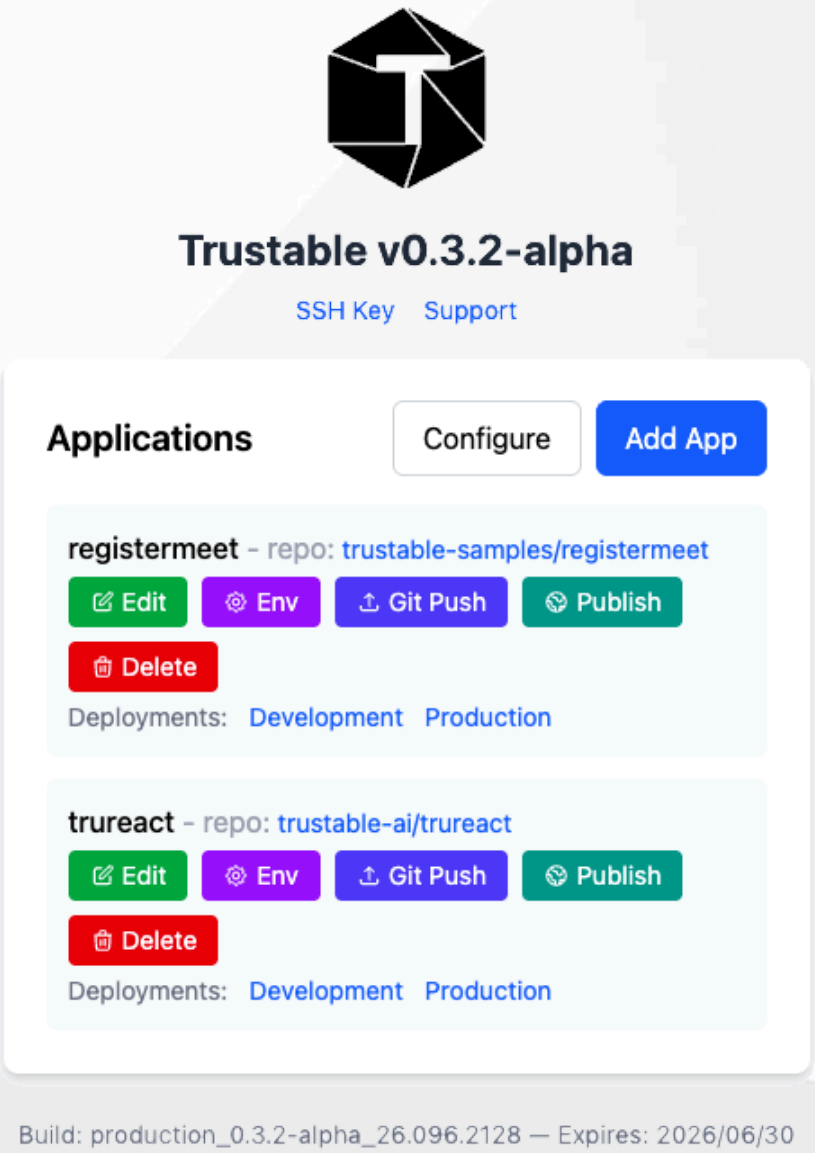

Global Configuration

- List and add models
- Choose your default coding and "small" model
  - small for titles, names
- Define your github identity

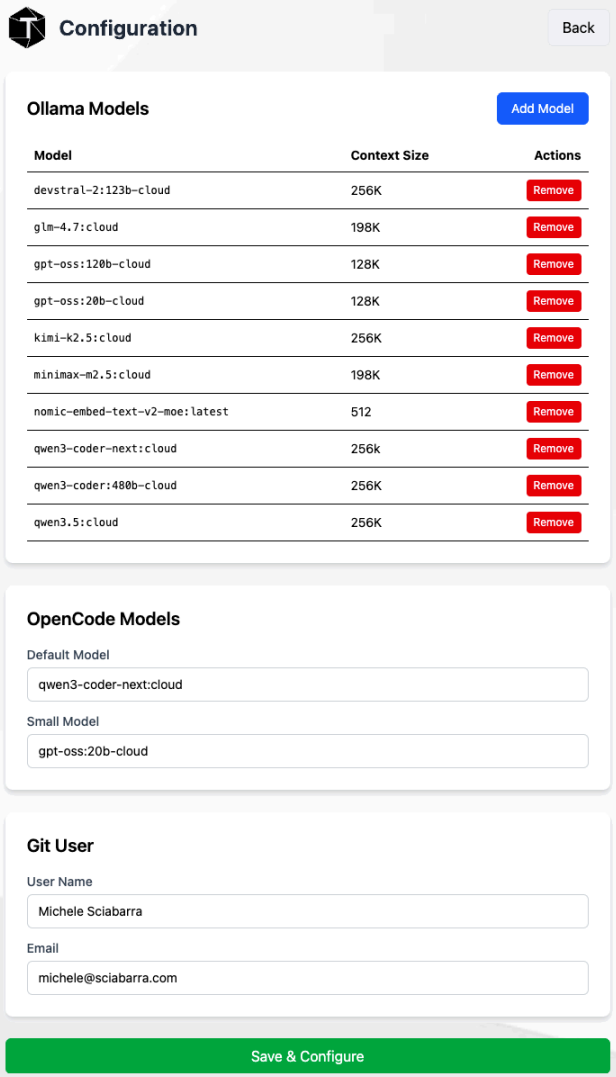

Add App

- Use the Starter
- Application Name and Password
- GitHub repo (add the key)

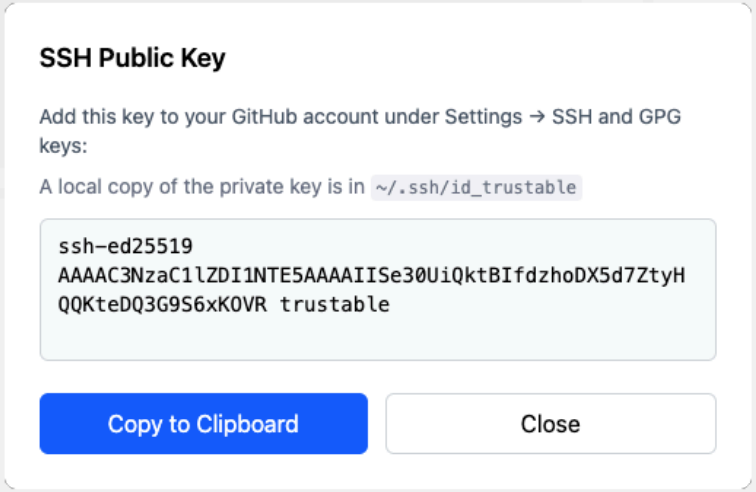

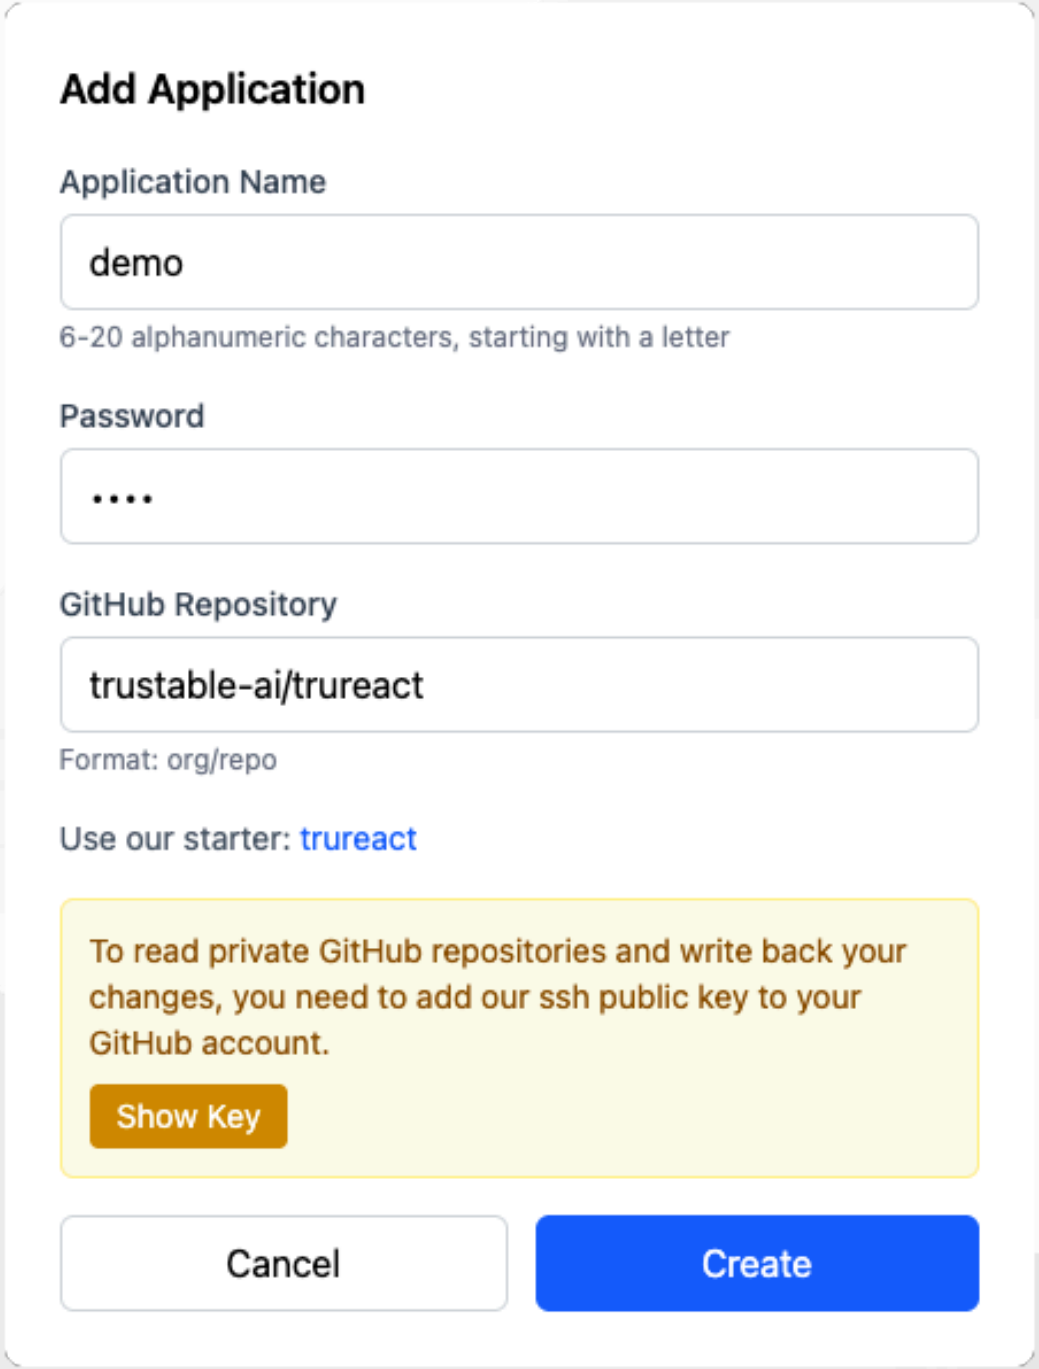

About Env vars

- Each app has **development** and **production** values
- `OPS_USER`, `OPS_PASSWORD` and `OPS_APIHOST` are fixed, you can define the values for publishing
- `OPS_REPO` is the repo where you save
- Other variables define the AI access
- You can (and must) add your own variables

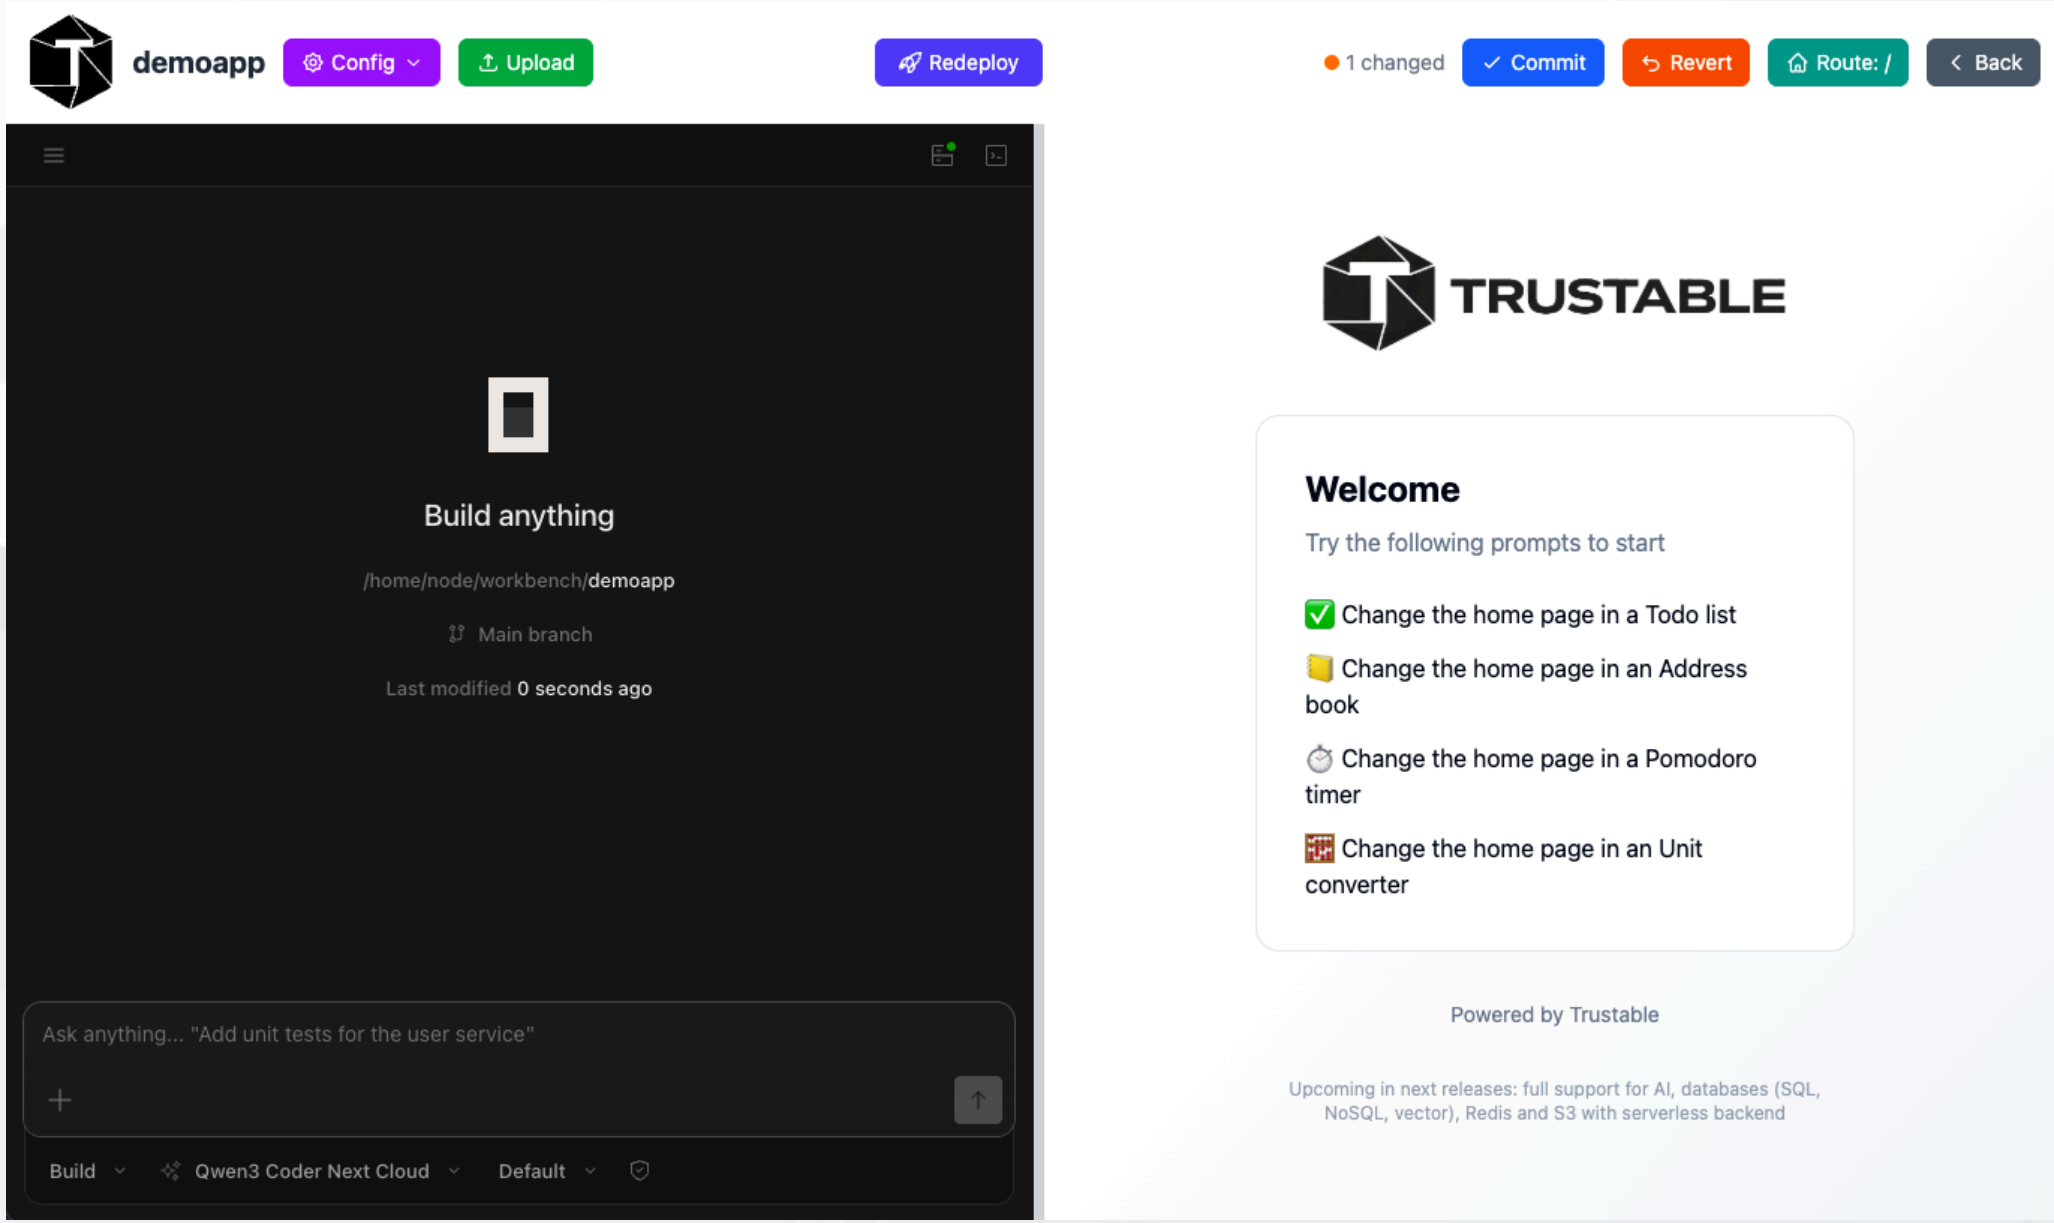
demoapp
Config
Upload
Redeploy
1 changed
Commit
Revert
Route: /
Back
Build anything
/home/node/workbench/demoapp
Main branch
Last modified 0 seconds ago
Ask anything... "Add unit tests for the user service"
Build
Qwen3 Coder Next Cloud
Default
TRUSTABLE
Welcome
Try the following prompts to start
Change the home page in a Todo list
Change the home page in an Address book
Change the home page in a Pomodoro timer
Change the home page in an Unit converter
Powered by Trustable
Upcoming in next releases: full support for AI, databases (SQL, NoSQL, vector), Redis and S3 with serverless backend

First Prompt

“ **change the home page in a todo list** ”

Once completed :

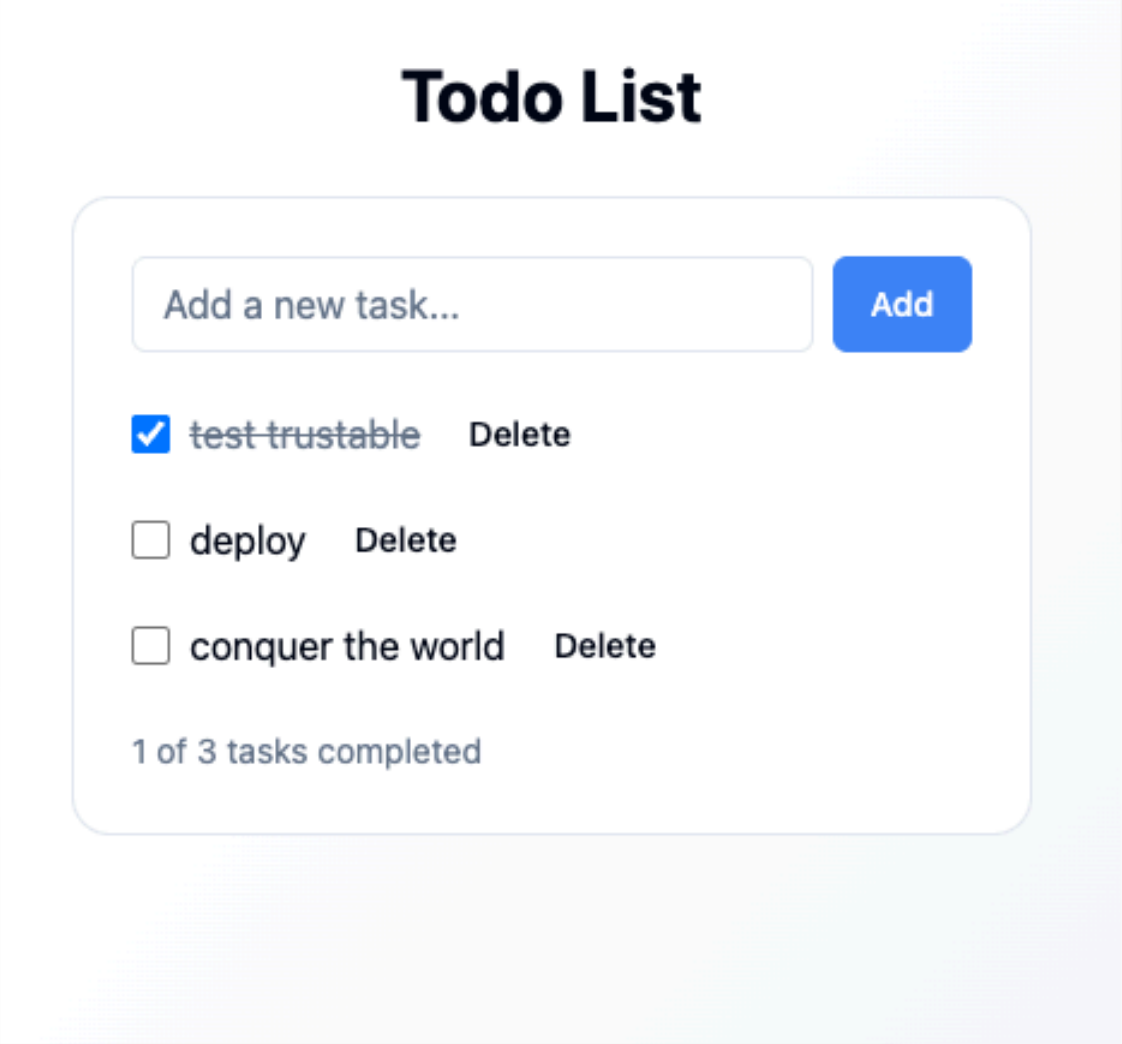

Routes

“ Add on the route `/pomodoro` a Pomodoro Timer ”

Route: /

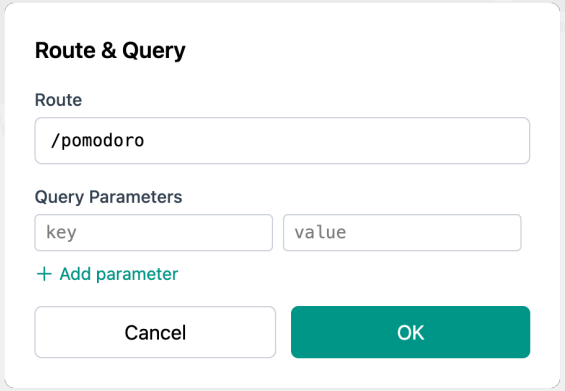

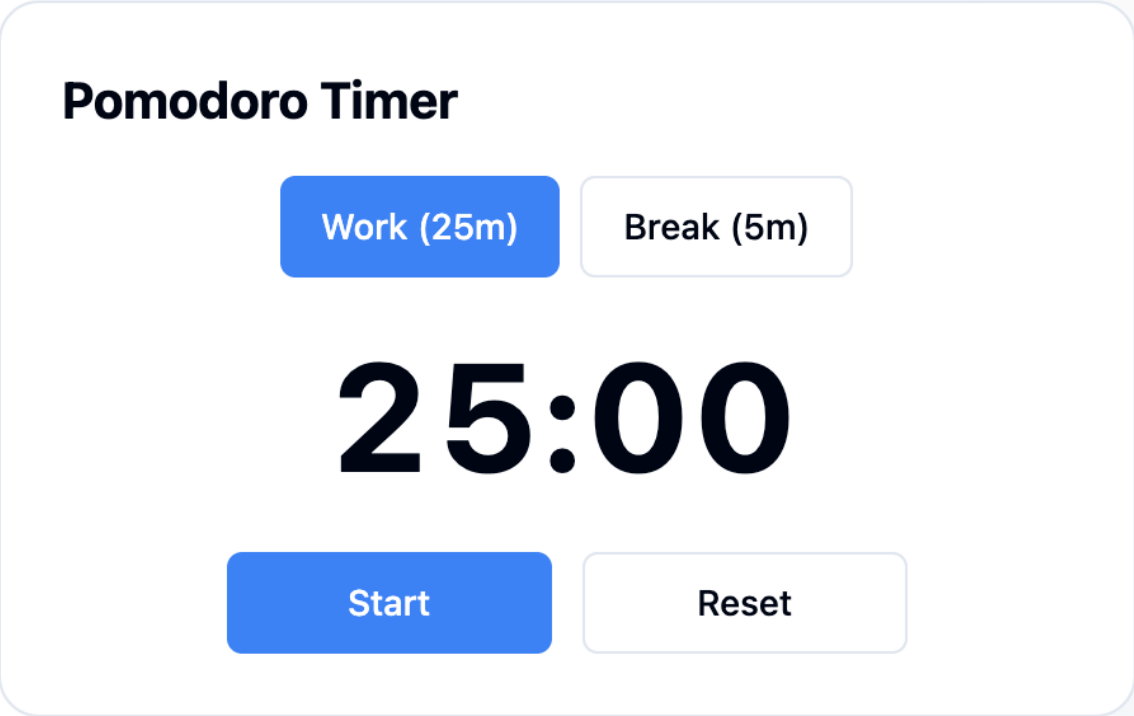

Memory

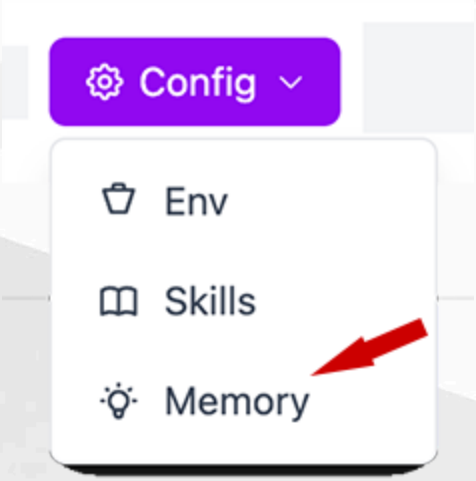

- execute `/init`

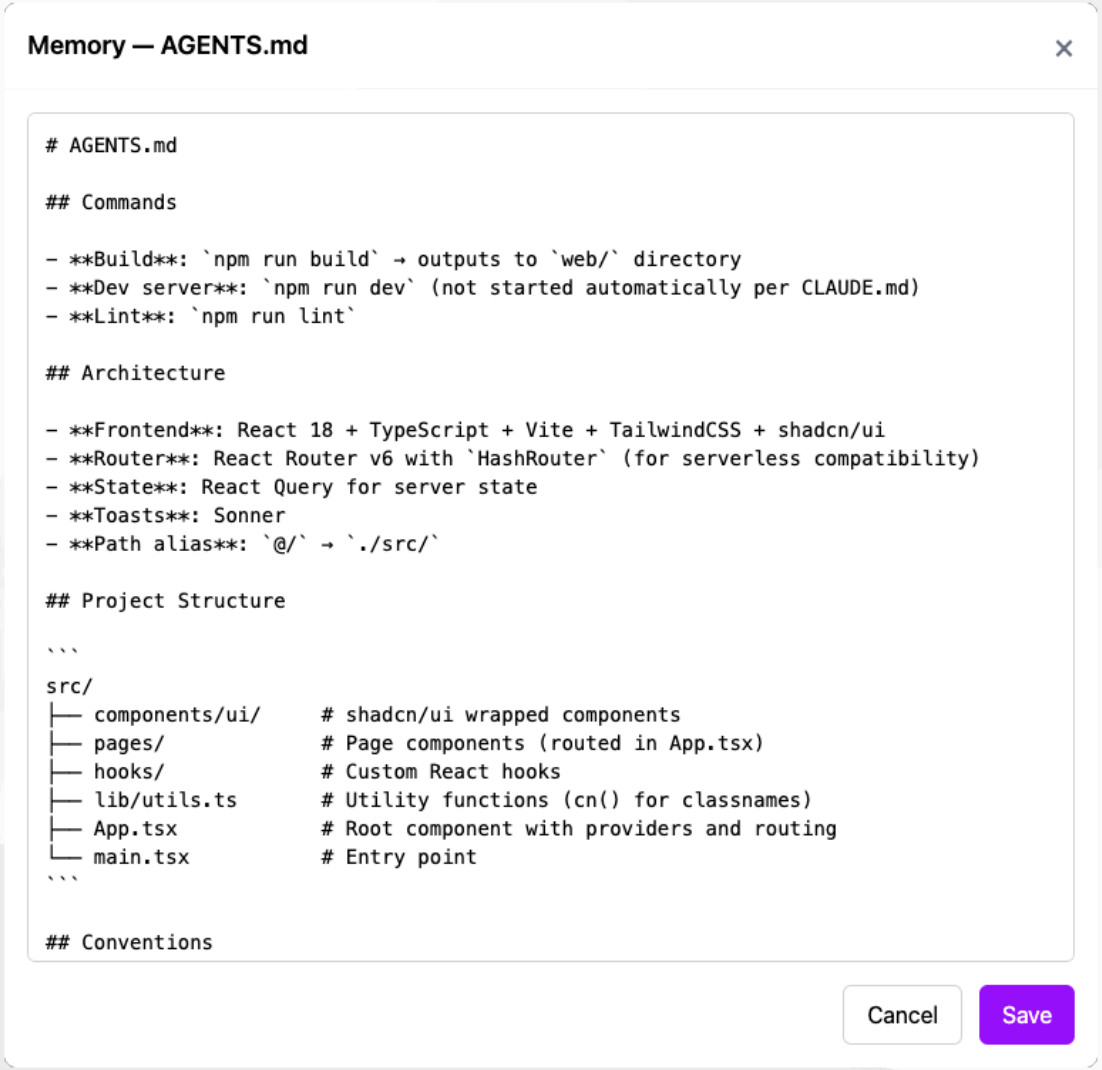

Skills

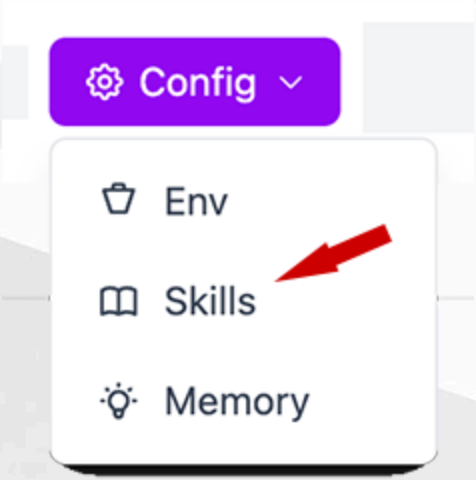

- set of informations
- updatable
- customizable

Skills

Source: trustable-ai/skills

Update Skills to Latest

Configure OPS_SKILLS in main window to use your own skill repo.

use-postgresql | use-redis | use-s3

description	how to connect and query a PostgreSQL database using psycopg
license	Apache 2.0
name	use-postgresql

To use PostgreSQL in an endpoint, first use the tool `add-postgresql` to add the connection to your endpoint. This makes `ctx.POSTGRESQL` available as a `psycopg` connection.

Running a query

Use `ctx.POSTGRESQL` to get the connection, then create a cursor and execute SQL:

```
def query_table(args, ctx=None):
    conn = ctx.POSTGRESQL
    cur = conn.cursor()
    try:
        cur.execute("SELECT * FROM my_table")
        rows = cur.fetchall()
        columns = [desc[0] for desc in cur.description]
        result = [dict(zip(columns, row)) for row in rows]
        return result
    finally:
        cur.close()
```

INSERT, UPDATE, DELETE

For write operations, remember to commit and check the affected row count:

```
def insert_row(args, ctx=None):
    conn = ctx.POSTGRESQL
```

Configure demoapp

Close

VARIABLE	Development	Production	Actions
OPS_USER	demoapp	demoapp	
OPS_PASSWORD	demoapp	XXXXXXXXXX	
OPS_APIHOST	http://miniops.me	https://nuvolaris.org	
OPS_REPO	trustable-ai/trureact	sciabarracom/demoapp	
OPS_SKILLS	trustable-ai/skills		
OPENAI_BASE_URL	http://localhost:11434/v1		
OPENAI_API_KEY	dummy		
OPENAI_CHAT_MODEL	gpt-oss:120b-cloud		
OPENAI_EMBEDDING_MODEL	nomic-embed-text-v2-moe:latest		

Add Variable

Commit

Close

Publish and Git Push

Git Push | Publish

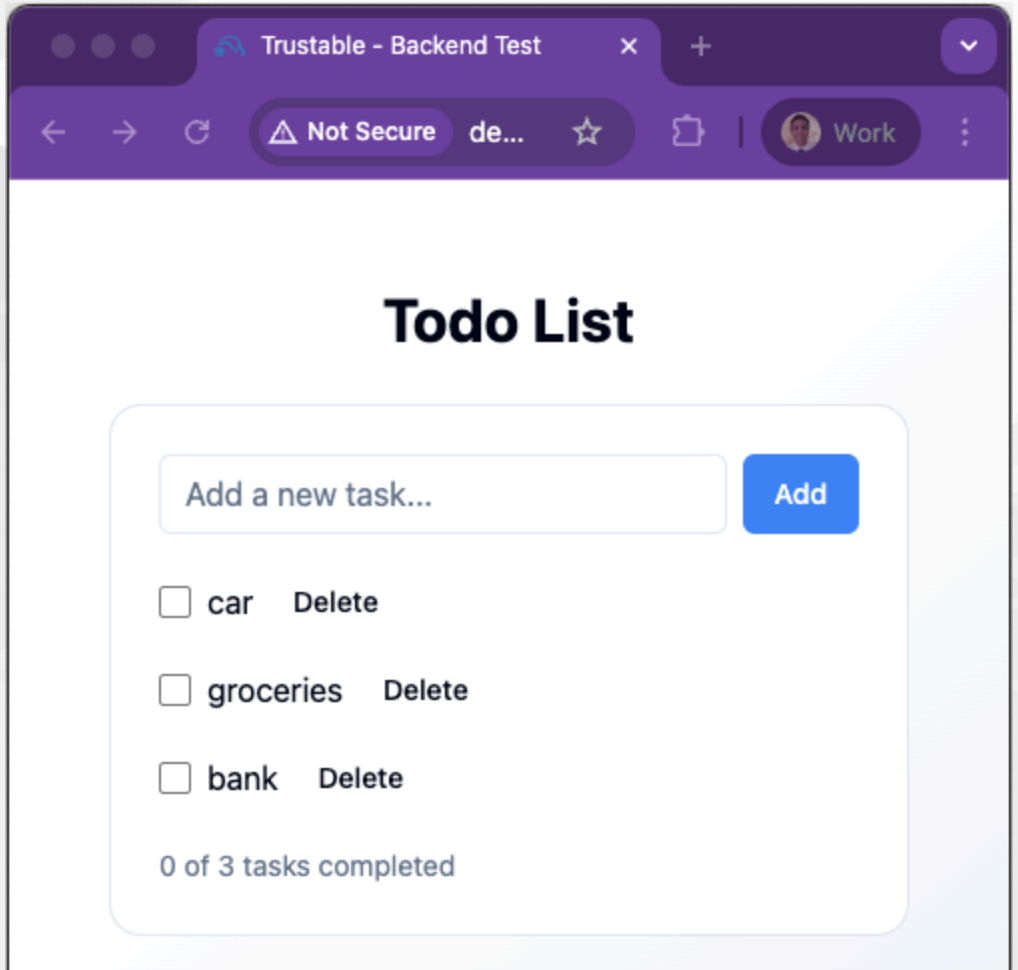

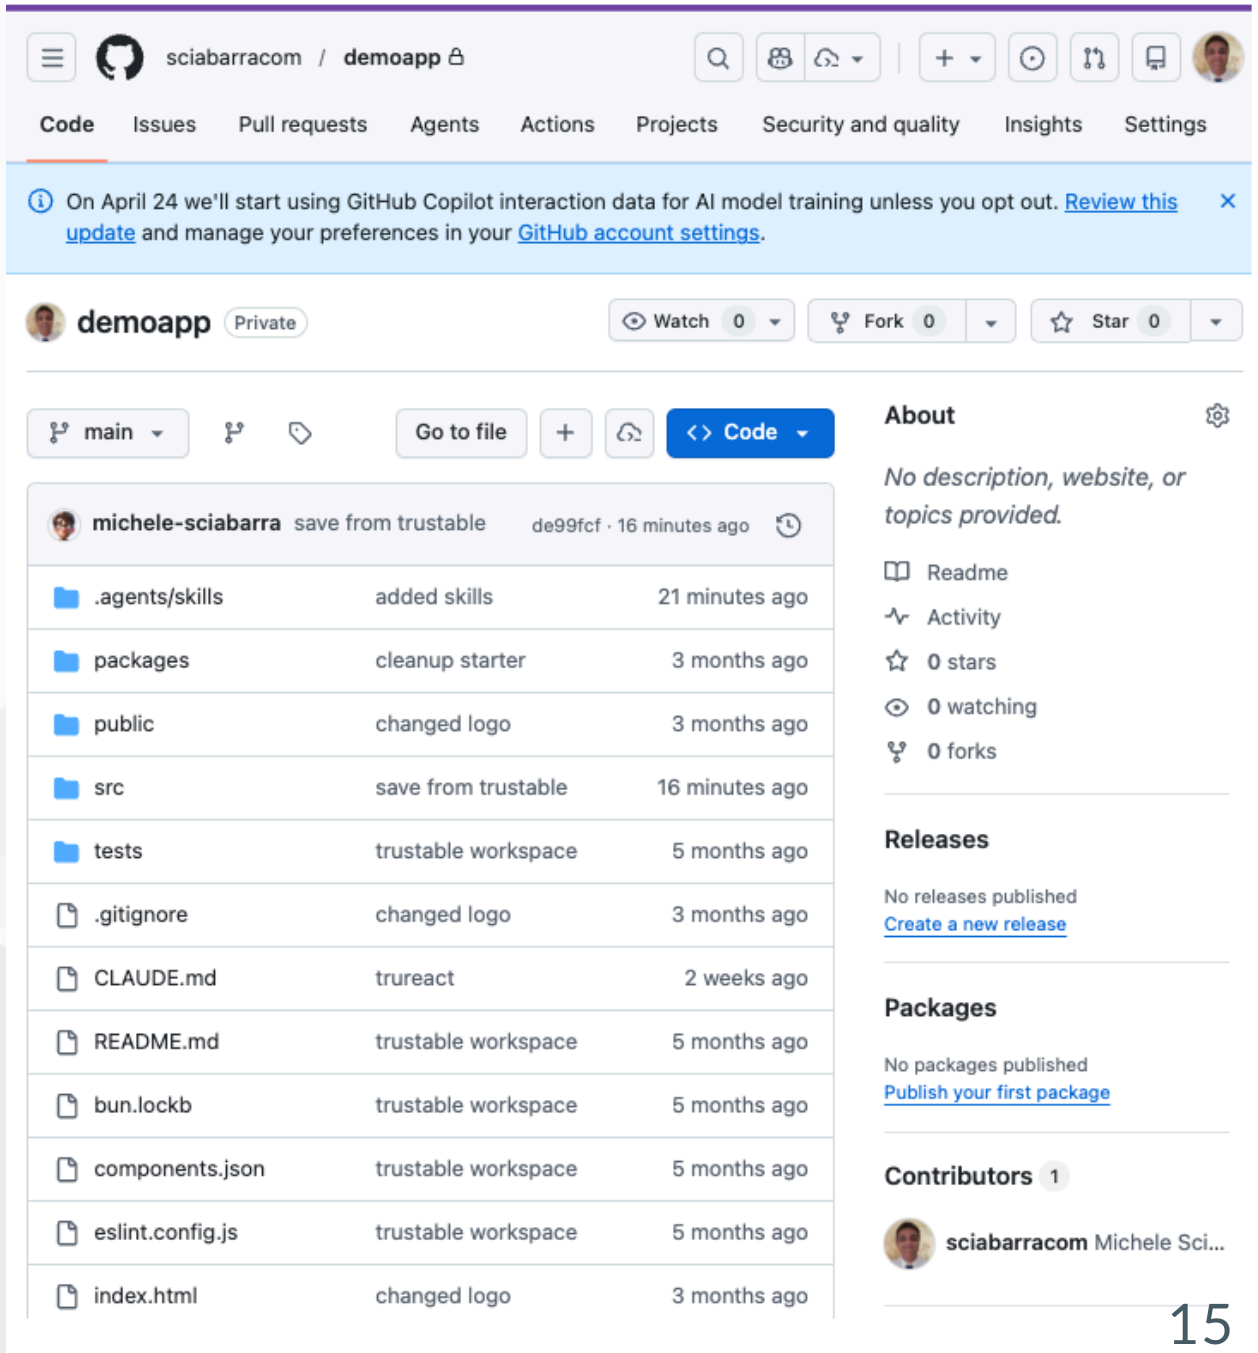

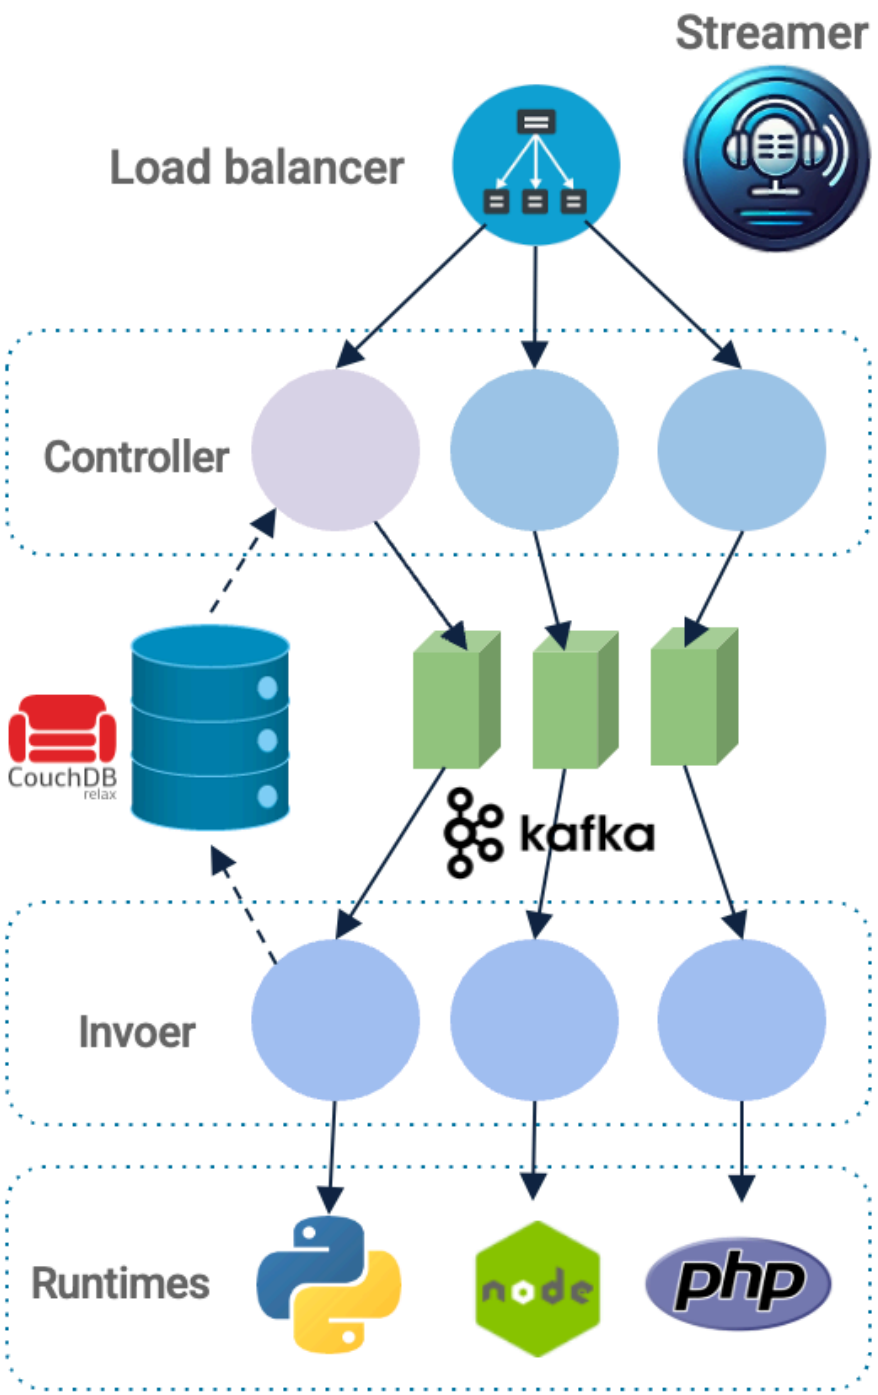

Ollama

Milvus

redis

PostgreSQL

Seaweed

S3

"List available tools"

- action-requirements: Add a library to an endpoint's requirements.txt
- action-add-secret: Add a secret to an endpoint's context
- action-add-redis: Add Redis connection to an endpoint
- action-add-milvus: Add Milvus vector DB connection
- action-invoke: Invoke an API action
- action-add-postgresql: Add PostgreSQL connection
- action-add-s3: Add S3 connection
- action-new: Create a new API endpoint

Create an IP Address API

> “add an api returning my ip address using ifconfig.me”

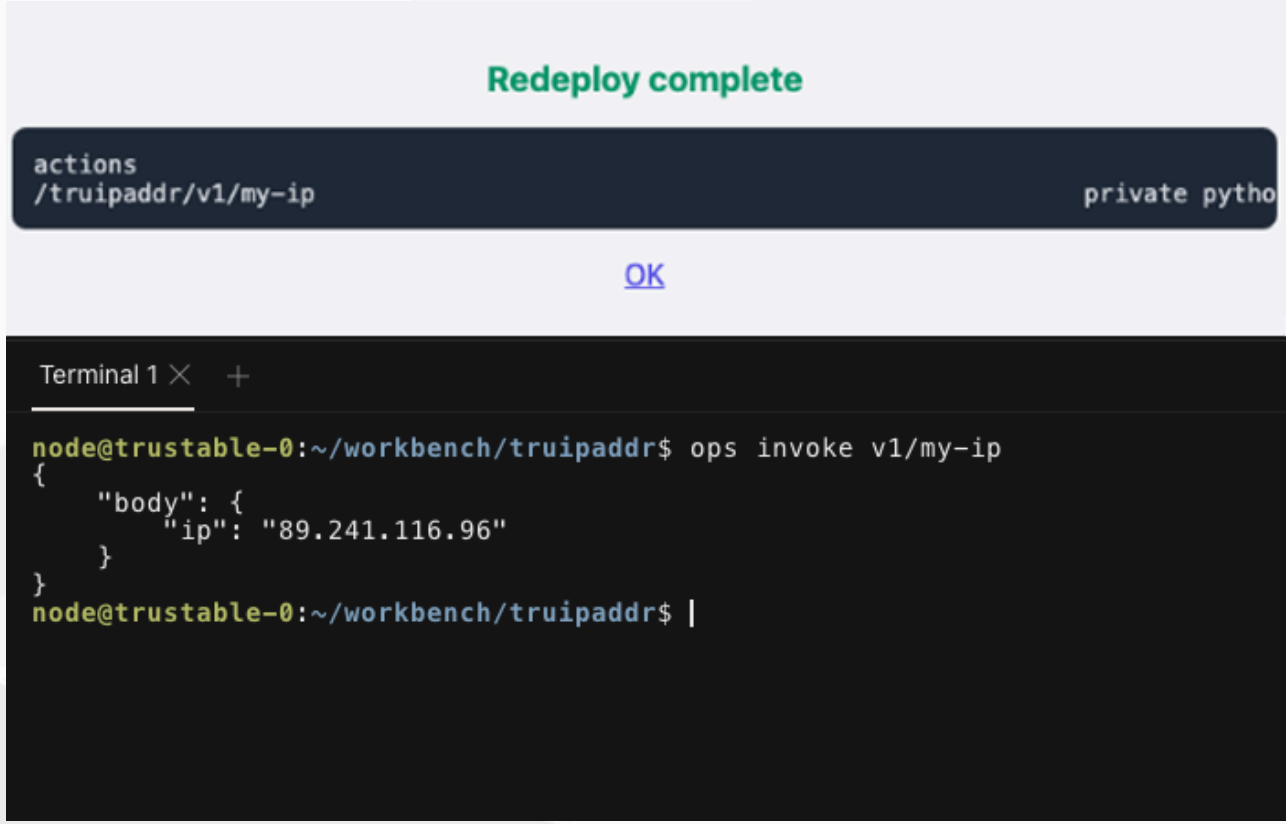

- Redeploy shows the actions
- Terminal allows invoke

UI showing IP

“ replace the card in the home page showing my current ip address ”

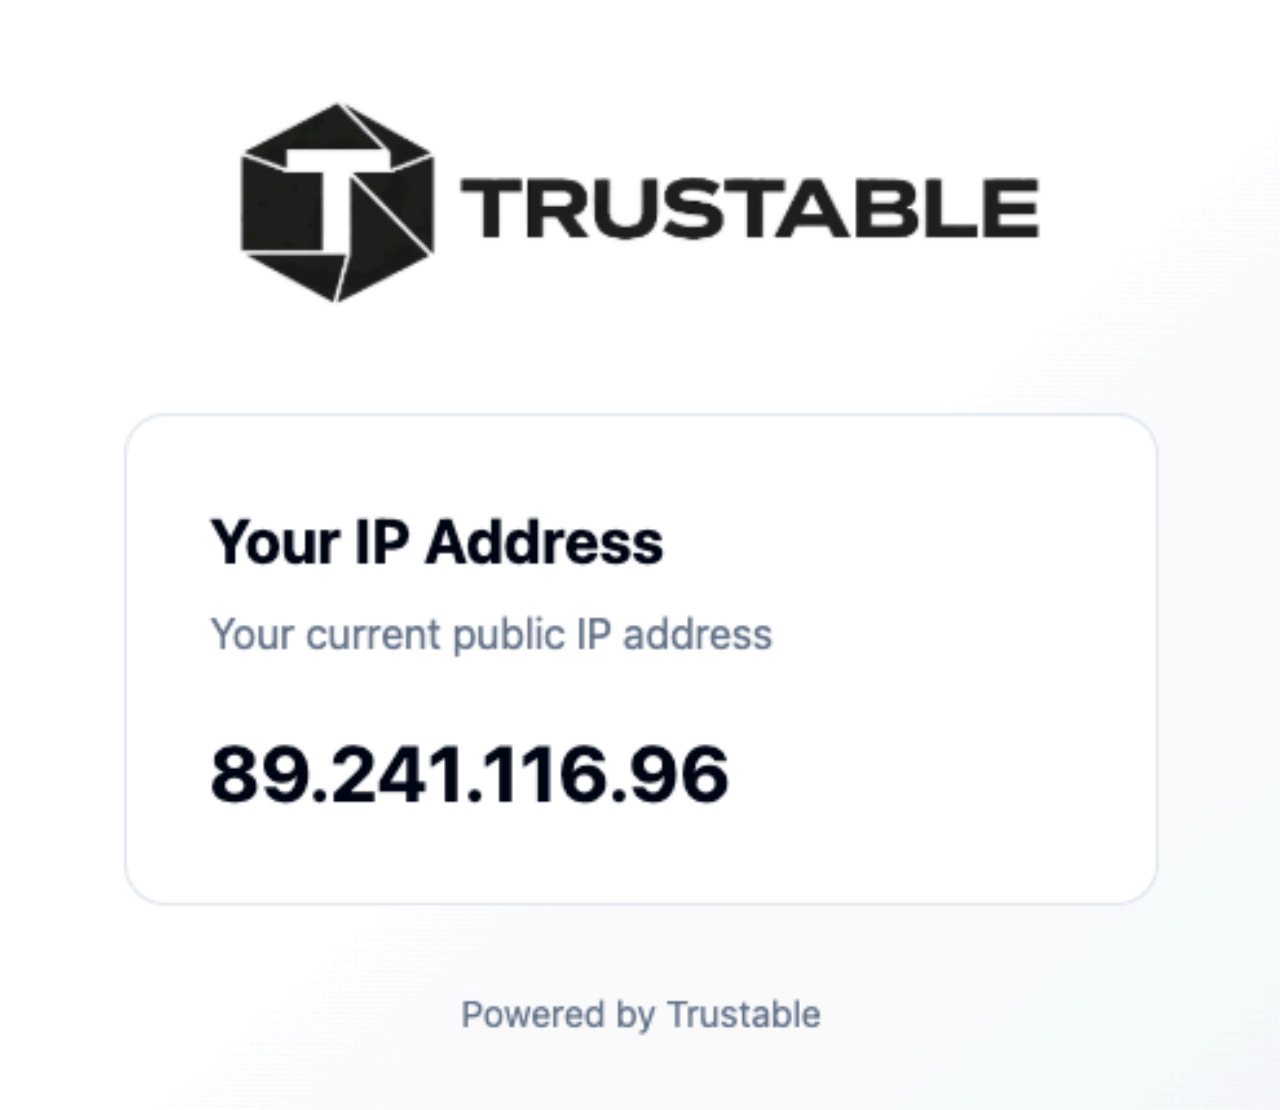

Use secrets

- Configure some GitHub the secrets in the UI, then:

> **use the secret GH_TOKEN and the repo GH_REPO and create an api endpoint creating an issue in github with parameters title and body**

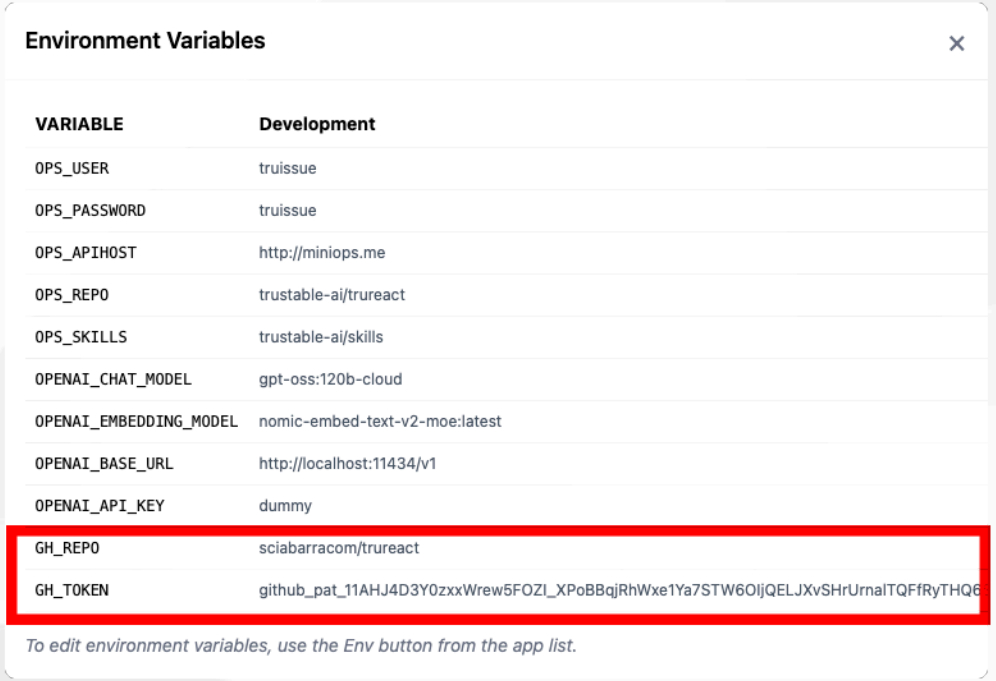

Environment Variables

VARIABLE	Development
OPS_USER	truissue
OPS_PASSWORD	truissue
OPS_APIHOST	http://miniops.me
OPS_REPO	trustable-ai/trureact
OPS_SKILLS	trustable-ai/skills
OPENAI_CHAT_MODEL	gpt-oss:120b-cloud
OPENAI_EMBEDDING_MODEL	nomic-embed-text-v2-moe:latest
OPENAI_BASE_URL	http://localhost:11434/v1
OPENAI_API_KEY	dummy
GH_REPO	sciabarracom/trureact
GH_TOKEN	github_pat_11AHJ4D3Y0zxxWrew5FOZI_XPoBBqjRhWxe1Ya7STW6OIjQELJXvSHrUrnalTQFfRyTHQ6

To edit environment variables, use the Env button from the app list.

UI for the Issues
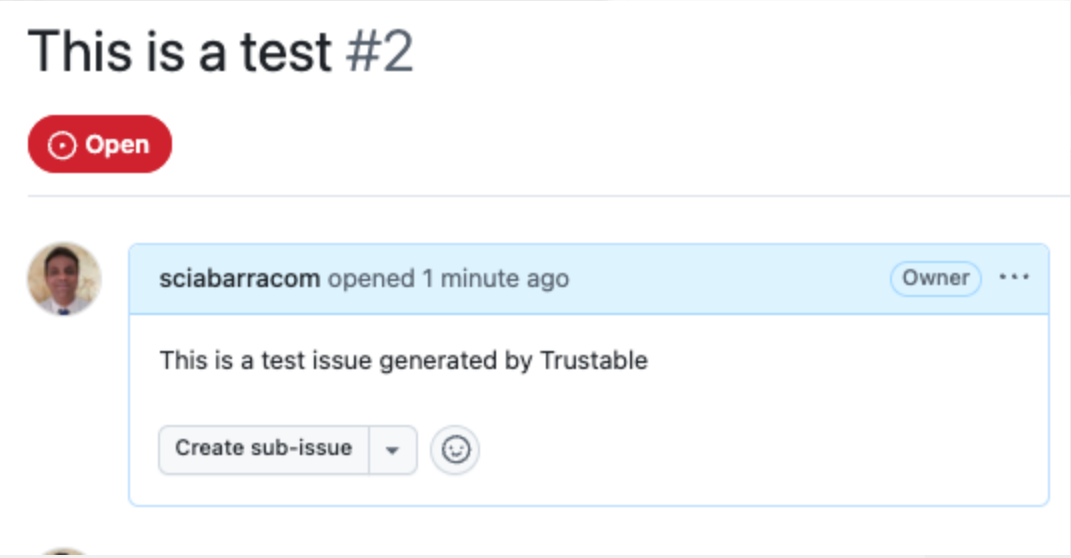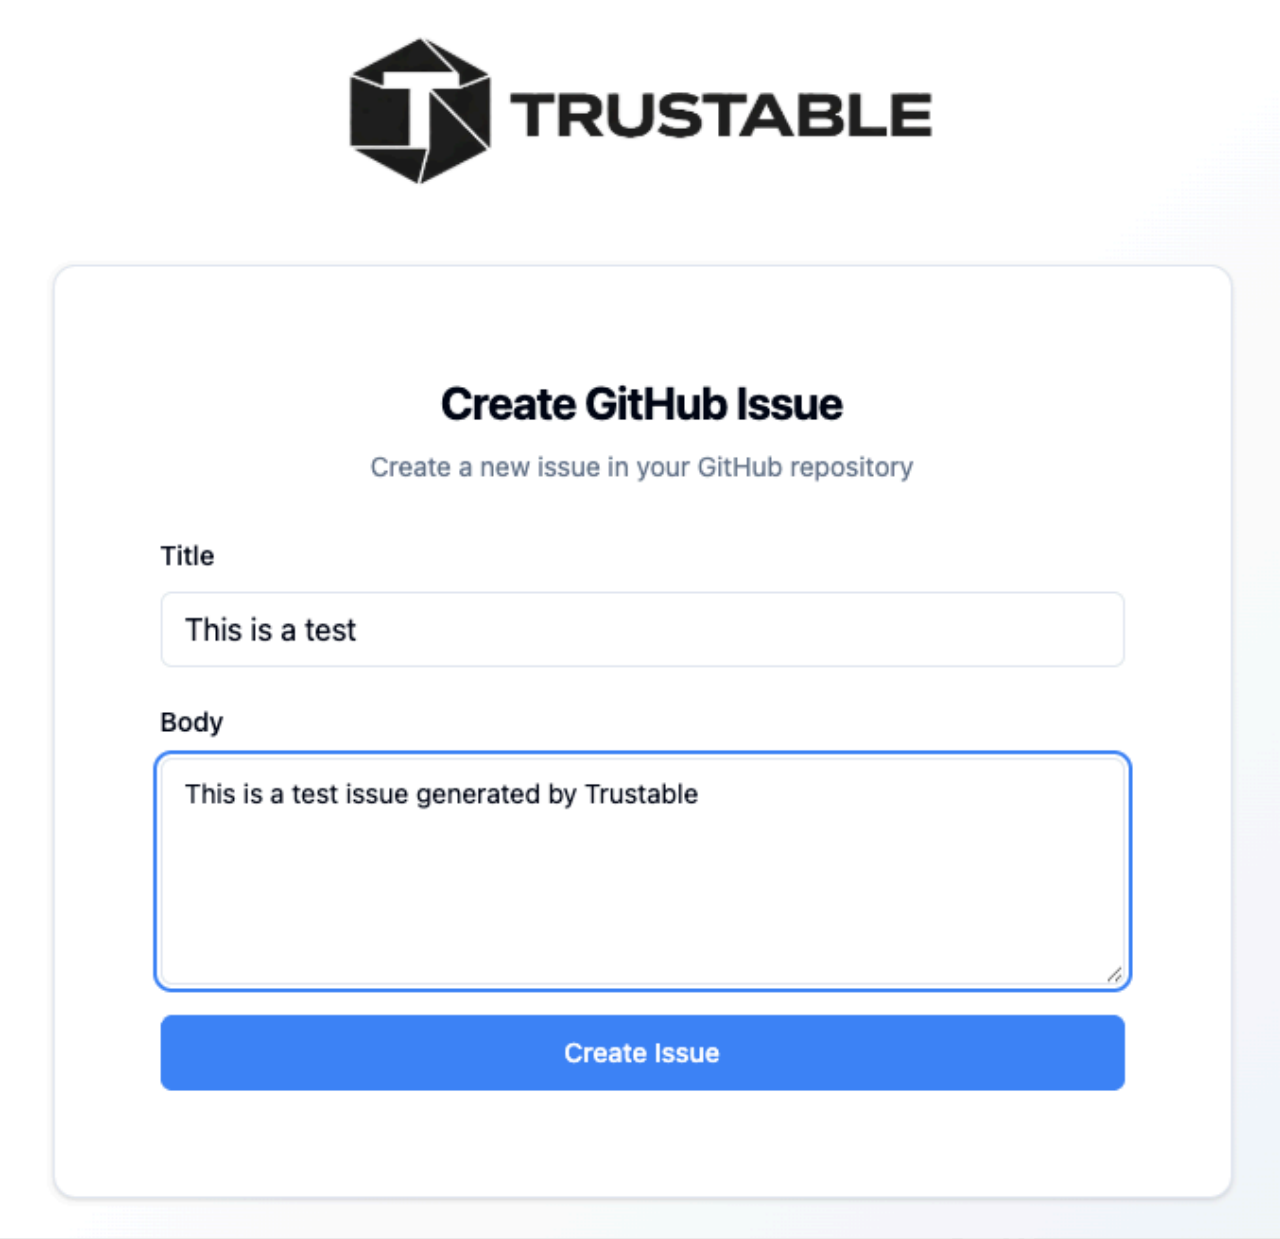
“ replace the home page with an user interface asking title and body and creating a github issue ”