




Experian ID Me Now Service

Integration API Specification

Version 1.0

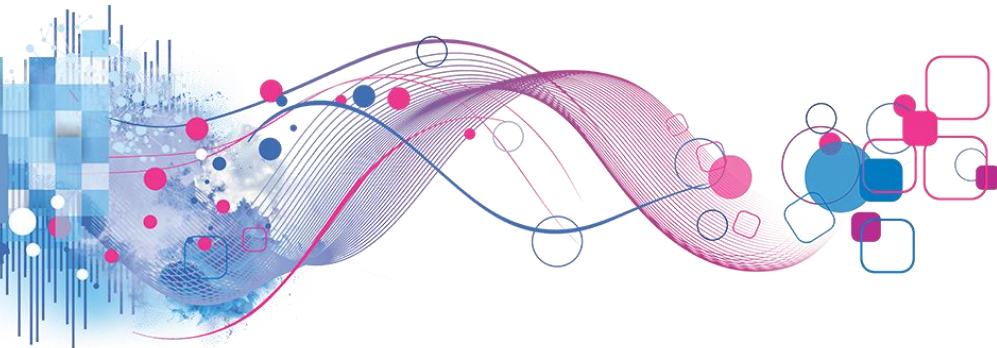



Contents

1.	Change Control	2
2.	Definitions	2
3.	Introduction.....	3
4.	Workflow diagram.....	3
5.	Web Service	4
6.	Service Input	4
	6.1 Workflow ID's.....	7
	6.2 StartWorkflow Input:.....	8
	6.3 CollectWorkflowResults Input.....	8
7.	Service Output	9
	7.1 StartWorkflow Response:.....	10
	7.2 Error Response:.....	10
8.	Error Codes and Descriptions	11



1. Change Control

Version	Date	Status	Change Description
1.0	16/03/2026	Initial	Initial Document created

2. Definitions

Term	Description
Alternative Liveness Verification	The Alternative Liveness Verification API provides comprehensive identity verification by combining: • Liveness Detection: Verifies that the submitted image is of a live person • Facial Biometric Matching: Compares the submitted image against Department of Home Affairs (DHA) records • ID Verification: Validates the South African ID number against government databases
Anti Money Laundering (AML) Screening	The AML Service enables client systems to screen individuals and entities against global and local watchlists, PEP (Politically Exposed Persons) lists, and negative media sources for anti-money laundering compliance.
Individual Liveness Verification	The Individual Liveness Verification API validates that a submitted selfie image is of a live person, not a spoof or screen capture. It uses advanced image quality, artifact, and liveness detection algorithms to ensure authenticity.
OCR Liveness Verification	The OCR Liveness Verification API provides comprehensive verification by combining: • Liveness Detection: Ensures the submitted selfie is of a live person • OCR Document Processing: Extracts and authenticates data from identity documents • Facial Comparison: Compares the live selfie to the document portrait
ID Liveness Verification	The ID Liveness Verification API validates a South African ID number and selfie image against Home Affairs records, confirming liveness and identity. It returns personal details, liveness metrics, and verification results.
Full ID Me Now	Combination of Alternative Liveness Verification & Anti Money Laundering



3. Introduction

This document serves as technical guide to allow 3rd parties to access Experian ID Me Now API by means of REST Service passed through a secure HTTPS tunnel.

The aim of this document is to define the REST services that will be required to exchanging data to and from Experian.

Note that this is not a free service and all transactions must be considered billable. To activate the service please contact Experian Integration for more information.


Description:

The IDMN service provides identity verification by validating an individual's identity against official records held by the Department of Home Affairs. The service is designed to confirm that a user is who they claim to be through biometric and document-based verification processes.

The service performs facial recognition by comparing a selfie captured from the user in real time with the official ID photograph stored at Home Affairs. A liveness detection check is applied to ensure that the selfie is captured from a live person at the time of verification and not from a static image, video, or other spoofing attempt.

4. Workflow diagram

The workflow diagram below is an example of the flow of the data within the system

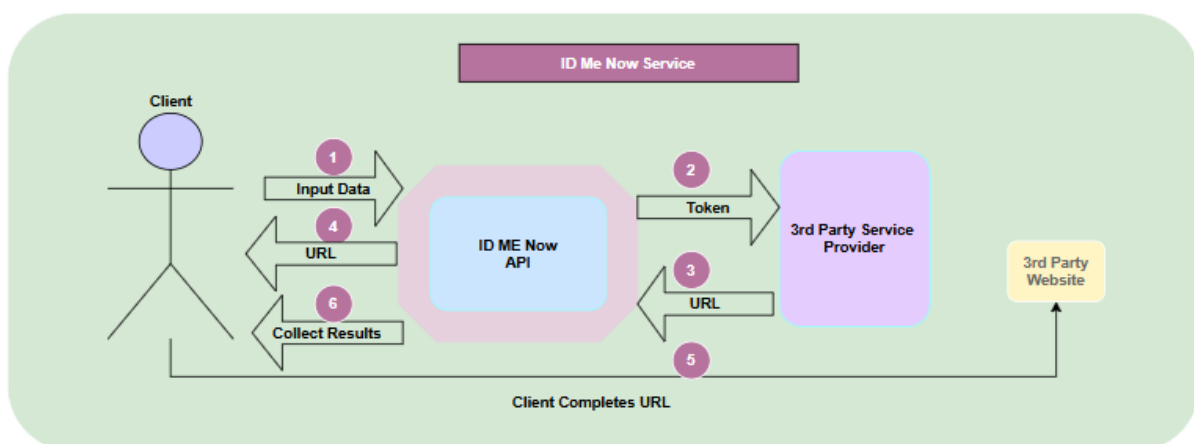



5. Web Service

The URL's below can be used to obtain more information regarding the REST interface.

Connection details	URL
UAT Server	https://apis-uat.experian.co.za:9443/IdMeNow/openapi/swagger.yaml
Live Server	https://apis.experian.co.za:9443/IdMeNow/openapi/swagger.yaml

Methods exposed via the web service

Field Name	Description
PingServer	This function can be used to test if the service is up.
StartWorkflow	This function can be used to submit the request to our 3 rd Party Provider to do a transaction.
CollectWorkflowResults	This function can be used to collect the results

6. Service Input

A REST web service interface is provided over a secure https tunnel. This section covers interface methods exposed via the REST service.

Please use Basic Authentication for the Service: basic access authentication is a method for an HTTP user agent to provide a username and password when making a request.

In basic HTTP authentication, a request contains a header field in the form of Authorization: Basic <credentials>, where credentials are the Base64 encoding of ID and password joined by a single colon

Function	Parameter	Data Type	Max Length	Required	Notes
PingServer	none	-	-		This function can be used to test if the service is up. If the result is:



					- True = Service is up False\timeout = Service is not up or cannot be reached.
StartWorkflow	Auth	-	-	-	Root for authorization details.
	system_settings	-	-	-	Root for System details.
	version	N	5	Y	Version of the input request. Current version = 1.0
	originating_application	AN	20	Y	Name of the originating application. REST_UI_TEST
	originating_environment	AN	20	Y	Identifies the originating environment e.g. UAT, PRODUCTION
	client_reference	AN	128	Y	Free format echo text field. Could be UUID. Client Reference
	request_time	AN	20	Y	Format: YYYY-MM-DDThh:mm:ss Example: 2025-01-27T13:23:21
	search_criteria	-	-	-	Root for Search details
	identity_number	AN	13	Y	South African ID Number or passport on



					person being searched on. Note: Identity is dictated by the Identity type below.
	identity_type	AN	8	Y	Identity Number type. Currently = SID or PASSPORT *SA ID Validation will only apply when SID was selected as Identity type.
	name	AN	35	Y	Searched forename/ first name.
	surname	AN	35	Y	Search surname/ last name.
	client_consent	AN	1	Y	Whether or not the consumer consented to this enquiry being performed. Y - Consumer gave consent for this enquiry N - Consumer did not give consent for this enquiry to be performed.
	workflow_id	N	2	Y	<u>Please refer to 6.1 Workflow ID's</u> 6.1 Workflow ID's
CollectWorkflowResults	Auth	-	-	-	Root for authorization details.
	system_settings	-	-	-	Root for System details.



	version	N	5	Y	Version of the input request. Current version = 1.0
	originating_application	AN	20	Y	Name of the originating application. REST_UI_TEST
	originating_environment	AN	20	Y	Identify the originating environment e.g. UAT, PRODUCTION
	client_reference	AN	128	Y	Free format echo text field. Could be UUID. Client Reference
	Request time	AN	20	Y	Format: YYYY-MM-DDThh:mm:ss Example: 2025-01-27T13:23:21
	Search Criteria	-	-	-	Root for Search details
	transaction_id	AN	-	Y	Transaction ID that returned on the 1st call(StartWorkflow)
	reference	AN	-	Y	Token that returned on the 1st call(StartWorkflow)

6.1 Workflow ID's

UAT	PROD	Description
10	6	Alternative Liveness Verification
11	7	ID Verification (Liveness check)
12	8	OCR Liveness Verification
13	9	Anti Money Laundering
14	10	Full IDMeNow
15	4	Individual Liveness Verification (no DHA)



6.2 StartWorkflow Input:

```
{
  "system_settings": {
    "version": "1.0",
    "originating_application": "QA",
    "originating_environment": "QA",
    "client_reference": "Start_QA",
    "request_time": "2026-03-16T08:38:59"
  },
  "search_criteria": {
    "identity_number": " 2903245665081",
    "identity_type": "SID",
    "name": "Bruce",
    "surname": "Wayne",
    "client_consent": "Y",
    "workflow_id": 10
  }
}
```

6.3 CollectWorkflowResults Input

```
{
  "system_settings": {
    "version": "1.0",
    "originating_application": "QA",
    "originating_environment": "QA",
    "client_reference": "Start_QA",
    "request_time": "2026-03-16T08:38:59"
  },
  "search_criteria": {
    "transaction_id": 13133799448858601677,
    "reference": "xv2Htp6"
  }
}
```



7. Service Output

The matrix below defines the output for the service in the case of a successful service call.

Field Name	Data Type	Max Length	Required	Description/Example
response_status	Alphanumeric	7	Y	Either Success or Failure
Error Code	Alphanumeric	7	N	Error code when transaction failed
Error Description	Alphanumeric	30	N	Error message when transaction failed
transaction_stats	-	-	Y	Root for Transaction Stats
received_time	Alphanumeric	20	Y	Format: YYYY-MM-DDThh:mm:ssZ
response_time	Alphanumeric	20	Y	Format: YYYY-MM-DDThh:mm:ssZ
system_uuid	Alphanumeric	36	Y	A System UUID for transaction
return_data	-	-	N	Root for Return Data.
transaction_id	Numeric	20	Y	Unique Transaction ID for result
token	Alphanumeric	30	N	Error message when transaction failed
url	Alphanumeric	-	Y	URL for the client to use to fill in banking info
date_created	Alphanumeric	25	Y	Date of the request



7.1 StartWorkflow Response:

```
{
  "response_status": "Success",
  "transaction_stats": {
    "received_time": "2026-03-16T14:54:40Z",
    "response_time": "2026-03-16T14:54:41Z",
    "system_uuid": "bf8f7231524cb0b416dae7c6c1d4a6bd"
  },
  "return_data": {
    "transaction_id": "3228768958151786737",
    "token": "kwHHGb8",
    "url": "https://experian.uat.tgpd.com/anonymous_workflow/kwHHGb8",
    "date_created": "2026-03-16T14:54:41Z"
  }
}
```

7.2 Error Response:

```
{
  "response_status": "Failure",
  "error_code": "IMN_102",
  "error_description": "Invalid version number supplied",
  "transaction_stats": {
    "received_time": "2026-03-16T15:06:39Z",
    "response_time": "2026-03-16T15:06:39Z",
    "system_uuid": "70092b477e8118cc8f2e26e03fafa01d"
  }
}
```



8. Error Codes and Descriptions

Code	Description
Input Request Errors	
IMS_606	Username or Password is incorrect for this Branch
IMS_608	Branch not switched on for the service
IMN_101	Not all string variables filled in
IMN_102	Invalid version number supplied
IMN_103	Originating Application length exceeds 20 characters
IMN_104	Originating Environment length exceeds 20 characters
IMN_105	Client Reference length exceeds 128 characters
IMN_107	Identity Number length exceeds 13 characters
IMN_108	Identity Type can only be SID or PASSPORT
IMN_109	Name length exceeds 35 characters
IMN_110	Surname length exceeds 35 characters
IMN_111	Client Consent can only be Y
Processing Errors	
IMN_GE_200	Malformed data or escape sequences use like /n /t /r
IMN_202	Problem collecting results
IMN_204	Reference cannot be empty
IMN_205	No records found for this reference
IMN_206	Transaction Id does not belong to your branch
IMN_207	Problem collecting cached results
IMN_208	Results are older than 7 days and can no longer be collected
IMN_209	Unable to Create file for BTTF Service
IMN_210	Unable to Read file from BTTF Service
Critical Errors	
IMN_988 to IMN_999	Internal System Error Note: (Error messages are mapped internally based on the error code)



Registered office address:
35 BallyClare Drive
Ballyoaks Office Park
Bryanston Ext 7
Johannesburg
www.experian.co.za