

IS415 Hands-on Exercise 3:

In this hands-on exercise, you will learn how to plot functional and truthful choropleth maps by using an R package called **tmap** package.

1.0 Overview

Choropleth mapping involves the symbolization of enumeration units, such as countries, provinces, states, counties or census units, using area patterns or graduated colors. For example, a social scientist may need to use a choropleth map to portray the spatial distribution of aged population of Singapore by Master Plan 2014 Subzone Boundary.

1.1 Survival Tip

It is advisable for you to read the functional description of each function before using them.

2.0 Getting Started

In this hands-on exercise, the key R package use is **tmap** package in R. Beside **tmap** package, four other R packages will be used. They are:

- **readr** for importing delimited text file,
- **tidyr** for tidying data,
- **dplyr** for wrangling data and
- **sf** for handling geospatial data.

Among the four packages, **readr**, **tidyr** and **dplyr** are part of **tidyverse** package.

The code chunk below will be used to install and load these packages in RStudio.

► Show code

Notice that, we only need to install **tidyverse** instead of **readr**, **tidyr** and **dplyr** individually.

3.0 Importing Data into R

3.1 The Data

Two data set will be used to create the choropleth map. They are:

- Master Plan 2014 Subzone Boundary (Web) (i.e. `MP14_SUBZONE_WEB_PL`) in ESRI shapefile format. It can be downloaded at data.gov.sg. This is a geospatial data. It consists of the geographical boundary of Singapore at the planning subzone level. The data is based on URA Master Plan 2014.
- Singapore Residents by Planning Area / Subzone, Age Group, Sex and Type of Dwelling, June 2011-2020 in csv format (i.e. `respopagesextod2011to2020.csv`). This is an aspatial data file. Although it does not contain any coordinates values, but its PA and SZ fields can be used as unique identifiers to geocode to `MP14_SUBZONE_WEB_PL` shapefile.

3.2 Importing Geospatial Data into R

The code chunk below uses the `st_read()` function of **sf** package to import `MP14_SUBZONE_WEB_PL` shapefile into R as a simple feature data frame called `mps_z`.

► Show code

```
Reading layer `MP14_SUBZONE_WEB_PL' from data source
`D:\tskam\IS415\Hands-on_Ex\Hands-on_Ex03\data\geospatial'
using driver `ESRI Shapefile'
Simple feature collection with 323 features and 15 fields
Geometry type: MULTIPOLYGON
Dimension:      XY
Bounding box:   xmin: 2667.538 ymin: 15748.72 xmax: 56396.44 ymax: 50256.33
Projected CRS: SVY21
```

You can examine the content of `mps_z` by using the code chunk below.

► Show code

```
Simple feature collection with 323 features and 15 fields
Geometry type: MULTIPOLYGON
Dimension:      XY
Bounding box:   xmin: 2667.538 ymin: 15748.72 xmax: 56396.44 ymax: 50256.33
Projected CRS: SVY21
First 10 features:
```

	OBJECTID	SUBZONE_NO	SUBZONE_N	SUBZONE_C	CA_IND
1	1	1	MARINA SOUTH	MSSZ01	Y
2	2	1	PEARL'S HILL	OTSZ01	Y
3	3	3	BOAT QUAY	SRSZ03	Y
4	4	8	HENDERSON HILL	BMSZ08	N
5	5	3	REDHILL	BMSZ03	N
6	6	7	ALEXANDRA HILL	BMSZ07	N

```

7      7      9  BUKIT HO SWEE  BMSZ09  N
8      8      2  CLARKE QUAY  SRSZ02  Y
9      9     13 PASIR PANJANG 1  QTSZ13  N
10     10      7  QUEENSWAY  QTSZ07  N

      PLN_AREA_N PLN_AREA_C      REGION_N REGION_C
1  MARINA SOUTH      MS CENTRAL REGION      CR
2      OUTRAM      OT CENTRAL REGION      CR
3 SINGAPORE RIVER      SR CENTRAL REGION      CR
4  BUKIT MERAH      BM CENTRAL REGION      CR
5  BUKIT MERAH      BM CENTRAL REGION      CR
6  BUKIT MERAH      BM CENTRAL REGION      CR
7  BUKIT MERAH      BM CENTRAL REGION      CR
8 SINGAPORE RIVER      SR CENTRAL REGION      CR
9  QUEENSTOWN      QT CENTRAL REGION      CR
10 QUEENSTOWN      QT CENTRAL REGION      CR

      INC_CRC FMEL_UPD_D  X_ADDR  Y_ADDR SHAPE_Leng
1  5ED7EB253F99252E  2014-12-05  31595.84  29220.19  5267.381
2  8C7149B9EB32EEFC  2014-12-05  28679.06  29782.05  3506.107
3  C35FEFF02B13E0E5  2014-12-05  29654.96  29974.66  1740.926
4  3775D82C5DDBEFBD  2014-12-05  26782.83  29933.77  3313.625
5  85D9ABEF0A40678F  2014-12-05  26201.96  30005.70  2825.594
6  9D286521EF5E3B59  2014-12-05  25358.82  29991.38  4428.913
7  7839A8577144EFE2  2014-12-05  27680.06  30230.86  3275.312
8  48661DC0FBA09F7A  2014-12-05  29253.21  30222.86  2208.619
9  1F721290C421BFAB  2014-12-05  22077.34  29893.78  6571.323
10 3580D2AFFBEE914C  2014-12-05  24168.31  30104.18  3454.239

      SHAPE_Area      geometry

1  1630379.3 MULTIPOLYGON (((31495.56 30...
2   559816.2 MULTIPOLYGON (((29092.28 30...
3   160807.5 MULTIPOLYGON (((29932.33 29...
4   595428.9 MULTIPOLYGON (((27131.28 30...
5   387429.4 MULTIPOLYGON (((26451.03 30...
6  1030378.8 MULTIPOLYGON (((25899.7 297...
7   551732.0 MULTIPOLYGON (((27746.95 30...
8   290184.7 MULTIPOLYGON (((29351.26 29...
9  1084792.3 MULTIPOLYGON (((20996.49 30...
10  631644.3 MULTIPOLYGON (((24472.11 29...

```

Notice that only the first ten records will be displayed. Do you know why?

3.3 Importing Attribute Data into R

Next, we will import *respogalsex2000to2018.csv* file into RStudio and save the file into an R dataframe called *popagsex*.

The task will be performed by using *read_csv()* function of **readr** package as shown in the code chunk below.

► Show code

3.4 Data Preparation

Before a thematic map can be prepared, you are required to prepare a data table with year 2020 values. The data table should include the variables PA, SZ, YOUNG, ECONOMY ACTIVE, AGED, TOTAL, DEPENDENCY.

- YOUNG: age group 0 to 4 until age group 20 to 24,
- ECONOMY ACTIVE: age group 25-29 until age group 60-64,
- AGED: age group 65 and above,
- TOTAL: all age group, and
- DEPENDENCY: the ratio between young and aged against economy active group

3.4.1 DATA WRANGLING

The following data wrangling and transformation functions will be used:

- `pivot_wider()` of **tidyr** package, and
- `mutate()`, `filter()`, `group_by()` and `select()` of **dplyr** package

► Show code

3.4.2 JOINING THE ATTRIBUTE DATA AND GEOSPATIAL DATA

Before we can perform the georelational join, one extra step is required to convert the values in PA and SZ fields to uppercase. This is because the values of PA and SZ fields are made up of upper- and lowercase on the other hand the SUBZONE_N and PLN_AREA_N are in uppercase.

► Show code

Next, `left_join()` of **dplyr** is used to join the geographical data and attribute table using planning subzone name e.g. SUBZONE_N and SZ as the common identifier.

► Show code

Thing to learn from the code chunk above:

- `left_join()` of **dplyr** package is used with `mps_z` simple feature data frame as the left data table is to ensure that the output will be a simple features data frame.

4.0 Choropleth Mapping Geospatial Data Using *tmap*

Two approaches can be used to prepare thematic map using *tmap*, they are:


- Plotting a thematic map quickly by using *qtm()*.
- Plotting highly customisable thematic map by using *tmap* elements.

4.1 Plotting a choropleth map quickly by using *qtm()*

The easiest and quickest to draw a choropleth map using **tmap** is using *qtm()*. It is concise and provides a good default visualisation in many cases.

The code chunk below will draw a cartographic standard choropleth map as shown below.

► Show code

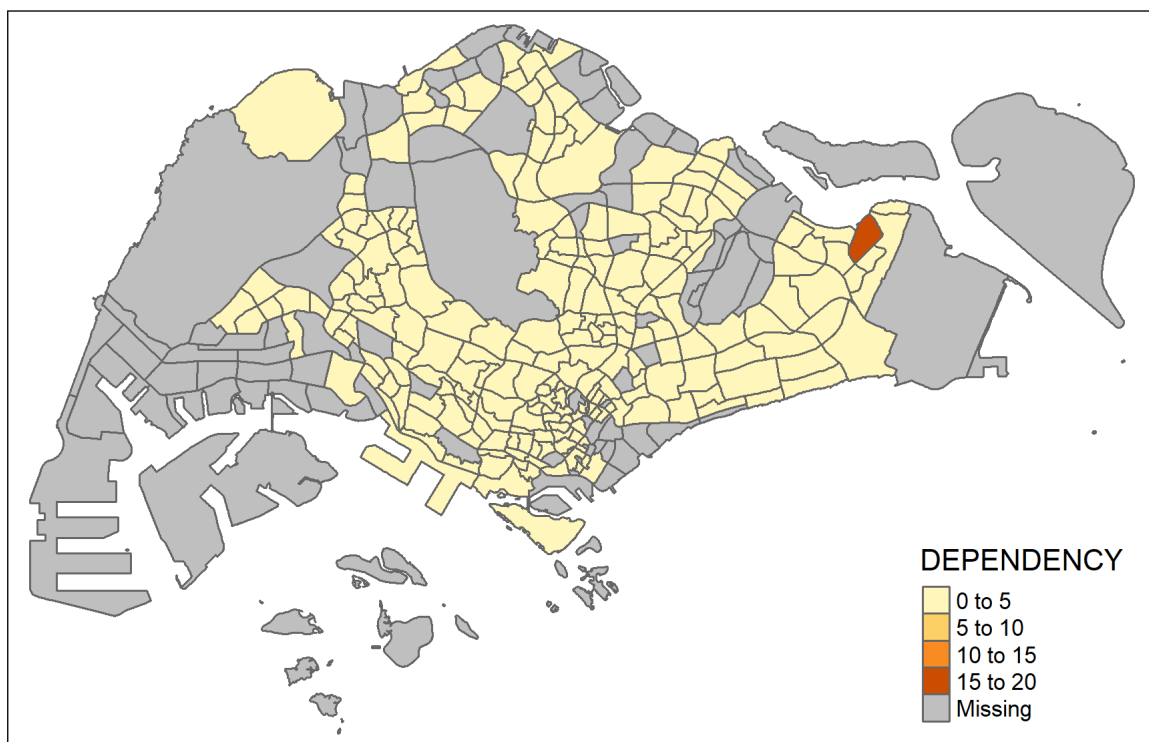

Things to learn from the code chunk above:


- *tmap_mode()* with "plot" option is used to produce a static map. For interactive mode, "view" option should be used.
- *fill* argument is used to map the attribute (i.e. DEPENDENCY)

4.2 Creating a choropleth map by using *tmap*'s elements

Despite its usefulness of drawing a choropleth map quickly and easily, the disadvantage of *qtm()* is that it makes aesthetics of individual layers harder to control. To draw a high quality cartographic choropleth map as shown in the figure below **tmap**'s drawing elements should be used.

► Show code

► Show code

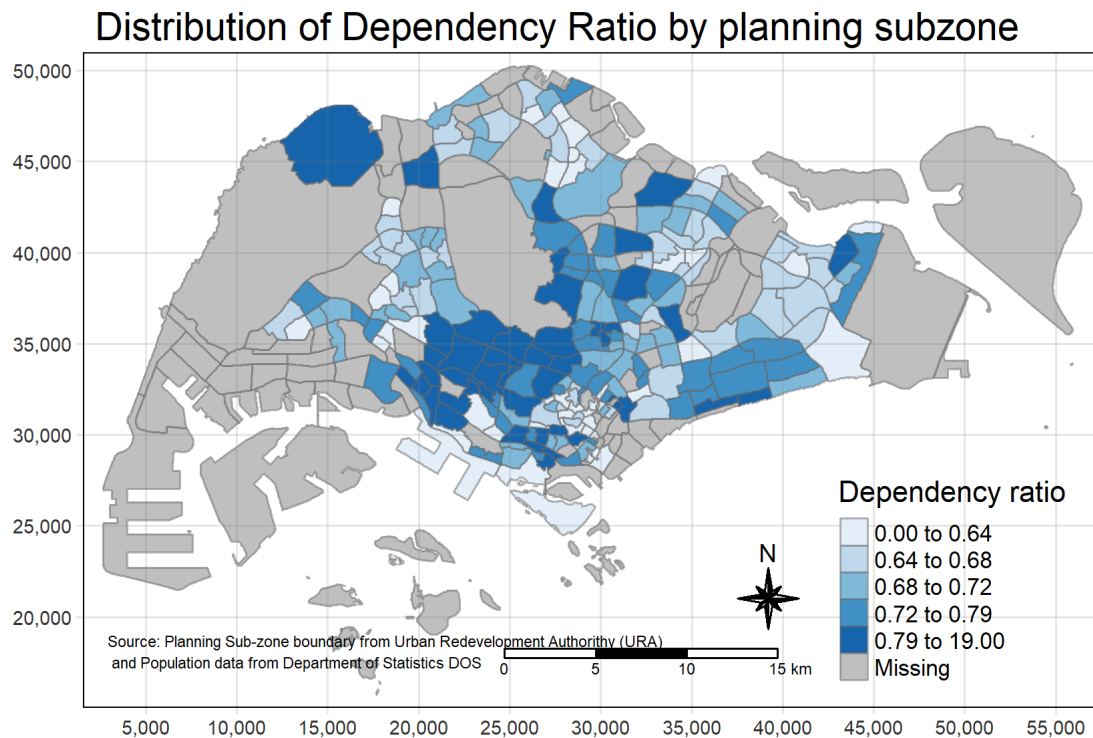

4.2.1 DRAWING A BASE MAP

The basic building block of **tmmap** is `tm_shape()` followed by one or more layer elements such as `tm_fill()` and `tm_polygons()`.

In the code chunk below, `tm_shape()` is used to define the input data (i.e. `mpsz_agmale2018`) and `tm_polygons()` is used to draw the planning subzone polygons

► Show code






4.2.2 DRAWING A CHOROPLETH MAP USING *TM_POLYGONS()*

To draw a choropleth map showing the geographical distribution of a selected variable by planning subzone, we just need to assign the target variable such as *Dependency* to *tm_polygons()*.

► Show code

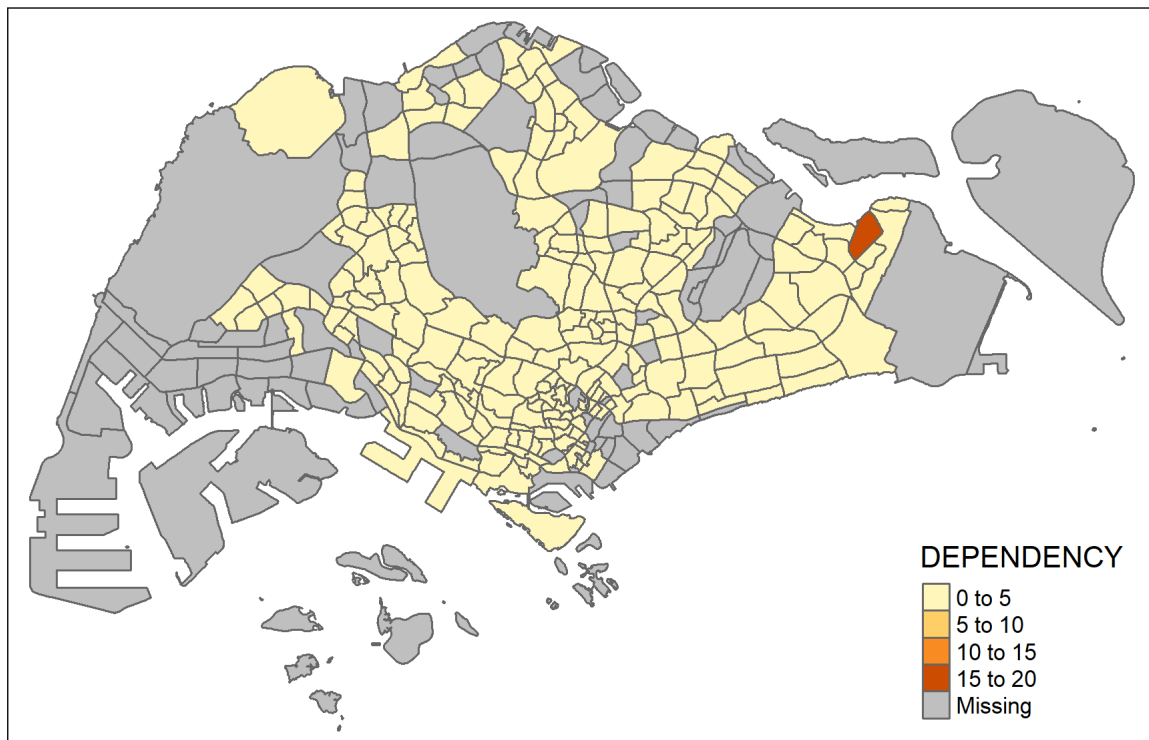

Things to learn from *tm_polygons()*:


- The default interval binning used to draw the choropleth map is called “pretty”. A detail discussion of the data classification methods supported by tmap will be discussed in sub-section 4.3.
- The default colour scheme used is “YlOrRd” of ColorBrewer. You will learn more about the color palette in sub-section 4.4.
- By default, Missing value will be shaded in grey.

4.2.3 DRAWING A CHOROPLETH MAP USING *TM_FILL()* AND **TM_BORDER()***

Actually, *tm_polygons()* is a wrapper of *tm_fill()* and *tm_borders()*. *tm_fill()* shades the polygons by using the default colour scheme and *tm_borders()* adds the borders of the shapefile onto the choropleth map.

The code chunk below draw a choropleth map by using *tm_fill()* alone.


► Show code

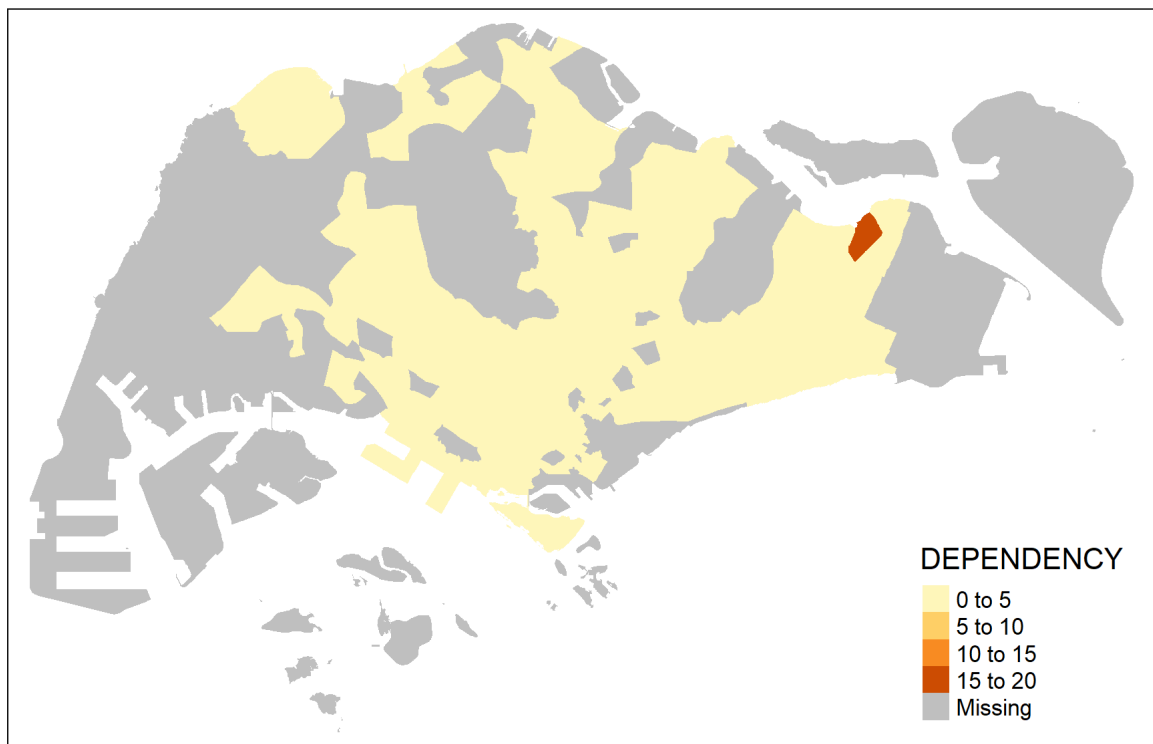

Notice that the planning subzones are shared according to the respective dependency values

To add the boundary of the planning subzones, `tm_borders` will be used as shown in the code chunk below.

► Show code

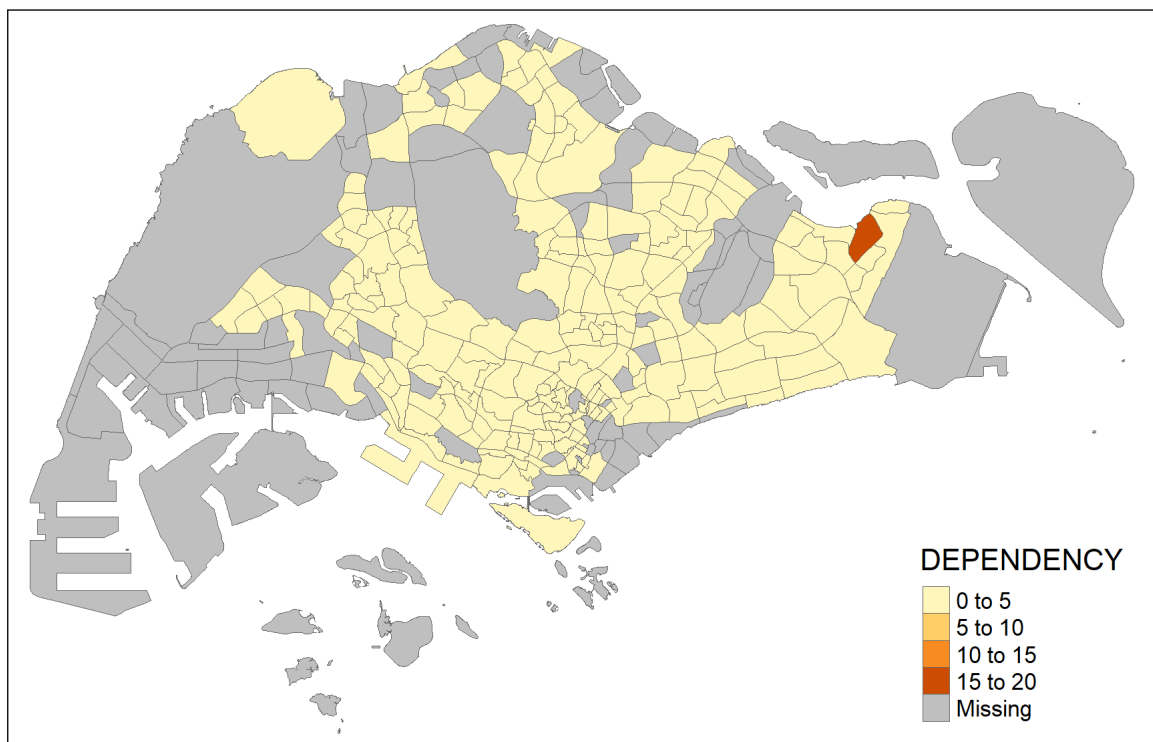

Notice that light-gray border lines have been added on the choropleth map.

The *alpha* argument is used to define transparency number between 0 (totally transparent) and 1 (not transparent). By default, the alpha value of the col is used (normally 1).

transparent). By default, the alpha value of the col is used (normally 1).

Beside *alpha* argument, there are three other arguments for *tm_borders()*, they are:

- *col* = border colour,
- *lwd* = border line width. The default is 1, and
- *lty* = border line type. The default is "solid".

4.3 Data classification methods of tmap

Most choropleth maps employ some method of data classification. The point of classification is to take a large number of observations and group them into data ranges or classes.


tmap provides a total ten data classification methods, namely: *fixed*, *sd*, *equal*, *pretty* (default), *quantile*, *kmeans*, *hclust*, *bclust*, *fisher*, and *jenks*.

To define a data classification method, the *style* argument of *tm_fill()* or *tm_polygons()* will be used.

4.3.1 PLOTTING CHOROPLETH MAPS WITH BUILT-IN CLASSIFICATION METHODS


The code chunk below shows a quantile data classification with 5 classes are used.

► Show code

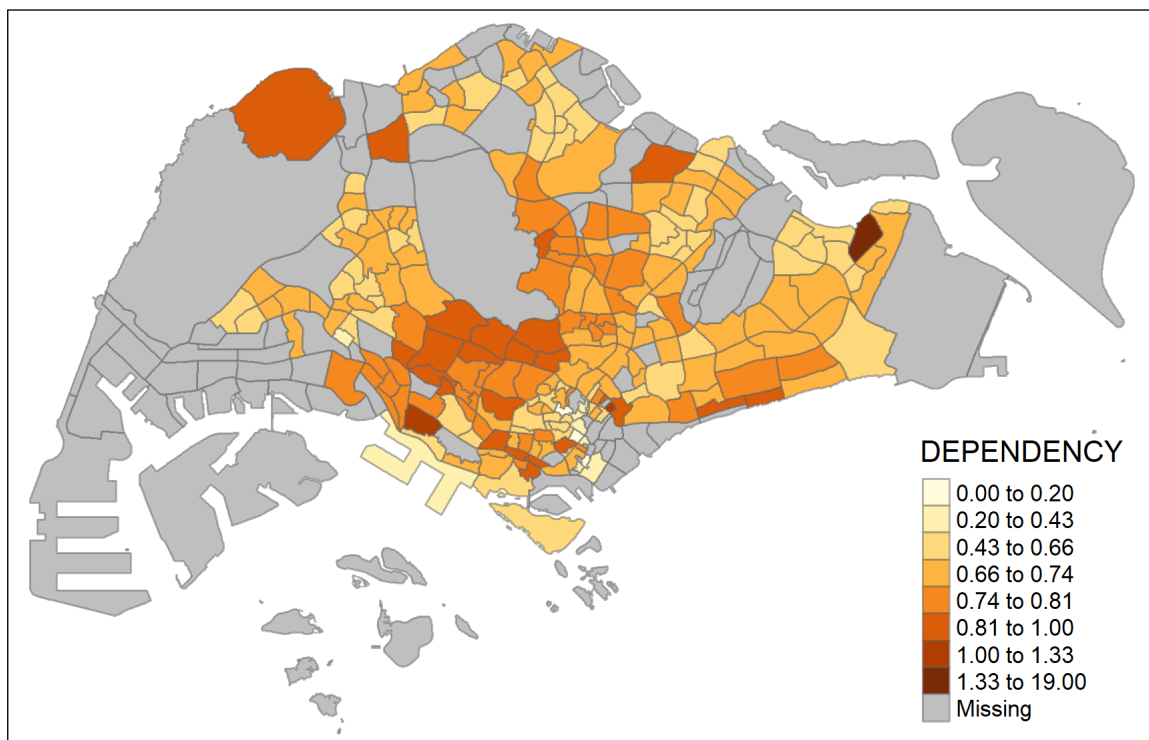

In the code chunk below, *equal* data classification method is used.

► Show code

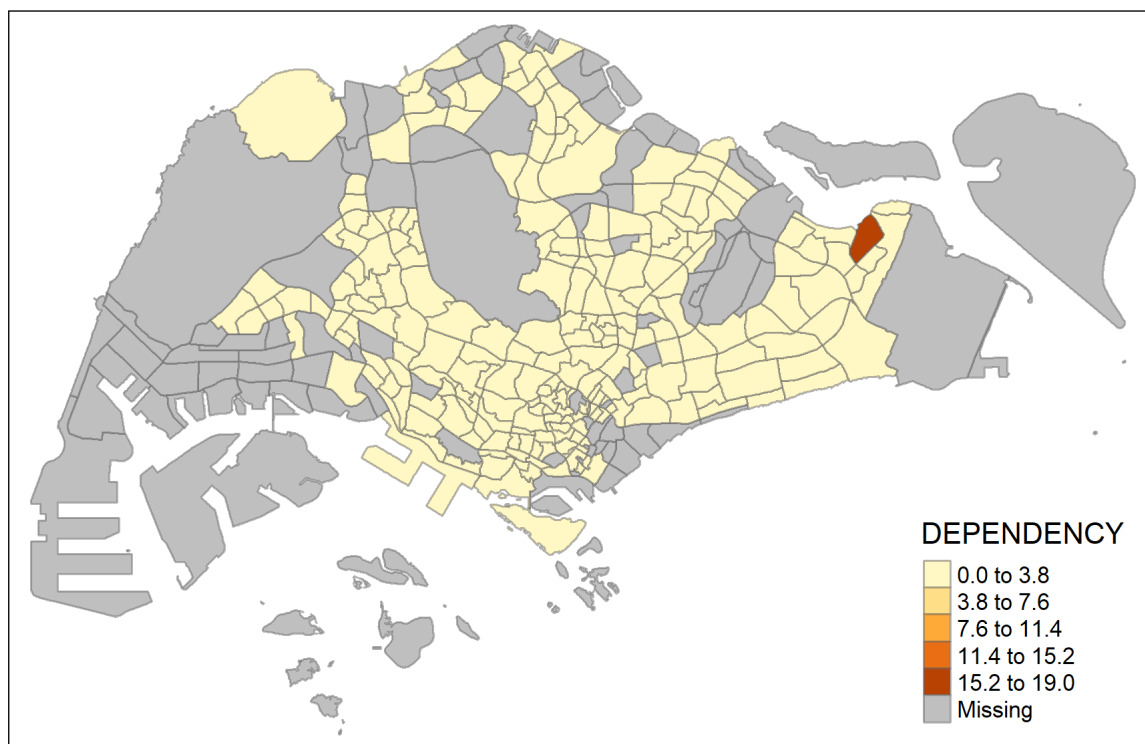

Notice that the distribution of quantile data classification method are more evenly distributed then equal data classification method.

4.3.2 PLOTTING CHOROPLETH MAP WITH CUSTOME BREAK

For all the built-in styles, the category breaks are computed internally. In order to override these defaults, the breakpoints can be set explicitly by means of the *breaks* argument to the *tm_fill()*. It is important to note that, in **tmap** the breaks include a minimum and maximum. As a result, in order to end up with *n* categories, *n+1* elements must be specified in the *breaks* option (the values must be in increasing order).

Before we get started, it is always a good practice to get some descriptive statistics on the variable before setting the break points. Code chunk below will be used to compute and display the descriptive statistics of **DEPENDENCY** field.


► Show code


Min.	1st Qu.	Median	Mean	3rd Qu.	Max.	NA's
0.0000	0.6519	0.7025	0.7742	0.7645	19.0000	92

With reference to the results above, we set break point at 0.60, 0.70, 0.80, and 0.90. In additional, we also need to include a minimum and maximum, which we set at 0 and 100. Our *breaks* vector is thus `c(0, 0.60, 0.70, 0.80, 0.90, 1.00)`

Now, we will plot the choropleth map by using the code chunk below.

► Show code



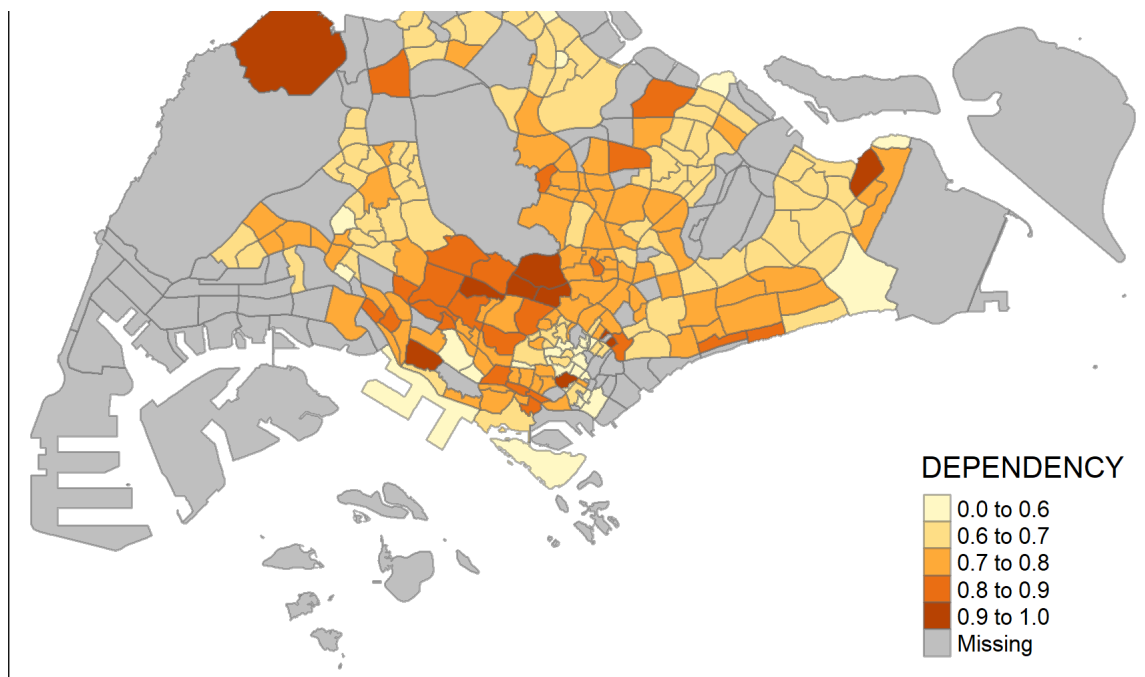


4.4 Colour Scheme

tmap supports colour ramps either defined by the user or a set of predefined colour ramps from the **RColorBrewer** package.

4.4.1 USING COLOURBREWER PALETTE

To change the colour, we assign the preferred colour to *palette* argument of *tm_fill()* as shown in the code chunk below.

► Show code

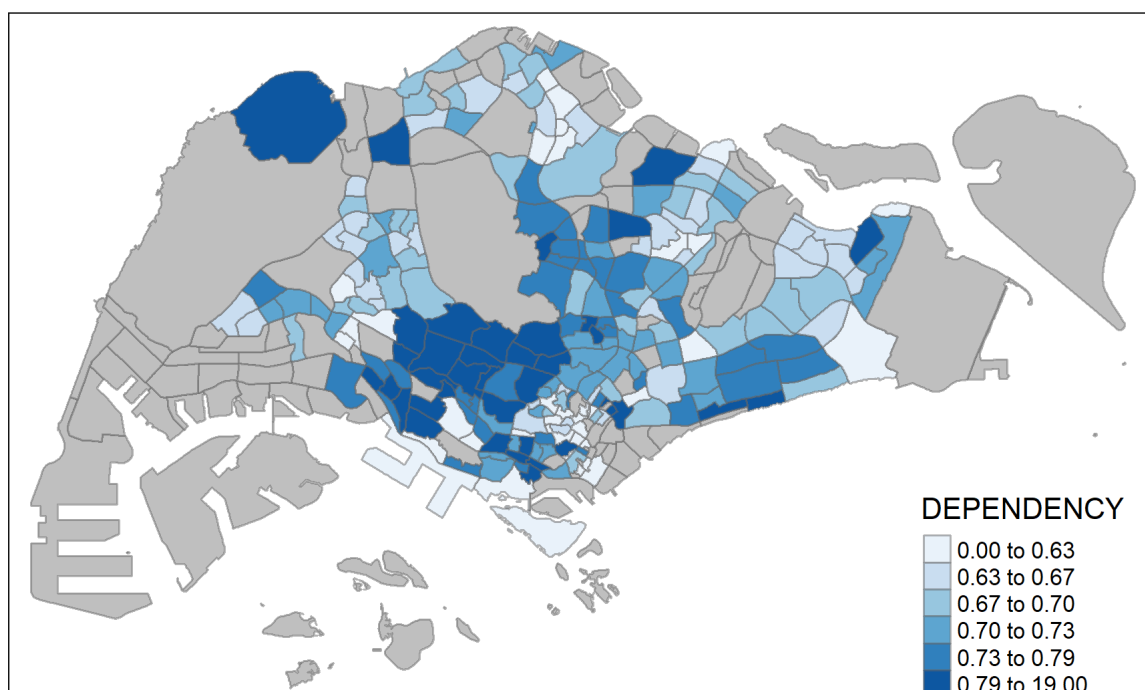




Notice that the choropleth map is shaded in green.

To reverse the colour shading, add a "-" prefix.

► Show code

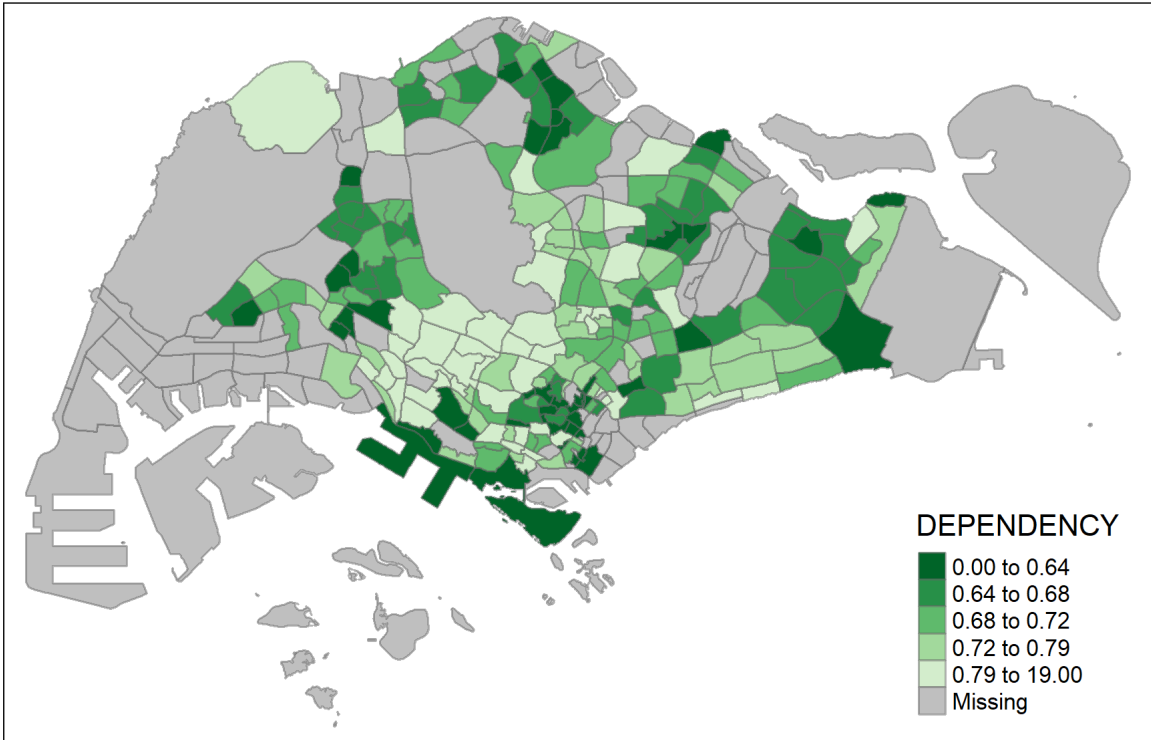

Notice that the colour scheme has been reversed.

4.5 Map Layouts

Map layout refers to the combination of all map elements into a cohesive map. Map elements include among others the objects to be mapped, the title, the scale bar, the compass, margins and aspects ratios, while the colour settings and data classification methods covered in the previous section relate to the palette and break-points used to affect how the map looks.


4.5.1 MAP LEGEND

In **tmap**, several *legend* options are provided to change the placement, format and appearance of the legend.

► Show code

Distribution of Dependency Ratio by planning subzone
(Jenks classification)



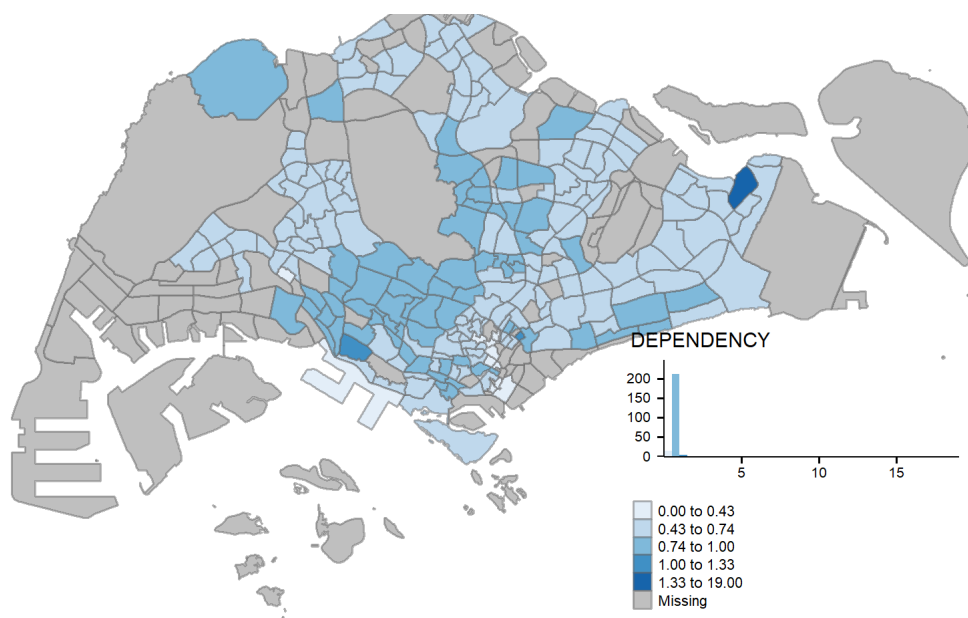


4.5.2 MAP STYLE

tmap allows a wide variety of layout settings to be changed. They can be called by using `tmap_style()`.

The code chunk below shows the *classic* style is used.

► Show code

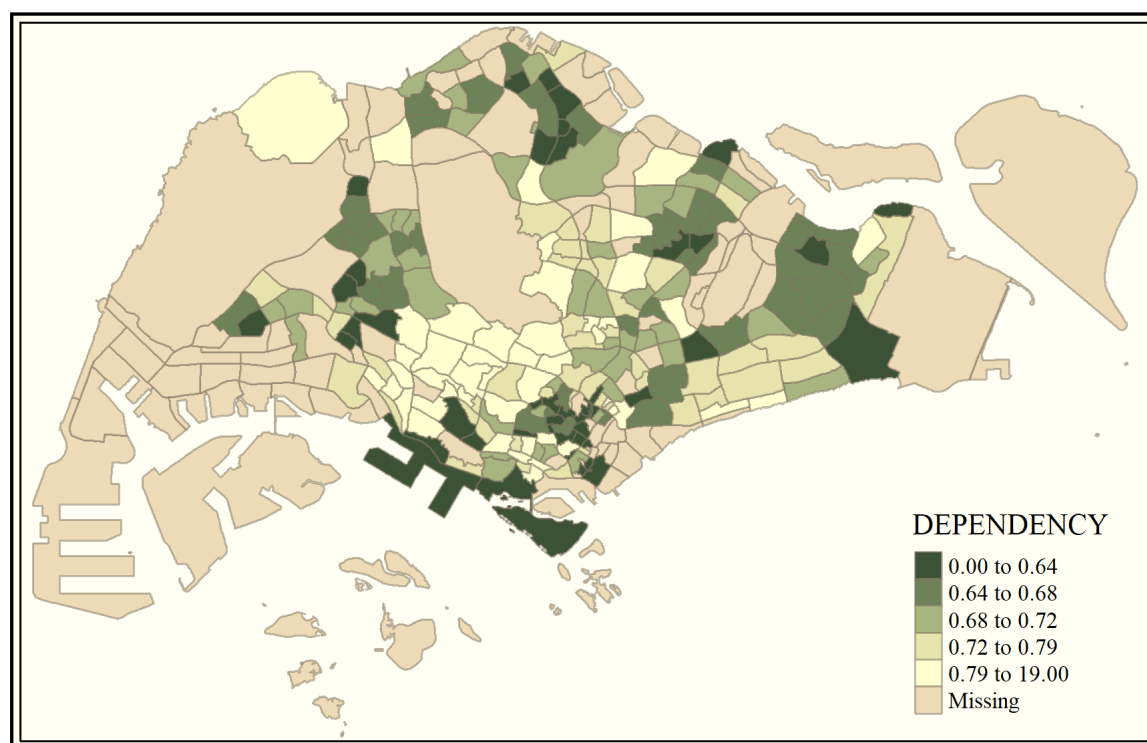


4.5.3 CARTOGRAPHIC FURNITURE

Beside map style, **tmap** also provides arguments to draw other map furniture such as compass, scale

bar and grid lines.

In the code chunk below, `tm_compass()`, `tm_scale_bar()` and `tm_grid()` are used to add compass, scale bar and grid lines onto the choropleth map.

► Show code

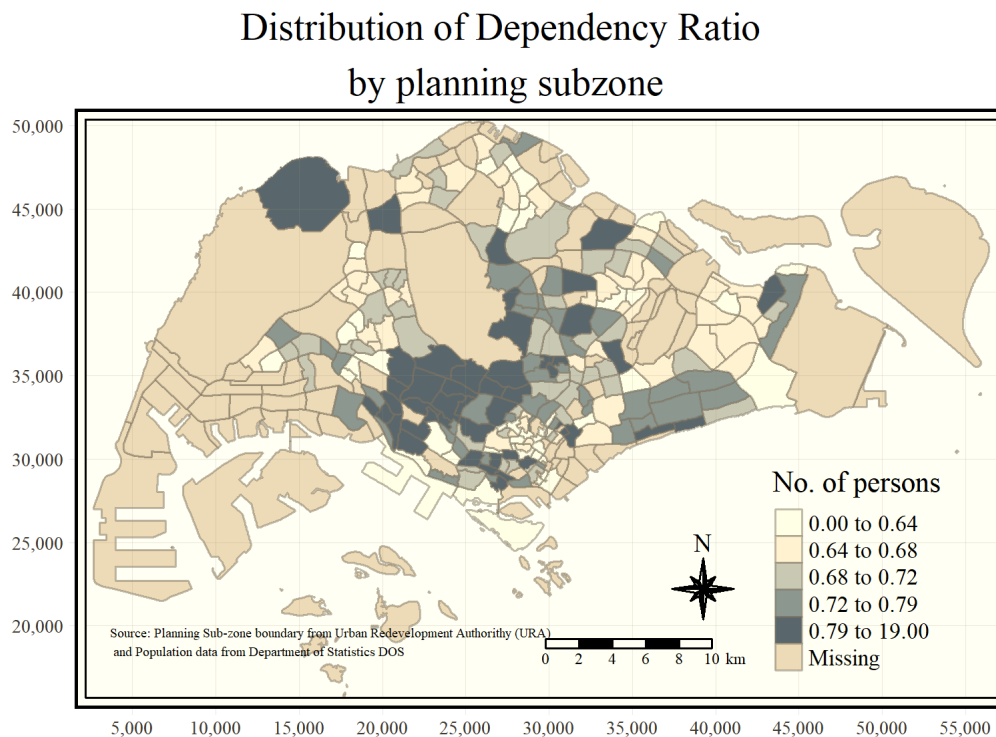

To reset the default style, the code chunk use the code chunk below.

► Show code

4.6 Drawing Small Multiple Choropleth Maps

Small multiple maps, also referred to facet maps, are composed of many maps arrange side-by-side, and sometimes stacked vertically. Small multiple maps enable the visualisation of how spatial relationships change with respect to another variable, such as time.


In **tmap**, small multiple maps can be plotted in three ways:

- by assigning multiple values to at least one of the aesthetic arguments,
- by defining a group-by variable in `tm_facets()`, and
- by creating multiple stand-alone maps with `tmap_arrange()`.

4.6.1 BY ASSIGNING MULTIPLE VALUES TO AT LEAST ONE OF THE AESTHETIC ARGUMENTS


In this example, small multiple choropleth maps are created by defining ***ncols*** in `tm_fill()`

► Show code

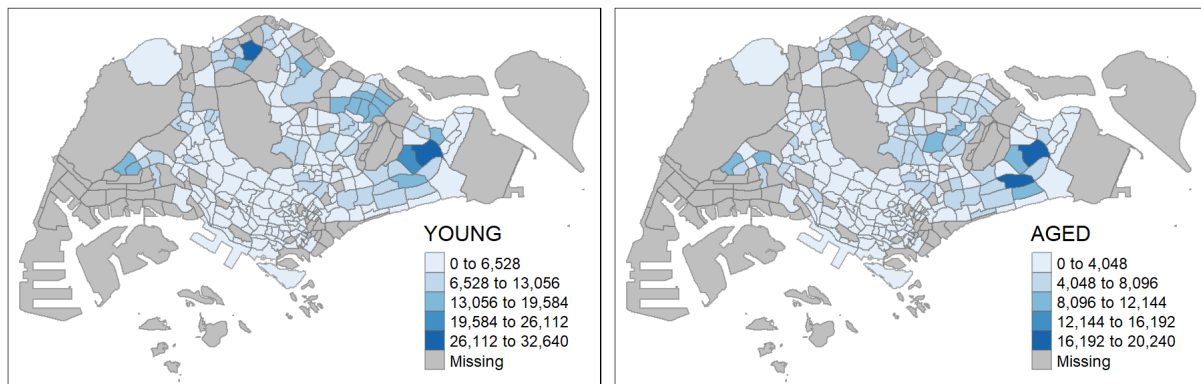

In this example, small multiple choropleth maps are created by assigning multiple values to at least one of the aesthetic arguments


► Show code

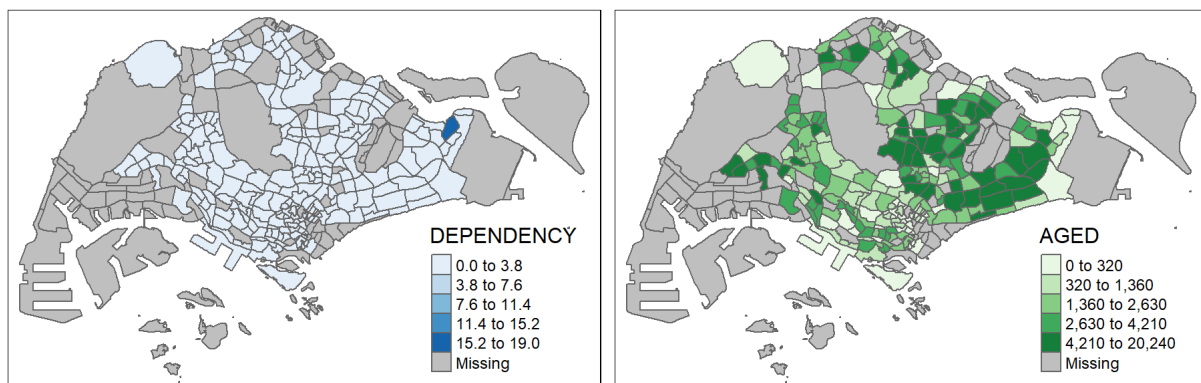

4.6.2 BY DEFINING A GROUP-BY VARIABLE IN `TM_FACETS()`

In this example, multiple small choropleth maps are created by using **tm_facets()**.


► Show code

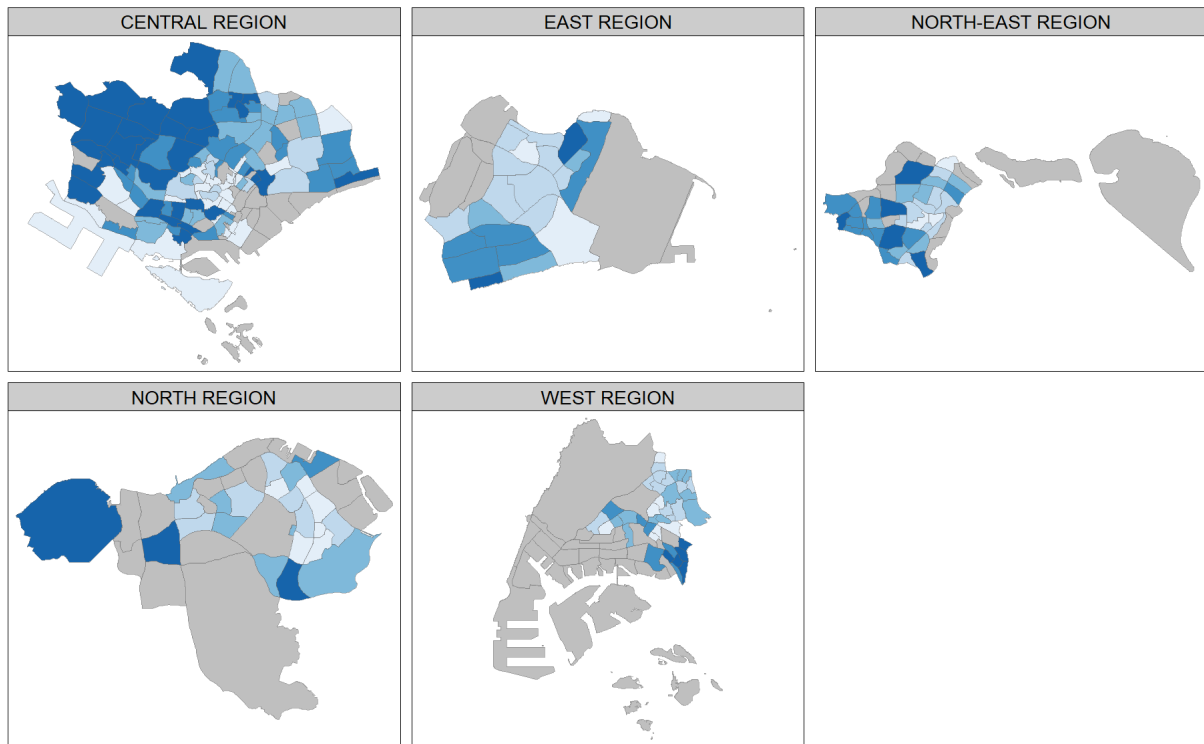

4.6.3 BY CREATING MULTIPLE STAND-ALONE MAPS WITH *TMAP_ARRANGE()*

In this example, multiple small choropleth maps are created by creating multiple stand-alone maps with **tmap_arrange()**.


► Show code

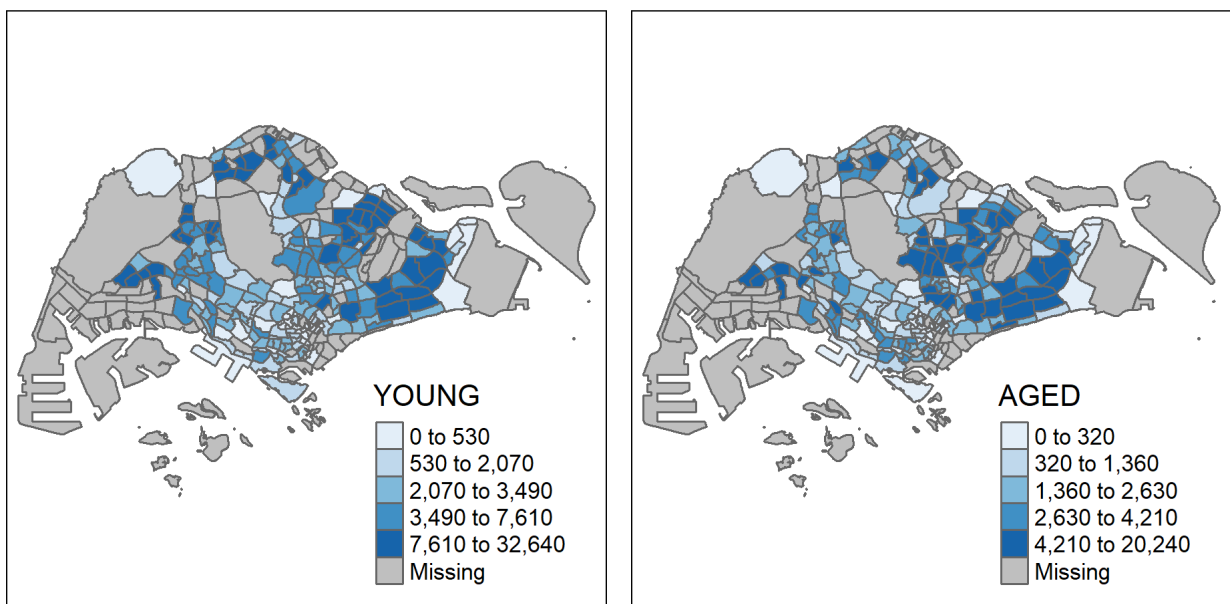

4.7 Mapping Spatial Object Meeting a Selection Criterion

Instead of creating small multiple choropleth map, you can also use selection function to map spatial objects meeting the selection criterion.

► Show code

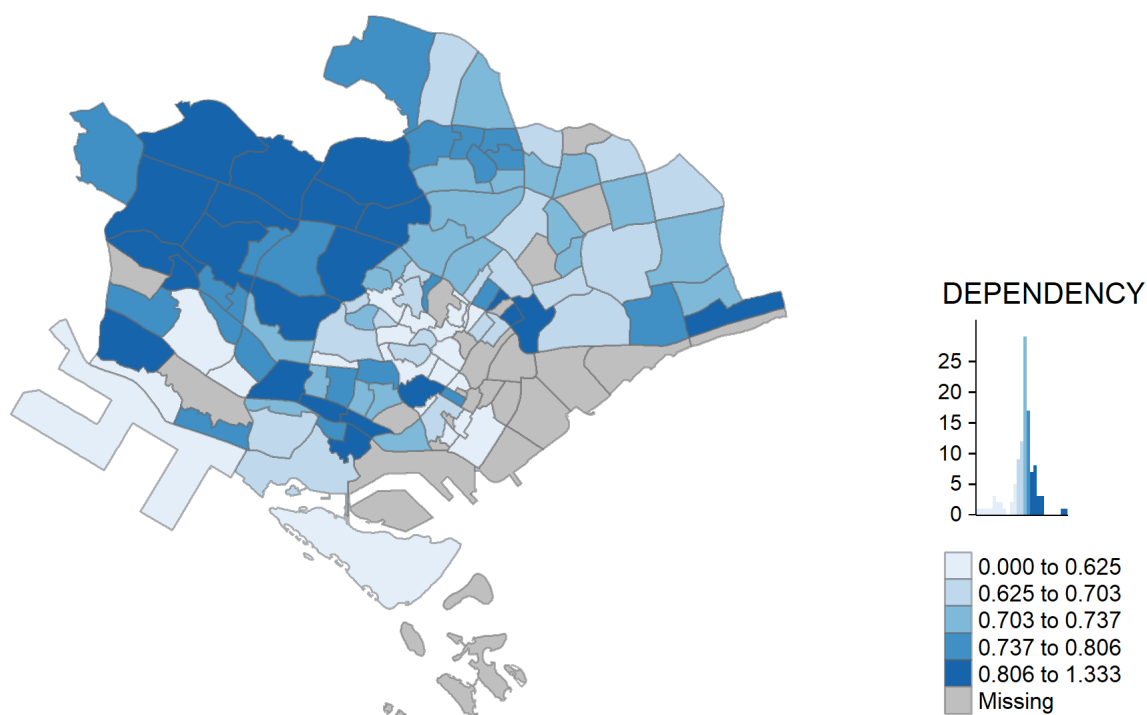

Reference

All about tmap package

- [tmap: Thematic Maps in R](#)
- [tmap](#)
- [tmap: get started!](#)
- [tmap: changes in version 2.0](#)
- [tmap: creating thematic maps in a flexible way \(useR!2015\)](#)
- [Exploring and presenting maps with tmap \(useR!2017\)](#)

Geospatial data wrangling

- [sf: Simple Features for R](#)
- [Simple Features for R: Standardized Support for Spatial Vector Data](#)
- [Reading, Writing and Converting Simple Features](#)

Data wrangling

- [dplyr](#)
- [Tidy data](#)
- [tidyr: Easily Tidy Data with 'spread\(\)' and 'gather\(\)' Functions](#)

► Show code