

Lesson 9: Network Data Visualisation and Analysis

Dr. Kam Tin Seong
Assoc. Professor of Information Systems

School of Computing and Information Systems,
Singapore Management University

2020-2-15 (updated: 2021-06-30)

Content

- Introduction to Graph Visual Analytics
- Graph Visualisation in Actions
- Basic Principles of Graph
- Network data sets
 - Graph data format
- Network Visualisation and Analysis
 - Network visualisation and analysis process model
 - Graph layouts and visual attributes
 - Network metrics


Introduction to Graph Analytics

- What is Graph Analytics?
- Basic concepts of graph
- Network in Real World
- Graph Visualisation in Actions

What is Graph Analytics?

- The study and analysis of data that can be transformed into a graph representation consisting of nodes and links.
- Analytic tools used to determine strength and direction of relationships between objects in a graph.
- The focus of graph analytics is on pairwise relationship between two objects at a time and structural characteristics of the graph as a whole.

Enron Email Corpus Network

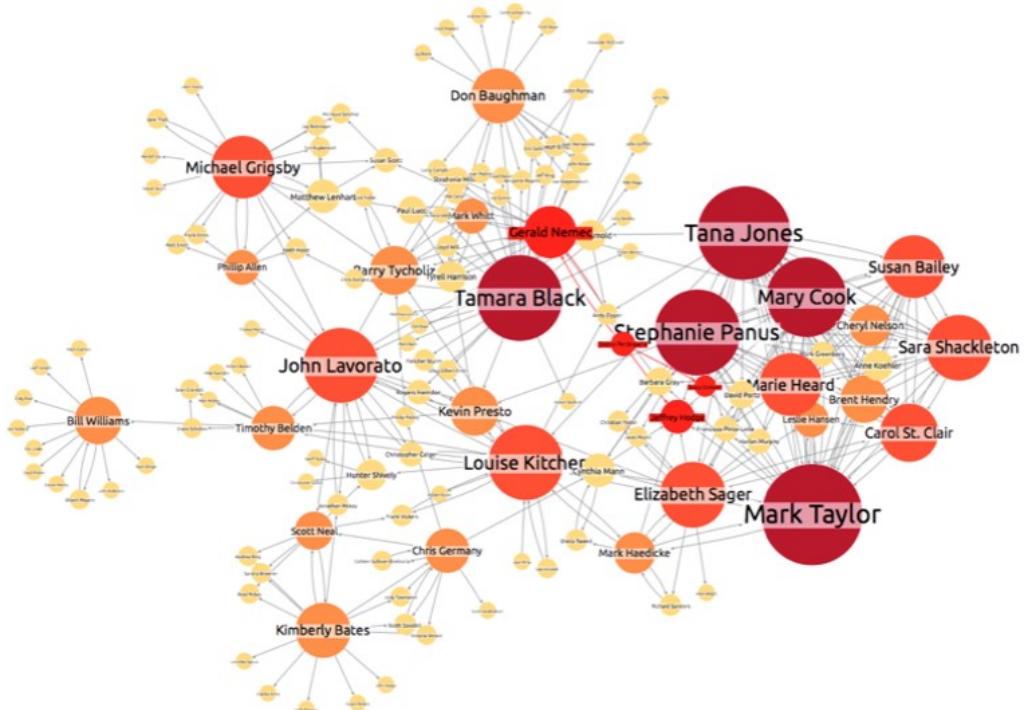


Source: <https://cambridge-intelligence.com/using-social-network-analysis-measures/>

What is Graph Analytics?

- For example, in a graph representing relationships (such as “liking” or “friending” another individual’s profile or site) between individuals, graph analytics can help answer questions like the following:
 - How many other individuals does the average individual “friend” with?
 - What is the maximum number of “friends” any one individual has?
 - How interconnected are groups of users with one another?
 - How many “friend” relationships does it take to get from one user to another user?
 - Are there isolated groups of individuals who are connected to each other but not to individuals not in their group?
- Applications of Graph Analytics include clustering, partitioning, search, shortest path solution, widest path solution, finding connected components, and page rank.

Graph Analytics in History: Classical Graph Theory

The Seven Bridges of Königsberg is a historically notable problem in mathematics. Its negative resolution by Leonhard Euler in 1735 laid the foundations of graph theory and prefigured the idea of topology.

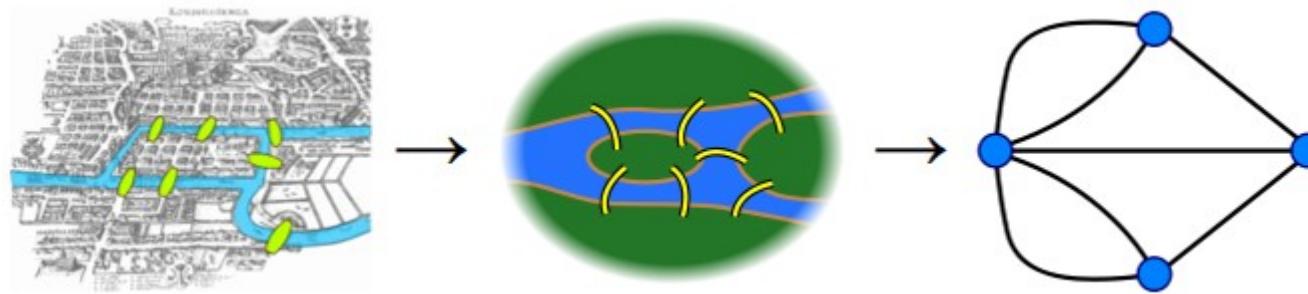


Source: http://en.wikipedia.org/wiki/Seven_Bridges_of_Königsberg

Graph Analytics in History: Sociogram

A sociogram is a tool for charting the relationships within a group. It's a visual representation of the social links and preferences that each person has – valuable data for leaders.

Early 20th-century social graph used

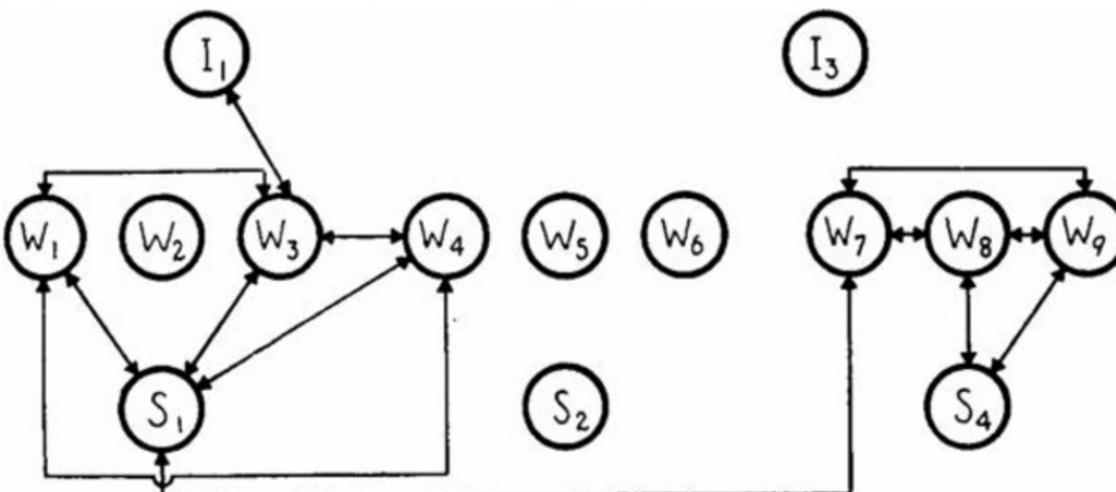

Source: Valdis Krebs (2010) "Your Choice Reveal Who You Are: Mining and Visualizing Social Patterns" in Beautiful Visualization.

Where are Graphs used


- Graphs are sometimes used in surprising ways. There are many problems which may not initially appear to take the form of graphs but can be solved more quickly if they are transformed into a graph:
 - Partitioning large physical volumes into smaller physical volumes as part of high performance simulations on supercomputers.
 - Parsing speech to determine what is the most likely sequence of words that matches a given set of sounds.
 - Analyzing the way different parts of a complex software program interact in order to proactively find and remove bugs.

Basic Principles of Graph

- Basic Graph
- Direct and Undirected Graphs
- Weighted Graph
- Ego-centric Graph
- Bipartite Graph
- Multimodel Graph


A Complete Graph

A complete graph is a simple **undirected** graph in which every pair of distinct **vertices** (also known as **nodes**) are connected by an unique **edge** (also known as **link**).

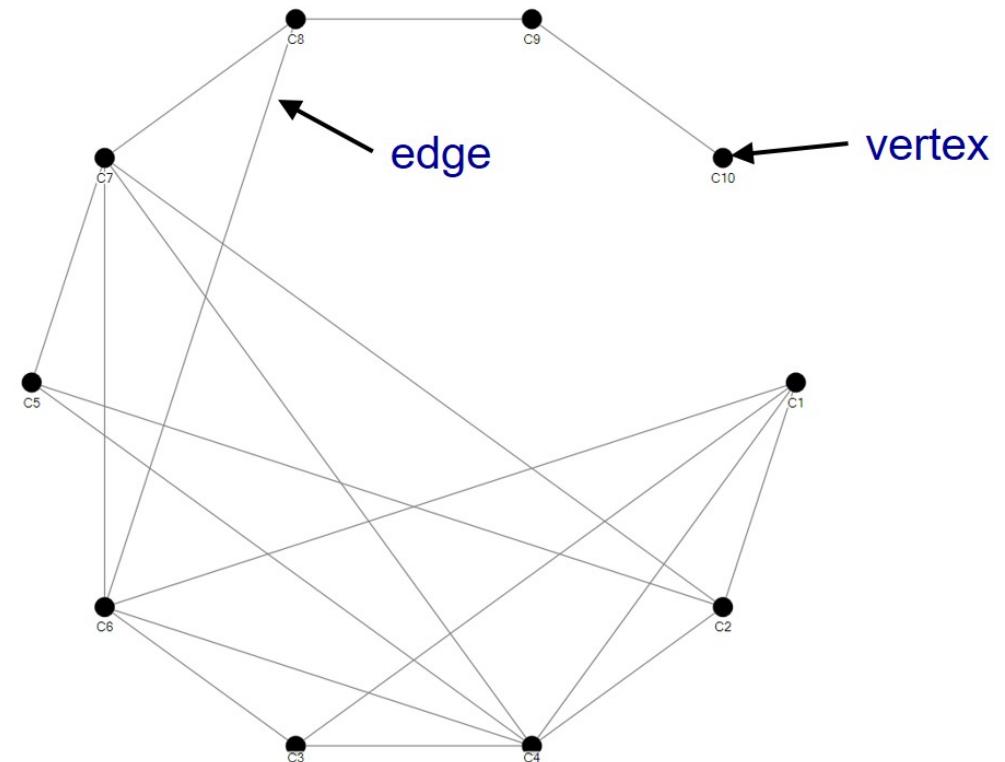




A Directed Graph

Have a clear origin and destination. Also known as *asymmetric edges*. Suitable for representing network with non reciprocal relationships such as Twitter.

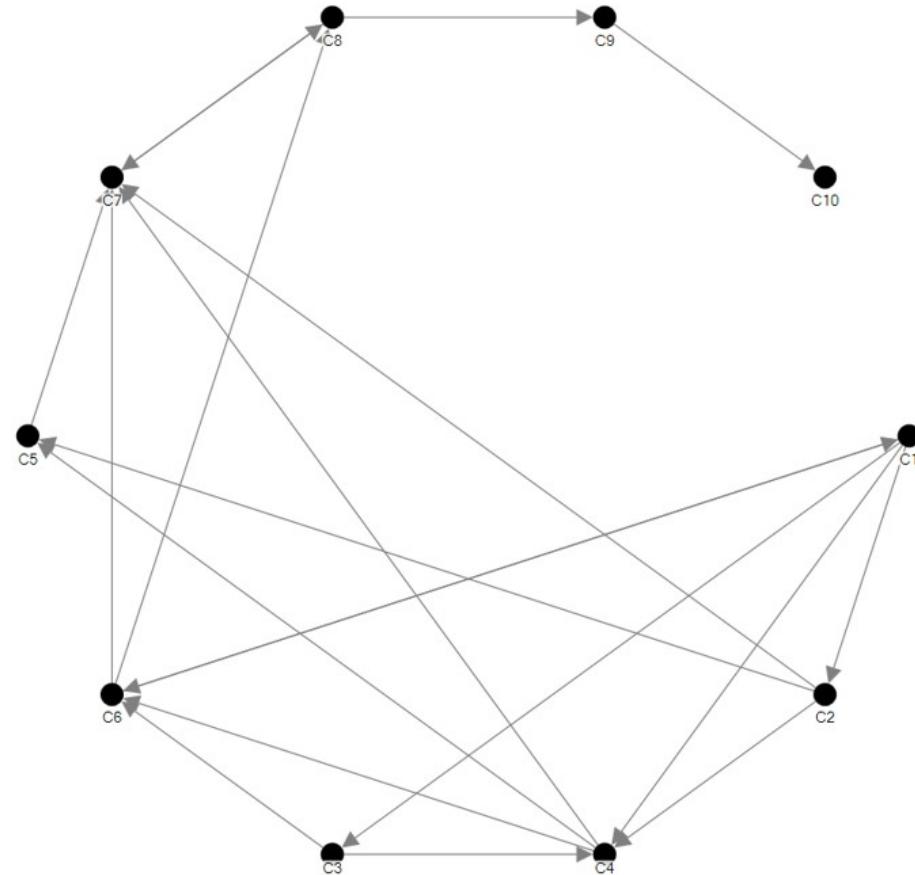


Graph representation

On the left is a normal graph, in the centre is a graph in which each edge is given a numerical value, and to the right is a directed graph.

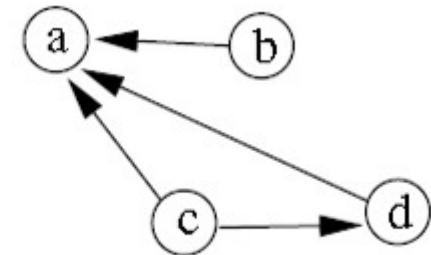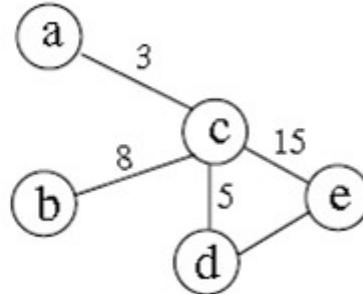


A weighted graph

- A weighted edge includes values associated with each edge that indicate the strength or frequency of tie. For example, numbers of calls between two staffs.

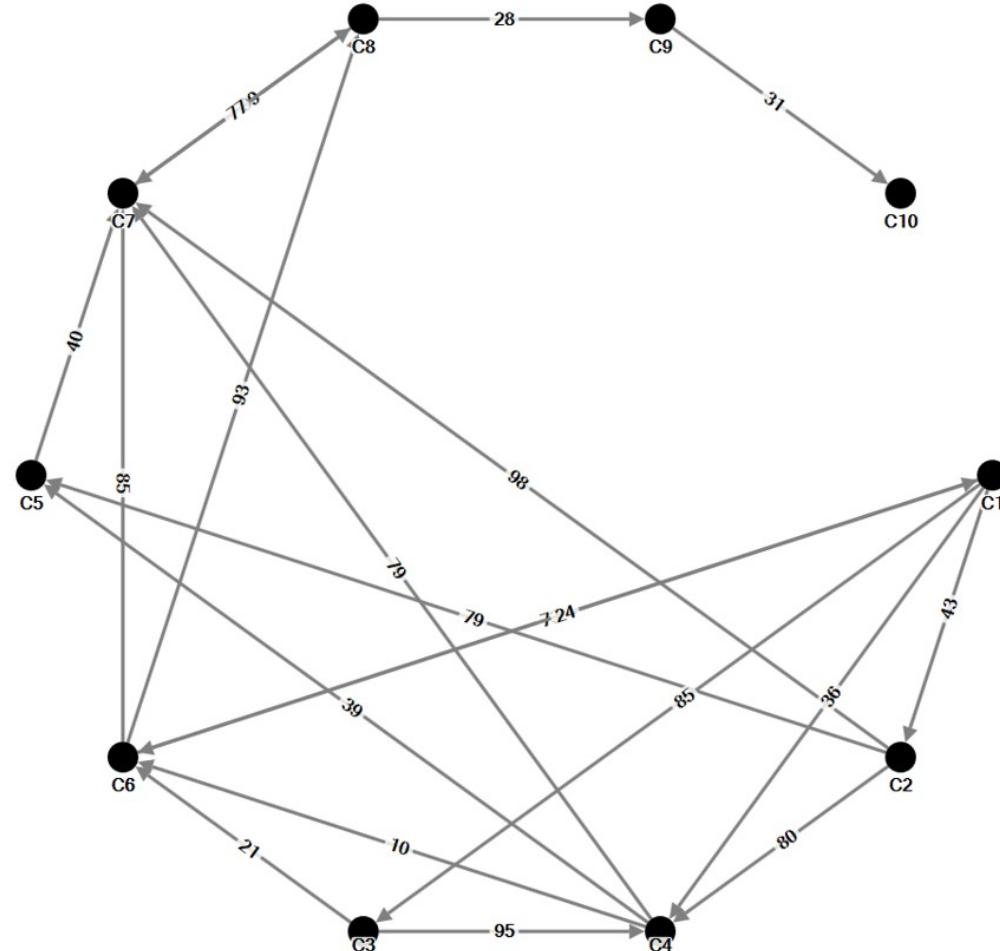


A weighted graph

- Edges with different thickness are used to represent the monthly calls by staffs.

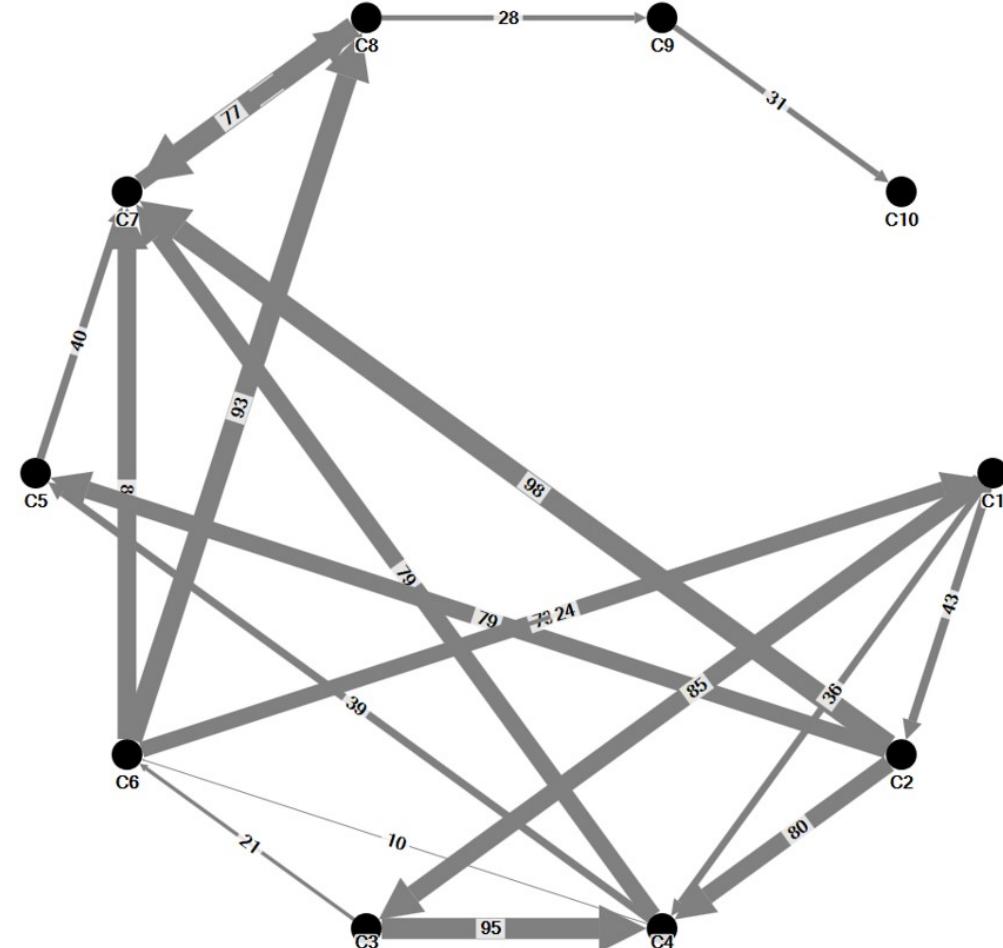


An ego-centric graph

- Network consisting of an individual and their immediate peers (Heer & Boyd, 2005).

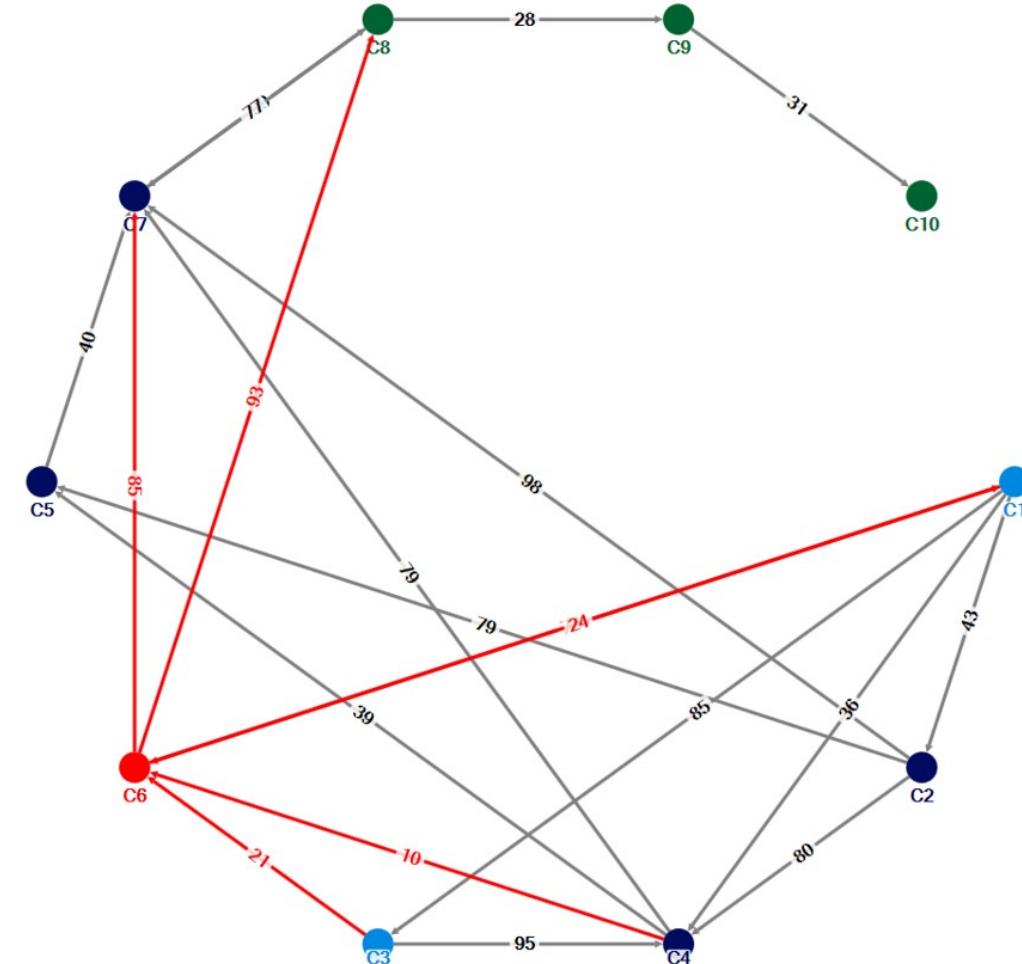


Bipartite Graph

- A graph whose vertices can be divided into two disjoint sets U and V such that every edge connects a vertex in U to one in V ; that is, U and V are independent sets.
- Equivalently, a bipartite graph is a graph that does not contain any odd-length cycles.

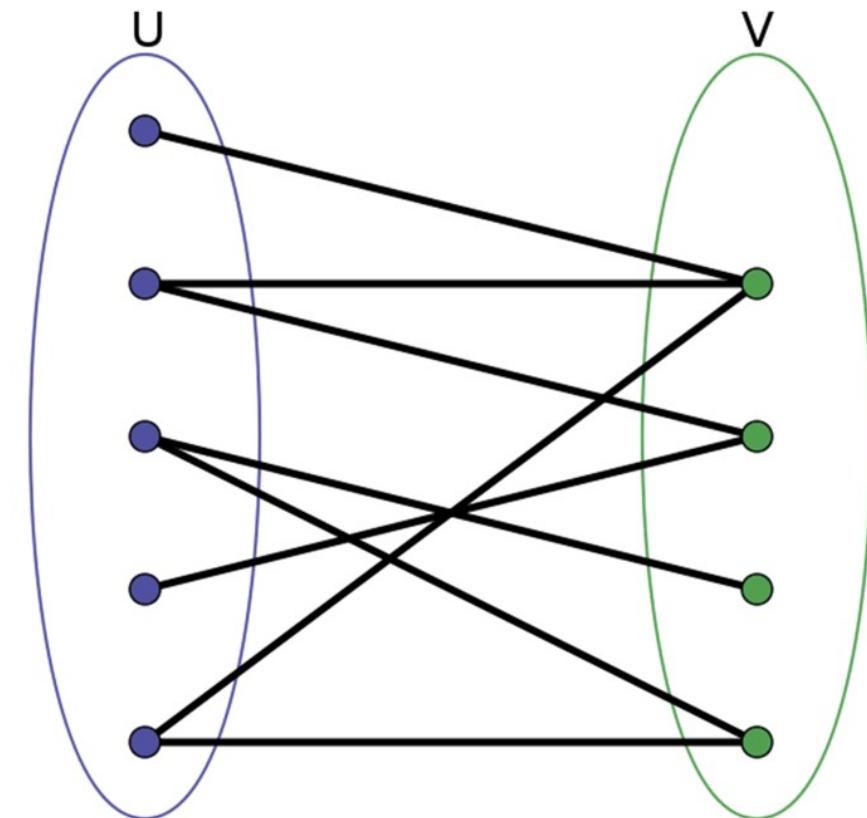


Affiliation Networks - Bipartite Graph

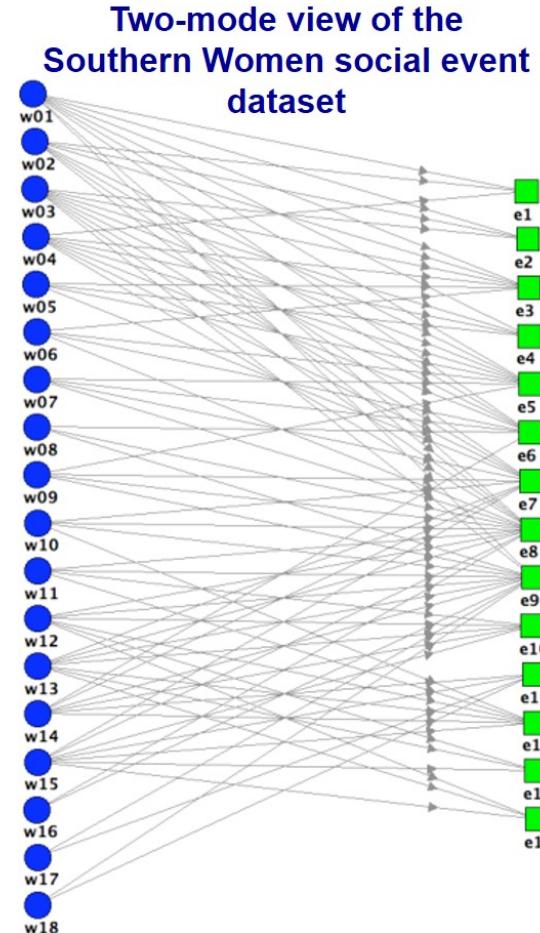

Source: Valdis Krebs (2010) "Your Choice Reveal Who You Are: Mining and Visualizing Social Patterns" in Beautiful Visualization.

A Multimodel Graph

Social network connecting different types of vertices. For example, a network may connect peers to discussion forums and blog posts they have commented on.

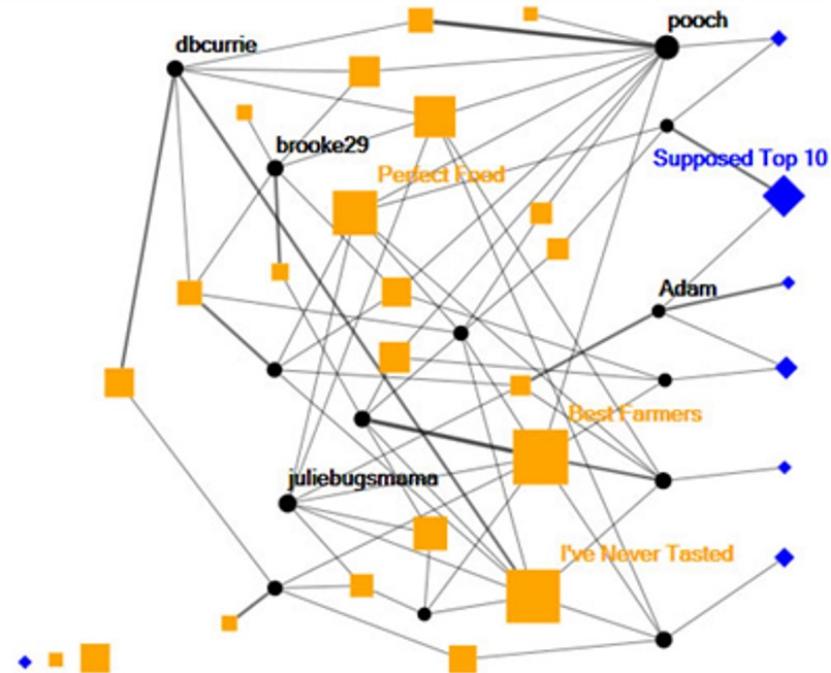

SeriousEats visualization emphasizing the most important people (black circles), forums (orange squares), and blogs (blue diamonds).

Network in real World

- Physical
 - Transportation (i.e. road, port, rail, etc)
 - Utility (electricity, water, gas, network cable, etc)
 - Natural (river, etc)
- Abstract
 - Social media (i.e. e-mail, Facebook, Twitter, Wikipedia, etc)
 - Organisation (i.e. NGO, politics, customer-company, staff-to-staff, criminal, terrorist, disease, etc)


Real world network

- Land transport



Real world network

- Maritime transport

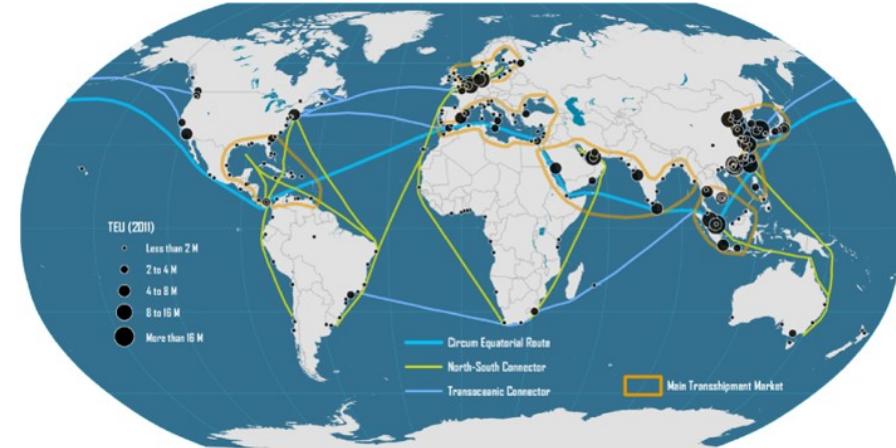

Real world network

- Air transport



Real world network

- Life line





Types of drains/canals




Real world network

- Social network

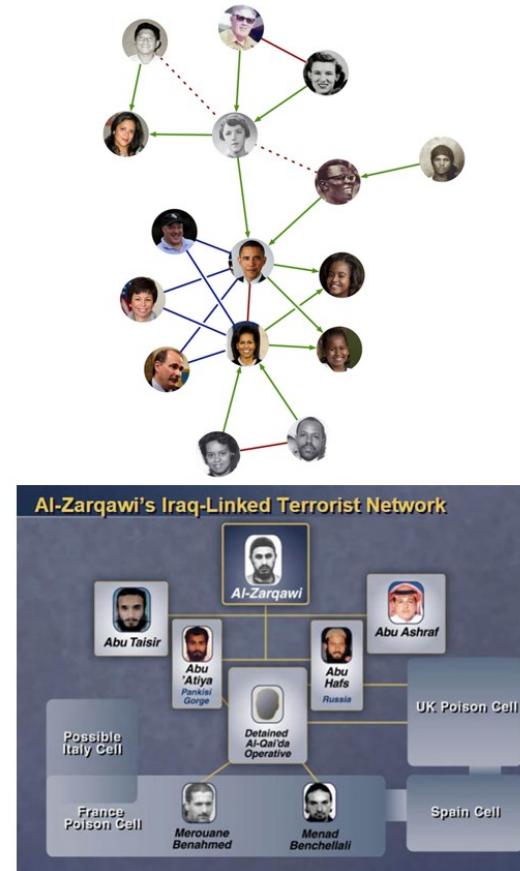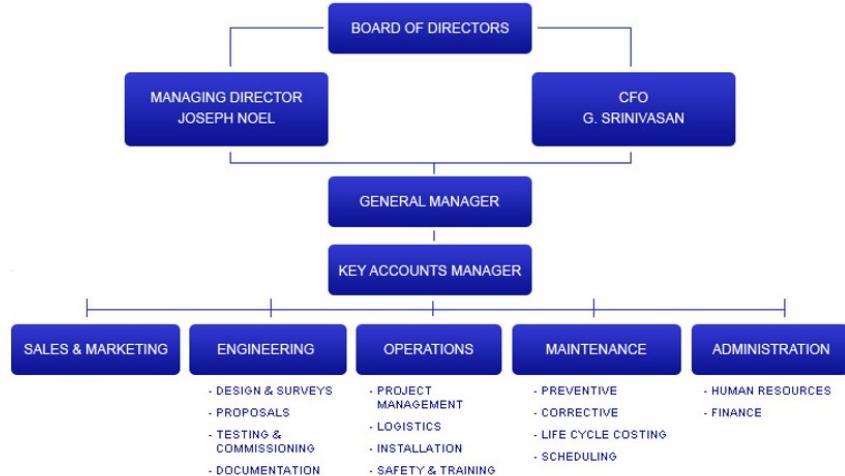

Graph Visualisation in action 1


Using graph visualisation to understand business networks

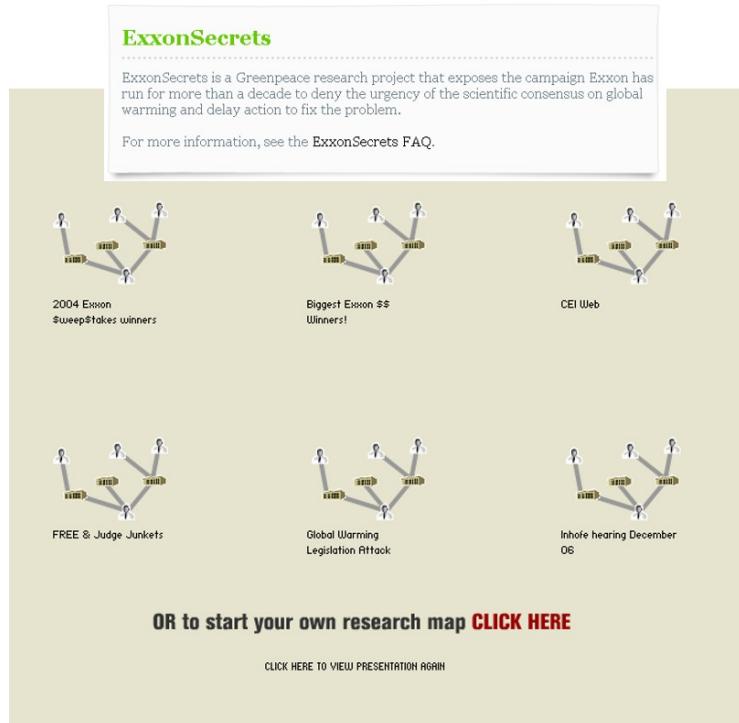

Source: <https://exxonsecrets.org/maps.php>

Graph Visualisation in action 2


Graph visualisation is used to reveal voting patterns among United States senators

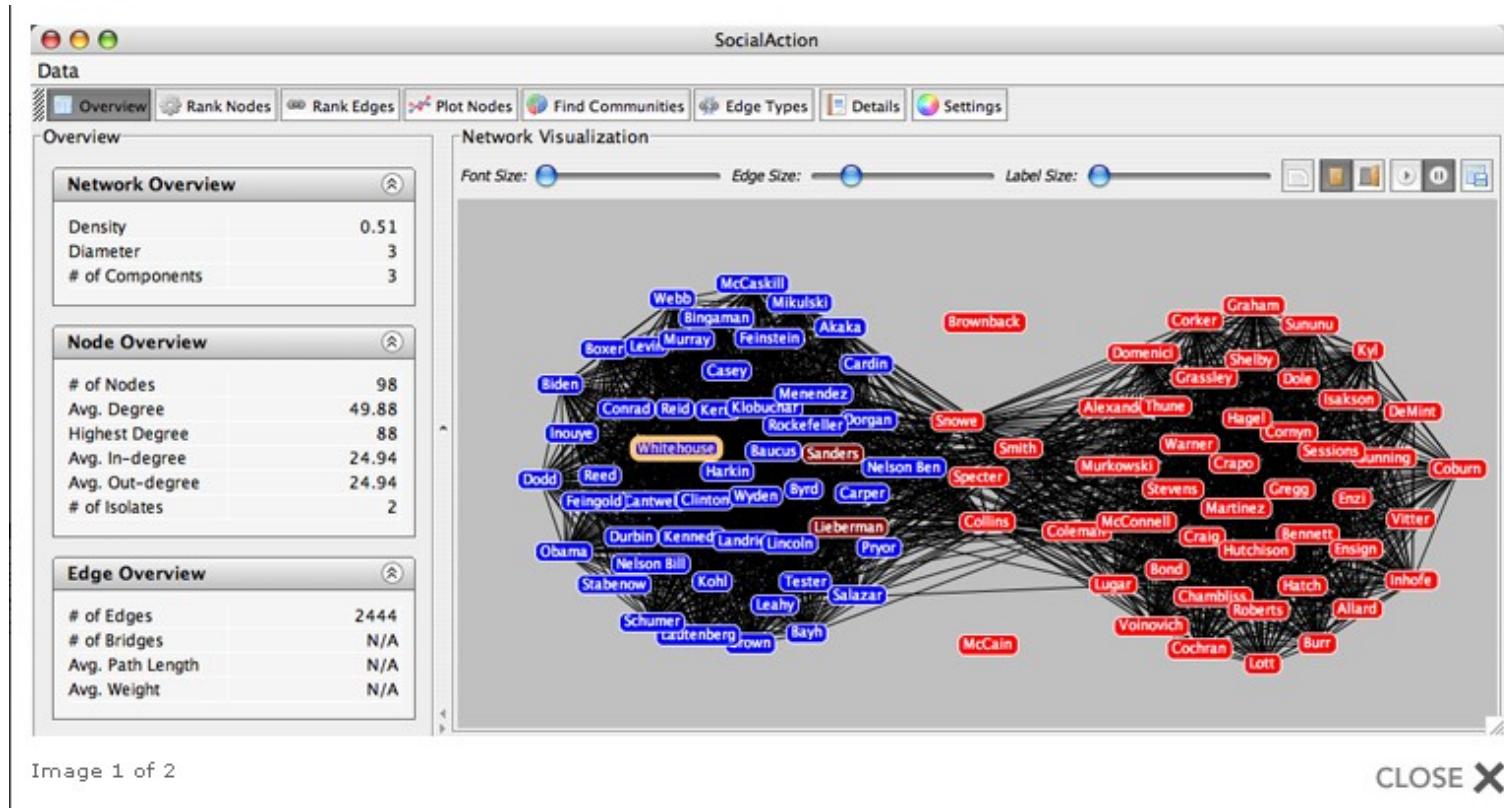

Source: <http://www.cs.umd.edu/hcil/socialaction/users/umd/socialaction.jnlp>


Graph Visualisation in action 3

Graph visualisation is used to understand online social network

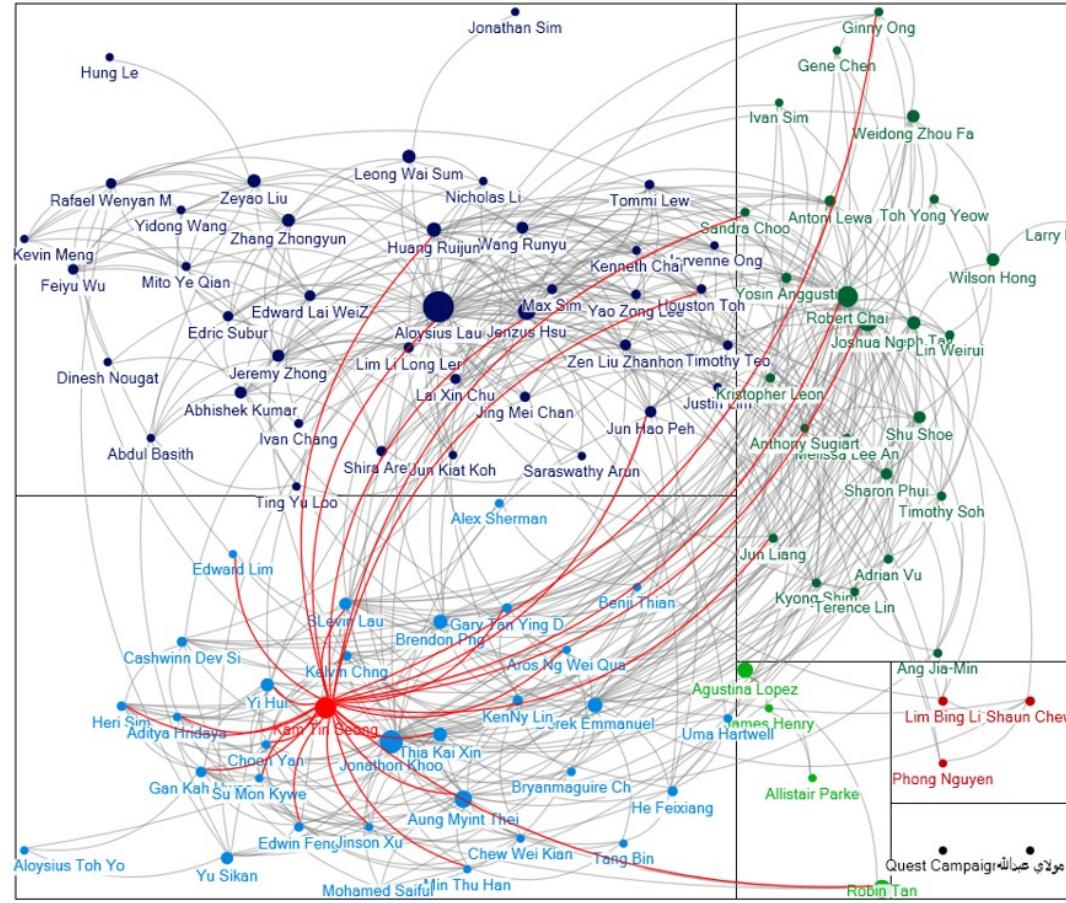

Graph Visualisation in action 4

Graph visualisation is used to show how the news are all connected by degrees of separation

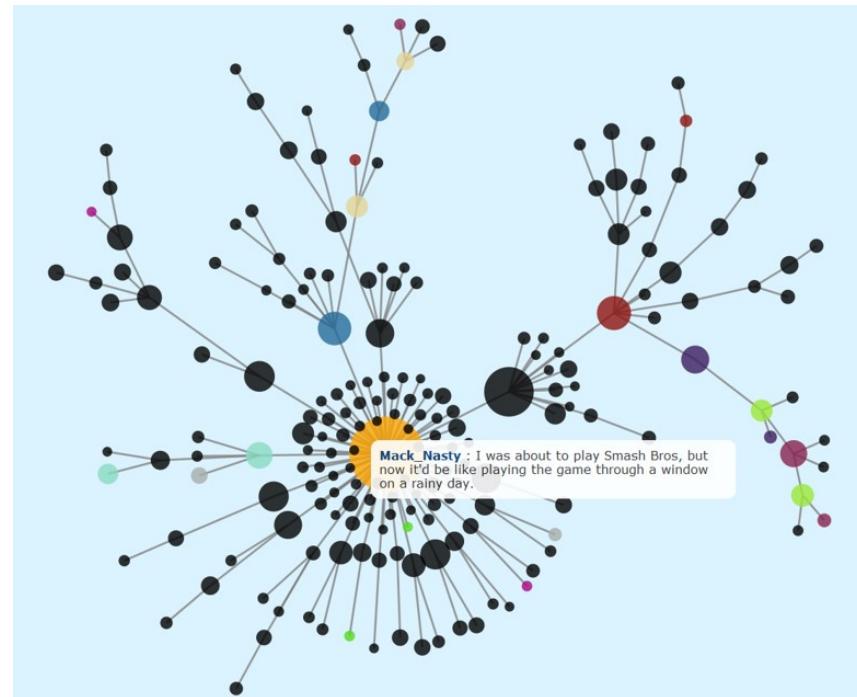

Source: Link: <http://whichlight.github.io/reddit-network-vis/?>
discussion=http://reddit.com/r/gaming/comments/3d2ewz/nintendo_president_satoru_iwata_passes_away/

Graph Visualisation in action 5

Application of network analysis in project management.

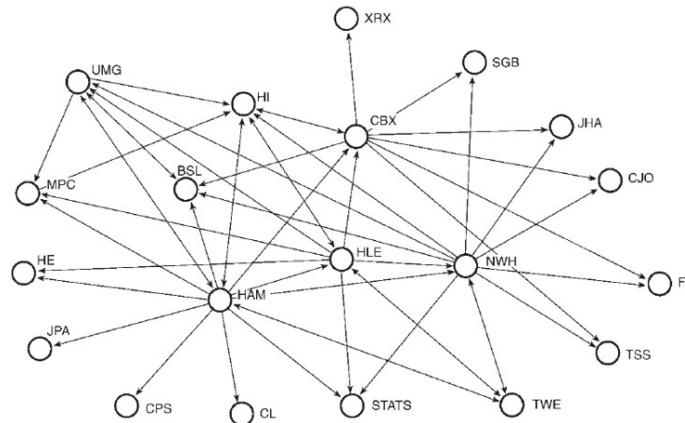


Figure 1 Design development information exchange network: traditional, private sector procurement
Key


| Ref. | Role | Ref. | Role |
|-------|--------------------------------------|-------|---|
| BSL | Concrete floor subC | JHA | Groundwork subC |
| CBX | Client's adviser | JPA | Landscape architect |
| CJO | Concrete frame subC | MPC | The Developer |
| CL | Fenestration and cladding supervisor | NWH | Main Contractor |
| CPS | Planning Supervisor | PPL | The Landlord |
| FBL | Brickwork subC | SGB | Scaffolding subC |
| HAM | Architect | STATS | Statutory bodies, authorities and undertakers |
| HE | M & E subC | TSS | Temporary electrical services |
| HI | Consultant Project Manager | TWE | Consultant QS |
| HLE | Consultant M & E services engineer | UMG | Consultant structural engineer |
| Note: | SubC = subcontractor | XRX | The tenant |

Source: Source: Pryke, S.D."Analysing construction project coalitions: exploring the application of social network analysis", Construction Management and Economics, (2004), 22. pp. 787-797.


Graph Visualisation in action 6

SecViz: Application of network graph in security

(a) Similarity graph of log entries and (b) Similarity graph of network scans

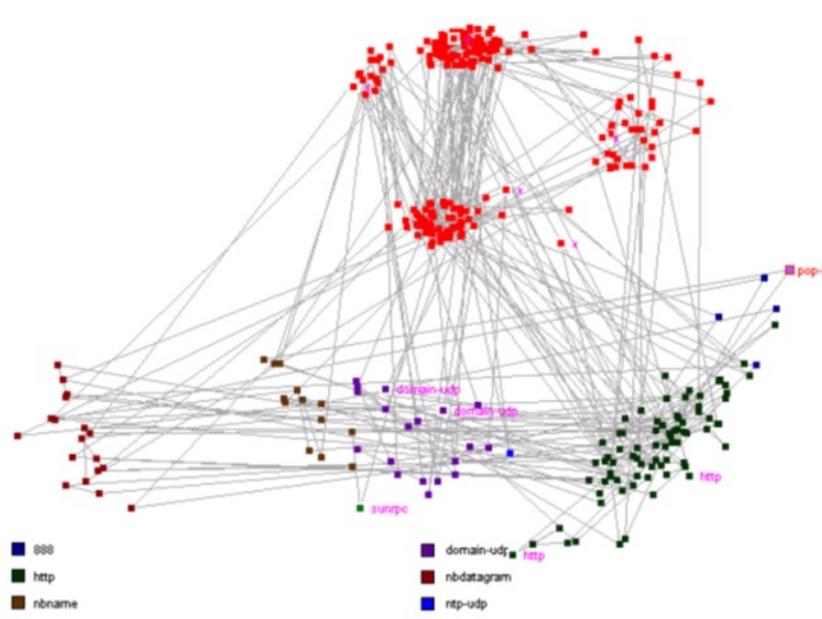

(a)

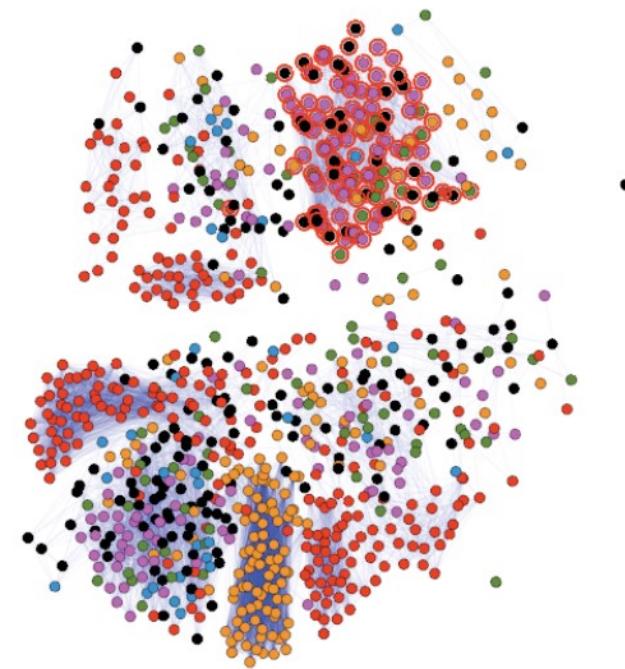


(b)

Graph Visualisation in action 7

Alumni network

- Networks of the below universities are expanded in a breadth first manner up to the depth of 2, (showing university, alumni and companies they are associated with through employment, investment or other activities)
- Size of the node reflects degree of the node (scaled logarithmically).

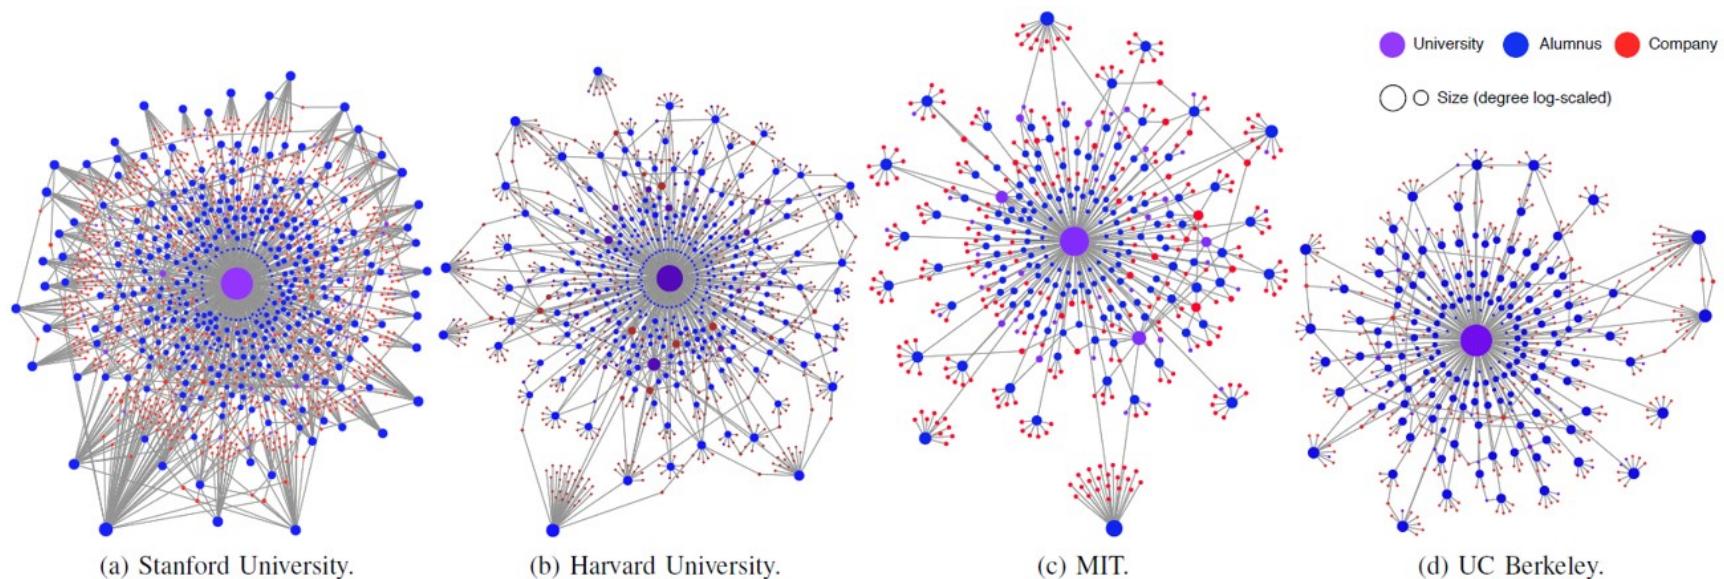


Source: <http://www.innovation-ecosystems.org/wp-content/uploads/2010/12/209.educon.pdf>

Graph Visualisation in action 8

Public Transport Network Analysis


- Degree centrality indexes for nodes in the existing (2006) and proposed (2020) public transport networks in Melbourne's north-east

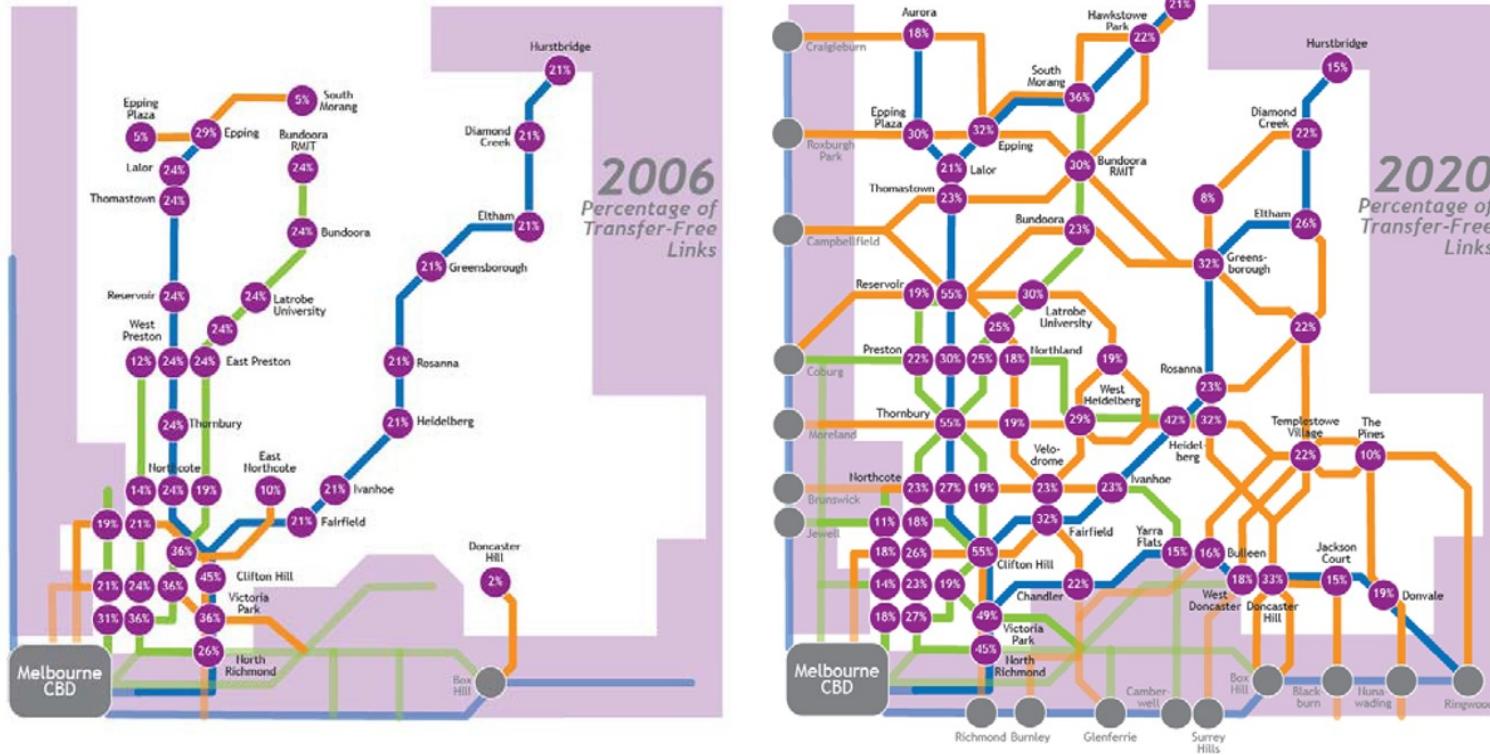

Graph Visualisation in action 9

Maritime Port Network Analysis


- Maritime degree, centrality and vulnerability: port hierarchies and emerging areas in containerized transport (2008-2010)

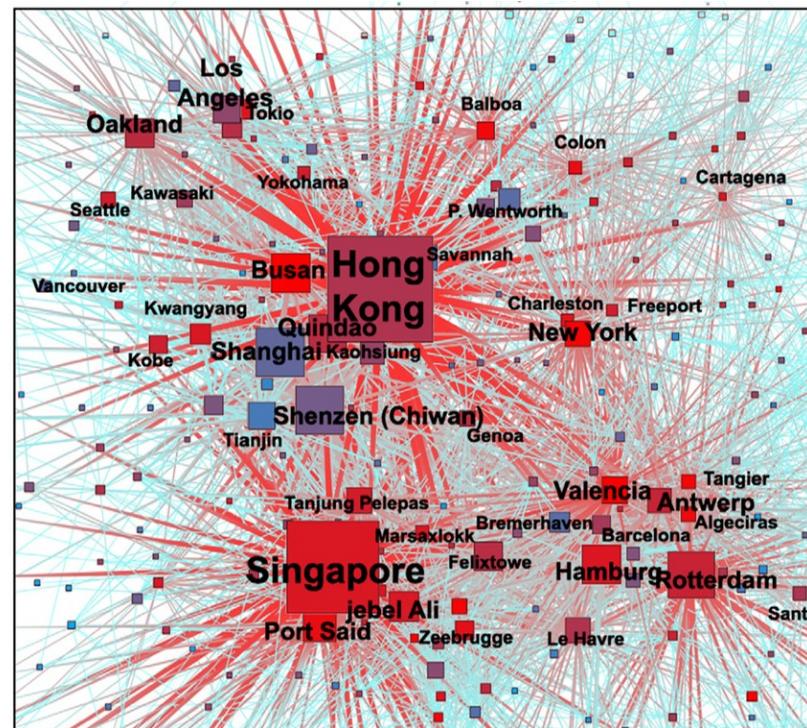

Graph Visualisation in action 10

Firm Network Analysis


- S&T cooperation network diagram of cities in China

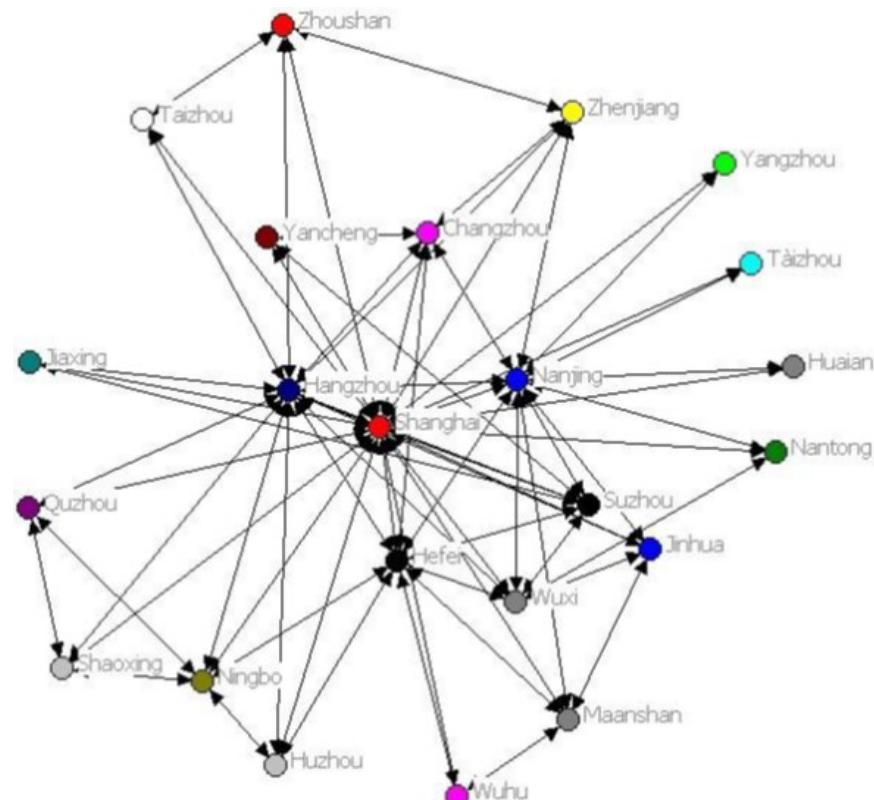

Graph Visualisation in action 11

UN Voting in Europe

- An interesting visual analytics product contributes to [tidytuesday](#). The code is available at this [github repository](#).

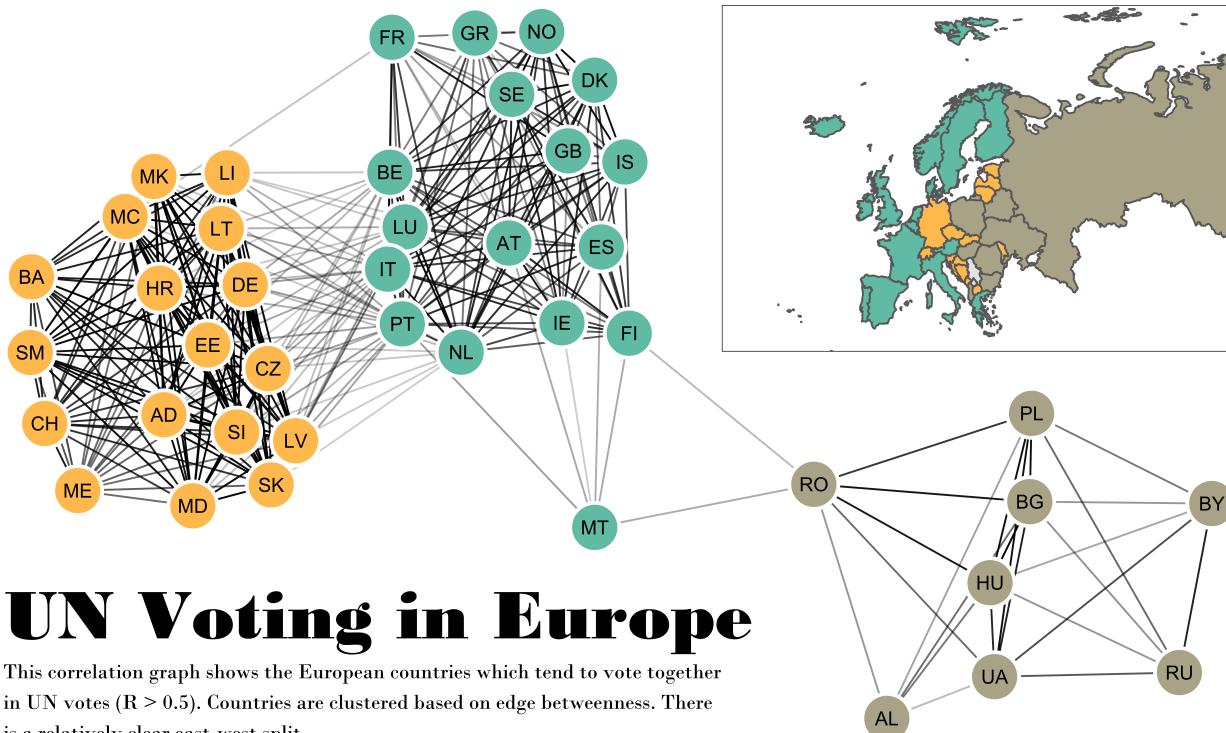

To learn more, go to Visual Complexity

Home About VC Book Stats Blog Books Links Contact

Subscribe to latest projects: Follow on:

visual complexity

Search the VC database: GO

RSA Conference APJ 2015
Join cyber security Keynotes, more.
Network & learn, July in Singapore.

Subject: Transportation Networks (59)

Indexing 906 projects

Filter by: SUBJECT ▾

- Art (69)
- Biology (55)
- Business Networks (42)
- Computer Systems (34)
- Food Webs (8)
- Internet (31)
- Knowledge Networks (129)
- Multi-Domain Representation (66)
- Music (41)
- Others (69)
- Pattern Recognition (47)
- Political Networks (32)
- Semantic Networks (44)
- Social Networks (125)
- Transportation Networks (59)
- World Wide Web (55)

Source: <http://www.visualcomplexity.com/vc/index.cfm?domain=Transportation%20Networks>

Graph Data

- What is graph data?
- Storing graph data
 - file-based
 - database management system
 - R object

Potential Graph Data Sources

Node and Link Data Sets

- Flight Stats.
- The record indicates the city pair (that is, a link), such as ORD-LGA or LAX-ATL. Note that this particular data has directed links. ORD-LGA is a flight that starts in Chicago's O'Hare Airport and ends at LaGuardia Airport in New York City and is different from LGA-ORD, which is a flight going in the other direction. Both links are valid.

Flight, Origin, Destination, Distance, Duration

AA100, ORD, LGA, 836km, 1:55

DL364, LAX, ATL, 2384km, n/a

AA102, ORD, LGA, 836km, 1:55

QF32, LHR, SYD, 11711km, 22:18

...

Potential Graph Data Sources

Link Records

- Sometimes only links are identified in a data set. One example is network log files. Although log files may seem arcane, they contain a wealth of interesting information—for example, from where people are connecting into a corporate network, when and where big files are transferred out, patterns of regular activity (such as network backup), and patterns of irregular activity (such as hackers attempting to break in).

Timestamp, Source, Destination, Etc

2/25/2014, 9.8.2.3, 128.2.9.87

2/25/2014, 7.6.9.5, 128.2.19.45

2/25/2014, 7.6.9.5, 128.2.9.87

...

Potential Graph Data Sources

Transaction Records

- By looking at the items that co-exist in a transaction, you can construct a graph. Nodes are the items, and links are the co-occurrence of items within any transaction. Examples of this type of graph include a wide variety of social networking (including e-mail data, as well as multiple authors of documents such as books, news stories, or reports.

To, From, CC, Date, Size

"Joe", "Zoe", "Tim", 12/09/2014, 156kb

"Joe", "Ben", "Ann, Tim, Zoe", 11/09/2014, 2048kb

"Joe", "Tim", "Ben, Zoe", 11/09/2014, 805kb

...

Potential Graph Data Sources

Sequence Data

- Sequence data is very similar to transaction data with explicit time stamps on each record.

| Time | Client_Address | Requested_File | Status |
|----------|----------------|--------------------------|--------|
| 09:55:15 | 12.34.56.78 | GET /index.html | 200 |
| 09:57:35 | 12.34.56.78 | GET /images/logo.gif | 200 |
| 09:58:22 | 12.34.56.78 | GET /flash/splash.swf | 200 |
| 09:58:35 | 55.44.33.22 | GET /ad/advertisement.js | 404 |
| ... | | | |

Potential Graph Data Sources

Unstructured Data (for Example, Tweets)

- Unstructured data can also be processed to extract nodes and links.
- A means to identify nodes and identify links is required. For example, tweets are short, 140-character messages publicly broadcast on Twitter. Tweets are a rich data source from which you can mine different kinds of nodes and links by looking for co-occurrence of hash tags (that is, user-defined topics), usernames, or stock symbols within tweets, and you can extract these to form graphs.

UserName, Time, Tweet

Benzinga, 01/15/2014, Is #Wendys Success at #McDonalds Expense?

\$MCD \$WEN <http://t.co/0ibzrKFiVB>

SeekingAlpha, 01/15/2014, 2 Dividend Machines I Purchased Last Week

<http://t.co/hMcX5rvSxH> \$TGT \$KO \$MCD

wallstCS, 01/15/2014, RT @Jacqui_WSCS: #Starbucks Catches

"McDonald's Syndrome" and Gets a #Stock Downgrade

<http://t.co/elwMdFbcQ4> via @wallstCS \$SBUX \$MCD

...

Potential Graph Data Sources

Matrix (for Example, Trade, Migration)

- Sometimes a matrix of data contains the same entries in both the first column and first row. For example, global trade flows between countries can be represented as a table of numbers (<http://stats.oecd.org>).

| From/To | Austria | Belgium | Denmark | ... |
|---------|---------|---------|---------|-----|
| Austria | n/a | 2.197b | 1.014b | ... |
| Belgium | 4.411b | n/a | 3.681b | ... |
| Denmark | 0.753b | 1.284b | n/a | ... |
| ... | | | | |

Potential Graph Data Sources

Statistical Correlation (for Example, Stocks, News Stories)

- Graphs can also be created statistically.

Stock1, Stock2, 1 year correlation

AAPL, GOOG, 0.94

AAPL, IBM, 0.77

GOOG, IBM, 0.66

...

Potential Graph Data Sources

Two Data Types (for Example, Board Memberships)

- A *bipartite* graph has two different types of nodes, with linkages between the different types. For example, a graph analysis of executives and their board memberships reveals the connections between companies via board members. The two different data types in this example are people and companies. These are the nodes. The board memberships are the links that connect a person to a company.

Exec, Board, Tenure

Sergey Brin, Google, 13 years

Paul Otellini, Intel, 11 years


Paul Otellini, Google, 9 years

...

Potential Graph Data Sources

Many Data Types (for Example, Social Links)

- People can be connected through many kinds of commonalities—for example, LinkedIn builds connections via companies, friendships, educational institutions, group memberships, and so on.

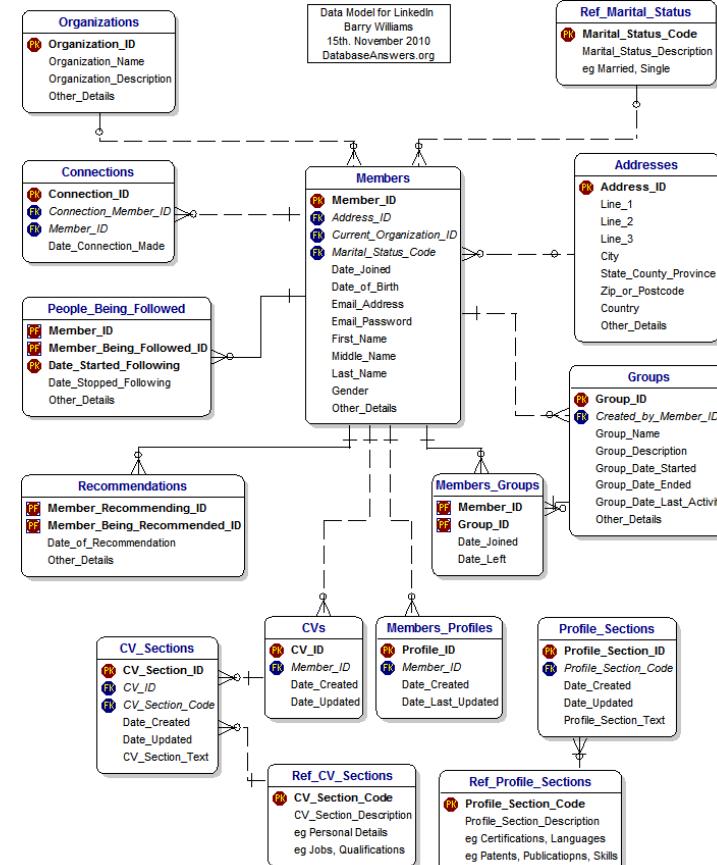


Popular Graph Data File Formats

- [GraphML](#), an XML-based file format for graphs.
- [GXL](#), graph exchange format based on XML.
- [Trivial Graph Format](#), simple text based format.
- [GML](#) is another widely used graph exchange format.
- [DGML](#), Directed Graph Markup Language from Microsoft.
- [XGMML](#), an XML-based graph markup language closely related to GML.
- [Dot Language](#), a format for describing graphs and their presentation, for the Graphviz set of tools.

Graph database

Neo4j (Network Exploration and Optimization 4 Java) is a graph database management system developed by Neo4j, Inc.

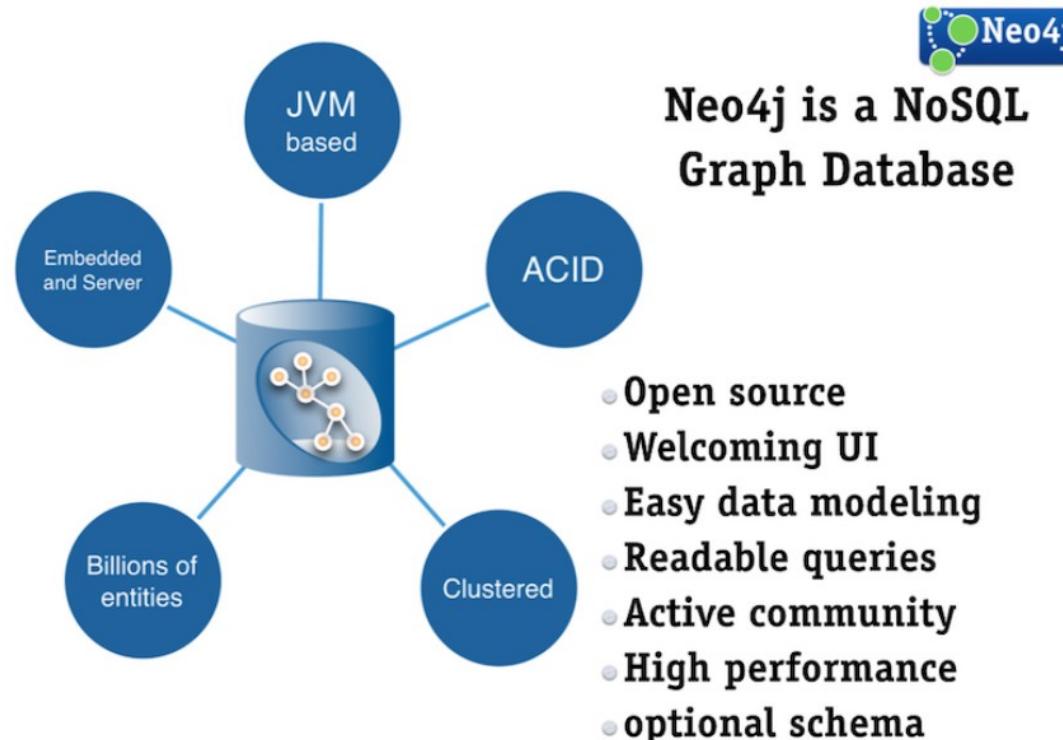

Source: <http://neo4j.com/developer/get-started/>

R Graph Objects

- [network](#): Classes for Relational Data
- [igraph](#): Network Analysis and Visualization. There is also R CRAN version of documentation. . .
- [tidygraph](#): A Tidy API for Graph Manipulation. Refer to these two articles for more information:
 - [Introducing tidygraph](#)
 - [tidygraph 1.1 – A tidy hope](#)

Introducing tidygraph

- A tidy API for graph/network manipulation in R
- It provides a way to switch between node and edge tables.
- It provides dplyr verbs for manipulating node and edge tables.
- It provides access to a lot of graph algorithms with return values that facilitate their use in a tidy workflow.
- The full reference guide is available at this [link](#).


Network Graph Visualisation and Analysis

- Layouts
- Visual Attributes
- Network Geometrics

Graph Layouts




Graph layouts are algorithms that return coordinates for each node in a network graph.

- Showing node-edge relationship.
- Very challenging for large graph.

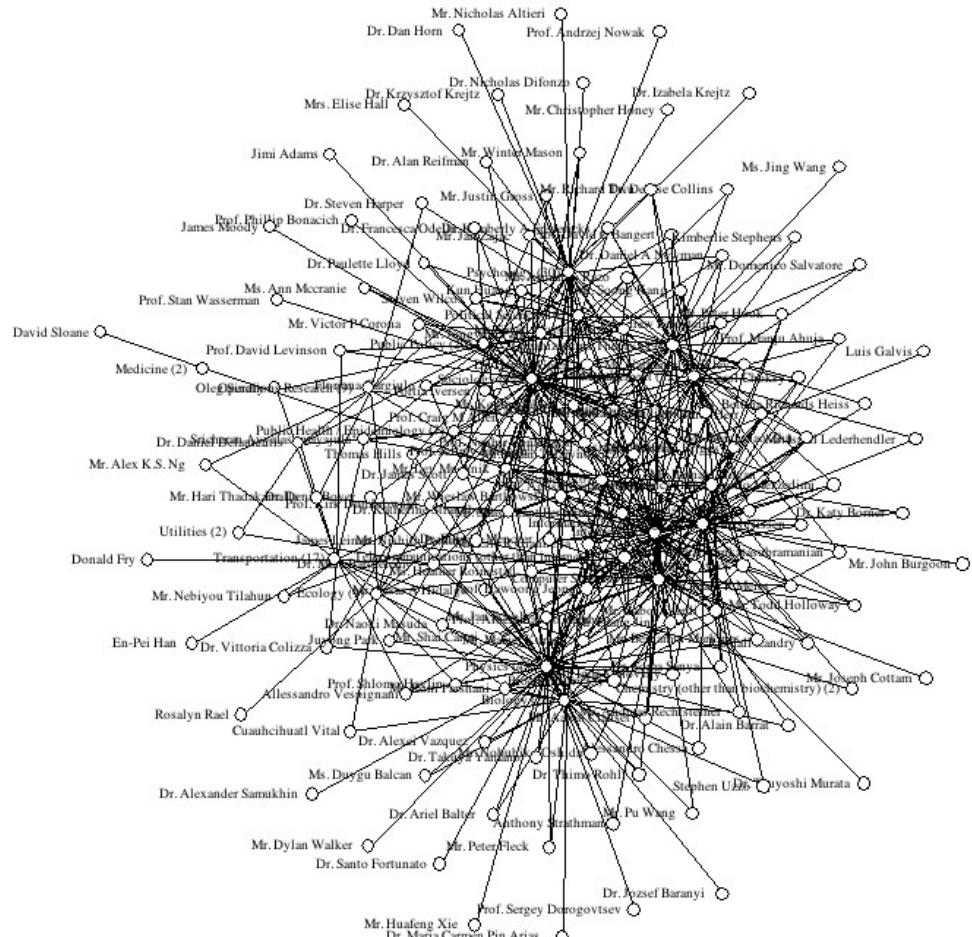


Node-and-Link Layouts

One common method for drawing graphs is to draw nodes as markers and edges as lines connecting them (also referred to as links)

| Type | Example | Description |
|----------------|--|--|
| Force-Directed |  | These layouts mimic physical forces, with forces pushing nodes apart, and links pulling connected nodes together. |
| Node-Only |  | These layouts are used in conjunction with force-directed layouts, particularly with large graphs. |
| Time-Oriented |  | These layouts are used where time is an element of the graph. A time-based ordering facilitates seeing the sequence. |
| Top-Down |  | These layouts are a traditional organizational layout of a hierarchy—top-down or left-right. |
| Radial |  | Sometimes a circular layout for graphs and hierarchies are effective. |

Node-and-Link Layouts


<https://flare.prefuse.org/>

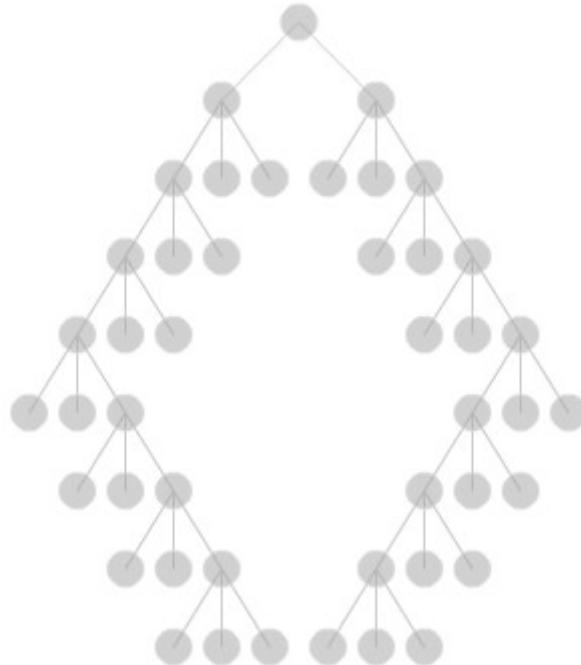

Source: <https://flare.prefuse.org/demo/>


Force-Directed Layout

- Force-directed graph drawing algorithms are a class of algorithms for drawing graphs in an aesthetically-pleasing way.
- Their purpose is to position the nodes of a graph in two-dimensional or three-dimensional space so that all the edges are of more or less equal length and there are as few crossing edges as possible, by assigning forces among the set of edges and the set of nodes, based on their relative positions, and then using these forces either to simulate the motion of the edges and nodes or to minimize their energy.

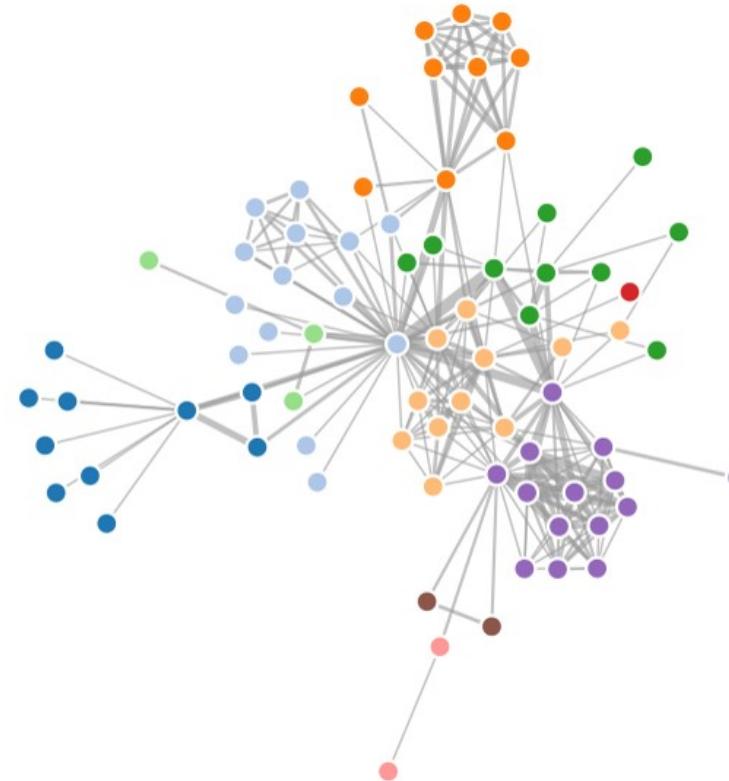

<http://bl.ocks.org/mbostock/4062045>

BiPartite Layout

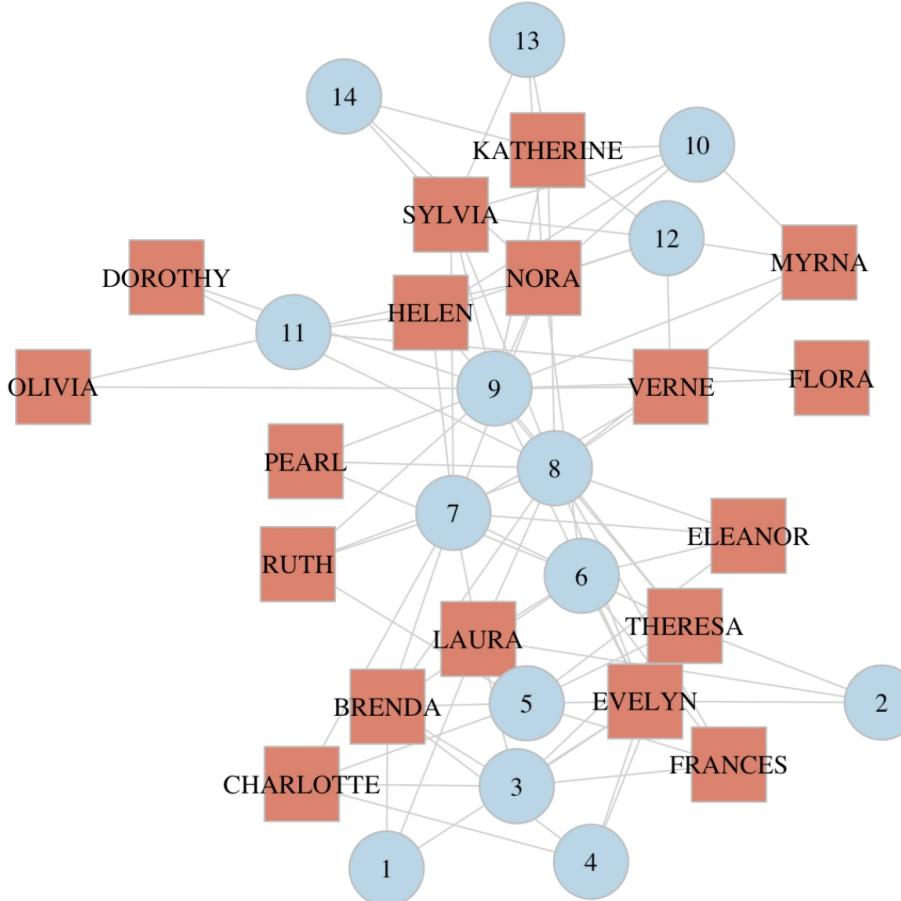

Source: <https://rpubs.com/pjmurphy/317838>

Node-Only Layout

UPDATED February 12, 2012

[TWITTER](#) [LINKEDIN](#) [SHARE](#)

Four Ways to Slice Obama's 2013 Budget Proposal

Explore every nook and cranny of President Obama's federal budget proposal.

All Spending Types of Spending Changes Department Totals


How \$3.7 Trillion Is Spent

Mr. Obama's budget proposal includes \$3.7 trillion in spending in 2013, and forecasts a \$901 billion deficit.

Circles are sized according to the proposed spending.




Color shows amount of cut or increase from 2012.




Source: <http://www.nytimes.com/interactive/2012/02/13/us/politics/2013-budget-proposal-graphic.html>

Time-Oriented Layout

Optogenetic

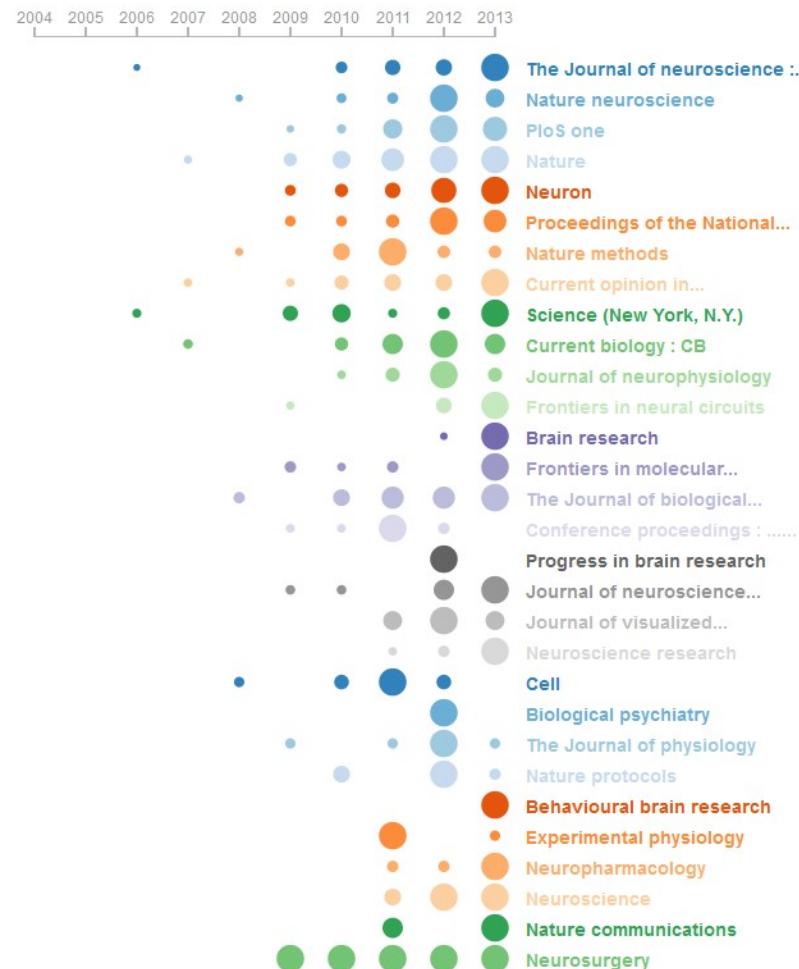


Radial Hierarchical Layout

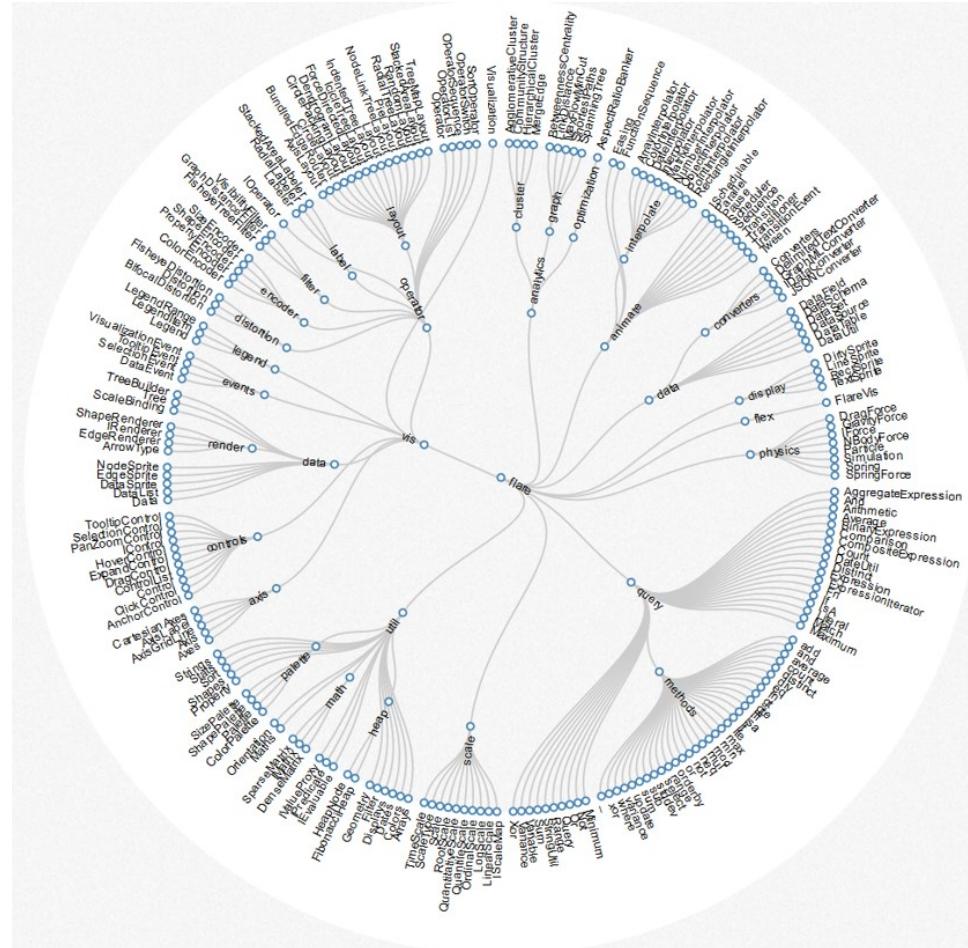


<http://mbostock.github.io/d3/talk/20111018/cluster.html>

Tree Hierarchical Layout

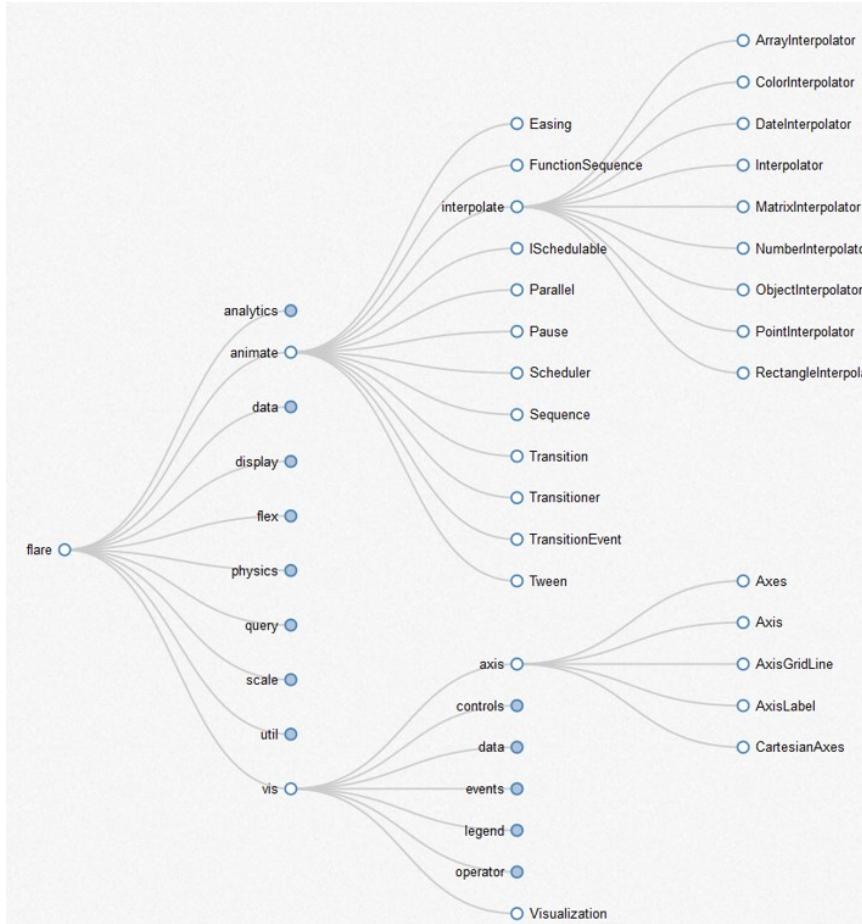


<http://mbostock.github.io/d3/talk/20111018/tree.html>

Geographic Layout

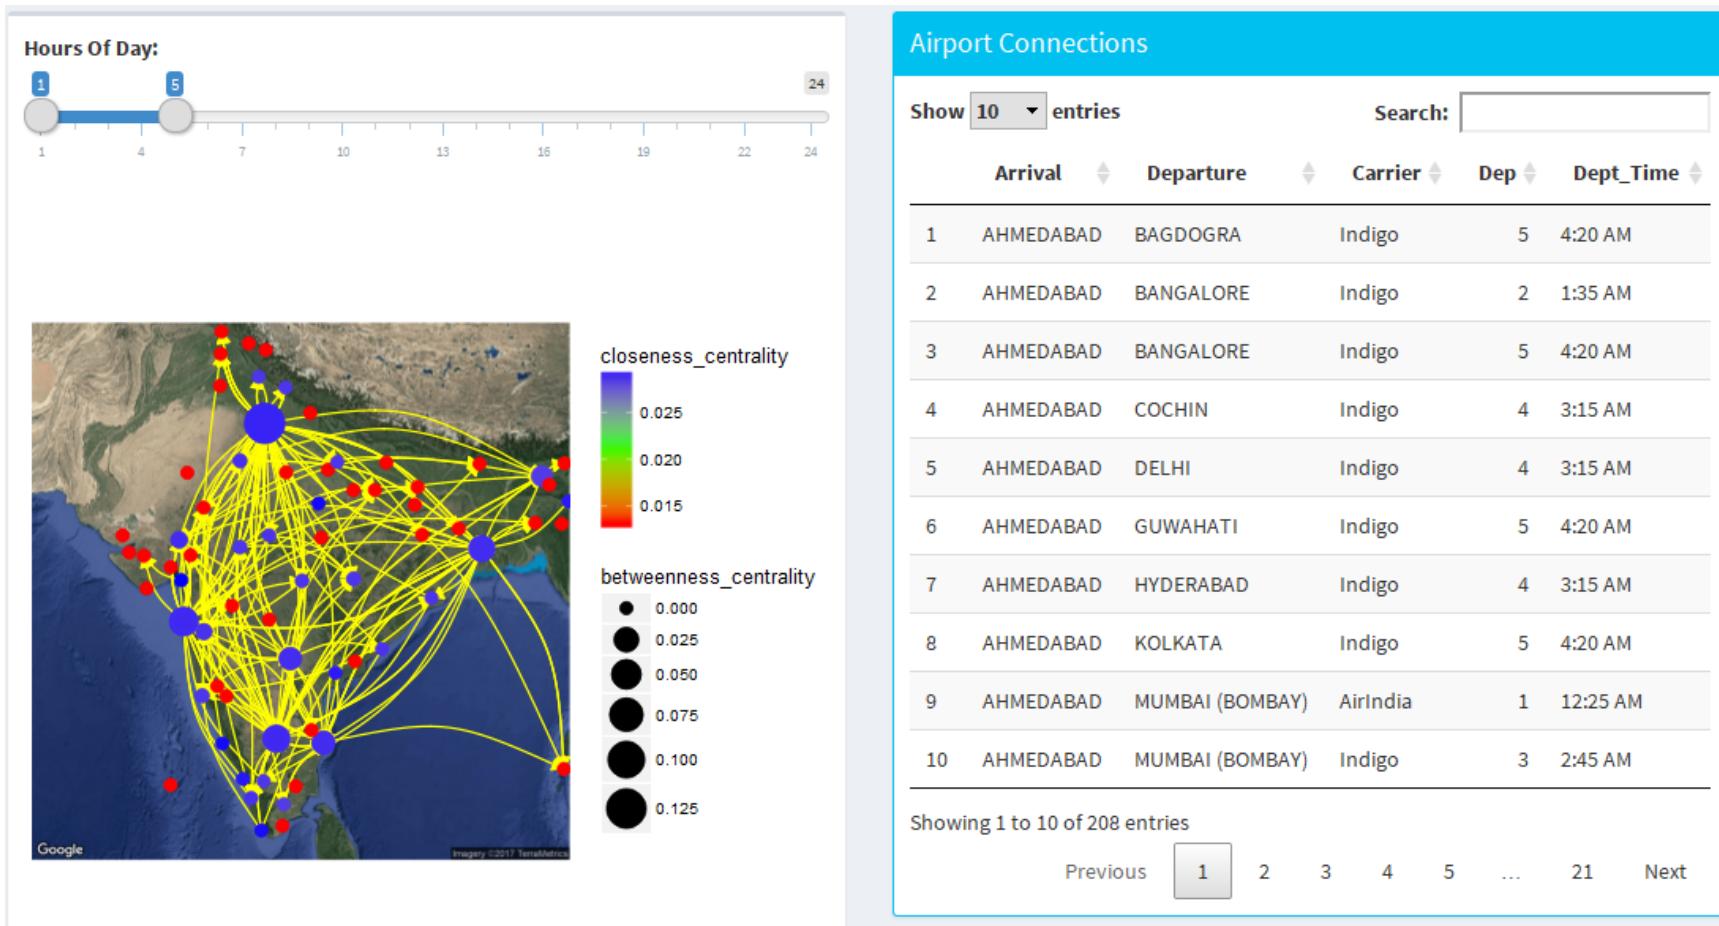


https://wiki.smu.edu.sg/1617t3isss608g1/ShinyNET_Data_Prep_Report

Chord Diagrams

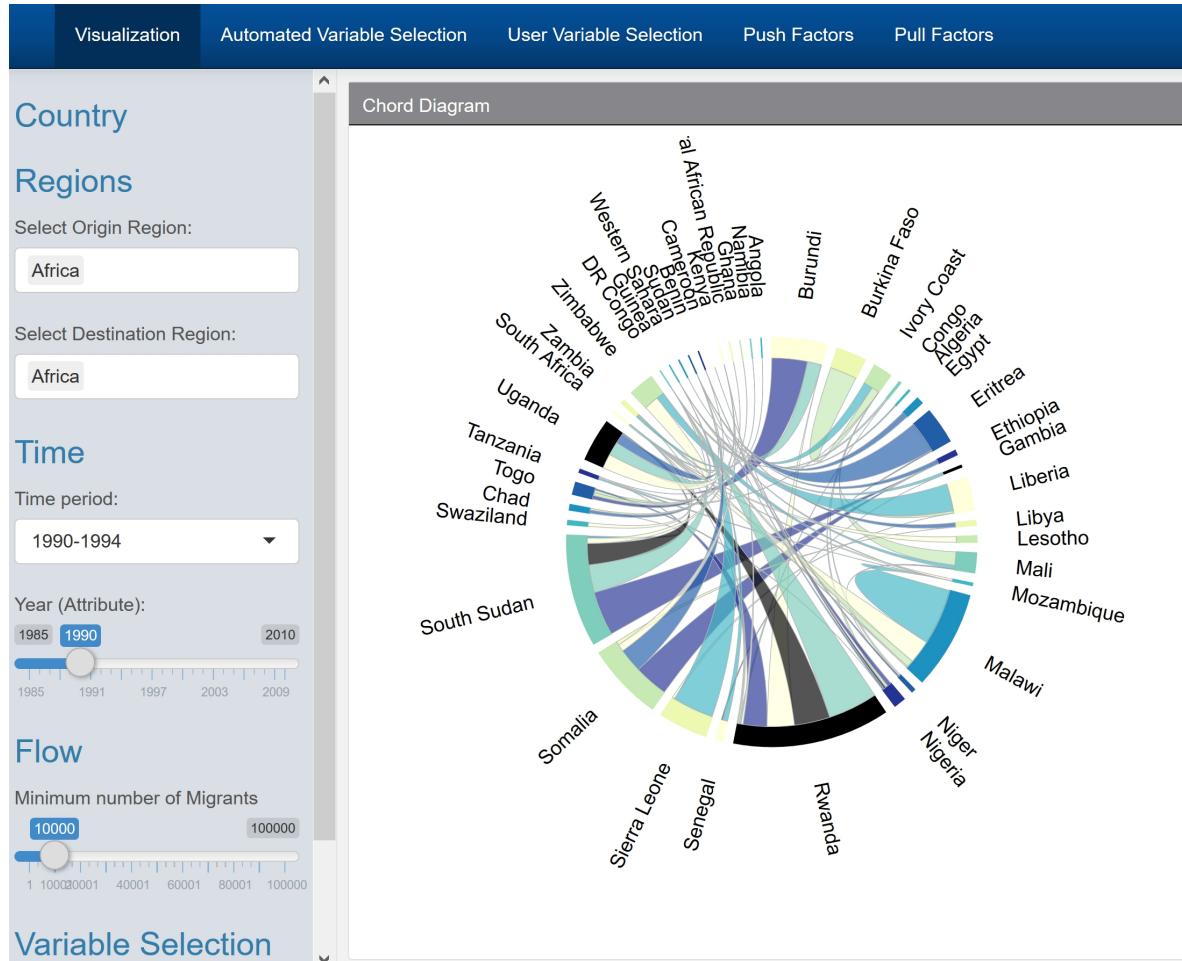


<https://davidten.shinyapps.io/migrationanalytics2/>

Sankey Diagrams

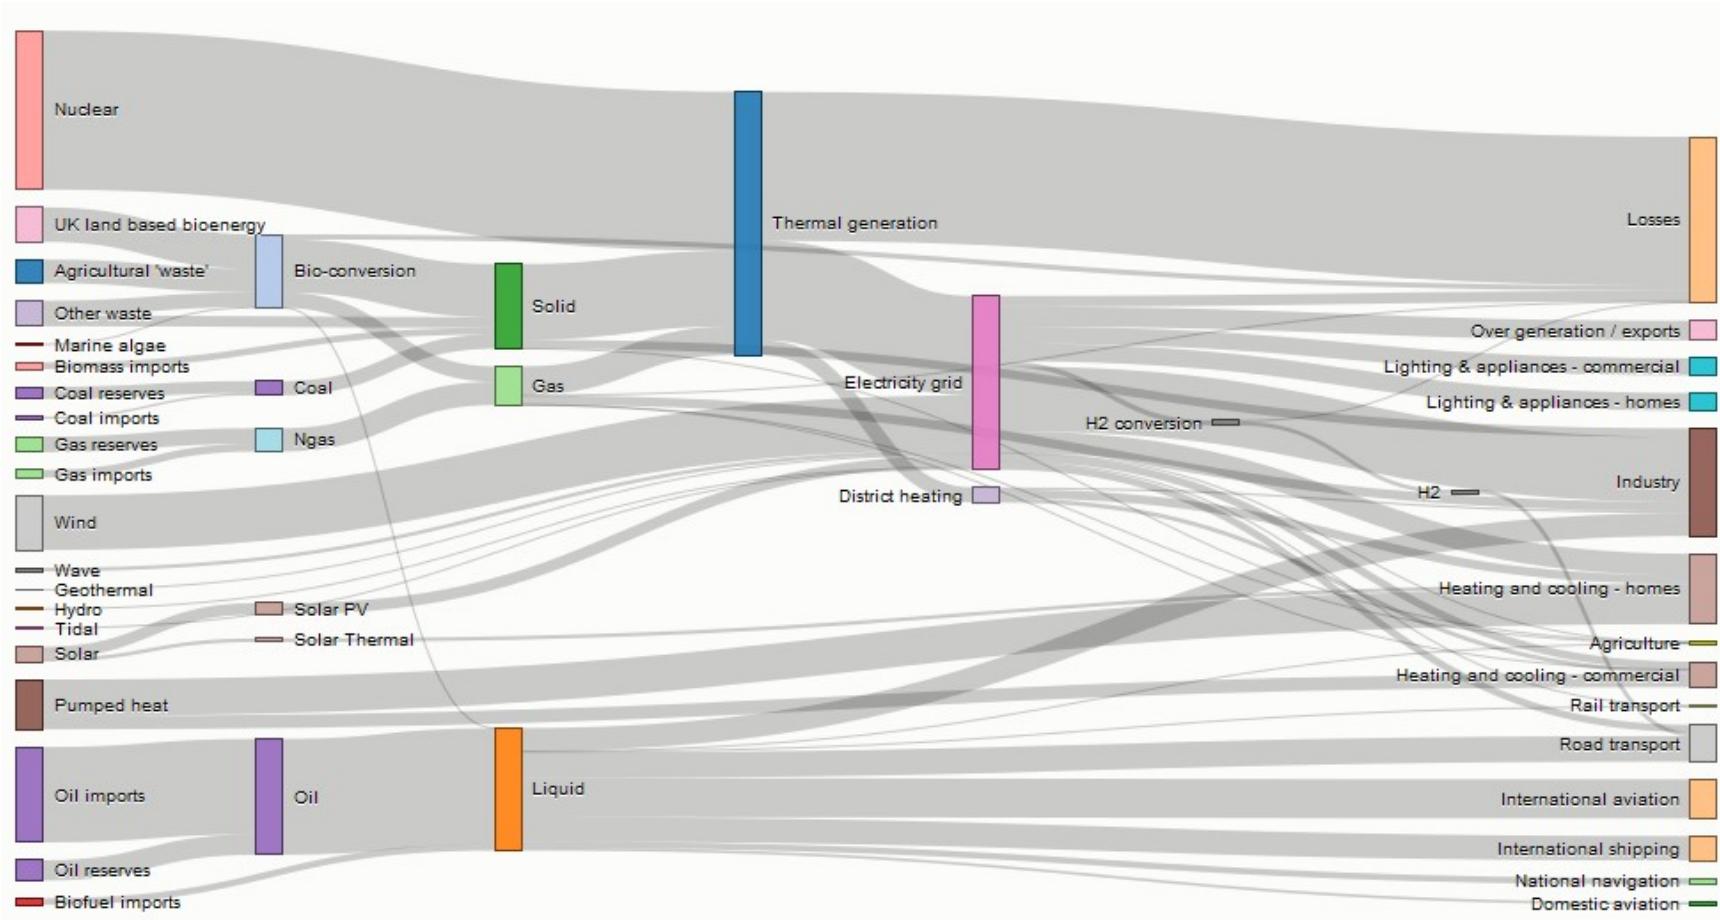


<https://observablehq.com/@d3/sankey-diagram>

Hive Plot (<https://academic.oup.com/bib/article/13/5/627/412507>)

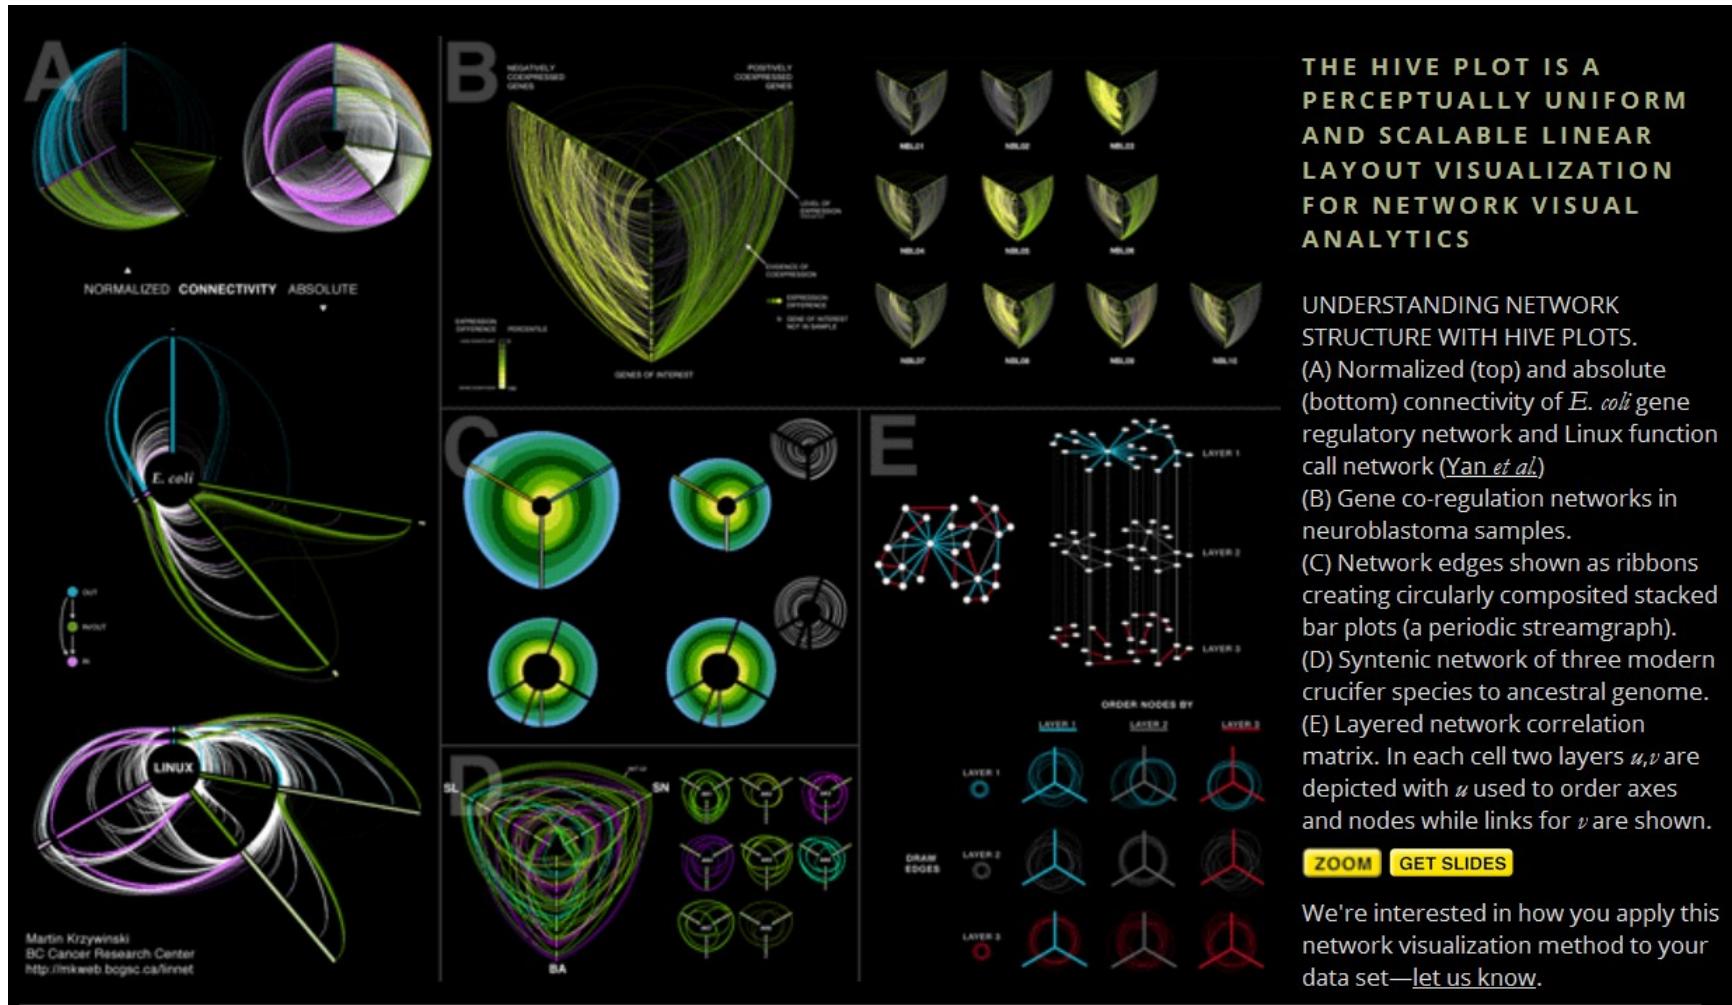


Hive Plot of Network of Individuals at Risk of HIV

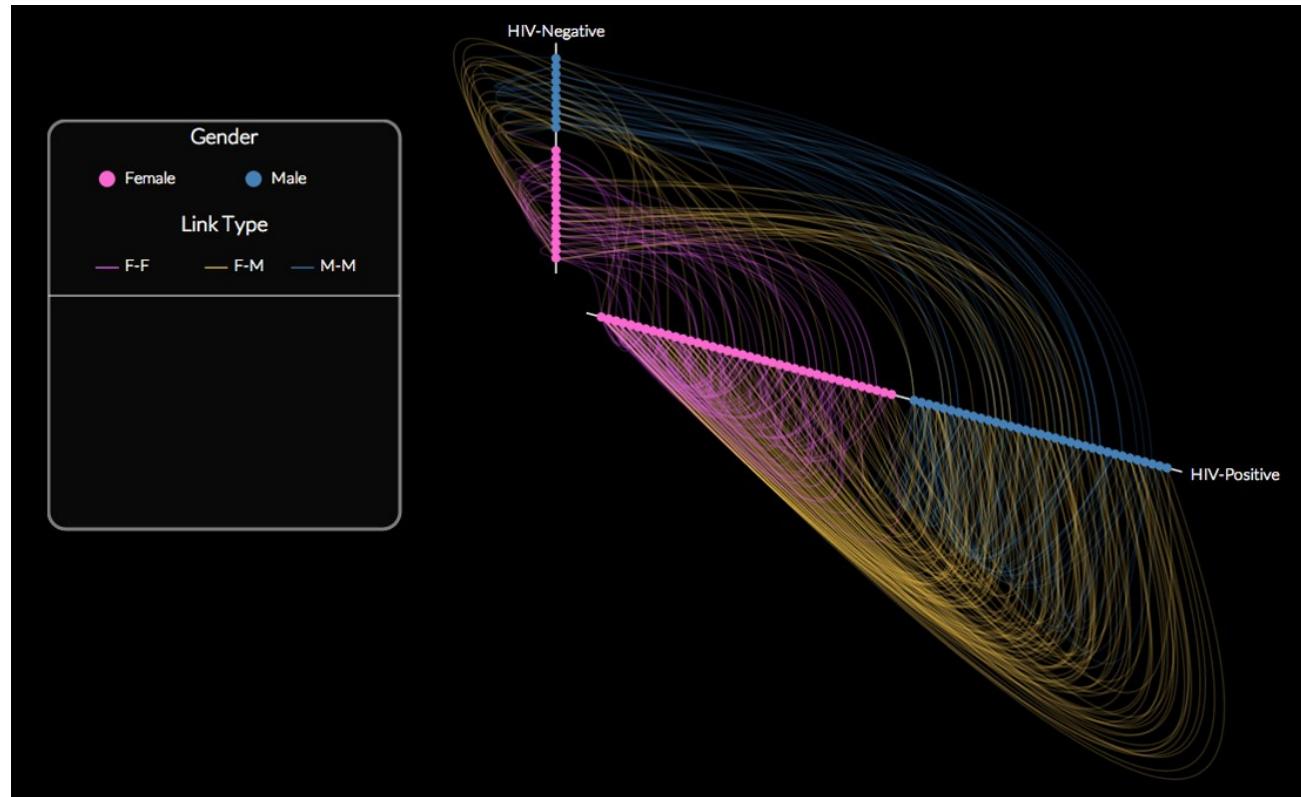


<https://konstantinkashin.com/assets/data/hiveplot.html>

Hive Plot in ggraph

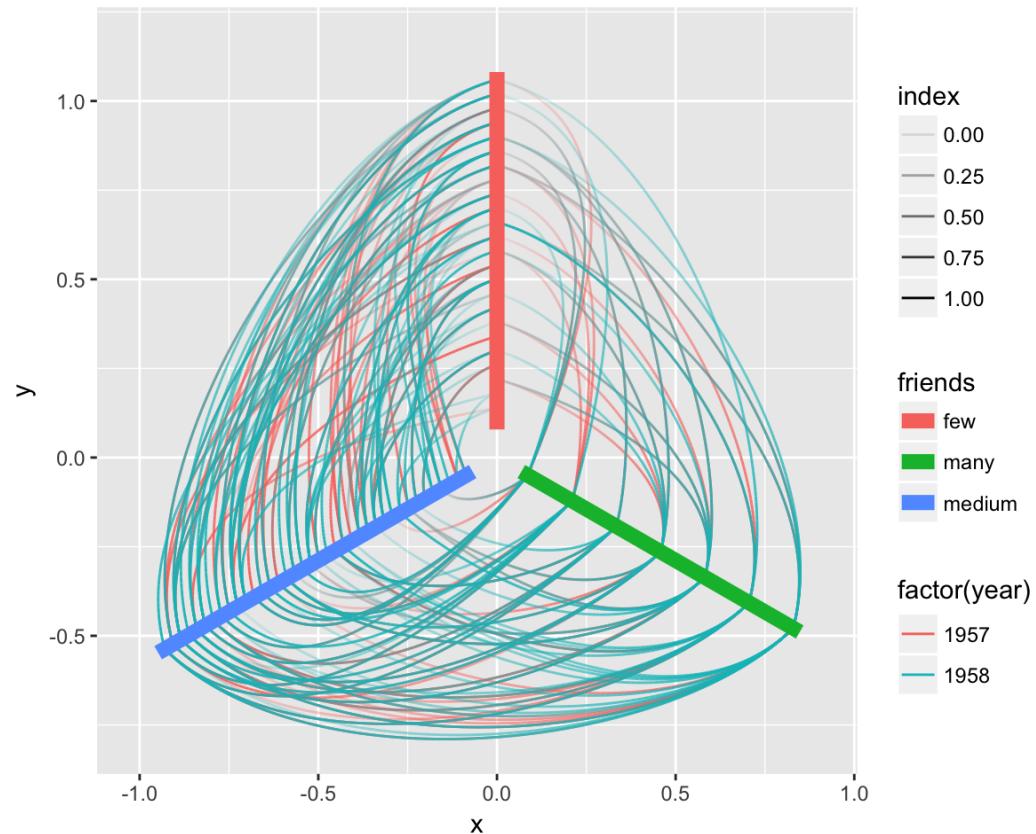






<https://www.data-imaginist.com/2017/ggraph-introduction-layouts/>

Adjacency Matrix (https://en.wikipedia.org/wiki/Adjacency_matrix)



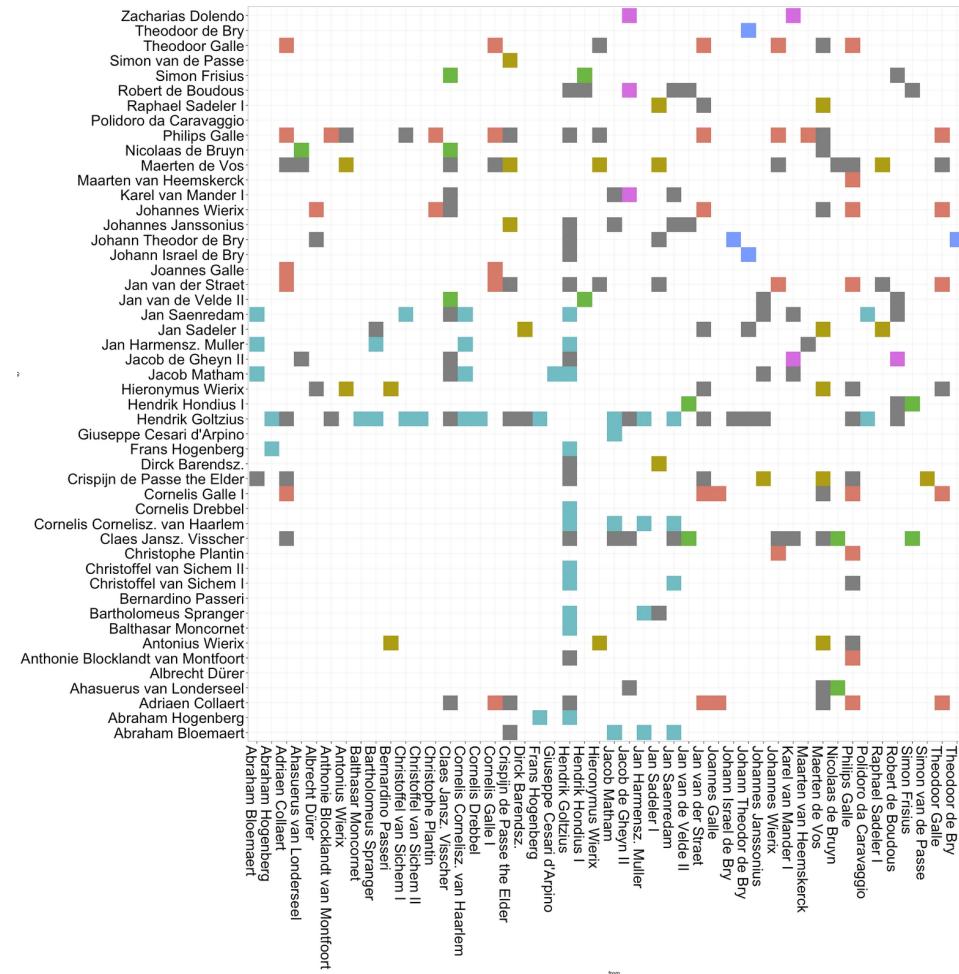


<https://matthewlincoln.net/2014/12/20/adjacency-matrix-plots-with-r-and-ggplot2.html>


Basic Visual Attributes

| ATTRIBUTE | EXAMPLE | DESCRIPTION |
|-------------|--|--|
| Node size |  | Shows magnitudes or quantities such as counts or sums |
| Node color |  | Shows different categories, or shows positive/negative numeric values |
| Label |  | Shows individual identity of a node or link |
| Edge weight |  | Shows the strength of a connection between nodes |
| Edge color |  | Shows categories (such as the type of connection) or numeric values (such as how recent the connection is) |
| Edge type |  | Shows direction via arrows, or shows other attributes via line styles |

Additional Visual Attributes

| ATTRIBUTE | EXAMPLE | DESCRIPTION |
|--|--|---|
| Bundled edges |  | Use these for aesthetics or to reveal relationships about connections. |
| Shapes |  | Use unique shapes to show a few different categories (for example, male/female, up/down, and so on). |
| Images |  | Use an image for a node (for example, a photo, a flag, an icon, a pie chart, bar chart, or sparkline). |
| Transparency, border color, arrow shape, font family, label offset, shadows, gradients, and more |  | There are other visual attributes that are less commonly used, sometimes because they are not available in a particular program, because they may be more obscure, or because they do not visually pop out as much as attributes such as size or color. |

Combining Visual Attributes

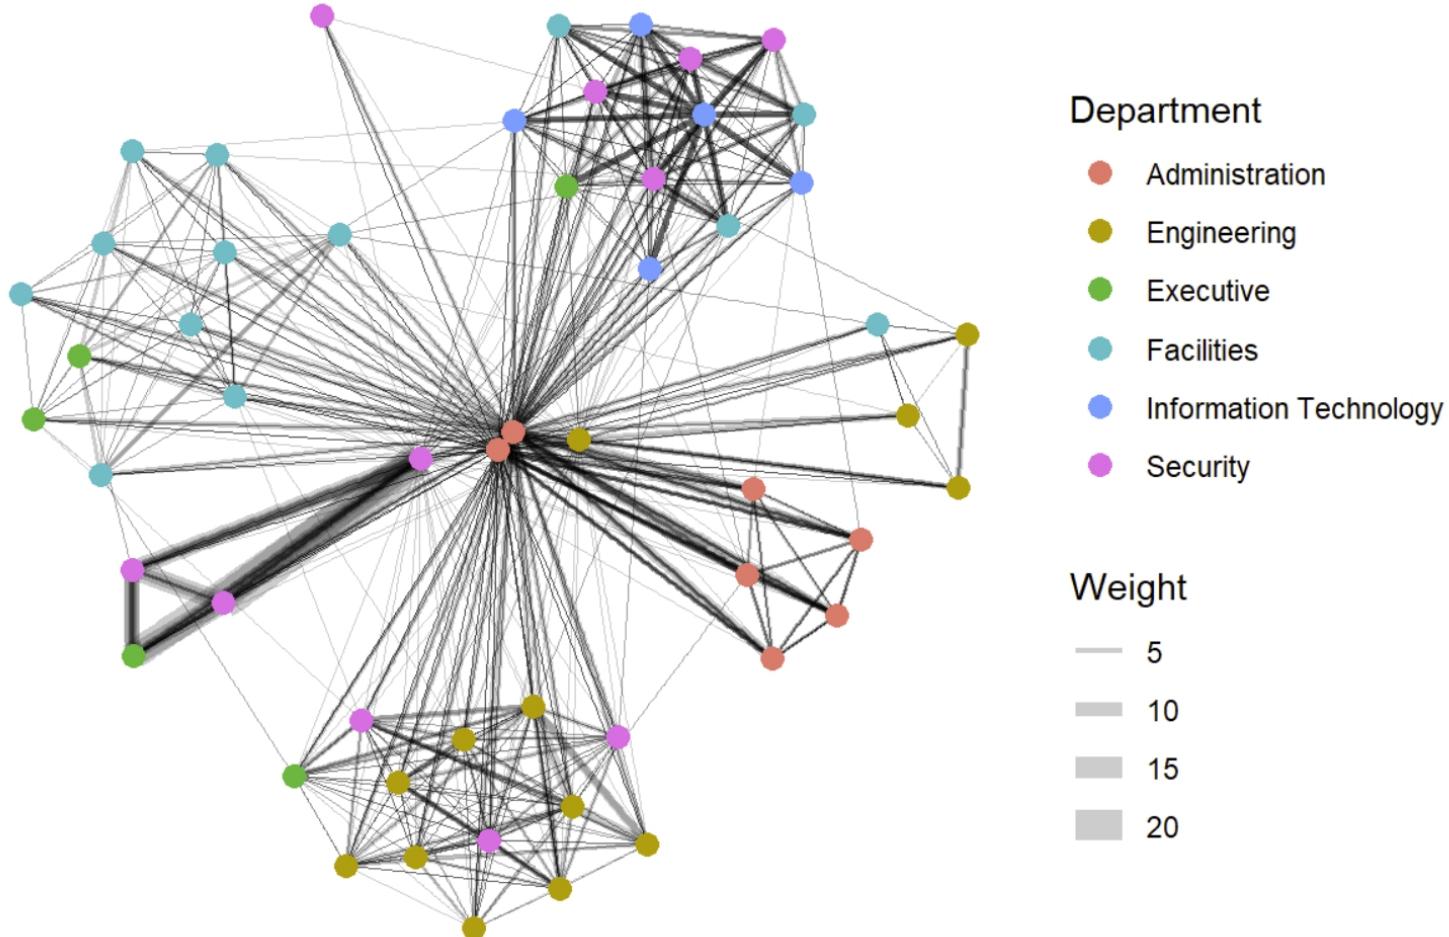

Department


- Administration
- Engineering
- Executive
- Facilities
- Information Technology
- Security

Weight

- 5
- 10
- 15
- 20


Network Visualisation and Analysis Process Model

(Hansen, D. L. et. al. 2009)

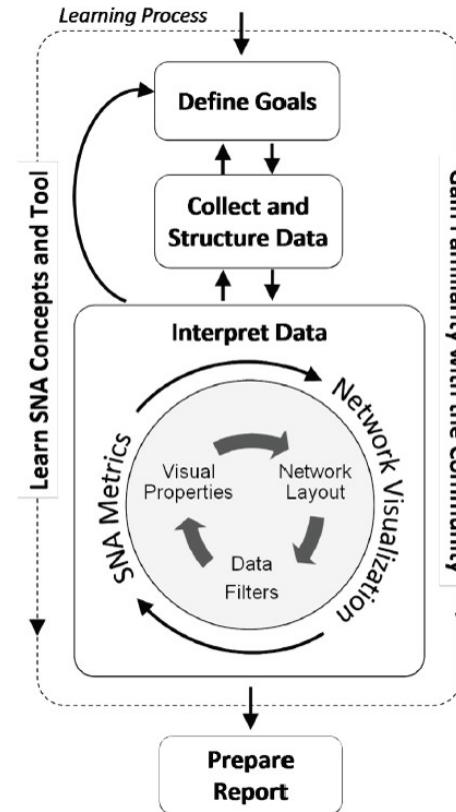


Measures of Power and Influence - Network Metrics

- A collection of statistical measures to report:
 - the connectivity of a node within a network,
 - the complexity of a network,
 - the clusters or sub-groups within a network.

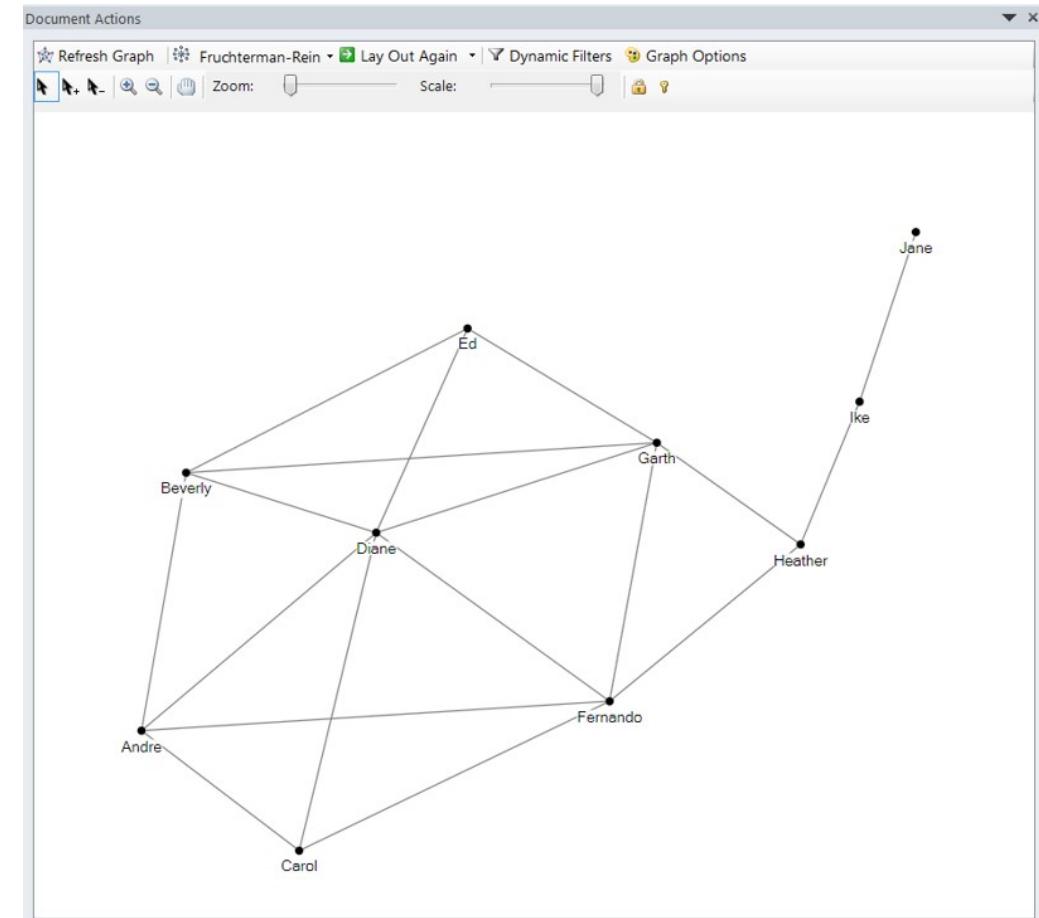

Network Metrics: Degree

- **Degree**, the number of direct connections a node has.
- Degree is often interpreted in terms of the immediate risk of node for catching whatever is flowing through the network (such as a virus, or some information).

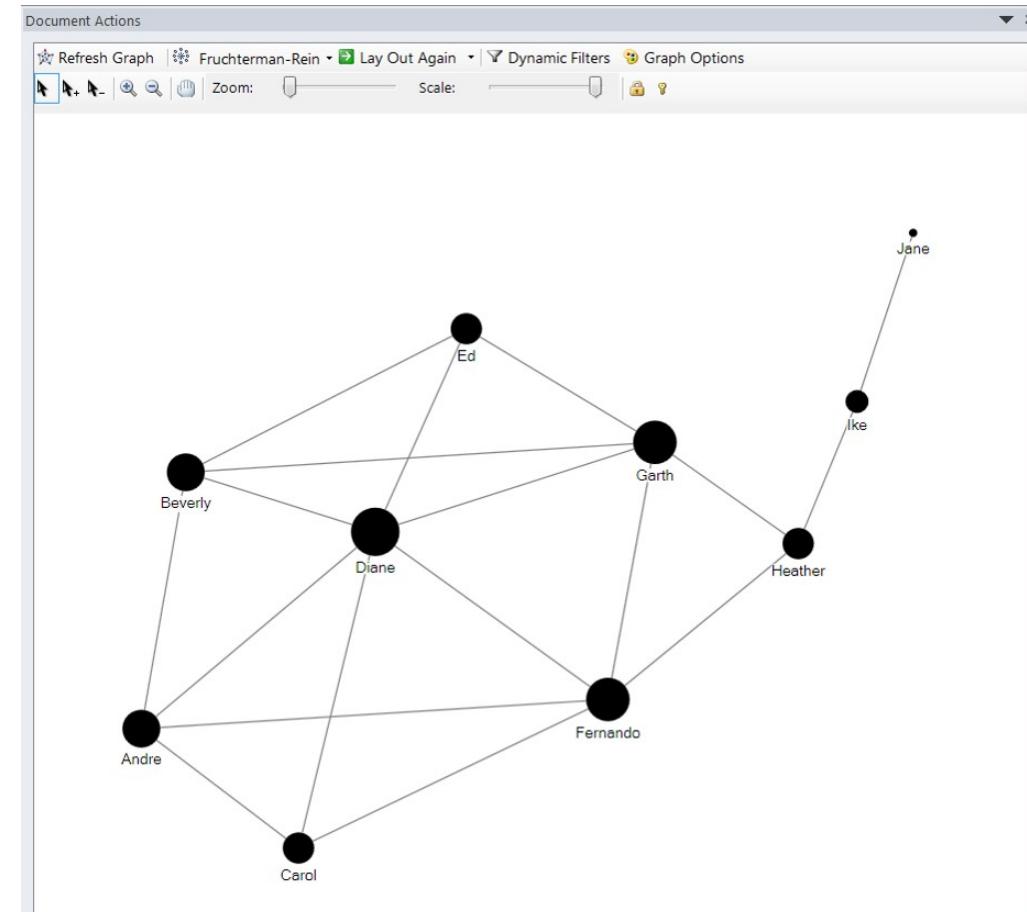


Network Metrics: In-degree & Out-degree

- If the network is **directed** (meaning that ties have direction), then we usually define two separate measures of degree centrality, namely **indegree** and **outdegree**.
- **Indegree** is a count of the number of ties directed to the node, and **outdegree** is the number of ties that the node directs to others.
- For positive relations such as friendship or advice, we normally interpret indegree as a form of popularity, and outdegree as gregariousness.


Network Metrics: Betweenness centrality

- **Betweenness** is a centrality measure of a vertex within a graph (there is also edge betweenness, which is not discussed here).
- Vertices that occur on many shortest paths between other vertices have higher betweenness than those that do not.

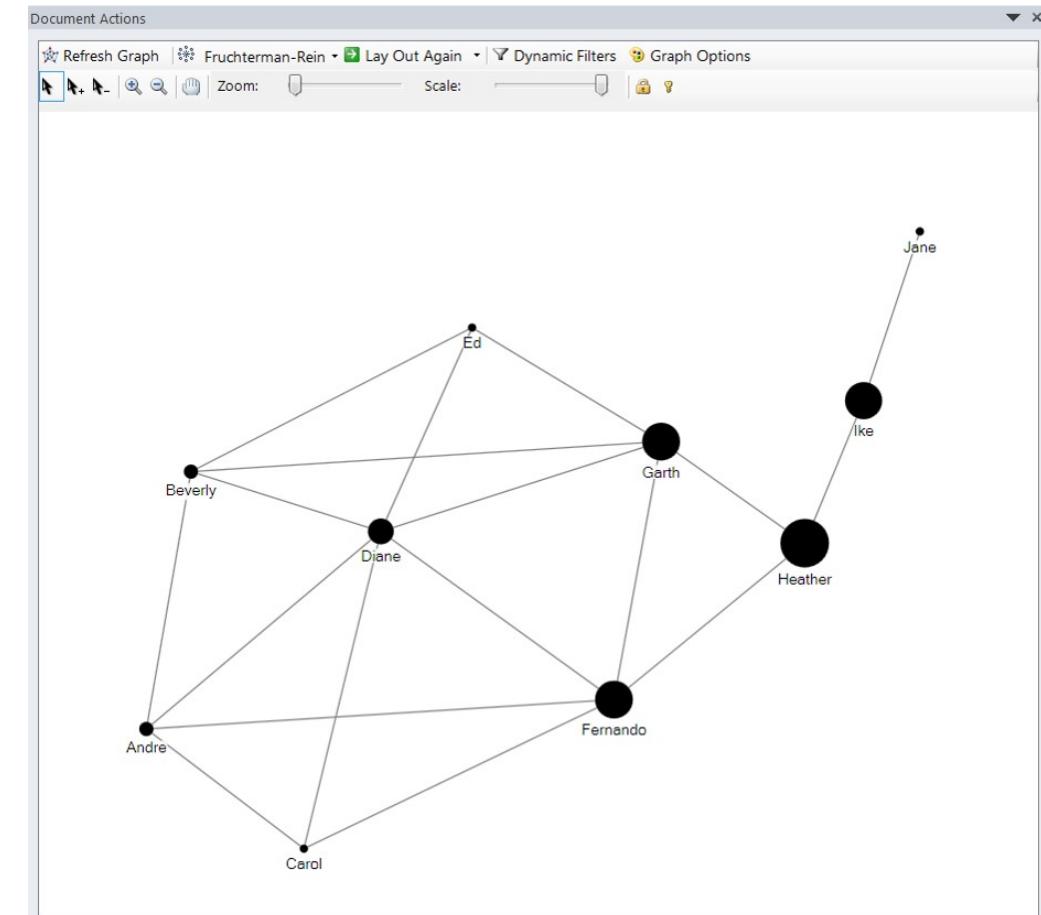


Network Metrics: Closeness Centrality

- In graph theory closeness is a centrality measure of a vertex within a graph. Vertices that are 'shallow' to other vertices (that is, those that tend to have short geodesic distances to other vertices within the graph) have higher closeness.
- **Closeness** is preferred in network analysis to mean shortest-path length, as it gives higher values to more central vertices, and so is usually positively associated with other measures such as degree.

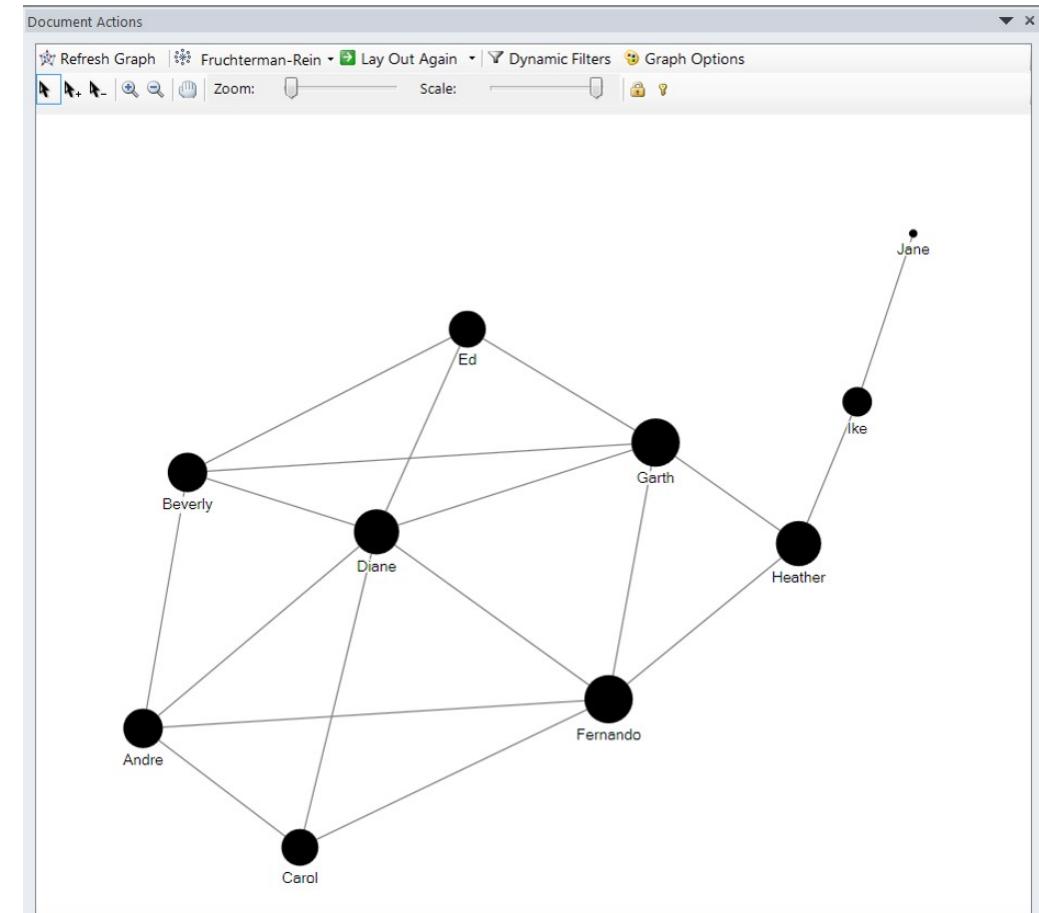


Network Metrics: Eigenvector Centrality

- A measure of the importance of a node in a network.
- It assigns relative scores to all nodes in the network based on the principle that connections to high-scoring nodes contribute more to the score of the node in question than equal connections to low-scoring nodes.).

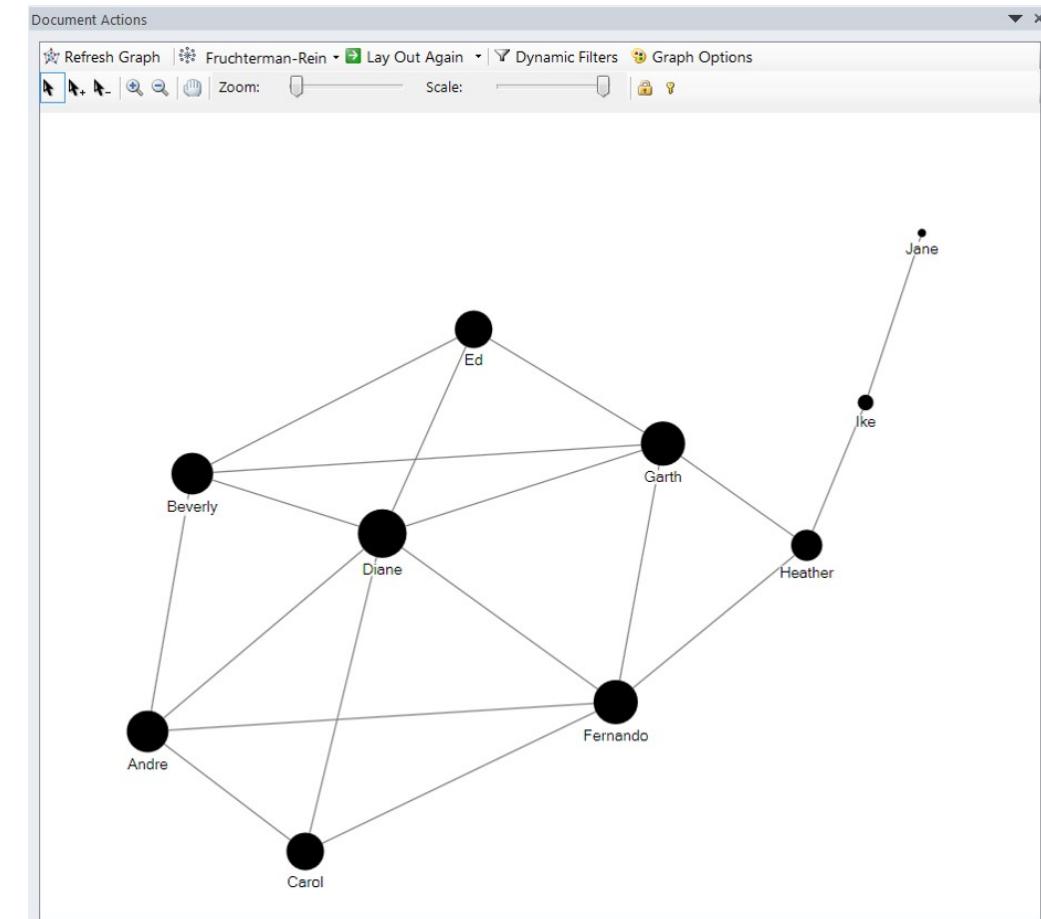

Network Metrics: Clustering Coefficient


- A measure on how connected a vertex's neighbours are to one another. More specifically, it is the number of edges connecting a vertex's neighbours divided by the total number of possible edges between the vertex's neighbour.

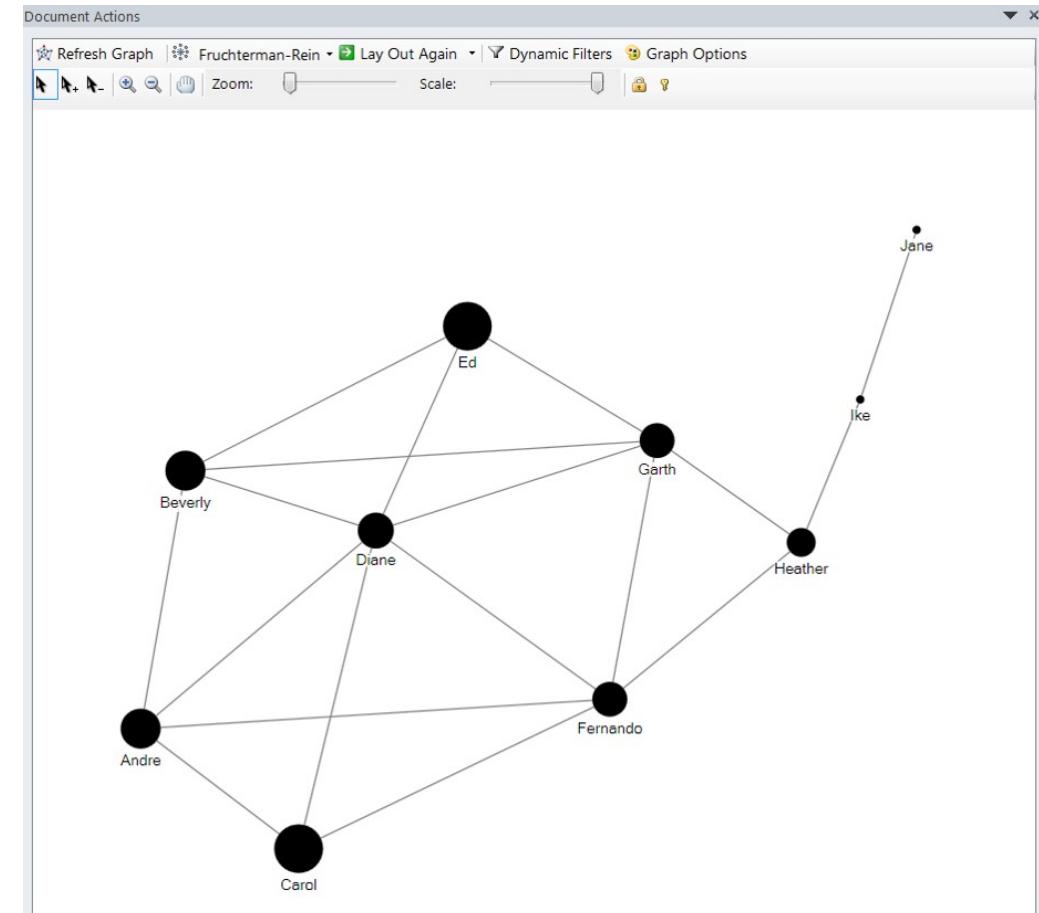

Network Analytics Methods


- Mapping relationships
- Identifying hierarchies
- Detecting communities
- Analysing flow

Analysing Spatial Networks Relationship

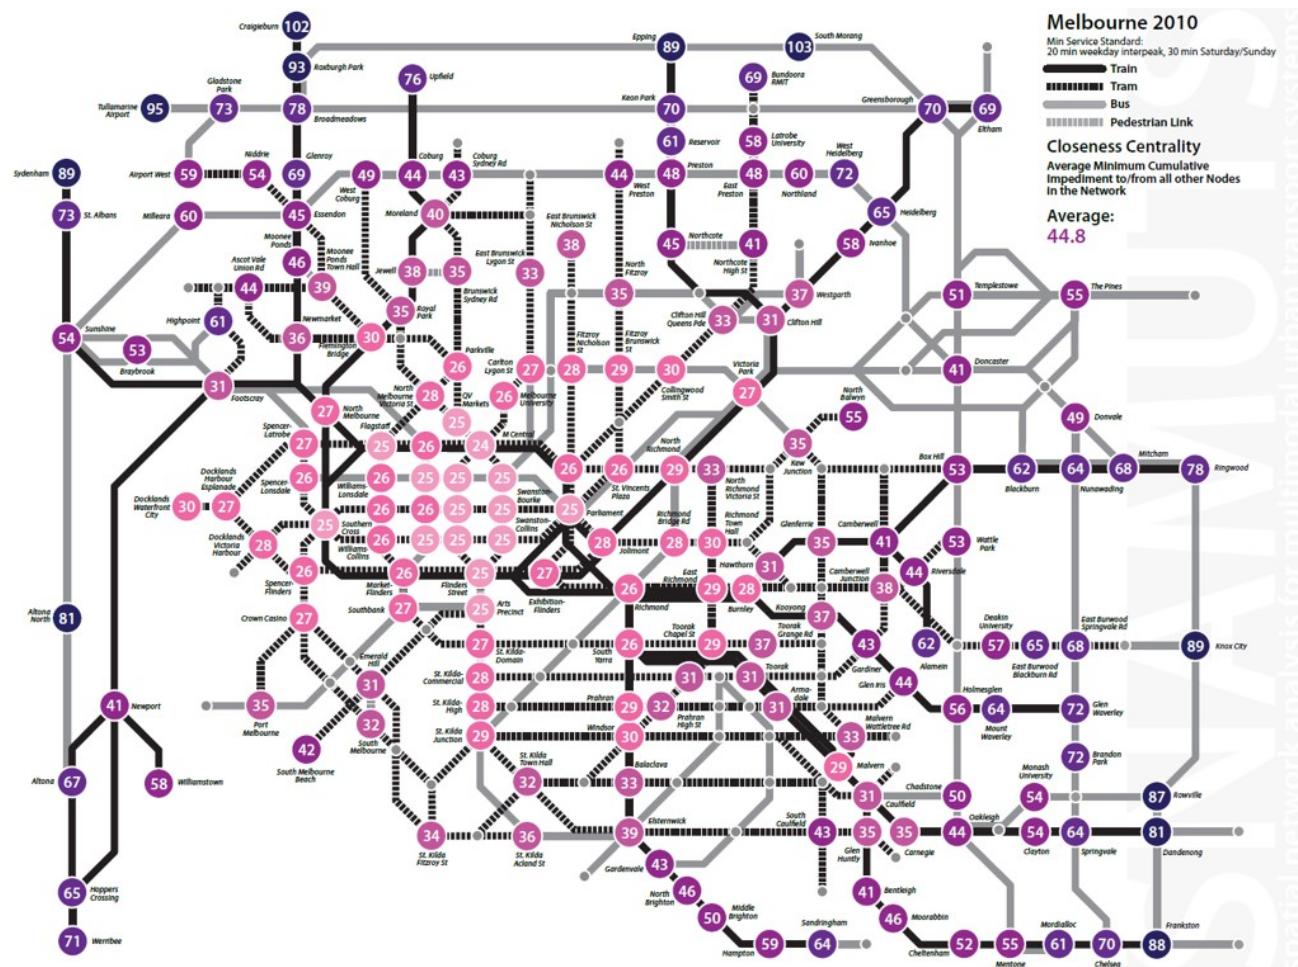


Source: <http://www.snamuts.com/melbourne.html>

Analysing Hierarchy of Spatial Network

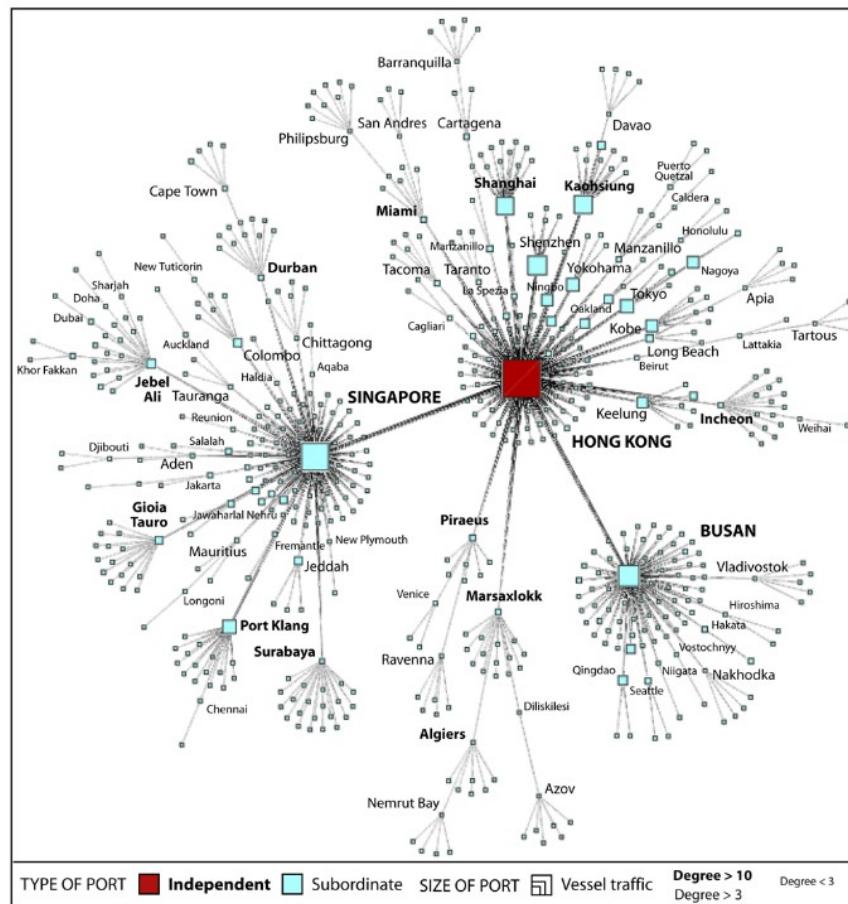

Source: <http://onlinelibrary.wiley.com/doi/10.1111/j.1471-0374.2011.00355.x/pdf>


Detecting communities

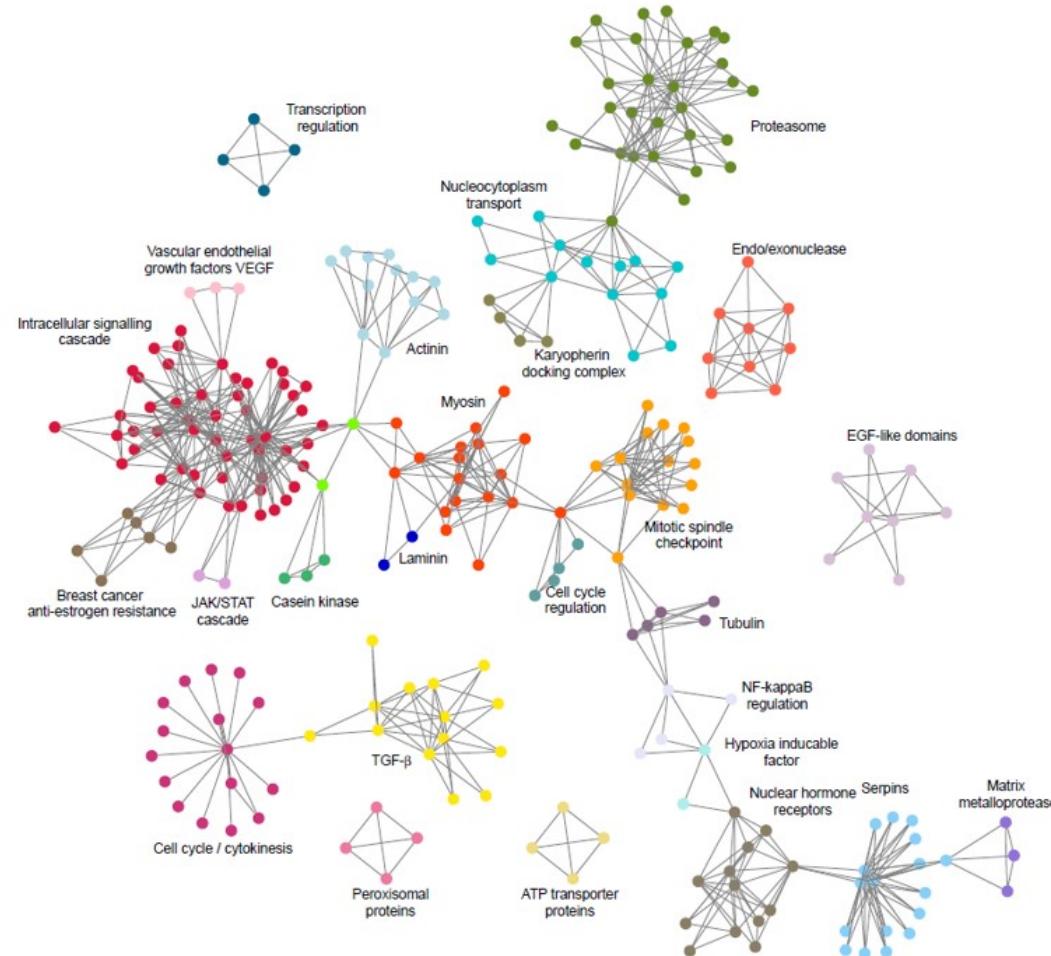

Source: Source: <http://arxiv.org/pdf/0906.0612.pdf>


Spatial Networks for Flow Analysis

Arteries of the City

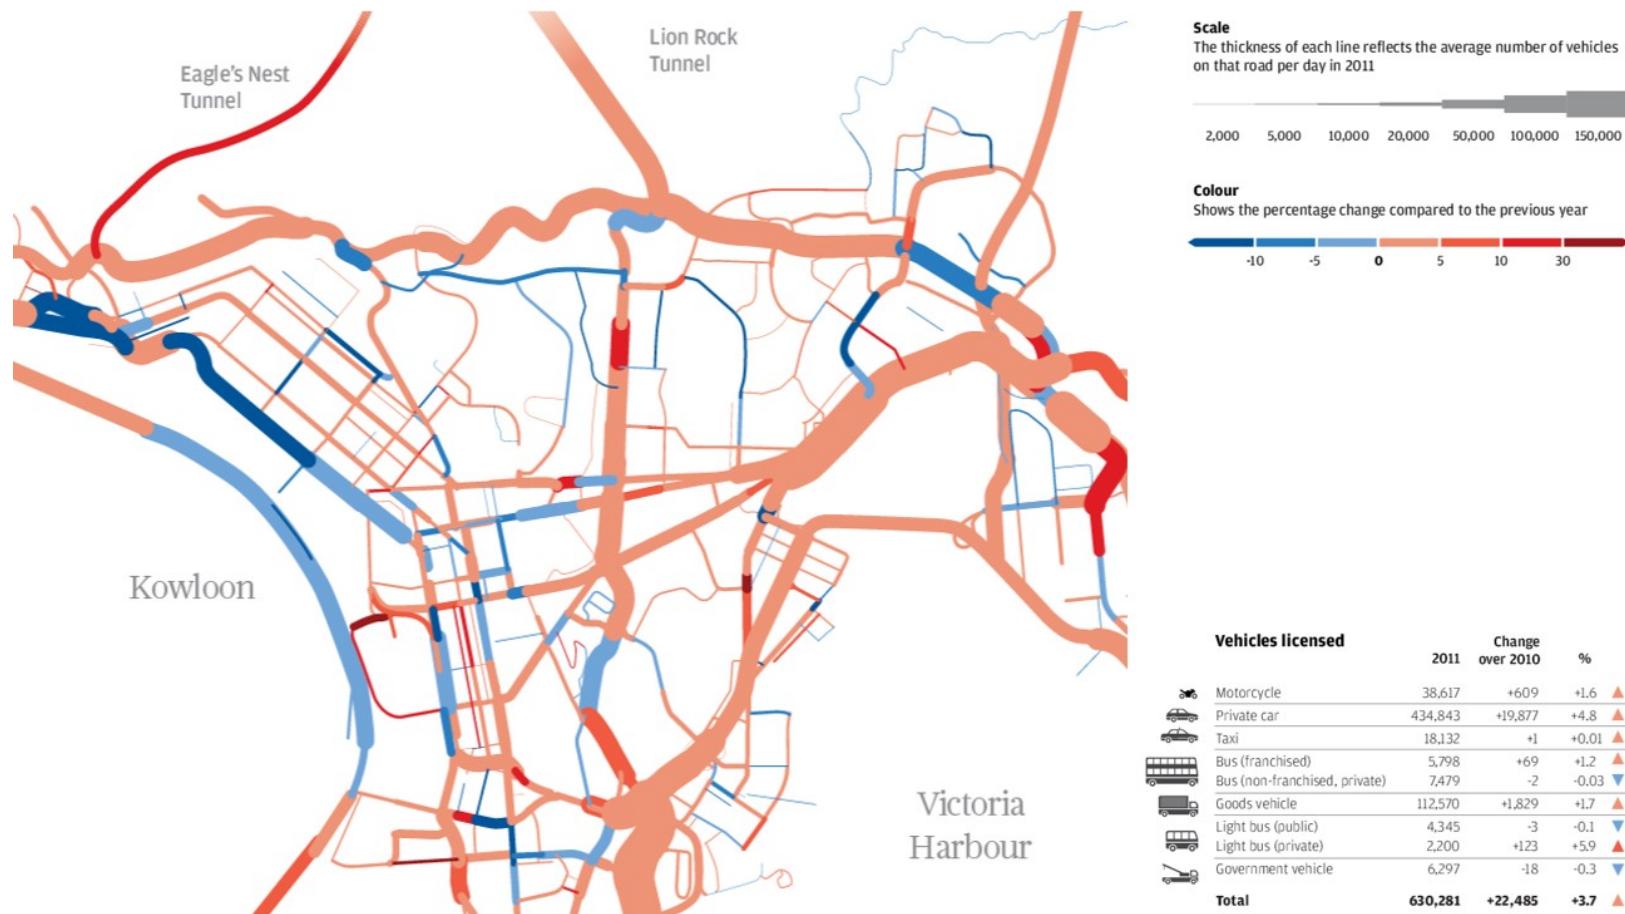


Swiss Knife for Graph Visualisation and Analysis I

[NodeXL](#), an open-source template for Microsoft® Excel® 2007 and 2010 that makes it easy to explore network graphs.

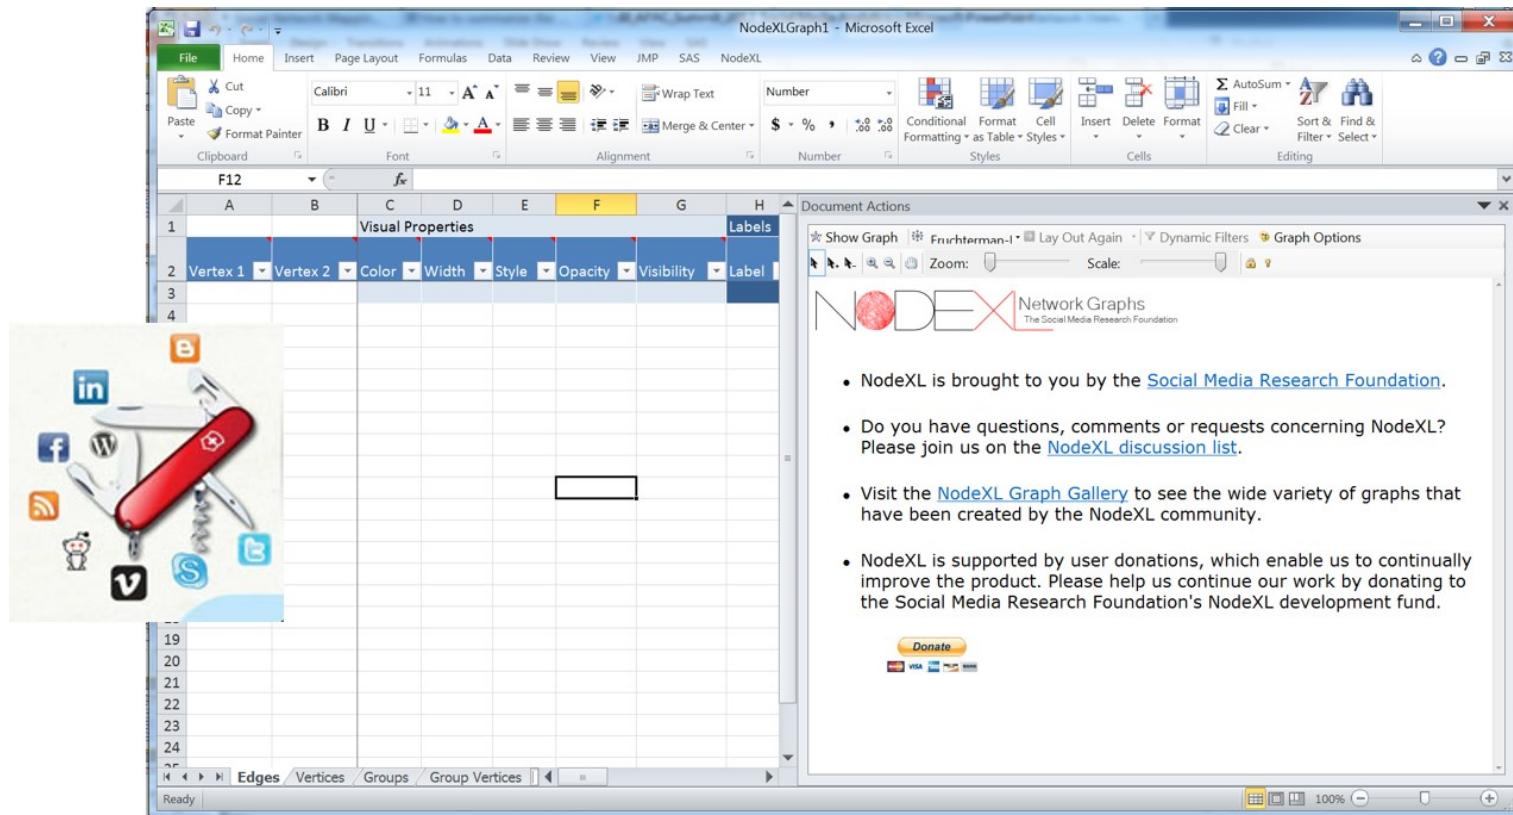

Swiss Knife for Graph Visualisation and Analysis II

Gephi, an open source network graph visualisation and analysis toolkit.

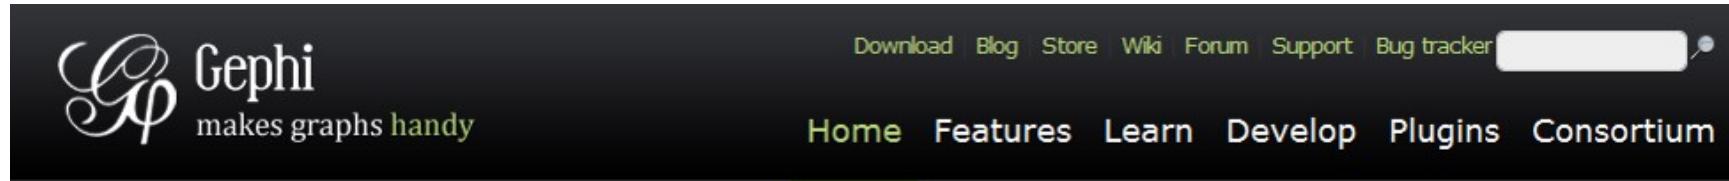

The Open Graph Viz Platform

Gephi is an interactive visualization and exploration **platform** for all kinds of networks and complex systems, dynamic and hierarchical graphs.


Runs on Windows, Linux and Mac OS X.
Gephi is open-source and free.

[Learn More on Gephi Platform »](#)



Download FREE
Gephi 0.8 alpha

[Release Notes](#) | [System Requirements](#)

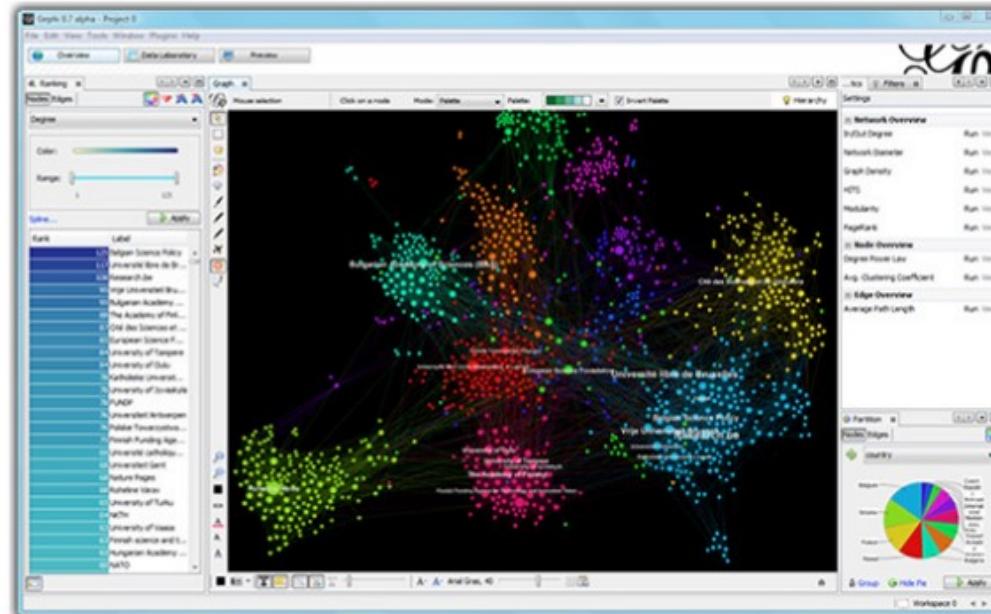

► [Features](#)
► [Quick start](#)

► [Screenshots](#)
► [Videos](#)

R Package for Network Visualisation and Analysis

- Network analysis centric
 - [igraph](#)
 - [sna](#)
 - [Network](#)
 - [tidygraph](#)
- Network visualization centric
 - [ggraph](#)
 - [vizNetwork](#)
 - [ggnet2](#)
 - [geomnet](#)
 - [ggnetwork](#)

Web enabled Graph Visualisation Libraries

- Graph
 - [Sigma.js](#)
 - [Cytoscape.js](#)
- Generic
 - [Vis.js](#)
 - [JavaScript InfoVis Toolkit](#)
 - [D3.js](#)

References






Highly Recommended:

- Richard Brath and David Jonker (2015) **Graph Analysis and Visualization: Discovering Business Opportunity in Linked Data**, John Wiley & Sons. This book is available [online](#) at smu digital library.
- Luke, Douglas A. (2015) **A user's guide to network analysis in R**, Springer. This book is available [online](#) at smu digital library.

Additional readings

- Ian McCulloh, Helen Armstrong, and Anthony Johnson (2013) **Social Network Analysis with Applications**, Chapter 1-3. This book is available [online](#) at smu digital library.
- Scott, John (2017) **Social network analysis** (4th Edition). This book is available [online](#) at smu digital library.

Geospatial Network Visualisation

| GEOSPATIAL NETWORK VISUALIZATION | | | | | |
|--|--|--|----------|------------|----------|
| <p>A collection of visualization techniques for geospatial network data.</p> <p>Poster (2019) • Full Survey Preprint (2021)</p> | | | | | |
| <p>Select filters: 95 / 95 techniques (show all)</p> | | | | | |
| <p>Geography Representation</p> <table border="1"> <tr> <td>Mapped</td> <td>Distorted</td> <td>Abstract</td> </tr> </table> | | | Mapped | Distorted | Abstract |
| Mapped | Distorted | Abstract | | | |
|  <p>Quantifying Global International Migration Flows</p> <p>Abel, Guy J.; Sander, Nikola. <i>Science</i> (2014) [Link]</p> <p>abstract explicit explicit integrated not_required</p> |  <p>Dynamic visualization of geographic networks using surface deformations with constraints</p> <p>Alper, Basak; Sümergen, Selçuk; Balcişov, Selim. <i>Proc. of the Computer Graphics International Conference (CGI)</i>, Computer Graphics Society, Petrópolis, Brazil (2007) [Link]</p> <p>distorted explicit abstract integrated required</p> |  <p>Revealing Patterns and Trends of Mass Mobility Through Spatial and Temporal Abstraction of Origin-Destination Movement Data</p> <p>Andrienko, Gennady; Andrienko, Natalia; Fuchs, Georg; Wood, Jo. <i>IEEE Transactions on Visualization and Computer Graphics</i> (2017) [Link]</p> <p>mapped explicit abstract superimposed not_required</p> | | | |
| <p>Node Representation</p> <table border="1"> <tr> <td>Explicit</td> <td>Aggregated</td> <td>Abstract</td> </tr> </table> | | | Explicit | Aggregated | Abstract |
| Explicit | Aggregated | Abstract | | | |
|  <p>Visualizing network data</p> <p>Becker, Richard A.; Eick, Stephen G.; Wilks, Allan R.. <i>IEEE Transactions on visualization and computer graphics</i> (1995) [Link]</p> <p>explicit aggregated abstract</p> |  <p>Map Warping for the Annotation of Metro Maps</p> <p>Böttger, Joachim; Brandes, Ulrik; Deussen, Oliver; Ziegold, Hendrik. <i>IEEE Computer Graphics and Applications</i> (2008) [Link]</p> <p>distorted explicit explicit superimposed not_required</p> |  <p>Clustered edge routing</p> <p>Bouts, Quirijn W.; Speckmann, Bettina. <i>2015 IEEE Pacific Visualization Symposium (PacificVis)</i> (2015) [Link]</p> <p>mapped explicit explicit superimposed not_required</p> | | | |
| <p>Link Representation</p> <table border="1"> <tr> <td>Explicit</td> <td>Aggregated</td> <td>Abstract</td> </tr> </table> | | | Explicit | Aggregated | Abstract |
| Explicit | Aggregated | Abstract | | | |
|  <p>Juxtaposed</p> <p>Nested</p> |  <p>Superimposed</p> <p>Integrated</p> |  <p>OntoTrix: a hybrid visualization for populated ontologies</p> <p>Bach, Benjamin; Pietriga, Emmanuel; Iaccardi, Ilaria; Legostaev, Gennady. <i>Proceedings of the 20th international conference companion on World wide web</i> (2011) [Link]</p> <p>abstract explicit explicit integrated required</p> | | | |

This [site](#) provides an outstanding overview and survey of various geospatial network visualisations.