


Peanut for Concrete5 Installation

Install Concrete5 and Knockout View Package


1. Create your database
2. Set up your web site or sub-domain. On Linux, ensure that the document root has permissions: file attributes = 755.
3. Download the latest Concrete5 version 8.* and unzip it to your root directory.
4. Set permissions, attributes: 755 on application/files/, application/config/, packages/ and updates/
5. Visit your web site to complete the installation. For details see: <https://documentation.concrete5.org/developers/installation/installation>
6. Turn on "Pretty Urls". See: <https://documentation.concrete5.org/tutorials/pretty-urls-version-8-and-htaccess>
7. Clear the Concrete5 cache.
See: <https://www.webhostinghub.com/help/learn/concrete5/troubleshoot/clear-cache>
8. Make a database backup. It is unlikely to be needed but good to have if any installation problems occur.
9. Extract all files from the distribution zip file to the Concrete 5 packages directory
10. Run the SQL installation scripts from the 'installation/sql' directory:
 - a. 0001-basic-tops-tables.sql (required)
 - b. 0002-qnut-permissions.sql (if you plan to install QNut packages.
11. Install the 'Knockout View' package.
12. In the application/bootstrap directory, merge app.php with peanut-app.php
13. Install and activate the 'Peanut' theme. You must have previously installed the 'Knockout View' package.
14. Just to be safe, make another backup.

Run the Peanut Smoke Test

15. Create a new page.
16. In edit mode, drag and drop a "Knockout View" block on to the page.

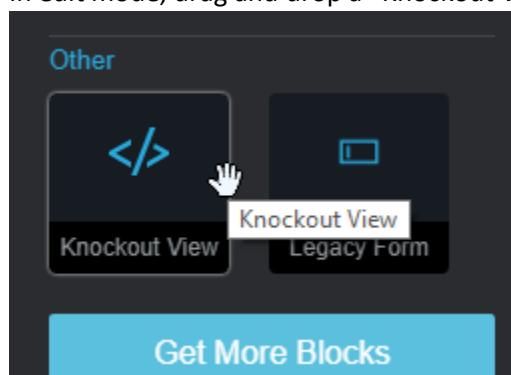

17. Enter the View Model name: peanut-smoke-test and check "Add Wrapper Markup. In this case it is not necessary to add anything in the content field.

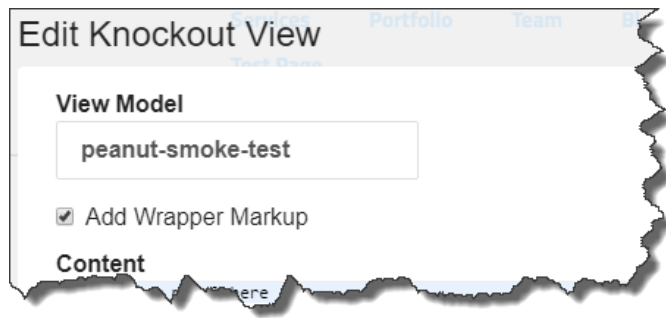

18. Run the page in your browser.