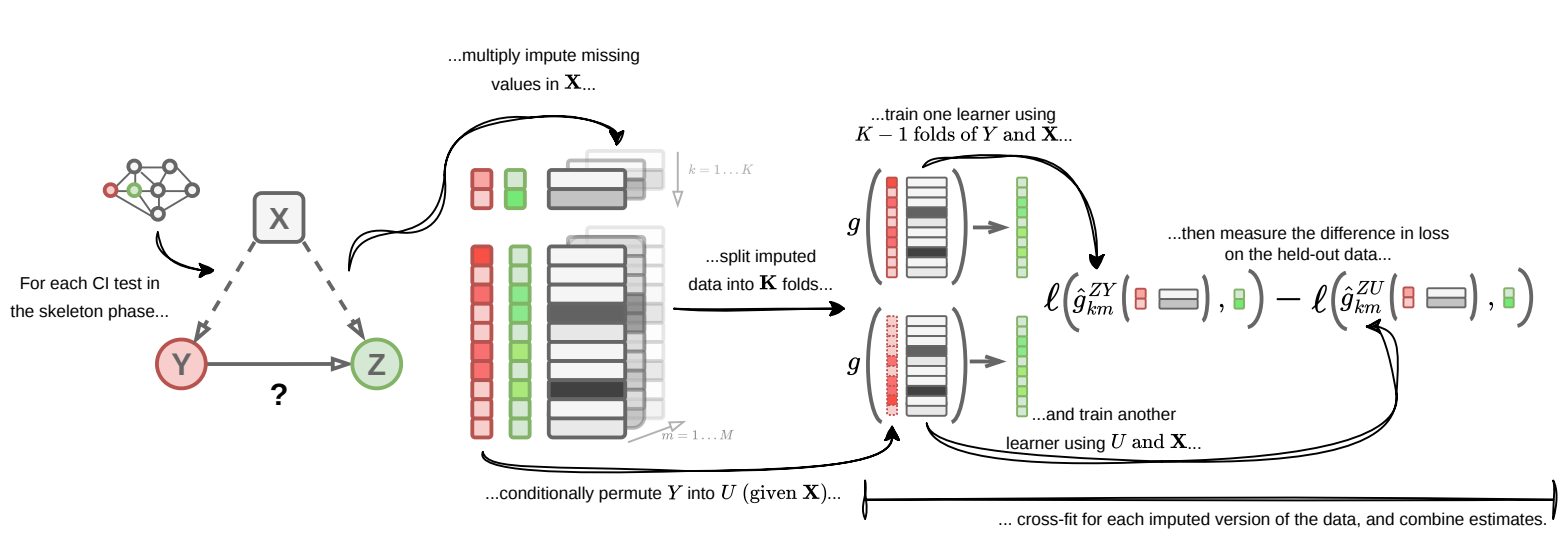

...multiply impute missing values in $\mathbf{X}$...
For each CI test in the skeleton phase...
X
Y
Z
?
$k = 1 \ldots K$
$m = 1 \ldots M$
...split imputed data into $\mathbf{K}$ folds...
...train one learner using $K-1$ folds of Y and $\mathbf{X}$...
g
g
$\ell\left(\hat{g}_{km}^{ZY}\left(\square\right), \square\right) - \ell\left(\hat{g}_{km}^{ZU}\left(\square\right), \square\right)$
...then measure the difference in loss on the held-out data...
...and train another learner using U and $\mathbf{X}$...
...conditionally permute Y into U (given $\mathbf{X}$)...
... cross-fit for each imputed version of the data, and combine estimates.