

Създаване на БД в C# чрез SQL server

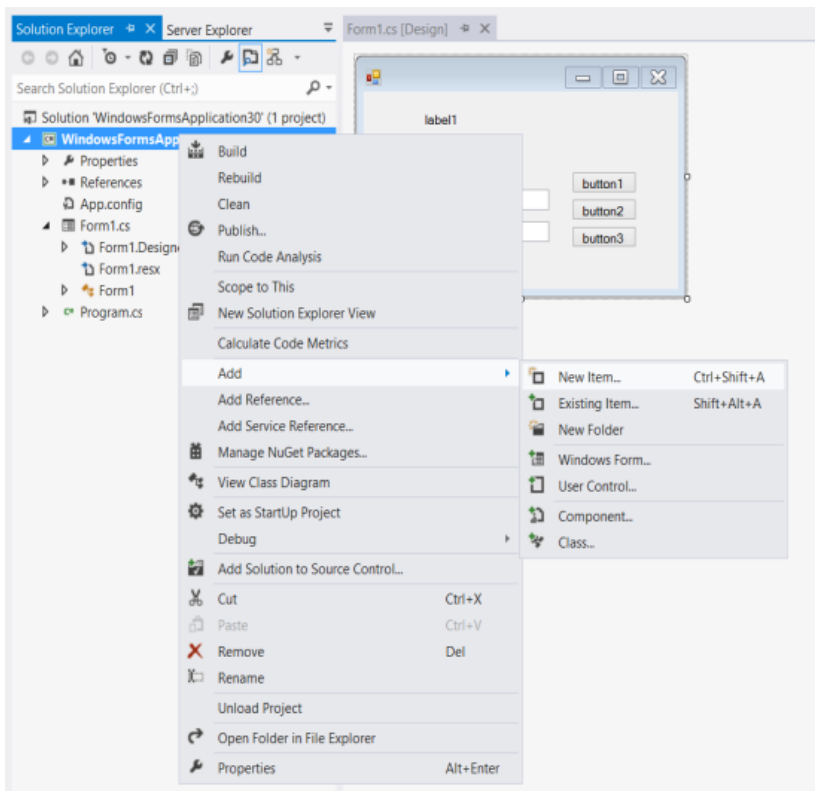


Fig.1

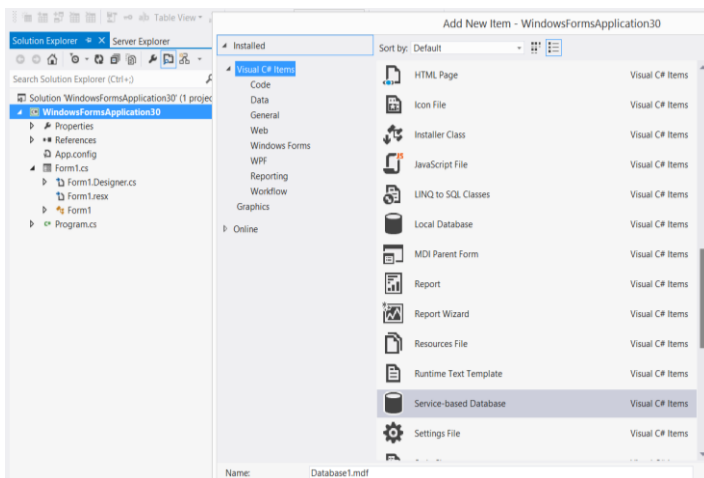


Fig.2

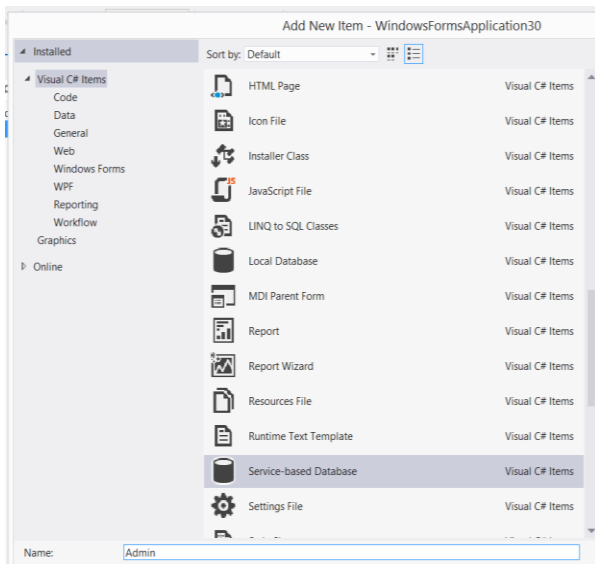


Fig.3

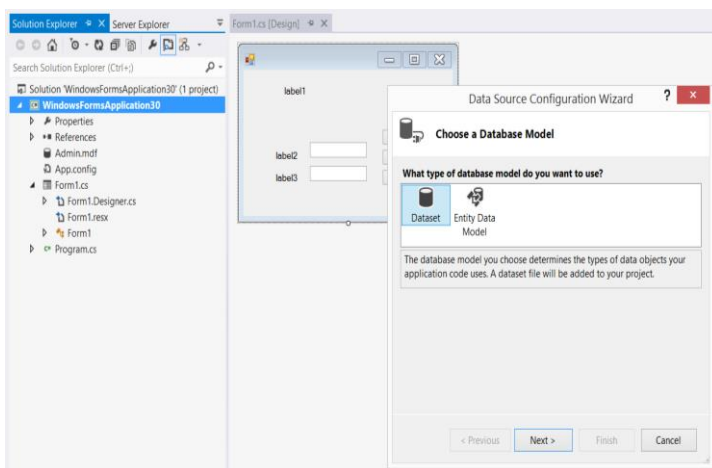


Fig.4

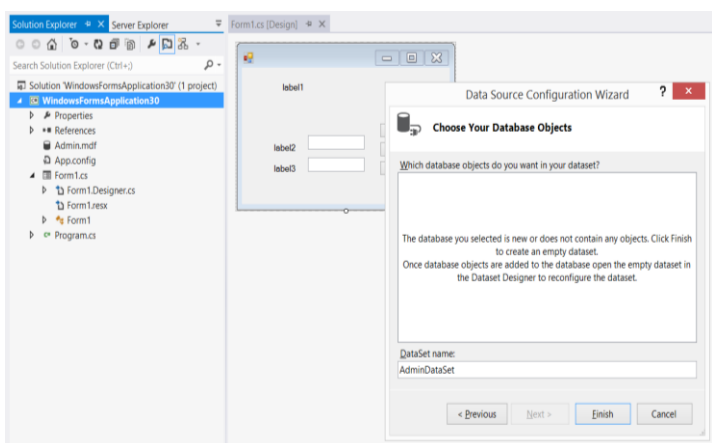


Fig.5

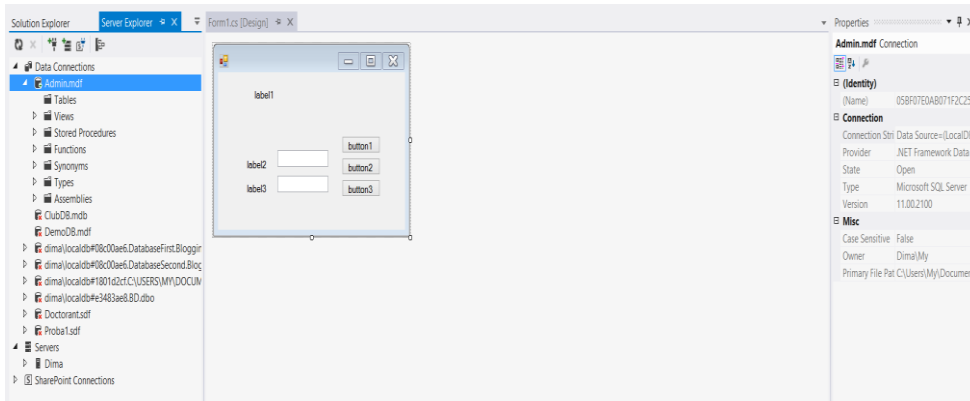


Fig.6

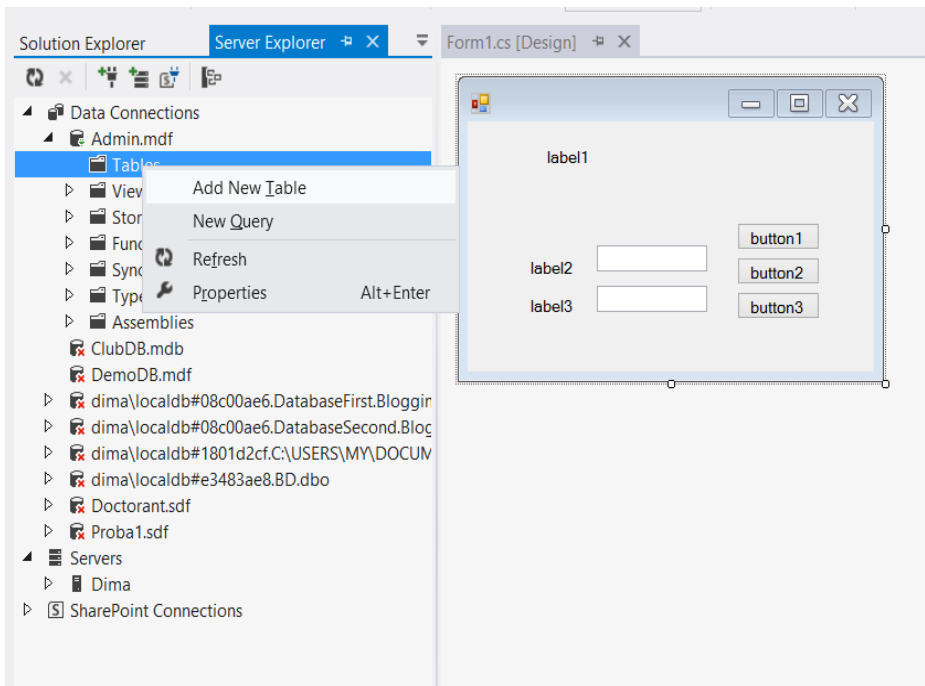


Fig.7

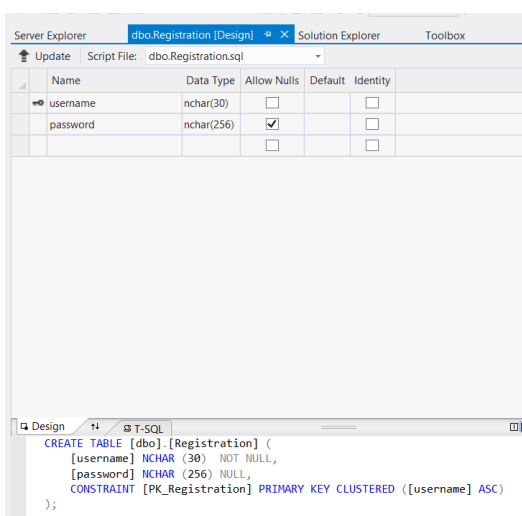


Fig.8

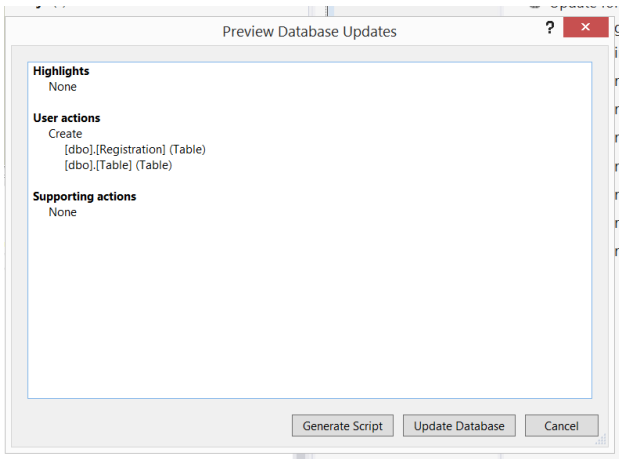


Fig.9

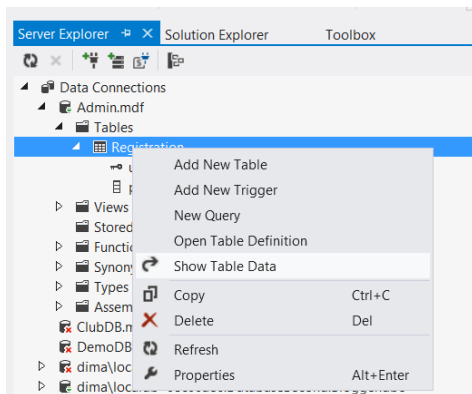


Fig.10

Implementation

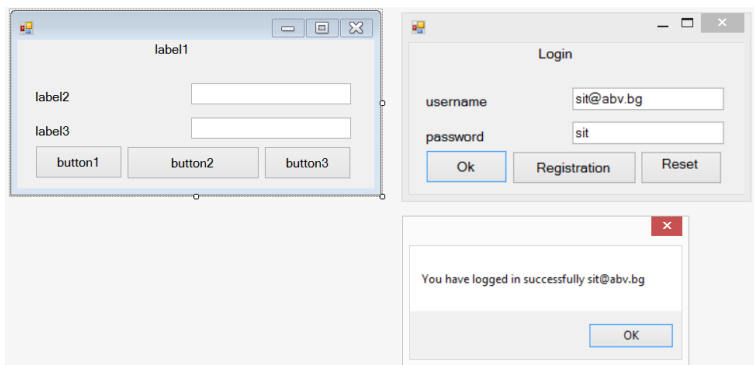


Fig.11

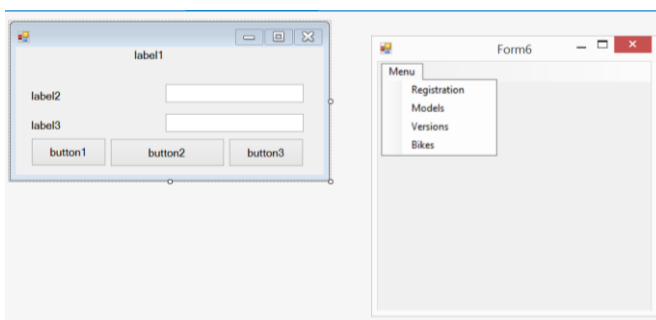


Fig.12

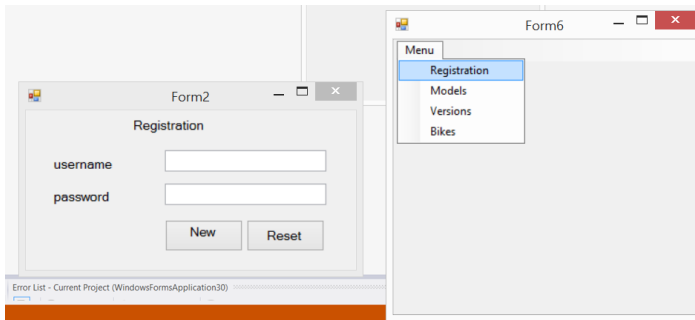


Fig.13

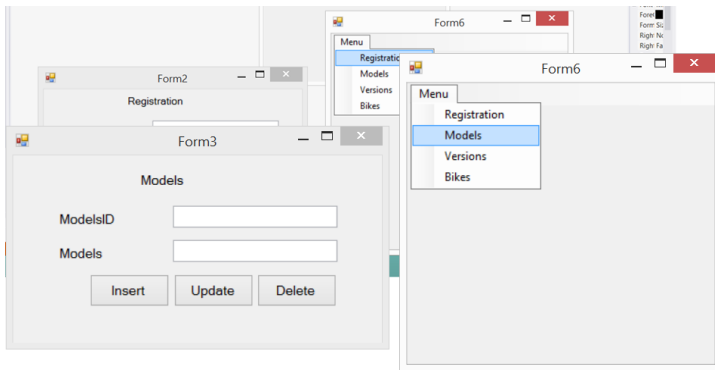


Fig.14

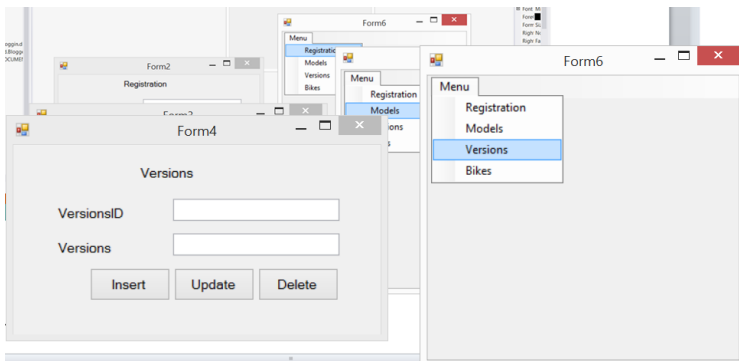


Fig.15


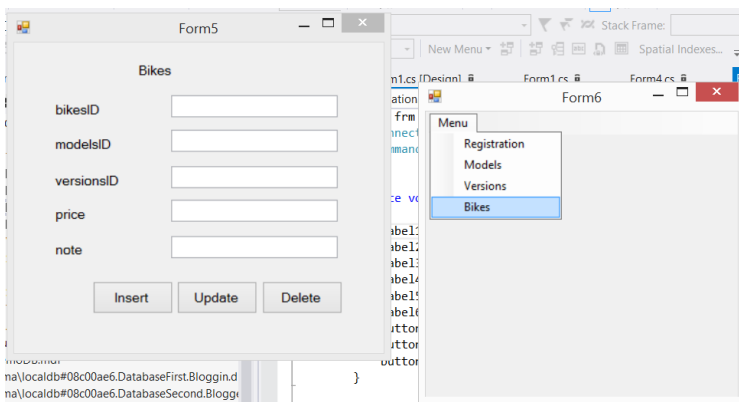


Fig.16



Форма 1

Кодиране

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;
using System.Data.SqlClient;

namespace WindowsFormsApplication30
{
    public partial class Form1 : Form
    {
        public Form1()
        {
            InitializeComponent();

            public String cs = @"Data Source=(LocalDB)\v11.0;AttachDbFilename=C:\Users\My\Documents\Visual Studio
2012\Projects\EXPERIMENT\Experiment1\WindowsFormsApplication30\WindowsFormsApplication30\Admin.mdf;Integrated Security=True";
            public SqlConnection myConnection = default(SqlConnection);
            public SqlCommand myCommand = default(SqlCommand);

            private void Form1_Load(object sender, EventArgs e)
            {
                label1.Text = "Login";
                label2.Text = "username";
                label3.Text = "password";
                button1.Text = "";
                button2.Text = "Registration";
                button3.Text = "Reset password";
                button1.BackColor = Color.White;
                button1.Image = Image.FromFile(@"C:\Users\My\Dropbox\My PC (Dima)\Desktop\ok.png");
                button1.BackgroundImageLayout = ImageLayout.Stretch;
            }

            private void button1_Click(object sender, EventArgs e)
            {
                try
                {
                    myConnection = new SqlConnection(cs);
                    myCommand = new SqlCommand("SELECT * FROM Registration WHERE username=@username AND password=@password",
myConnection);
                    SqlParameter uName = new SqlParameter("@username", SqlDbType.VarChar);
                    SqlParameter uPassword = new SqlParameter("@password", SqlDbType.VarChar);
                    uName.Value = textBox1.Text;
                    uPassword.Value = textBox2.Text;
                    myCommand.Parameters.Add(uName);
                    myCommand.Parameters.Add(uPassword);
                    myCommand.Connection.Open();
                    SqlDataReader myReader = myCommand.ExecuteReader(CommandBehavior.CloseConnection);
                    if (myReader.Read() == true)
                    {
                        MessageBox.Show("You have logged in successfully " + textBox1.Text);

                        //Hide the login form
                        this.Hide();
                        Form6 frm = new Form6();
                        frm.Show();
                    }
                }
                else
                {

```


```

        {
            MessageBox.Show("Login Failed...Try again !", "Login Denied", MessageBoxButtons.OK, MessageBoxIcon.Error);
            textBox1.Clear();
            textBox2.Clear();
            textBox1.Focus();
        }
        if (myConnection.State == ConnectionState.Open)
        {
            myConnection.Dispose();
        }
    }
    catch (Exception ex)
    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}

private void button2_Click(object sender, EventArgs e)
{
    Form2 frm = new Form2();
    frm.Show();
}

private void button3_Click(object sender, EventArgs e)
{
    Form3 frm = new Form3();
    frm.Show();
}
}
}
//

```



Форма 2

```

using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;
using System.Data.SqlClient;

namespace WindowsFormsApplication30
{
    public partial class Form2 : Form
    {
        public Form2()
        {
            InitializeComponent();
        }

        Form1 frm = new Form1();
        SqlConnection myConnection;
        SqlCommand myCommand;
        SqlDataAdapter adapt;

        private void Form2_Load(object sender, EventArgs e)
        {
            label1.Text = "Registration";
            label2.Text = "username";
            label3.Text = "password";
        }
    }
}

```

```

        button1.Text = "New record";
        button2.Text = "Reset";
        button3.Text = "Delete";
    }

    private void DisplayData()
    {
        myConnection.Open();
        DataTable dt = new DataTable();
        adapt = new SqlDataAdapter("select username from Registration where username='"+textBox1.Text+"' ", myConnection);
        adapt.Fill(dt);
        dataGridView1.DataSource = dt;
        myConnection.Close();
    }

    private void button1_Click(object sender, EventArgs e)
    {
        try
        {
            myConnection = new SqlConnection(frm.cs);
            myCommand = new SqlCommand("Insert into Registration values('" + textBox1.Text + "','" + textBox2.Text + "')", myConnection);
            myConnection.Open();
            myCommand.Parameters.AddWithValue("@username", textBox1.Text);
            myCommand.Parameters.AddWithValue("@password", textBox2.Text);
            myCommand.ExecuteNonQuery();
            myConnection.Close();
            MessageBox.Show("Insert successfully!");
            DisplayData();
            if (myConnection.State == ConnectionState.Open)
            {
                myConnection.Dispose();
            }
        }
        catch (Exception ex)
        {
            MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
        }
    }

    private void button2_Click(object sender, EventArgs e)
    {
        //Reset password from Table Registration
        try
        {
            myConnection = new SqlConnection(frm.cs);
            myCommand = new SqlCommand("SELECT * FROM Registration WHERE username=@username", myConnection);
            SqlParameter uName = new SqlParameter("@username", SqlDbType.VarChar);
            uName.Value = textBox1.Text;
            myCommand.Parameters.Add(uName);
            myCommand.Connection.Open();
            SqlDataReader myReader = myCommand.ExecuteReader(CommandBehavior.CloseConnection);
            if (myReader.Read() == true)
            {
                MessageBox.Show("Yes!!!");
                myConnection.Close();
                myConnection.Open();
                myCommand.CommandType = CommandType.Text;
                myCommand.CommandText = "Update Registration set password='" + textBox2.Text + "' where username='" + textBox1.Text + "'";
                myCommand.ExecuteNonQuery();
                myConnection.Close();
                MessageBox.Show("Reset password!");
            }
            else
            {
                MessageBox.Show("There is no such user!", "Login user", MessageBoxButtons.OK, MessageBoxIcon.Error);
                textBox1.Clear();
                textBox2.Clear();
                textBox1.Focus();
            }
            if (myConnection.State == ConnectionState.Open)
            {
                myConnection.Dispose();
            }
        }
        catch (Exception ex)
    }

```




```

    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}

private void button3_Click(object sender, EventArgs e)
{
    try
    {
        myConnection = new SqlConnection(frm.cs);
        myCommand = new SqlCommand("delete Registration where username=@username", myConnection);
        myConnection.Open();
        myCommand.Parameters.AddWithValue("@username", textBox1.Text);
        myCommand.ExecuteNonQuery();
        myConnection.Close();
        MessageBox.Show("Delete successfully!");
        DisplayData();
        if (myConnection.State == ConnectionState.Open)
        {
            myConnection.Dispose();
        }
    }
    catch (Exception ex)
    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}

private void dataGridView1_RowHeaderMouseClick(object sender, DataGridViewCellMouseEventArgs e)
{
    textBox1.Text = dataGridView1.Rows[e.RowIndex].Cells[0].Value.ToString();
}
}
//

```

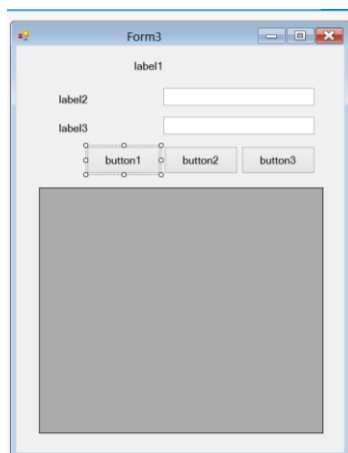

Форма 3

```

using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;
using System.Data.SqlClient;

namespace WindowsFormsApplication30
{
    public partial class Form3 : Form

```

```

{
    public Form3()
    {
        InitializeComponent();
    }
    Form1 frm = new Form1();
    SqlConnection myConnection;
    SqlCommand myCommand = default(SqlCommand);
    SqlDataAdapter adapt;

    private void Form3_Load(object sender, EventArgs e)
    {
        label1.Text = "Models";
        label2.Text = "ModelsID";
        label3.Text = "Models";
        button1.Text = "Insert";
        button2.Text = "Update";
        button3.Text = "Delete";
    }

    private void DisplayData()
    {
        myConnection.Open();
        DataTable dt = new DataTable();
        adapt = new SqlDataAdapter("select * from Models", myConnection);
        adapt.Fill(dt);
        dataGridView1.DataSource = dt;
        myConnection.Close();
    }

    private void button1_Click(object sender, EventArgs e)
    {
        try
        {
            myConnection = new SqlConnection(frm.cs);
            myCommand = new SqlCommand("insert into Models(modelsID,models) values(@modelsID,@models)",
myConnection);
            myConnection.Open();
            myCommand.Parameters.AddWithValue("@modelsID", textBox1.Text);
            myCommand.Parameters.AddWithValue("@models", textBox2.Text);
            myCommand.ExecuteNonQuery();
            myConnection.Close();
            MessageBox.Show("Insert successfully!");
            DisplayData();
            if (myConnection.State == ConnectionState.Open)
            {
                myConnection.Dispose();
            }
        }
        catch (Exception ex)
        {
            MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
        }
    }

    private void button2_Click(object sender, EventArgs e)
    {
        try
        {
            myConnection = new SqlConnection(frm.cs);

```


```

        myCommand = new SqlCommand("update Models set models=@models where modelsID=@modelsID",
myConnection);
        myConnection.Open();
        myCommand.Parameters.AddWithValue("@modelsID", textBox1.Text);
        myCommand.Parameters.AddWithValue("@models", textBox2.Text);
        myCommand.ExecuteNonQuery();
        myConnection.Close();
        MessageBox.Show("Update successfully!");
        if (myConnection.State == ConnectionState.Open)
        {
            myConnection.Dispose();
        }
    }
    catch (Exception ex)
    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}

private void button3_Click(object sender, EventArgs e)
{
    try
    {
        myConnection = new SqlConnection(frm.cs);
        myCommand = new SqlCommand("delete Models where modelsID=@modelsID", myConnection);
        myConnection.Open();
        myCommand.Parameters.AddWithValue("@modelsID", textBox1.Text);
        myCommand.ExecuteNonQuery();
        myConnection.Close();
        MessageBox.Show("Delete successfully!");
        if (myConnection.State == ConnectionState.Open)
        {
            myConnection.Dispose();
        }
    }
    catch (Exception ex)
    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}

private void dataGridView1_RowHeaderMouseClick(object sender, DataGridViewCellMouseEventArgs e)
{
    textBox1.Text = dataGridView1.Rows[e.RowIndex].Cells[0].Value.ToString();
}
}
//

```

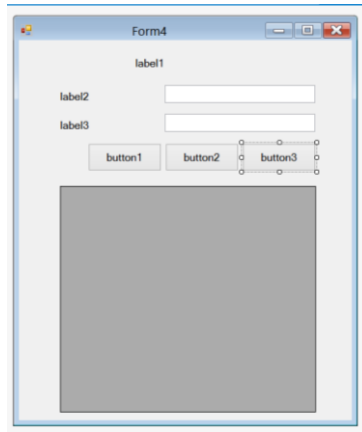

Форма 4

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Data.SqlClient;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;

namespace WindowsFormsApplication30
{
    public partial class Form4 : Form
    {
        public Form4()
        {
            InitializeComponent();
        }
        Form1 frm = new Form1();
        SqlConnection myConnection;
        SqlCommand myCommand = default(SqlCommand);
        SqlDataAdapter adapt;

        private void Form4_Load(object sender, EventArgs e)
        {
            label1.Text = "Versions";
            label2.Text = "VersionsID";
            label3.Text = "Versions";
            button1.Text = "Insert";
            button2.Text = "Update";
            button3.Text = "Delete";
        }

        private void DisplayData()
        {
            myConnection.Open();
            DataTable dt = new DataTable();
            adapt = new SqlDataAdapter("select * from Versions", myConnection);
            adapt.Fill(dt);
            dataGridView1.DataSource = dt;
            myConnection.Close();
        }

        private void button1_Click(object sender, EventArgs e)
        {
            try
            {
                myConnection = new SqlConnection(frm.cs);
                myCommand = new SqlCommand("insert into Versions(versionsID,versions) values(@versionsID,@versions)", myConnection);
                myConnection.Open();
                myCommand.Parameters.AddWithValue("@versionsID", textBox1.Text);
                myCommand.Parameters.AddWithValue("@versions", textBox2.Text);
                myCommand.ExecuteNonQuery();
            }
            catch { }
        }
    }
}
```

```

        myConnection.Close();
        MessageBox.Show("Insert successfully!");
        DisplayData();
        if (myConnection.State == ConnectionState.Open)
        {
            myConnection.Dispose();
        }
    }
    catch (Exception ex)
    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}


private void button2_Click(object sender, EventArgs e)
{
    try
    {
        myConnection = new SqlConnection(frm.cs);
        myCommand = new SqlCommand("update Versions set versions=@versions where versionsID=@versionsID", myConnection);
        myConnection.Open();
        myCommand.Parameters.AddWithValue("@versionsID", textBox1.Text);
        myCommand.Parameters.AddWithValue("@versions", textBox2.Text);
        myCommand.ExecuteNonQuery();
        myConnection.Close();
        MessageBox.Show("Update successfully!");
        DisplayData();
        if (myConnection.State == ConnectionState.Open)
        {
            myConnection.Dispose();
        }
    }
    catch (Exception ex)
    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}

private void button3_Click(object sender, EventArgs e)
{
    try
    {
        myConnection = new SqlConnection(frm.cs);
        myCommand = new SqlCommand("delete Versions where versionsID=@versionsID", myConnection);
        myConnection.Open();
        myCommand.Parameters.AddWithValue("@versionsID", textBox1.Text);
        myCommand.ExecuteNonQuery();
        myConnection.Close();
        MessageBox.Show("Delete successfully!");
        if (myConnection.State == ConnectionState.Open)
        {
            myConnection.Dispose();
        }
    }
    catch (Exception ex)
    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}

private void dataGridView1_RowHeaderMouseClick(object sender, DataGridViewCellMouseEventArgs e)
{
    textBox1.Text = dataGridView1.Rows[e.RowIndex].Cells[0].Value.ToString();
}

}
//

```

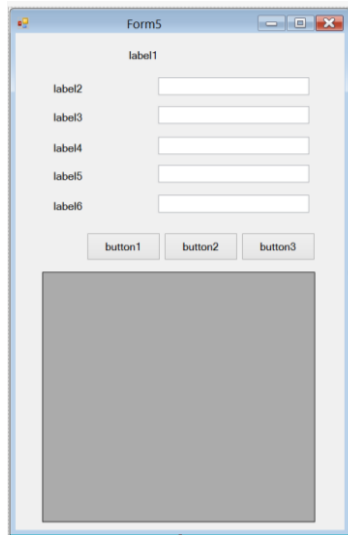

Форма 5

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Data.SqlClient;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;

namespace WindowsFormsApplication30
{
    public partial class Form5 : Form
    {
        public Form5()
        {
            InitializeComponent();
        }
        Form1 frm = new Form1();
        SqlConnection myConnection;
        SqlCommand myCommand = default(SqlCommand);
        SqlDataAdapter adapt;

        private void Form5_Load(object sender, EventArgs e)
        {
            label1.Text = "Bikes";
            label2.Text = "bikesID";
            label3.Text = "modelsID";
            label4.Text = "versionsID";
            label5.Text = "price";
            label6.Text = "note";
            button1.Text = "Insert";
            button2.Text = "Update";
            button3.Text = "Delete";
        }

        private void DisplayData()
        {
            myConnection.Open();
            DataTable dt = new DataTable();
            adapt = new SqlDataAdapter("select * from Bikes", myConnection);
            adapt.Fill(dt);
            dataGridView1.DataSource = dt;
            myConnection.Close();
        }
        private void button1_Click(object sender, EventArgs e)
        {
            try
            {
                myConnection = new SqlConnection(frm.cs);
                myCommand = new SqlCommand("insert into Bikes(bikesID, modelsID, versionsID, price, note) "+
```

```

        "values(@bikesID,@modelsID,@versionsID,@price,@note)", myConnection);
myConnection.Open();
myCommand.Parameters.AddWithValue("@bikesID", textBox1.Text);
myCommand.Parameters.AddWithValue("@modelsID", textBox2.Text);
myCommand.Parameters.AddWithValue("@versionsID", textBox3.Text);
myCommand.Parameters.AddWithValue("@price", textBox4.Text);
myCommand.Parameters.AddWithValue("@note", textBox5.Text);
myCommand.ExecuteNonQuery();
myConnection.Close();
MessageBox.Show("Insert successfully!");
DisplayData();
if (myConnection.State == ConnectionState.Open)
{
    myConnection.Dispose();
}
}
catch (Exception ex)
{
    MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
}
}

private void button2_Click(object sender, EventArgs e)
{
    try
    {
        myConnection = new SqlConnection(frm.cs);
        myCommand = new SqlCommand("update Bikes set modelsID=@modelsID where bikesID=@bikesID", myConnection);
        myConnection.Open();
        myCommand.Parameters.AddWithValue("@bikesID", textBox1.Text);
        myCommand.Parameters.AddWithValue("@modelsID", textBox2.Text);
        myCommand.ExecuteNonQuery();
        myConnection.Close();
        MessageBox.Show("Update successfully!");
        if (myConnection.State == ConnectionState.Open)
        {
            myConnection.Dispose();
        }
    }
    catch (Exception ex)
    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}


private void button3_Click(object sender, EventArgs e)
{
    try
    {
        myConnection = new SqlConnection(frm.cs);
        myCommand = new SqlCommand("delete Bikes where bikesID=@modelsID", myConnection);
        myConnection.Open();
        myCommand.Parameters.AddWithValue("@bikesID", textBox1.Text);
        myCommand.Parameters.AddWithValue("@modelsID", textBox2.Text);
        myCommand.ExecuteNonQuery();
        myConnection.Close();
        MessageBox.Show("Delete successfully!");
        if (myConnection.State == ConnectionState.Open)
        {
            myConnection.Dispose();
        }
    }
    catch (Exception ex)
    {
        MessageBox.Show(ex.Message, "Error", MessageBoxButtons.OK, MessageBoxIcon.Error);
    }
}

private void dataGridView1_RowHeaderMouseClick(object sender, DataGridViewCellMouseEventArgs e)
{
    textBox1.Text = dataGridView1.Rows[e.RowIndex].Cells[0].Value.ToString();
}

}
}

```

//

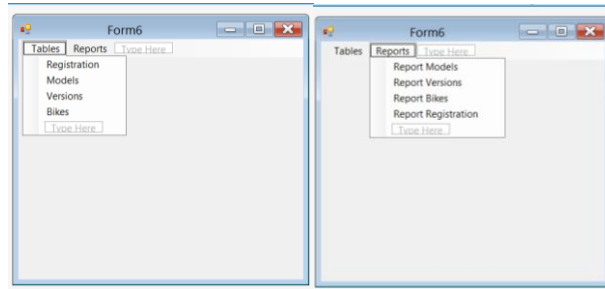

Форма 6

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;

namespace WindowsFormsApplication30
{
    public partial class Form6 : Form
    {
        public Form6()
        {
            InitializeComponent();
        }

        private void Form6_Load(object sender, EventArgs e)
        {
        }

        private void registrationToolStripMenuItem_Click(object sender, EventArgs e)
        {
            Form2 frm = new Form2();
            frm.Show();
        }

        private void modelsToolStripMenuItem_Click(object sender, EventArgs e)
        {
            Form3 frm = new Form3();
            frm.Show();
        }

        private void versionsToolStripMenuItem_Click(object sender, EventArgs e)
        {
            Form4 frm = new Form4();
            frm.Show();
        }

        private void bikesToolStripMenuItem_Click(object sender, EventArgs e)
        {
            Form5 frm = new Form5();
            frm.Show();
        }

        private void reportModelsToolStripMenuItem_Click(object sender, EventArgs e)
        {
            Form7 frm = new Form7();
            frm.Show();
        }

        private void reportVersionsToolStripMenuItem_Click(object sender, EventArgs e)
        {
            Form8 frm = new Form8();
            frm.Show();
        }

        private void reportBikesToolStripMenuItem_Click(object sender, EventArgs e)
        {
        }
    }
}
```



```
        Form9 frm = new Form9();  
        frm.Show();  
    }  
}
```